

NPOI: recent technology and science

J. A. Benson^a, D. J. Hutter^a, K. J. Johnston^b, R. T. Zavala^a, N. M. White^c, T. A. Pauls^d,
G. C. Gilbreath^d, J. T. Armstrong^d, R. B. Hindsley^d

^aU.S. Naval Observatory, Flagstaff Station, P.O. Box 1149, Flagstaff, AZ, USA

^bU.S. Naval Observatory, 3450 Massachusetts Av. NW, Washington DC, USA

^cLowell Observatory, 1400 West Mars Hill Road, Flagstaff, AZ 86001

^dRemote Sensing Division, Naval Research Laboratory, Code 7210 Washington, DC 20375

ABSTRACT

We describe recent science projects that the Navy Prototype Optical Interferometer (NPOI) scientific staff and collaborators are pursuing. Recent results from the wide angle astrometric program and imaging programs (rapid rotators, binaries and Be stars) will be summarized. We discuss some of the technology that enables the NPOI to operate routinely as an observatory astronomical instrument.

Keywords: Optical interferometry, astrometry, imaging, NPOI

1. INTRODUCTION

In this paper we give an overview of progress on the NPOI since the Waikoloa SPIE 2002 meeting. We also discuss some recent science projects utilizing the NPOI that are being pursued by NPOI scientific staff and collaborators. Some of the recent technological upgrades to the NPOI are also discussed.

2. ASTROMETRY: TECHNOLOGY AND SCIENCE

As has been discussed in the literature, e.g. Armstrong et al.,¹ the NPOI was originally designed to operate in either an imaging mode or an astrometric mode. A recent upgrade specific to the astrometric mode has been the addition of a nearly end-to-end internal path length metrology system. Historically the internal instrument delay term has been designated by the misnomer *constant term* (CT). Of course, at the micron level, the internal instrument delay is anything **but** constant. With the addition of our internal path length metrology system (CT metrology) we can now monitor this delay during on sky astrometric observations. The CT-metrology measured-changes in the internal instrument delay are then used in the astrometric data reductions to correct for internal path length changes.

The CT metrology beams are injected into the feed beam system from the temperature-stable beam combining room. Figure 1 shows the injection optics. Once the CT beams are in the feed system, they travel in reverse along the star light path until they reach a small cube corner reflector that is placed as near to the siderostat mirror as possible. Figure 2 shows the CT cube corner in the astrometric west hut. The CT cube corner is positioned in the shadow of the siderostat metrology cat's-eye. Except for the thin strut holding the CT cube corner no additional star light is occulted. The CT cube corner then reflects the CT beam back along the star light path until the CT injection optics retrieve the return beam, where it is combined with the stable reference arm of the metrology interferometer and then sent on to the CT detector.

In order to minimize the cost and need for specialized electronics for the CT metrology system, we utilized a standard PC and an off-the-shelf ADC. The PC runs real-time Linux (<http://www.aero.polimi.it/~rtai>) and directly digitizes the reference and measurement analog sinusoidal signals of the metrology interferometer. The necessary phase detection and fringe counting is all done in software. Additional cost saving was achieved by digitizing the analog Inter Range Instrumentation Group (IRIG) timing signal that we pipe around the site for timing synchronizations. The decoding of the digitized IRIG signal is also done in software. This decoding

E-mail: jbenon@nofs.navy.mil, djh@nofs.navy.mil, johnston.kenneth@usno.navy.mil, bzavala@nofs.navy.mil, nmw@lowell.edu, pauls@nrl.navy.mil, gilbreath@nrl.navy.mil, armstrong@nrl.navy.mil, hindsley@nrl.navy.mil

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 2004		2. REPORT TYPE		3. DATES COVERED 00-00-2004 to 00-00-2004	
4. TITLE AND SUBTITLE NPOI: recent technology and science				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Research Laboratory, Remote Sensing Division, Code 7210, 4555 Overlook Avenue SW, Washington, DC, 20375				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT We describe recent science projects that the Navy Prototype Optical Interferometer (NPOI) scientific staff and collaborators are pursuing. Recent results from the wide angle astrometric program and imaging programs (rapid rotators, binaries and Be stars) will be summarized. We discuss some of the technology that enables the NPOI to operate routinely as an observatory astronomical instrument.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 8	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			



Figure 1. CT metrology injection optics. The dotted white line starting at the lower right indicates the path of the injected metrology beam.

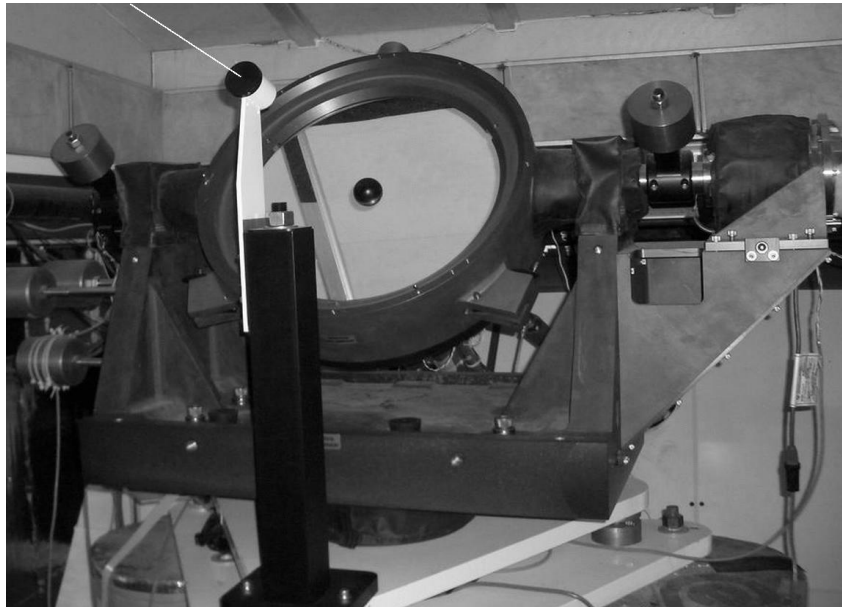


Figure 2. CT metrology cube corner at the siderostat. The dotted white line starting at the upper left indicates the path of the metrology beam.

and time tagging serves to precisely synchronize the CT metrology data with the same IRIG signal that is used to time tag the stellar fringe data and fast delay line metrology data.

The CT metrology recorder runs continuously during an astrometry night. In addition to continuously recording the CT data, we also position the siderostats in retro-reflection mode and record fringes from a lab source (congenially known as Alp Lab) periodically throughout the night. The Alp Lab measurements are used

to correct for the fact that the CT cube corner is not directly on the surface of the siderostat. Figure 3 shows an example of the differential CT data after they have been calibrated to the Alp Lab measurements. It is readily

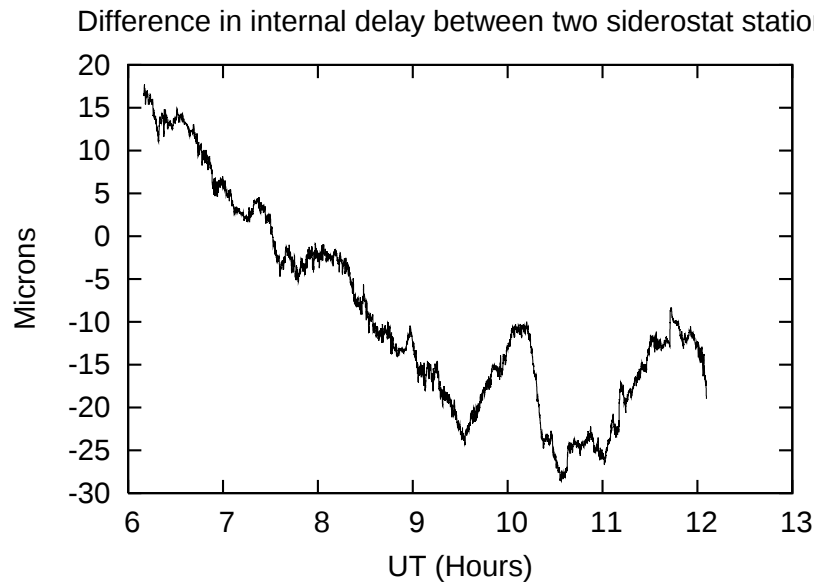


Figure 3. The difference in delay between two siderostat stations as measured by the CT metrology system.

apparent from Fig. 3 that a simple linear, or low-order polynomial, interpolation between Alp Lab measurements, typically obtained every 45 minutes, would in general give a poor representation of the actual internal delay variations for arbitrary times. Figure 4 shows fringe delay atmospheric dispersion corrected residuals on Polaris before correcting by the CT metrology measurements of the internal delay shown in Fig. 3. Figure 5 shows the fringe delay atmospheric dispersion corrected residuals after applying the internal delay correction shown in Fig. 3. The RMS of the residuals in Fig. 5 is 1.5 microns. The rule of thumb for converting such delay residuals to astrometric precision is 10 milliarcseconds/micron.

3. IMAGING: TECHNOLOGY AND SCIENCE

Since the SPIE 2002 meeting, we have not done any hardware upgrades that are specific to the imaging operational mode of the NPOI. A number of the technological details of the NPOI imaging operations were discussed by Benson et al.² in the Proceedings of the 2002 conference.

New techniques have been developed, see Clark et al.,³ for initially aligning the internal mirrors in the *elevator* vacuum cans that are placed at every potential siderostat station on the array.

We have made significant advances in automating some of the NPOI optical alignment tasks. See the following Sect. 4 for a description of these upgrades.

A number of NPOI imaging science projects have come to fruition since the 2002 conference. Here we give a short introduction to the papers in these Proceedings that describe these results in detail.

3.1. RAPID ROTATORS

Peterson et al.⁴ report on observations obtained with the NPOI of the bright A stars, Vega and Altair. The authors report on the detection of significant asymmetries in the brightness distributions of both stars. Both brightness distributions are well modeled by simple Roche spheroids including gravity darkening, as expected for rapidly rotating stars. In the case of Vega, the model suggests that the star is near breakup and is sharp lined because it is seen nearly pole on.

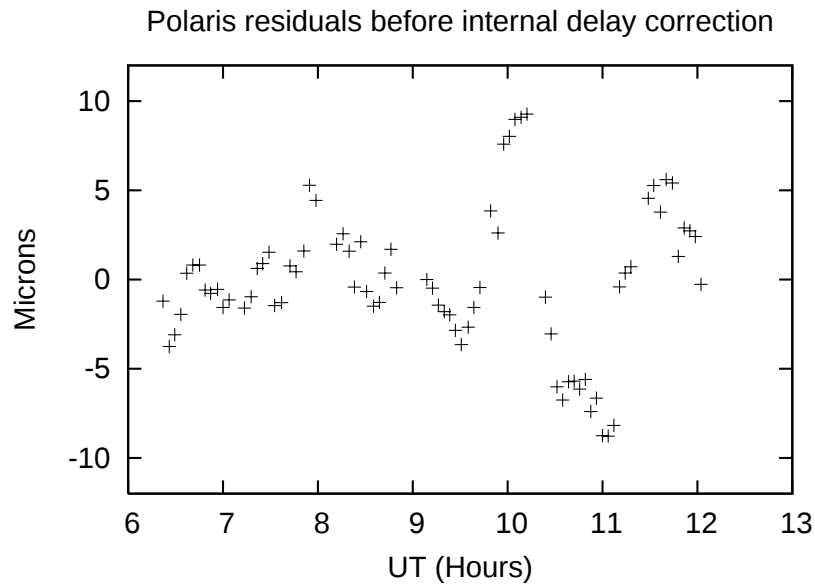


Figure 4. Atmospheric dispersion corrected fringe delay residuals before applying the internal delay correction as measured by the CT metrology.

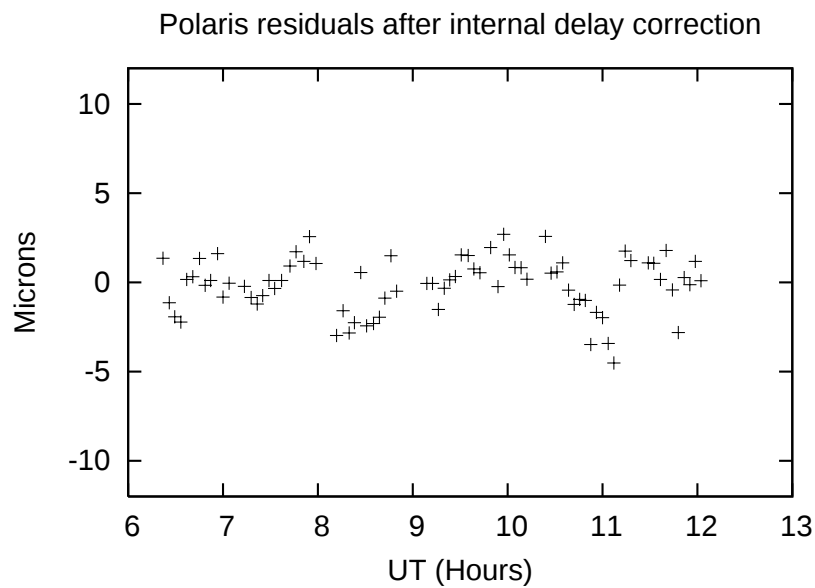


Figure 5. atmospheric dispersion corrected fringe delay residuals after applying the internal delay correction as measured by the CT metrology.

On a similar topic, Hummel et al.⁵ report on applying improved data analysis techniques to observations of Altair obtained with the NPOI. The authors find general agreement with the oblateness of Altair as discovered by van Belle et al.⁶ with the Palomar Testbed Interferometer.

3.2. BINARY STARS

Hutter et al.⁷ report on observations using the NPOI to support the Terrestrial Planet Finder (TPF) mission. Here the authors report on the use of the NPOI to help cull down the list of target stars for the TPF mission. To date, 29 of the 60 brightest ($V \leq 4.3$) candidate stars north of Dec = -20 deg have each been observed on multiple nights. Preliminary analysis of these data indicate the possible detection of stellar companions to several of these stars.

Armstrong et al.⁸ report on using precisely scheduled observations with the NPOI to observe binaries. The times of the observations are carefully chosen to correspond with the time that a projected baseline is perpendicular to the expected position angle of the binary. The authors show that very precise astrometric parameters of the binary can be obtained from such observations.

3.3. HYDROGEN ALPHA IMAGING

Gilbreath et al.⁹ report on NPOI closure phase observations obtained in and out of the H-alpha line on a number of Be stars.

Tycner et al.^{10,11} have used the unique multichannel spectral capabilities of the NPOI to measure the size and orientation of the emission line regions around Be stars. The authors use a technique that can be considered a form of self-calibration in which the spectral channels in the continuum are used to calibrate the channel where the H-alpha line occurs. Briefly, the technique is to fit a quadratic polynomial to the channels that lie outside the line and apply the result to the line data. The authors apply the technique to the stars γ Cassiopeia and ζ Tauri. See their papers^{10,11} for the complete details.

4. TECHNOLOGY AND AUTOMATED ALIGNMENT

The NPOI, like any other optical or infrared interferometer, has *a lot* of mirrors. The alignment of a subset of these mirrors must be checked and possibly adjusted every night prior to observing. It has always been our goal to automate this alignment process as much as possible (see White et al.¹² for a recent discussion of the benefits of such automation). As such, we have recently outfitted all of our mirrors on our optical switch yard table (beam relay table between the fast delay lines and the beam combiner table) with motorized micrometers. We have a manual *paddle* controller that can be plugged into any of the motorized micrometers via telephone cable patch panels. The manual controller enables pulse and slew control of the motorized micrometers. In addition, the motorized micrometers are also wired into controllers that can be addressed by a computer over a serial link. The computer controllers enable computerized pulse control of the motors. The controllers also have various bit I/O lines for control of DC motors and digital status information. In addition to control of the relevant mirrors, an automatic alignment requires feedback on how the alignment is proceeding. We are using large area quad cells (LAQs) to provide this feedback. The LAQ design considerations and engineering tests on prototype cells was discussed in Gilbreath and Mozurkewich.¹³ We have now built controllers and motorized mounts for these LAQs and installed the quad cells on the switch yard table. A close up of a beam's motorized mirrors and LAQ as installed on the optical switch yard table is shown in Fig. 6. Here the LAQ is shown in the upper active alignment position. The other alignment position is when the beam's LAQ is flipped down and it intercepts the lower beam before the fast delay line. Figure 7 shows the LAQ in the lower alignment position. A stow sensor is also provided so that the computer can position the LAQ at a position between the two vertical beams so that star light can pass over and below the stowed LAQ. This stowed orientation is shown in Fig. 8.

We have demonstrated automated closed loop alignments of the switch yard table mirror LAQ combinations on all six beams. We are currently working on making the auto alignment servo faster and more robust.

5. CONCLUSIONS

With the recent addition of an internal delay metrology system, we have shown that the NPOI is now technologically capable of making astrometric observations with a nightly precision approaching 15 milliarcseconds.

Another technological milestone towards automation of the nightly alignments of various beam relay mirrors has been reached with the installment and near complete implementation of the LAQ alignment system.

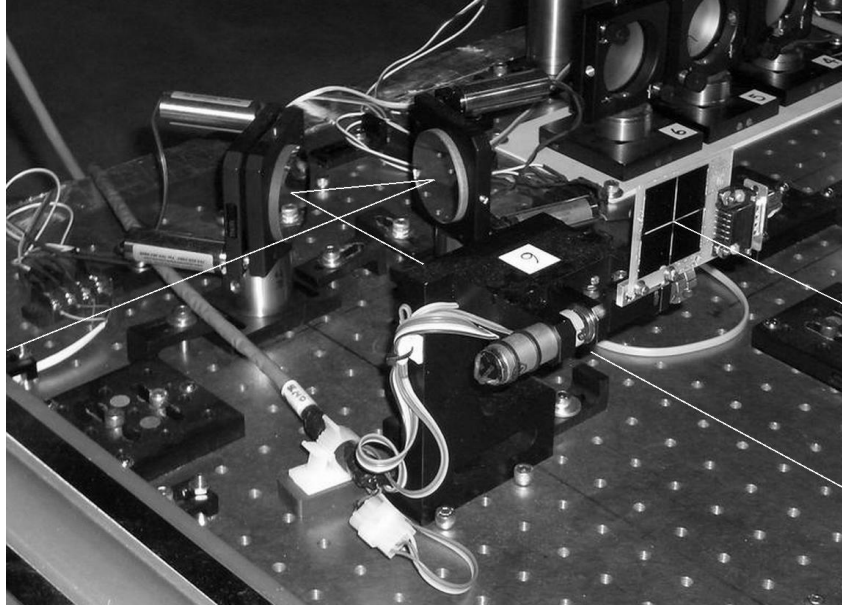


Figure 6. Motorized mirrors and large area quad cell in the upper alignment position. The dotted white line starting at the left indicates the path of the alignment metrology beam. The alignment beams goes off to the lower right towards the fast delay line. After traversing the fast delay line cart optics, the beam returns, offset in a vertical plane, and impinges on the large area quad cell.

The ever increasing automation of the NPOI and subsequent ease of operation continues to improve its observing efficiency. This enables the NPOI scientific staff and collaborators to pursue a number of science programs with the NPOI. Discussions of a number of these programs are presented elsewhere in the Proceedings of this conference (see Sect. 3 for explicit references).

ACKNOWLEDGMENTS

We gratefully acknowledge the NPOI observers for their continued careful and efficient operation of the NPOI. We also gratefully acknowledge the skillful instrument makers at the USNO and Lowell Observatory instrument shops.

J.A.B thanks Karl Isbrecht for his electronics design and construction of many of the various controllers that we are using to improve the automation of the instrument. He also thanks Stacy Nichols for her programming work on the LAQ system and numerous other automation efforts. J.A.B. also thanks Brit O'Neill for taking care of many of the day-to-day observing related issues.

The NPOI is a joint project of the U. S. Naval Observatory and the Naval Research Laboratory in conjunction with Lowell Observatory. The NPOI is funded by the Oceanographer of the Navy and the Office of Naval Research.

REFERENCES

1. J. T. Armstrong, D. Mozurkewich, L. J. Rickard, D. J. Hutter, J. A. Benson, P. F. Bowers, N. M. Elias II, C. A. Hummel, K. J. Johnston, D. F. Buscher, J. H. Clark III, L. Ha, L.-C. Ling, N. M. White, and R. S. Simon, "The Navy Prototype Optical Interferometer," *Ap. J.* **496**, pp. 550–571, 1998.
2. J. A. Benson, C. A. Hummel, and D. Mozurkewich, "Simultaneous 6-station observations with the NPOI," in *Interferometry for Optical Astronomy II*, W. A. Traub, ed., *Proc. SPIE* **4838**, pp. 358–368, 2003.

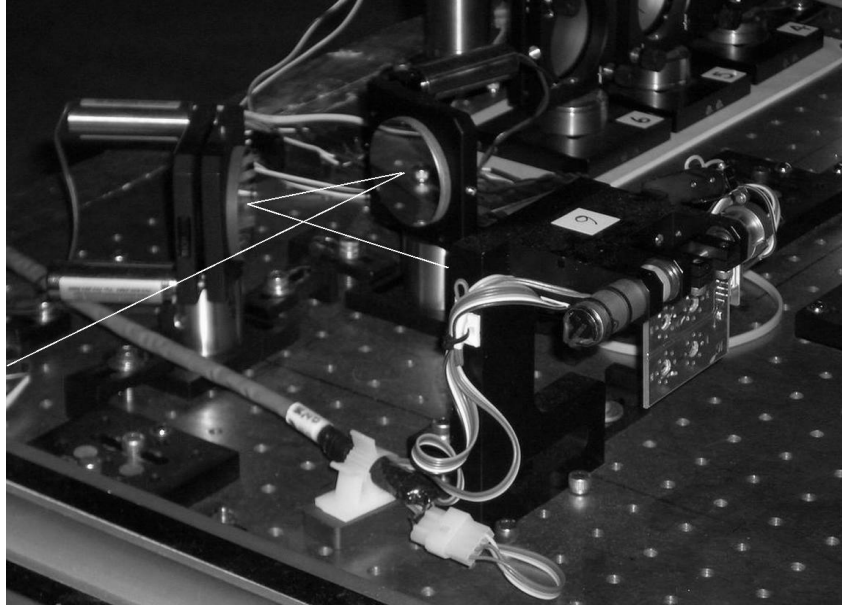


Figure 7. Large area quad cell in the lower alignment position.

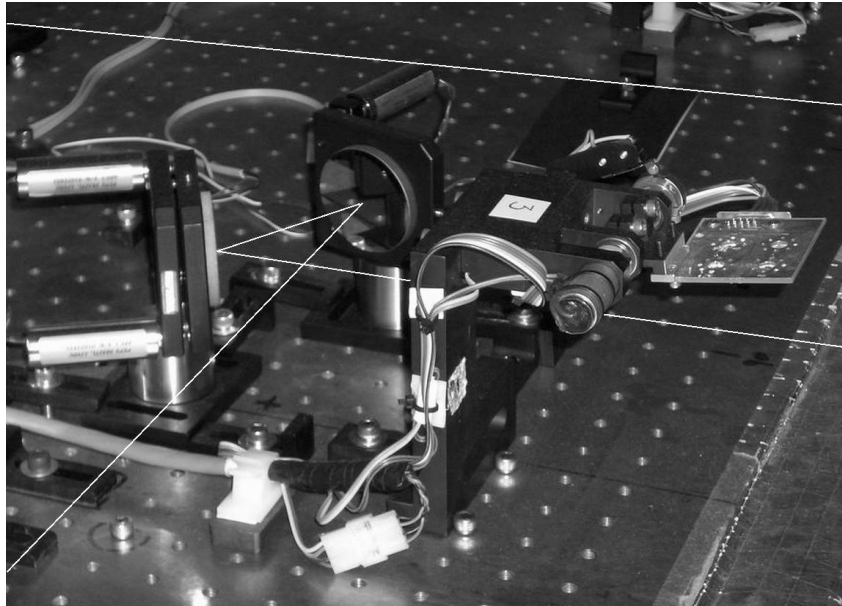


Figure 8. Large area quad cell in the stow position. The starlight beam passes over the top of the LAQ, through the fast delay line, returns offset in the vertical plan, passes under the LAQ and then on to the beam combining table.

3. J. H. Clark III, J. L. Murphy, L. Ha, J. D. Howard, G. C. Gilbreath, R. B. Hindsley, and J. P. Walton, "Alignment of vacuum feed stations on the NPOI," in *New Frontiers in Stellar Interferometry*, W. A. Traub, ed., *Proc. SPIE* **5491**, p. in press, 2004.
4. D. M. Peterson, C. A. Hummel, T. A. Pauls, J. T. Armstrong, J. A. Benson, G. C. Gilbreath, R. B. Hindsley, D. J. Hutter, and D. Mozurkewich, "Resolving the effects of rotation in early type stars," in *New Frontiers in Stellar Interferometry*, W. A. Traub, ed., *Proc. SPIE* **5491**, p. in press, 2004.

5. C. A. Hummel, D. Mozurkewich, J. A. Benson, P. Kervella, and D. M. Peterson, "Coherent integration of NPOI phase closure data on Altair," in *New Frontiers in Stellar Interferometry*, W. A. Traub, ed., *Proc. SPIE* **5491**, p. in press, 2004.
6. G. T. van Belle, D. R. Ciardi, R. R. Thompson, R. L. Akeson, and E. A. Lada, "Altair's oblateness and rotation velocity from long-baseline interferometry," *Ap. J.* **559**, pp. 1155–1164, 2001.
7. D. J. Hutter, J. A. Benson, R. T. Zavala, K. J. Johnston, T. A. Pauls, C. A. Hummel, and J. T. Armstrong, "Imaging stellar multiplicity with the NPOI," in *New Frontiers in Stellar Interferometry*, W. A. Traub, ed., *Proc. SPIE* **5491**, p. in press, 2004.
8. J. T. Armstrong, J. H. Clark III, G. C. Gilbreath, R. B. Hindsley, D. J. Hutter, D. Mozurkewich, and T. A. Pauls, "Precision narrow-angle astrometry of binary stars with the NPOI," in *New Frontiers in Stellar Interferometry*, W. A. Traub, ed., *Proc. SPIE* **5491**, p. in press, 2004.
9. G. C. Gilbreath, T. A. Pauls, J. T. Armstrong, D. Mozurkewich, J. H. Clark III, R. B. Hindsley, and D. J. Hutter, "H alpha observations using closure phases at the NPOI," in *New Frontiers in Stellar Interferometry*, W. A. Traub, ed., *Proc. SPIE* **5491**, p. in press, 2004.
10. C. Tycner, A. R. Hajian, D. Mozurkewich, J. T. Armstrong, J. A. Benson, G. C. Gilbreath, D. J. Hutter, T. A. Pauls, and J. B. Lester, "A method for internal calibration of optical interferometer data and application to the circumstellar envelope of Gamma Cassiopeae," *A. J.* **125**, pp. 3378–3388, 2003.
11. C. Tycner, A. R. Hajian, J. T. Armstrong, J. A. Benson, G. C. Gilbreath, D. J. Hutter, J. B. Lester, D. Mozurkewich, and T. A. Pauls, "The circumstellar envelope of Zeta Tauri through optical interferometry," *A. J.* **127**, pp. 1194–1203, 2004.
12. N. M. White, D. Mozurkewich, D. J. Hutter, J. A. Benson, C. A. Hummel, and J. H. Clark III, "Operational experience with the NPOI," in *Observatory operations to optimize scientific return III*, P. J. Quinn, ed., *Proc. SPIE* **4844**, pp. 159–163, 2002.
13. G. C. Gilbreath and D. Mozurkewich, "Large aperture quad cell for fiducial alignment with large diameter beams," in *Interferometry in Optical Astronomy*, A. Quirrenbach, ed., *Proc. SPIE* **4006**, pp. 1128–1135, 2000.