

REPORT DOCUMENTATION PAGE

*Form Approved
OMB No. 0704-0188*

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to the Department of Defense, Executive Services and Communications Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ORGANIZATION.

1. REPORT DATE (DD-MM-YYYY) 12-03-2008		2. REPORT TYPE Conference Proceeding		3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE Estimation of Upstream Discharge in Data-Deprived Riverine Environments				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER 0602435N	
6. AUTHOR(S) John E.M. Brown, Cheryl Ann Blain				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER 73-6802-A7-5	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Research Laboratory Oceanography Division Stennis Space Center, MS 39529-5004				8. PERFORMING ORGANIZATION REPORT NUMBER NRL/PP/7320-07-8054	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Office of Naval Research 800 N. Quincy St. Arlington, VA 22217-5660				10. SPONSOR/MONITOR'S ACRONYM(S) ONR	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution is unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT Rivers pose one of the most challenging environments to quantify as they contain elements of both land and water. Their dynamical scales are small in size relative to traditional ocean processes, and are ever-changing in their position and character. To compound the problem, many riverine environments of interest to the US Navy are inaccessible or denied and typically have very little, if any, known information. To address the operational needs of the Navy in rivers, a River Simulation Tool (RST) is being developed that brings together satellite imagery, hydrodynamic and hydrological modeling. One component of the RST requires estimation of upstream discharge. To do this we use NASA's Land Information System (LIS) to generate the surface runoff and subsurface baseflow. We force the land surface model within LIS using satellite-derived precipitation. Finally, we generate the upstream discharge by routing the runoff and baseflow using a river routing model from the University of Washington. While this approach has been demonstrated on a large scale (0.5 deg resolution) for the combined Ganges/Brahmaputra River Basin on the Indian Sub-Continent (Brown, 2007), our challenge here is to apply these techniques to a small scale regime (~1 km). As a first test case we chose the local Pearl River (Mississippi/Louisiana) watershed. Preliminary results will be shown.					
15. SUBJECT TERMS HYDROIK, land information system, land surface modelling, baseflow					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UL	18. NUMBER OF PAGES 9	19a. NAME OF RESPONSIBLE PERSON Cheryl Ann Blain
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (Include area code) 228-688-5616

7.5A Estimation of Upstream Discharge in Data-Deprived Riverine Environments

John E. M. Brown* and Cheryl Ann Blain*
Naval Research Laboratory, Stennis Space Center

1. The Challenge for the US Navy

There are over 900,000 rivers and 224 major river basins in the world. The US Navy has recently increased its focus on riverine environments. This activity has seen an exponential rise since the Global War on Terror ensued and is expected to grow as Special Warfare assumes an ever-increasing role in Navy operations. To meet this operational demand the Navy created the Navy Expeditionary Combat Command (NECC) with its two newly formed River Squadrons along with the existing capabilities of the Navy SEAL (NSW) and Special Boat Teams (SBT) (Fig. 1).

Fig. 1 SBT-22, based at Stennis Space Center, exercises on the Pearl River.



Rivers pose one of the most challenging environments to quantify as they contain elements of both land and water, they are small in size relative to normal (deep and coastal ocean) Navy operations, and are ever-changing in their position and character. To compound the problem, Navy operations are targeted at inaccessible

Corresponding authors' address:
Ocean Dynamics & Prediction Branch Code 7322,
Naval Research Laboratory, Stennis Space Center,
MS 39529-5004. Email: brown@nrlssc.navy.mil;
cheryl.ann.blain@nrlssc.navy.mil

20080409003

or denied river environments that typically have very little, if any, known information.

In the past, Navy analysis of the river environment has relied heavily on imagery-based information. For all its utility, imagery cannot provide detailed spatial/temporal information on river dynamics when imagery is not available. Predictive numerical modeling of rivers is extremely valuable in addressing these needs. However, the lack of detailed knowledge of an entire river system precludes the application of sophisticated hydrodynamic models.

2. Approach

Our approach is to bring together satellite remote sensing, hydrodynamic modeling, and hydrological modeling in a coupled fashion so that one can characterize any river reach of interest. One critical forcing component to any

realistic numerical model of a stretch of river is its upstream discharge. But specification of the upstream discharge is very difficult as this information is not typically available for rivers of military interest. In order to obtain a reasonable estimate of upstream discharge an accurate representation of land surface processes is needed. We use NASA's Land Information System (LIS) (Fig. 2) to generate surface runoff and subsurface baseflow. We couple these parameters with a river routing model to produce upstream river discharge estimates as a necessary boundary condition to the hydrodynamic model. In general, the physics in such models have the capability to resolve local riverine features.

LIS was developed by the Hydrological Sciences Branch (Code 613.4) at NASA's Goddard Space Flight Center (GSFC) (Kumar et al. 2006).

LIS is a high performance land surface modeling and data assimilation system, based on GSFC's Global Land Data Assimilation System (Rodell et al. 2004).

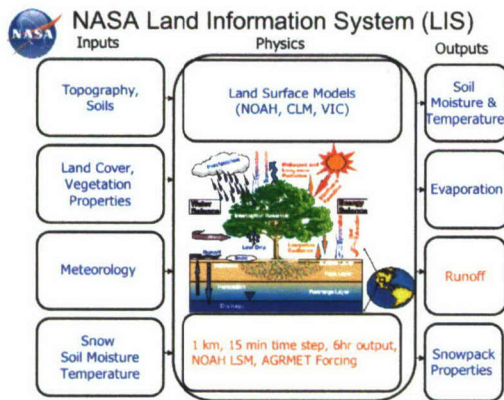


Fig. 2 NASA's Land Information System. The model configuration is shown in red. Output of interest is runoff.

In order to generate a streamflow hydrograph for comparison with observations it is necessary to route the runoff from each model grid cell to the basin outlet. We use the University of Washington's Variable Infiltration Curve (VIC) post-processor river routing model (Lohmann et al. 1996, 1998a,b) (Fig. 3).

VIC River Routing Model

Grid Cell - Impulse response function

Channel Flow - linearized Saint-Venant Equation

$$\frac{\partial Q}{\partial t} = D \frac{\partial^2 Q}{\partial x^2} - C \frac{\partial Q}{\partial x}$$

Q Discharge
D Diffusion
C Velocity

Exit in one direction

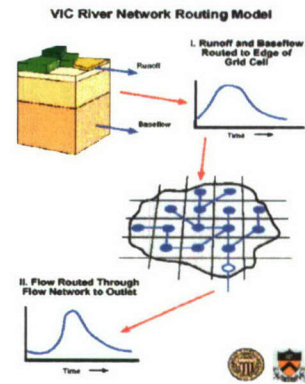


Fig. 3 University of Washington's VIC River Routing Model.

The major advantages to using LIS and the VIC river routing models are that they are well-established, widely-adopted, rely on readily available satellite data sets and are suited to supercomputer processing.

3. Application to the Tactical Scale

Runoff generated must be routed through a river network. In one example of continental scale modeling Brown (2007) used the University of New Hampshire's Simulated Topological Network at 30-minute resolution (STN-

30) (Vörösmarty et al. 2000) to generate daily discharge estimates for major rivers draining into the Bay of Bengal. Figure 4 shows the STN-30 network for our test case – the Pearl River, USA watershed.

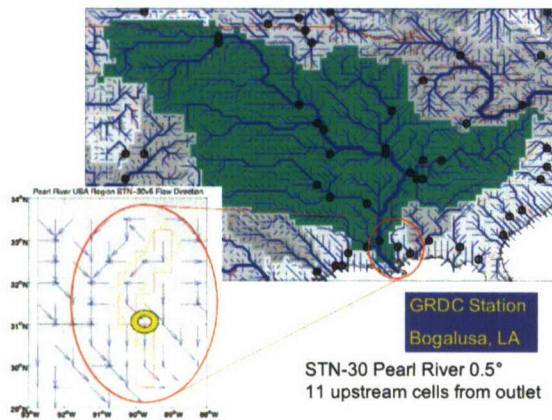


Fig. 4 STN-30 network for the Pearl River basin

At the 0.5° scale there are only 11 upstream cells from the river outlet with only one gauge station in the Global Runoff Data Center climatology. In our test case we apply the same techniques on the tactical scale. NASA's LIS produces output at a nominal 1 km scale

and we find a suitable river network with the United States Geological Survey's (USGS) HYDRO1K 1 km flow-direction data set. However, first we must match the HYDRO1K network to the LIS 1 km grid so that the surface runoff and subsurface baseflow grid values can be routed along their correct flow paths. One challenge is that the USGS HYDRO1K data is in a Lambert Azimuthal Equal Area projection while the NASA LIS data are in a rectangular/Mercator projection. A further complication is that in the HYDRO1K data $1\text{km} = 0.009009^\circ$ while in the NASA LIS data $1\text{km} = 0.01^\circ$. The adjustment process resulted in a river network that embedded several flow-direction errors that had to be manually corrected to allow the river routing model to work. These errors can generally be grouped as crossed

vectors, double-backs, and triangles (Fig. 5).

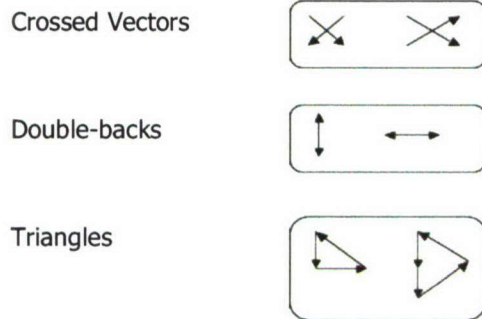


Fig. 5 Types of flow-direction errors after network adjustment

We leverage off the research efforts of NASA and the US Air Force Weather Agency (AFWA) who run LIS on the high performance supercomputer at the Naval Oceanographic Office (NAVO). The AFWA LIS was configured with the NOAH land surface model and forced by AFWA's own Agricultural Meteorology (AGRMET) model which incorporates unique precipitation, radiation and surface forcing algorithms. For our test case LIS was run at 15-minute time-steps with 6-hourly output.

The entire LIS run covers the whole Pearl River domain: 30°-33.5° N & 88°-91.5° W or 351 x 351 1 km grid cells (not shown) from December 2005 to August 2007. At this resolution there are 20,530 upstream cells from the outlet. A total of 361 flow-direction errors were found in and around the USGS delineated Pearl River boundary, or an error rate of 1.5%-2.0%. In comparison there are only 576 upstream cells for the entire Ganges/Brahmaputra Basin in the quality-controlled STN-30 network.

Another factor complicating the application of these methods to the tactical scale are the differing formats of the LIS output and the VIC routing model data input. LIS output is given as 6-hourly files covering a domain versus VIC routing input given as 0.01° files of runoff and baseflow time-series data. For the Bay of Bengal study region in Brown (2007) there were 3721 total grid

cells (61 x 61 0.5° grid cells). Converting from the LIS output format to a VIC routing compatible format was a process that took one weekend of MATLAB processing time on a single workstation. For this test case the time required to convert a domain of 351 x 351 would take two weeks MATLAB processing time on a single workstation.

Due to various data storage, processing, and transfer issues we will only show results for December 2005 and January 2006 for a smaller subset domain (75 x 75 0.01° grid cells) covering the northeast corner of the Pearl River basin (Figs. 6 & 7). Model results are produced for USGS gauge stations Burnside, MS (upstream) and Edinburg, MS (downstream).

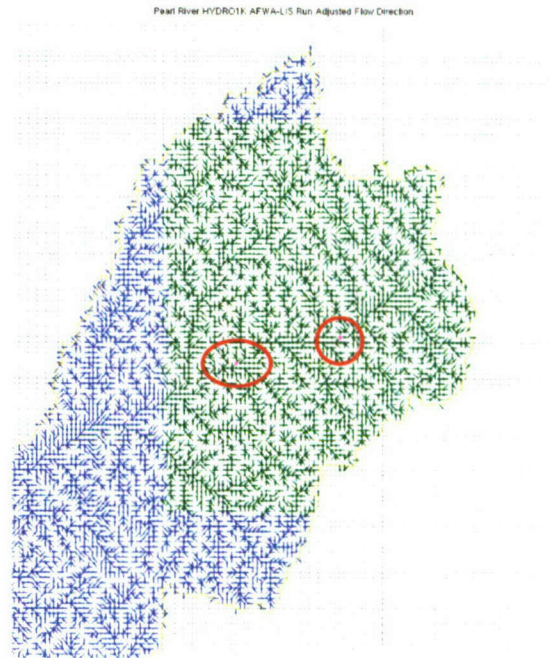


Fig. 6 Northeast corner of Pearl River domain (75 x 75 grid cells). Results are produced for USGS gauge stations Burnside, MS (magenta point in red circle) and Edinburg, MS (magenta point inside red oval).

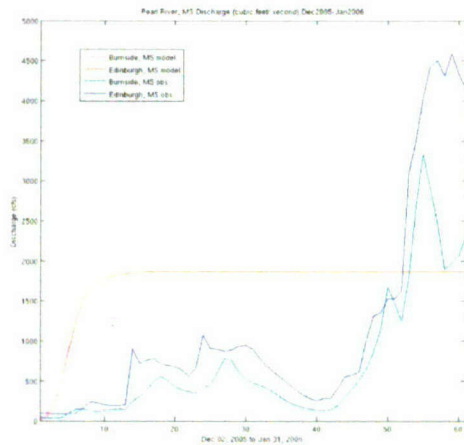


Fig. 7 Initial model results for the smaller domain. River discharge values for Burnside, MS (USGS observations in cyan, LIS/VIC-routed model in magenta) and Edinburg, MS (USGS observations in blue, LIS/VIC-routed model in red).

At first glance we see that the LIS/VIC-routed model discharge is within the climatologically expected values, but do not show the natural variability of the USGS observations. Also one can see the so-called “start-up” effect that is documented on the VIC website. Conceptually, the problem is that the river channels are started “empty” because no state file is stored

for the routing arrays. This effect soon corrects itself depending on travel time. Without an in-depth analysis of the AFWA forcing data one can see that the LIS/VIC-routed model did not pick up a noticeable precipitation event in late January 2006.

4. Way Forward

In order for NASA’s LIS and the University of Washington’s VIC river routing model to be adapted to the tactical scale a few issues need to be addressed. Due to the number of grid cells within a river basin at the 1 km scale as many steps as possible need to be automated. Thus, the process of adjusting the river routing network from one scale or projection to another needs to include algorithms for checking flow-direction errors. Additional scripting can transform the LIS model output of temporal files of a domain to the VIC

river routing model format of grid cell files of time-series data. Currently, the VIC river routing model routs daily land surface model output. Ideally, upstream discharge as a boundary condition to the hydrodynamic model would need to have a 6-hourly (or finer) resolution capability.

Resolution of the forcing data (radiation, precipitation, wind, etc) as well as the land surface state parameter data (land cover, soil type, etc) is an issue. Land surface models are most sensitive to the precipitation forcing. At the tactical scale it is easy to understand how a local rain event could be missed within the targeted domain. Data quality checks of the LIS model output could also be automated with any bad values corrected or set to zero.

Since we are at the limits of applicability with these techniques other routing schemes and small-scale

hydrological models such as the University of Washington's Distributed Hydrology Soil Vegetation Model may need to be adopted.

However, our goal is not to model an entire river basin at 1 km or finer scale, but rather to provide a set of workable and appropriate boundary conditions to the main hydrodynamic model for a given data-deprived environment.

Acknowledgement

This work was sponsored under a National Research Council Post-doctoral fellowship funded by an NRL Rapid Transition Project: Feature Extraction and Simulation of River Dynamics using Satellite-Derived Information. Many thanks to Mr. John Eylander, US Air Force Weather Agency and the NASA LIS project team directed by Dr. Christa-Peters Lidard.

References

- Brown, J.E.M. (2007). 3.3 Generating river discharge estimates for the Bay of Bengal using NASA's Land Information System. American Meteorological Society 21st Hydrology Conference, San Antonio, TX. 16 pp. Online at <http://ams.confex.com/ams/pdfpapers/120845.pdf>
- Kumar, S.V., C.D. Peters-Lidard, Y. Tian, P.R. Houser, J. Geiger, S. Olden, L. Lightly, J.L. Eastman, B. Doty, P. Dirmeyer, J. Adams, K. Mitchell, E.F. Wood, and J. Sheffield (2006). Land Information System - An Interoperable Framework for High Resolution Land Surface Modeling. *Environmental Modeling & Software*, v. 21, 1402-1415 Online at: <http://lis.gsfc.nasa.gov/Papers/index.shtml>.
- Lohmann, D., R. Nolte-Holube, and E. Raschke (1996). A large-scale horizontal routing model to be coupled to land surface parameterization schemes, *Tellus*, 48A,5, pp708-721.
- Lohmann, D., E. Raschke, B. Nijssen, and D.P. Lettenmaier (1998a). Regional Scale Hydrology: I. Formulation of the VIC-2L Model Coupled to a Routing Model, *Hydrological Sciences Journal*, 43(1), pp 131-141.
- Lohmann, D., E. Raschke, B. Nijssen, and D.P. Lettenmaier (1998b). Regional Scale Hydrology: II. Application of the VIC-2L Model to the Weser River, Germany, *Hydrological Sciences Journal*, 43(1), pp 143-157.
- Rodell M., P.R. Houser, U. Jambor, J. Gottschalck, K. Mitchell, C.-J. Meng, K. Arsenault, B. Cosgrove, J. Radakovich, M. Bosilovich, J.K. Entin, J.P. Walker, D. Lohmann, and D. Toll (2004). The global land data assimilation system. *Bulletin of the American Meteorological Society*, 85, 381-394.
- Vörösmarty, C.J., B.M. Fekete, M. Meybeck and R.B. Lammers (2000). Global system of rivers: Its role in organizing continental land mass and delinkages, *Global Biogeochemical Cycles*, 14(2), 599-621.