

Report Documentation Page				Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.						
1. REPORT DATE 07 JUN 2007		2. REPORT TYPE Technical, Success Story		3. DATES COVERED 26-01-2007 to 07-06-2007		
4. TITLE AND SUBTITLE Transparent Calibrated Moisture Boot For UH-60 Pitch Trim Actuator				5a. CONTRACT NUMBER		
				5b. GRANT NUMBER		
				5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)				5d. PROJECT NUMBER 07-0125-01		
				5e. TASK NUMBER		
				5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Center for Defense Manufacturing & Machining,1600 Technology Way,Latrobe,PA,15650				8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)		
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited						
13. SUPPLEMENTARY NOTES						
14. ABSTRACT The UH-60 Black Hawk Helicopter Pitch Trim Actuator manufactured by MOOG Inc. Aircraft Group currently utilizes a black opaque dust and moisture boot for protecting a rotating shaft and seal. During normal operation, hydraulic fluid can seep past the seal and collect in the boot. Currently, there is no way to determine the amount of fluid that has collected in the boot. This fluid will continue to collect in the boot until a sufficient quantity is accumulated to detach the boot from its seat on the Pitch Trim Actuator end cap, ultimately spilling hydraulic fluid on the upper flight deck. Once the hydraulic fluid is detected on the flight deck, the Pitch Trim Actuator is assumed to be unserviceable and consequently turned in for repair. It is estimated that 20% of the Pitch Trim Actuators turned in for this reason are still serviceable. The NCDMM, working together with Alliance Partner Polymer Technologies Incorporated (PTI), set out to develop a transparent calibrated moisture boot for the Pitch Trim Actuator. This calibrated boot will allow for a visual inspection to measure the fluid seepage as a function of flight hours to determine Pitch Trim Actuator serviceability.						
15. SUBJECT TERMS UH-60 Black Hawk Helicopter Pitch Trim Actuator; Alliance Partner Polymer Technologies Incorporated; NCDMM; Success Stories						
16. SECURITY CLASSIFICATION OF:				17. LIMITATION OF ABSTRACT 1	18. NUMBER OF PAGES 1	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified				

Transparent Calibrated Moisture Boot For UH-60 Pitch Trim Actuator

NCDMM Project No. 07-0125-01

PROBLEM / OBJECTIVE

The UH-60 Black Hawk Helicopter Pitch Trim Actuator manufactured by MOOG Inc. Aircraft Group currently utilizes a black opaque dust and moisture boot for protecting a rotating shaft and seal. During normal operation, hydraulic fluid can seep past the seal and collect in the boot. Currently, there is no way to determine the amount of fluid that has collected in the boot. This fluid will continue to collect in the boot until a sufficient quantity is accumulated to detach the boot from its seat on the Pitch Trim Actuator end cap, ultimately spilling hydraulic fluid on the upper flight deck. Once the hydraulic fluid is detected on the flight deck, the Pitch Trim Actuator is assumed to be unserviceable and consequently turned in for repair. It is estimated that 20% of the Pitch Trim Actuators turned in for this reason are still serviceable.

The NCDMM, working together with Alliance Partner Polymer Technologies Incorporated (PTI), set out to develop a transparent calibrated moisture boot for the Pitch Trim Actuator. This calibrated boot will allow for a visual inspection to measure the fluid seepage as a function of flight hours to determine Pitch Trim Actuator serviceability.

ACCOMPLISHMENTS / PAYOFF




Single Cavity Injection Mold

Process Improvement

Polymer Technologies Inc. designed a single cavity injection mold configured to produce a transparent boot. This tool was fabricated and delivered to PTI for development of the boot.

PTI worked closely with representatives from AMRDEC, SAIC and material suppliers to determine optimal material for the transparent moisture boot. Once the material had been selected, PTI developed

the appropriate molding parameters in order to successfully mold the transparent calibrated moisture boot.

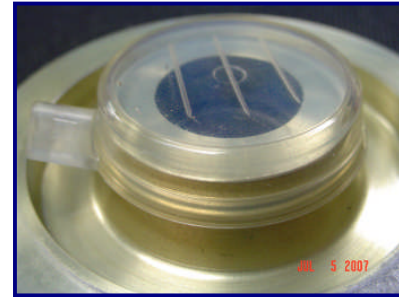

Transparent Calibrated Moisture Boot

Implementation and Technology Transfer

The transparent calibrated moisture boots produced are currently being flight-tested.

Expected Benefits

Based on historical overhaul data, the implementation of this boot is expected to reduce the number of serviceable Pitch Trim Actuators turned in for overhaul prematurely by 20%. With an average monthly demand (AMD) of 37.8 units at an average overhaul cost (AOC) of \$12,064, the projected yearly cost avoidance is estimated to be \$1,094,446. This equates to a savings of over \$20M for the life of the program.

TIME LINE / MILESTONE

Start Date.....January 07
End Date.....June 07

PROJECT FUNDING

NCDMM Funding.....\$35K

PARTICIPANTS

Polymer Technologies Incorporated
NCDMM

For additional information concerning this project, contact the NCDMM at www.ncdmm.org