

LATEST CALIBRATION OF GLONASS P-CODE TIME RECEIVERS

A. Foks¹, J. Nawrocki², and W. Lewandowski³

¹ Space Research Centre of Polish Academy of Sciences, ul. Bartycka 18A, 00-716 Warsaw, Poland; E-mail: afoks@cbk.waw.pl; Tel.: +48-22-8403766

² Astrogeodynamical Observatory Borowiec, Space Research Centre, Polish Academy of Sciences, 62-035 Kórnik, Poland; E-mail: nawrocki@cbk.poznan.pl, Tel.: +48-61-8170187

³ Bureau International des Poids et Mesures, Pavillon de Breteuil, 92310 Sèvres, France; E-mail: wlewandowski@bipm.org; Tel.: +33-1-45077063

Abstract

The Russian GLONASS navigation system, although not yet finished, provides interesting opportunities for international time metrology. Its P-code signal shows an outstanding performance. In particular, it allows calibration of GLONASS time receivers with an uncertainty below 1 ns.

Our paper reports the latest differential calibration of GLONASS P-code time receivers located at the AOS and the BIPM, by means of a portable receiver. Receiver time biases were determined for different GLONASS frequencies. Removing these biases, reaching sometimes 10 ns, allows time transfer with an accuracy of around 1 ns.

1 INTRODUCTION

Over the last 50 years, the accuracy of atomic clocks has improved by an order of magnitude every 7 years. Today, they reach a stability in frequency of 1 part in 10^{16} . The stability of the international reference time scales, International Atomic Time (TAI) and Coordinated Universal Time (UTC), is presently about 10^{15} over a period of a few weeks. Meanwhile, the standard uncertainty of GPS C/A-code common view, currently the most widely used method of time transfer (and the main method providing the data for the calculation of TAI and UTC), is still a few nanoseconds.

To enable comparisons of increasingly stable clocks, it is important to improve time transfer methods. One of the new approaches to time and frequency comparisons consists of using GLONASS (Global Navigation Satellite System) P-code. Use of GLONASS in standard CGGTTS common-view mode was introduced into time metrology in 1996 by W. Lewandowski et al. [1,2]. Studies of this approach have been continued by J. Azoubib, W. Lewandowski, and J. Nawrocki in 2000 and 2001 [3,4].

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

| | | | | | |
|--|------------------------------------|-------------------------------------|-------------------------------|---|------------------------------------|
| 1. REPORT DATE DEC 2004 | | 2. REPORT TYPE | | 3. DATES COVERED 00-00-2004 to 00-00-2004 | |
| 4. TITLE AND SUBTITLE Latest Calibration of Glonass P-Code Time Receivers | | | | 5a. CONTRACT NUMBER | |
| | | | | 5b. GRANT NUMBER | |
| | | | | 5c. PROGRAM ELEMENT NUMBER | |
| 6. AUTHOR(S) | | | | 5d. PROJECT NUMBER | |
| | | | | 5e. TASK NUMBER | |
| | | | | 5f. WORK UNIT NUMBER | |
| 7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Space Research Centre of Polish Academy of Sciences, ul. Bartycka 18A, 00-716 Warsaw, Poland, | | | | 8. PERFORMING ORGANIZATION REPORT NUMBER | |
| 9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) | | | | 10. SPONSOR/MONITOR'S ACRONYM(S) | |
| | | | | 11. SPONSOR/MONITOR'S REPORT NUMBER(S) | |
| 12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited | | | | | |
| 13. SUPPLEMENTARY NOTES See also ADM001784. 36th Annual Precise Time and Time Interval (PTTI) Systems and Applications Meeting, Washington, DC on 7-9 Dec 2004 | | | | | |
| 14. ABSTRACT The Russian GLONASS navigation system, although not yet finished, provides interesting opportunities for international time metrology. Its P-code signal shows an outstanding performance. In particular, it allows calibration of GLONASS time receivers with an uncertainty below 1 ns. Our paper reports the latest differential calibration of GLONASS P-code time receivers located at the AOS and the BIPM, by means of a portable receiver. Receiver time biases were determined for different GLONASS frequencies. Removing these biases, reaching sometimes 10 ns, allows time transfer with an accuracy of around 1 ns. | | | | | |
| 15. SUBJECT TERMS | | | | | |
| 16. SECURITY CLASSIFICATION OF: | | | 17. LIMITATION OF ABSTRACT | 18. NUMBER OF PAGES | 19a. NAME OF RESPONSIBLE PERSON |
| a. REPORT unclassified | b. ABSTRACT unclassified | c. THIS PAGE unclassified | | | |

2 ADVANTAGES OF GLONASS

The GPS and GLONASS systems share basically the same concept. A substantial difference between GPS and GLONASS is in the signal structure. GPS uses Code Division Multiple Access (CDMA): every satellite transmits the same two carriers modulated by PRN-codes particular to each satellite. GLONASS uses Frequency Division Multiple Access (FDMA): two individual carrier frequencies are assigned to each satellite, but the PRN-codes are the same for all satellites.

Hence, the GPS carrier frequencies f_{L1} and f_{L2} are invariable:

$$f_{L1(\text{GPS})} = 1575.42 \text{ MHz}$$

$$f_{L2(\text{GPS})} = 1227.60 \text{ MHz}$$

and the individual GLONASS carrier frequencies f_{L1}^k and f_{L2}^k are defined by:

$$f_{L1(\text{GLONASS})}^k = 1602.0 \text{ MHz} + 0.5625k \text{ MHz}$$

$$f_{L2(\text{GLONASS})}^k = 1246.0 \text{ MHz} + 0.4375k \text{ MHz}$$

where k is the carrier number assigned to the specific satellite.

Both GPS and GLONASS have freely accessible C/A-code that modulates L1 only. Like the GPS precision code, the GLONASS P-code modulates both carriers, but unlike GPS it is also freely accessible.

The GLONASS P-code has two main advantages for high-precision time transfer. Firstly, the GLONASS P-code modulation onto both L1 and L2 carrier frequencies allows high-precision measurements of ionospheric delays. Secondly, the GLONASS P-code chip rate is one-tenth that of the GLONASS C/A-code and one-fifth that of the GPS C/A-code. This means that GLONASS P-code pseudo-range measurements are much more precise than GPS or GLONASS C/A-code measurements.

3 DETERMINATION OF GLONASS FREQUENCY BIASES

The differential calibration of a GLONASS time receiver is realized by a one-site comparison with a portable receiver through common views [5]. Both receivers are connected to the same clock and the antennas are separated by at most a few meters.

Such a comparison at short distance eliminates the common-clock error and errors resulting from satellite broadcast ephemerides, ionospheric and tropospheric delays, and antenna coordinates; only the noise of the receivers is observed.

| | | GLONASS | GPS |
|------------------------------|-------|---|--------------------------------------|
| operator | | Military Space Forces (Russia) | Department of Defense (USA) |
| nominal number of satellites | | 24* | 24 |
| orbit altitude | | 19 100 km | 20 200 km |
| orbital planes | | 3 | 6 |
| orbital inclination | | 64.8° | 55° |
| period of revolution | | ~ 11 h 16 min. | ~ 11 h 58 min. |
| ground track repetition | | 8 sidereal days | 1 sidereal day |
| reference frame | | PZ-90 | WGS-84 |
| time reference | | UTC (SU) | UTC (USNO) |
| ephemeris representation | | position, velocity and acceleration | orbital parameters |
| signal separation | | Frequency Division Multiple Access (FDMA) | Code Division Multiple Access (CDMA) |
| carrier frequencies | L1 | 1602.00 – 1614.94 MHz | 1575.42 MHz |
| | L2 | 1246.00 – 1256.06 MHz | 1227.60 MHz |
| | L1/L2 | 9 / 7 | 77 / 60 |
| code chip rate | C/A | 0.511 MHz | 1.023 MHz |
| | P | 5.113 MHz | 10.23 MHz |
| code length (bits) | C/A | 511 | 1023 |
| | P | $5.113 \cdot 10^6$ | $2.3547 \cdot 10^{14}$ |
| navigation message length | | 2 min. 30 s | 12 min. 30 s |

*The present number of GLONASS satellites is below its nominal value.

Table 1. GPS vs. GLONASS.


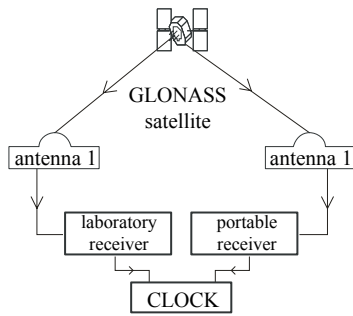


Figure 1. Scheme of differential calibration.

The most recent differential calibrations of GLONASS equipment were made in the late 1990s.

We detail measurements that took place at the Bureau International des Poids et Mesures (BIPM), the Astrodynamical Observatory of Space Research Centre, Polish Academy of Sciences (AOS, Borowiec), Royal Observatory of Belgium (ORB, Brussel), and the Nederland Meetinstituut, Van Swinden Laboratory (NMI-VSL, Delft). Receiver No. 0017 (BIPM A) was chosen as reference; it had been compared with portable BIPM receiver No. 0019 in 1997 [5].

The GLONASS P-code frequency biases are shown in Figure 2. It can be seen that they differ not only for every GLONASS frequency, but also for each receiver.

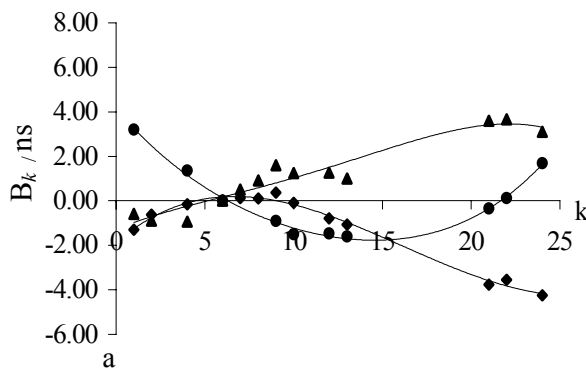

| Lab. | Local Receiver Ser. No. | Portable Receiver Ser. No. | Period | Number of Common Views |
|------|-------------------------|----------------------------|------------------|------------------------|
| BIPM | 0017 (BIPM A) | 0019 (ROVER) | 11/09 – 23/10/97 | 899 (L1) |
| BIPM | 0025 (BIPM D) | 0017 (BIPM A) | 31/08 – 02/10/98 | 739 (L1) 698 (L2) |
| AOS | 0030 (AOS) | 0017 (BIPM A) | 11/01 – 24/01/99 | 922 (L1) |
| ORB | 0022 (ORB) | 0017 (BIPM A) | 02/02 – 12/02/99 | 412 (L1) 398 (L2) |
| VSL | 0018 (VSL 18) | 0017 (BIPM A) | 15/02 – 27/02/99 | 807 (L1) 783 (L2) |

Table 2. Some calibrations of GLONASS P-code receivers made in the 1990s by the BIPM.

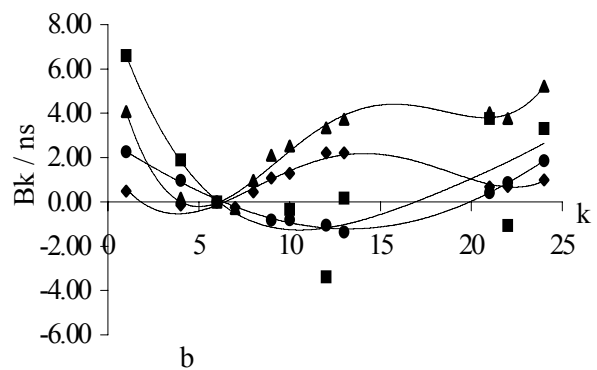


Figure 2. GLONASS P-code frequency biases with respect to frequency No. 6:

- a)
- receiver No 0030 (AOS) L1
 - ▲ receiver No 0018 (VSL) L1
 - ◆ receiver No 0018 (VSL) L2

- b)
- receiver No 0025 (BIPM D) L1
 - receiver No 0025 (BIPM D) L2

▲receiver No 0022 (ORB) L1

◆receiver No 0022 (ORB) L2

Figure 3 shows an example of one-site comparisons of two receivers. The GLONASS C/A code multi-channel data are noisier than the GPS data. However, the GLONASS P-code single-channel comparison with frequency biases removed shows outstanding performance. Corresponding time deviations are shown in Figure 4.

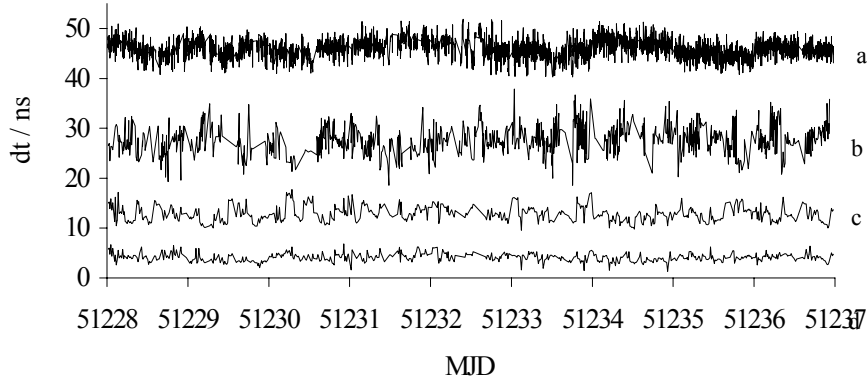


Figure 3. One-site comparisons at the VSL:

- a GPS C/A-code multi-channel;
- b GLONASS C/A-code multi-channel;
- c GLONASS P-code single-channel;
- d GLONASS P-code single-channel with frequency removed.

biases

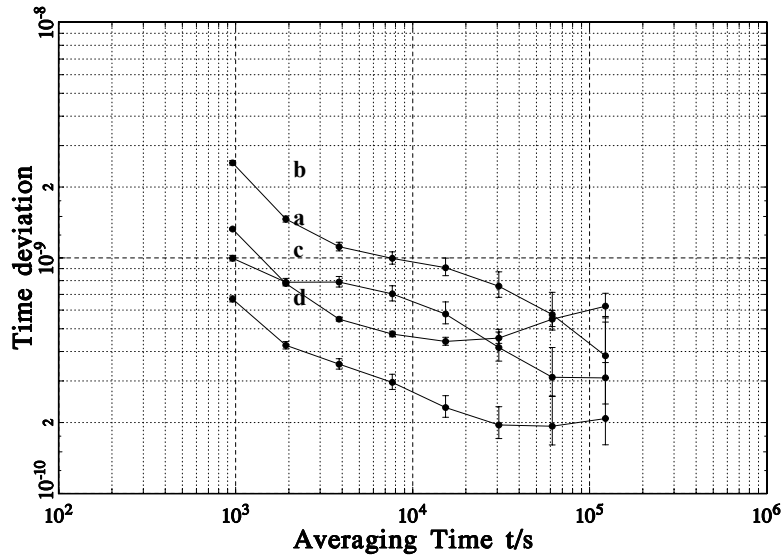


Figure 4. Time deviations for one-site comparisons:

- a GPS C/A-code,
- b GLONASS C/A-code,
- c GLONASS P-code (L1) without corrections for GLONASS frequency biases,
- d GLONASS P-code (L1) with corrections for GLONASS frequency biases.

4 APPLICATION OF CALIBRATED GLONASS FREQUENCY BIASES

We applied the frequency biases obtained from the data from January and February 1999 to the time transfer between AOS and NMI-VSL made in February 1999. Using the measurements with broadcast ephemerides and modeled ionospheric delays, the 1-day root-mean-square (RMS) of GLONASS P-code common view after corrections for frequency biases is about 3.7 ns, which is the same as for GPS.

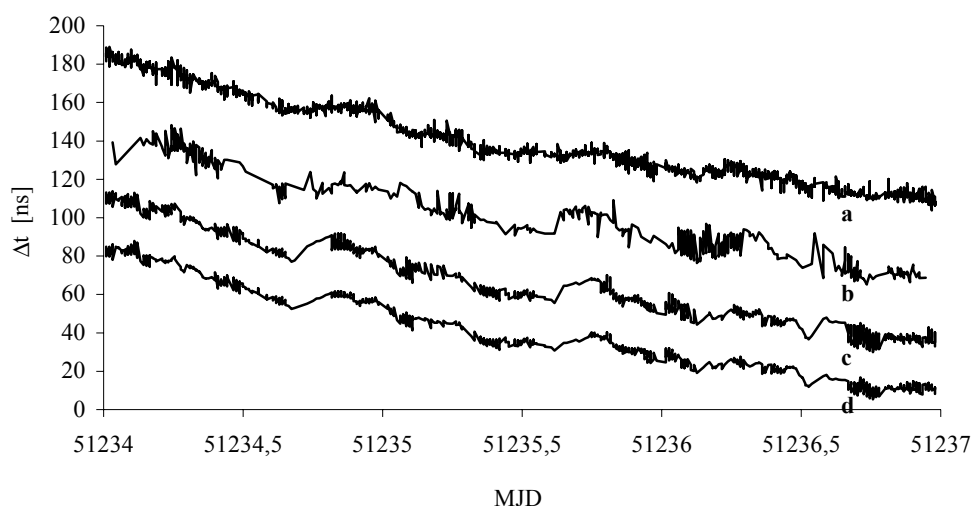


Figure 5. [UTC (AOS) – UTC (VSL)] compared by:

- a GPS C/A-code,
- b GLONASS C/A-code,
- c GLONASS P-code (L1) without corrections for GLONASS frequency biases,
- d GLONASS P-code (L1) with corrections for GLONASS frequency biases
(with broadcast ephemerides and modeled ionospheric delay).

5 CONCLUSIONS

The use of GLONASS P-code promises further improvement in the stability of time transfer. Therefore, it is very important to repeat calibrations of GLONASS receivers in order to determine the frequency biases of those currently in operation.

After corrections for ionospheric delay, derived from IGS maps or P-code double-frequency measurements of the ionosphere, and precise ephemerides, clock-comparison uncertainties of less than 1 ns can be obtained [3,4].

New GLONASS calibration exercises, using the new generation of receivers, are programmed for the near future.

REFERENCES

- [1] W. Lewandowski, J. Azoubib, A. G. Gevorkyan, P. P. Bogdanov, J. Danaher, G. de Jong, and J. Hahn, 1997, “*First Results from GLONASS Common-View Time Comparisons Realized According to the BIPM International Schedule*,” in Proceedings of the 28th Annual Precise Time and Time Interval (PTTI) Applications and Planning Meeting, 3-5 December 1996, Reston, Virginia, USA (U.S. Naval Observatory, Washington, D.C.), pp. 357-366.
- [2] W. Lewandowski, J. Azoubib, G. de Jong, J. Nawrocki, and J. Danaher, 1998, “*A New Approach to International Satellite Time and Frequency Comparisons: ‘All-in-View’ Multi-Channel GPS + GLONASS Observations*,” in Proceedings of the ION-GPS Meeting, 16-19 September 1997, Kansas City, Missouri, USA (Institute of Navigation, Alexandria, Virginia), pp. 1085-1091.
- [3] J. Azoubib and W. Lewandowski, 2000, “*Test of GLONASS precise-code time transfer*,” **Metrologia**, **37**, 55-59.
- [4] W. Lewandowski, J. Nawrocki, and J. Azoubib, 2001, “*First use of IGEX precise ephemerides for intercontinental GLONASS P-code time transfer*,” **Journal of Geodesy**, **75**, 620-625.
- [5] J. Azoubib, G. de Jong, and W. Lewandowski, 1997, “*Differential time corrections for multi-channel GPS and GLOANSS time equipment located at 3S Navigation, BIPM and VSL, Part 1*,” Rapport BIPM-97/6.