



**Continuum Modeling of Elastic Dielectric Solids
With Defects, With Application to Barium
Strontium Titanate Thin Films**

**by John D. Clayton, Peter W. Chung, M. A. Grinfeld, and
William D. Nothwang**

ARL-RP-222

September 2008

A reprint from XXII ICTAM, Adelaide, Australia, 25–29 August 2008.

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

Army Research Laboratory

Aberdeen Proving Ground, MD 21005-5069

ARL-RP-222**September 2008**

Continuum Modeling of Elastic Dielectric Solids With Defects, With Application to Barium Strontium Titanate Thin Films

John D. Clayton, M. A. Grinfeld, and William D. Nothwang
Weapons and Materials Research Directorate, ARL

Peter W. Chung
Computational and Information Sciences Directorate, ARL

A reprint from *XXII ICTAM*, Adelaide, Australia, 25–29 August 2008.

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) September 2008		2. REPORT TYPE Reprint		3. DATES COVERED (From - To) August 2007–August 2008	
4. TITLE AND SUBTITLE Continuum Modeling of Elastic Dielectric Solids With Defects, With Application to Barium Strontium Titanate Thin Films				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) John D. Clayton, Peter W. Chung, M. A. Grinfeld, and William D. Nothwang				5d. PROJECT NUMBER AH-80	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRD-ARL-WM-TD Aberdeen Proving Ground, MD 21005-5069				8. PERFORMING ORGANIZATION REPORT NUMBER ARL-RP-222	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES A reprint from <i>XXII ICTAM</i> , Adelaide, Australia, 25–29 August 2008.					
14. ABSTRACT A model is developed for the electromechanical behaviour of dielectric crystals with defects: dislocations, vacancies, and misoriented boundaries. A geometric framework describes the deformation of the lattice in the presence of such defects. Thermodynamic and kinetic relations are formulated, the latter enabling description of diffusion of charged vacancies and mass rearrangement at free surfaces. Analytical and numerical solutions of specific problems offer insight into performance of barium strontium titanate (BST) films.					
15. SUBJECT TERMS dielectric, vacancy, dislocation, electrostatics, diffusion					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UL	18. NUMBER OF PAGES 8	19a. NAME OF RESPONSIBLE PERSON John D. Clayton
a. REPORT UNCLASSIFIED	b. ABSTRACT UNCLASSIFIED	c. THIS PAGE UNCLASSIFIED			19b. TELEPHONE NUMBER (Include area code) 410-278-6146

CONTINUUM MODELING OF ELASTIC DIELECTRIC SOLIDS WITH DEFECTS, WITH APPLICATION TO BARIUM STRONTIUM TITANATE THIN FILMS

John D. Clayton^{*}, Peter W. Chung^{**}, M.A. Grinfeld^{*}, & William D. Nothwang^{***}

^{*}Impact Physics, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, 21005, USA

^{**}Computational Science and Engineering, U.S. Army Research Laboratory, USA

^{***}Multifunctional Materials, U.S. Army Research Laboratory, USA

Summary A model is developed for the electromechanical behaviour of dielectric crystals with defects: dislocations, vacancies, and misoriented boundaries. A geometric framework describes the deformation of the lattice in the presence of such defects. Thermodynamic and kinetic relations are formulated, the latter enabling description of diffusion of charged vacancies and mass rearrangement at free surfaces. Analytical and numerical solutions of specific problems offer insight into performance of barium strontium titanate (BST) films.

THEORY: KINEMATICS, THERMODYNAMICS, AND KINETICS

A number of continuum theories describing the coupled electrostatic and mechanical behaviour of dielectric crystalline solids have emerged during the previous half century [1-3]. The present formulation extends traditional models [2] of elastic dielectric materials to account for imperfections in the lattice, specifically vacancies and dislocations. Effects of misorientations across polarized subdomains are also considered. Defects are not resolved individually, but instead their number densities are treated via continuous distributions. The macroscopic displacement gradient $\nabla \mathbf{u}$ obeys

$$\nabla \mathbf{u} = \boldsymbol{\gamma}^E + \boldsymbol{\gamma}^P + \boldsymbol{\gamma}^V, \quad \dot{\boldsymbol{\gamma}}^P = \sum_k \nu^{(k)} \mathbf{s}^{(k)} \otimes \mathbf{m}^{(k)}, \quad \boldsymbol{\gamma}^V = (\chi/3) \mathbf{1}, \quad (1)$$

where $\boldsymbol{\gamma}^E$ is the recoverable lattice distortion, $\boldsymbol{\gamma}^P$ is the plastic distortion, $\boldsymbol{\gamma}^V$ is expansion or contraction from defects, ν is the slip rate on glide system k with direction $\mathbf{s}$ and normal $\mathbf{m}$, and χ is the volume fraction of defects. Let

$$\dot{\xi} = -\nabla \cdot \mathbf{Q}, \quad \chi = \alpha \xi, \quad \dot{a} = -\alpha(\mathbf{Q} \cdot \mathbf{n} + \bar{\nabla} \cdot \mathbf{q}) / (1 - \text{tr} \boldsymbol{\gamma}^E - \chi), \quad (2)$$

where $\mathbf{Q}$ is the bulk flux of vacancies, ξ is the number of vacancies per unit volume, and α is the volume per vacancy. Surface fluxes are described by the vector $\mathbf{q}$, with components spanning two surface coordinates, and $\bar{\nabla}$ is the surface gradient. Conservation of mass at external surface s provides the final equality in (2) specifying the rate of surface growth $\dot{a}$ [4]. The lattice deformation mapping $\mathbf{A}$ is introduced similarly to that in [5]:

$$A_{.b}^a = \delta_{.b}^a + \gamma_{.b}^{Ea} + \gamma_{.b}^{Va}, \quad \hat{\nabla}_b \mathbf{d}_a = \mathbf{d}_{a,b} - \hat{\Gamma}_{ba}^c \mathbf{d}_c, \quad \hat{\Gamma}_{cb}^a = A_{.d}^a A^{-1d}_{.b,c} + \Xi_{cb}^a + \Upsilon_c \delta_b^a, \quad (3)$$

and includes effects of elasticity and stress-free volumetric expansion, but not dislocation glide. Spatial gradients on the manifold of lattice directors $\mathbf{d}_a$ are described by the covariant derivative $\hat{\nabla}$ [5, 6], where Ξ_{cb}^a and Υ_c account for rotation and stretch gradients, respectively, due to surface and point defects. Three quantities describing the defect content of the crystal emerge from the torsion and curvature of the connection in the second and third of Eq. (3): the dislocation density tensor, the disclination density tensor, and the point defect vector, each having physical interpretations in perovskite crystals. The local governing equations of electrostatics are written in reduced form as [1, 2]

$$\mathbf{E} = -\nabla \phi, \quad \hat{\rho} = \nabla \cdot \mathbf{D}, \quad \mathbf{D} = \varepsilon_0 \mathbf{E} + \mathbf{P}, \quad (4)$$

with $\mathbf{E}$ the electric field, ϕ the electric potential, $\mathbf{D}$ the electric displacement, $\mathbf{P}$ the polarization, ε_0 the permittivity of free space, and $\hat{\rho}$ the charge density related to the concentration of vacancies by $\hat{\rho} = ez\xi$, where e is the charge of an electron and z is the valence contribution of each defect. The Helmholtz free energy per unit mass follows the functional dependencies

$$\psi = \psi(\boldsymbol{\gamma}^E, \mathbf{P}, \xi, h, \theta), \quad (5)$$

with the scalar-valued function h accounting for energetic contributions from point, line, and surface defects distinct from ξ . An admissible set of bulk thermodynamic and kinetic relations is

$$\sigma^{ab} = \rho \partial \psi / \partial \gamma_{(ab)}^E, \quad E_a = \rho \partial \psi / \partial P^a, \quad \eta = -\partial \psi / \partial \theta, \quad (6)$$

$$\mu = \rho \partial \psi / \partial \xi + ez\phi + \alpha p, \quad \mathbf{Q} = -\mathbf{d} \cdot \nabla \mu, \quad \sum \tau^{(k)} \nu^{(k)} + \nabla \mu \cdot \mathbf{d} \cdot \nabla \mu \geq \dot{h} \rho \partial \psi / \partial h, \quad |\mathbf{d}| \geq 0. \quad (7)$$

Above, $\boldsymbol{\sigma}$ is the stress, ρ is the mass density, η is the entropy, p is the pressure, $\mathbf{d}$ is the bulk diffusivity of point defects, and $\tau^{(k)}$ is the resolved shear stress on slip system k . At free surfaces, vacancy fluxes obey

$$\mathbf{Q} \cdot \mathbf{n} = \beta \left[\alpha (\rho \psi + \phi \hat{\rho} - \kappa \zeta) / (1 - \text{tr} \gamma^E - \chi) + \mu \right], \quad \mathbf{q} = -\hat{\mathbf{A}} \cdot \bar{\nabla} \left[(\rho \psi + \phi \hat{\rho} - \kappa \zeta) / (1 - \text{tr} \gamma^E - \chi) \right], \quad |\hat{\mathbf{A}}| \geq 0, \quad (8)$$

where ζ is the energy per unit area associated with surface tension, κ is the surface curvature, and $\beta \geq 0$. Extension of the theory to large deformations and nonlinear electrostatics is currently underway.

APPLICATION: CHARGED VACANCY MIGRATION IN BST THIN FILMS

The present application focuses on BST films in the paraelectric (i.e. cubic) phase. Free energy potential (8) is written

$$\rho \psi = \mathbb{C}^{abcd} (1 - \alpha \xi) \gamma_{(ab)}^E \gamma_{(cd)}^E / 2 + \Lambda_{ab} P^a P^b / 2 + \varphi, \quad (9)$$

$$\varphi = \alpha^{-1} N_A (G_0(\theta) + N_A k_B \theta \chi \ln \chi) \approx \alpha^{-1} N_A (G_0(\theta) + \Gamma N_A k_B \theta \chi^2 / 2), \quad (10)$$

where $\mathbb{C}^{abcd}$ and Λ_{ab} are elastic and dielectric constants, respectively, and where N_A and k_B are Avogadro's number and Boltzmann's constant. Equations (2), (3), and (6)-(8) are solved using numerical methods (1-D and 3-D transient simulations) and analytical methods (1-D steady-state solutions). In the former case, in one spatial dimension (Fig. 1) and under the action of an externally applied voltage, vacancies coalesce into layers of large concentration near potential free boundaries when the first of (10) is used, leading to an increase in the electric field in the vicinity of such boundaries that may affect loss characteristics of the film. Heterogeneous growth of the surface of the film resulting from surface roughness is evident in the 3-D solution of (2) and (8), as shown in Fig. 2. At steady state and in one spatial dimension, using the second of (10), the vacancy distribution obeys the simple equation

$$(\Gamma k_B \theta + 2\alpha \mathbb{C} \gamma^E / 3) d^2 \chi / dx^2 - (ez)^2 (\alpha \varepsilon_0 \varepsilon_R)^{-1} \chi = 0, \quad (11)$$

where $\mathbb{C}$, γ^E , and ε_R are respectively the elastic modulus, uniaxial elastic strain, and dielectric constant. The solution of (11) for boundary conditions corresponding to a grain boundary depletion layer [7] is shown in Fig. 3, where $\bar{\sigma}$ is the average compressive residual stress in the film possibly due to interfacial lattice parameter mismatch, σ' and Γ' are the normalized stress and normalized energy per vacancy, and χ_s is the saturation density of vacancies. Nonlinear defect distributions and decreasing average concentration are positively correlated with increasing compressive stresses.

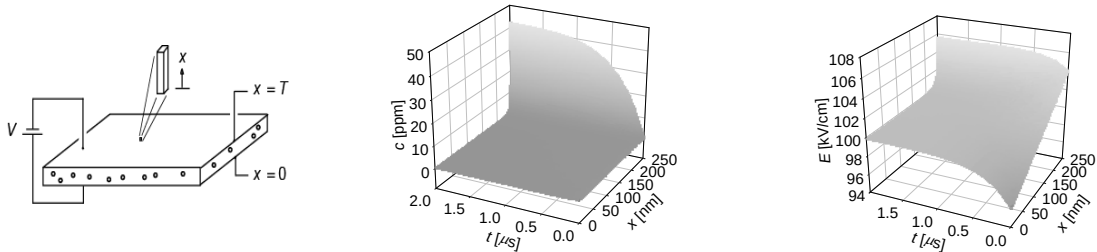


Fig. 1. Numerical solution (1-D) for BST film of thickness T : (left) geometry, (center) transient vacancy concentration c , and (right) electric field E (initial concentration $c_0 = 0.5$ ppm, applied voltage $V = \phi_{x=0} = 2.5$ V).

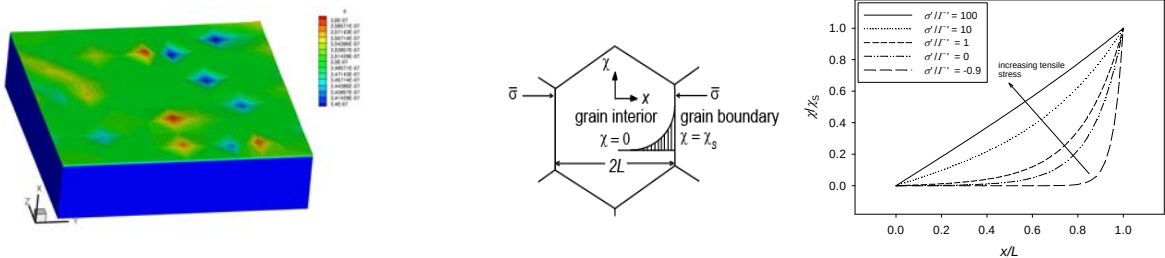


Fig. 2. Numerical solution (3-D) for surface coordinate x .

Fig. 3. Geometry and analytical solution (1-D) for steady state vacancy content.

References

- [1] Stratton J.A.: Electromagnetic Theory. McGraw Hill, NY, 1941.
- [2] Toupin R.A.: The Elastic Dielectric. *J. Rat. Mech.* **5**: 849-915, 1956.
- [3] Maugin G.A.: Continuum Mechanics of Electromagnetic Solids. North-Holland, Amsterdam, 1988.
- [4] Grinfeld M.A., Hazzledine P.M.: Role of Vacancies in Slow Evolution of a Traction-Free Interface. *Europhys. Lett.* **37**: 409-413, 1997.
- [5] Minagawa S.: Stress Functions and Stress Function Spaces of Non-Metric Connection for 3-Dimensional Micropolar Elastostatics. *Int. J. Eng. Sci.* **19**: 1705-1710, 1981.
- [6] Clayton J.D., Bammann D.J., McDowell, D.L.: A Geometric Framework for the Kinematics of Crystals with Defects. *Phil. Mag.* **85**: 3983-4010, 2005.
- [7] Saha S., Krupanidhi S.B.: Microstructure Related Influence on the Electrical Properties of Pulse Laser Ablated (Ba,Sr)TiO₃ Thin Films. *J. Appl. Phys.* **88**: 3506-3513, 2000.

NO. OF
COPIES ORGANIZATION

1 DEFENSE TECHNICAL
(PDF INFORMATION CTR
only) DTIC OCA
8725 JOHN J KINGMAN RD
STE 0944
FORT BELVOIR VA 22060-6218

1 US ARMY RSRCH DEV &
ENGRG CMD
SYSTEMS OF SYSTEMS
INTEGRATION
AMSRD SS T
6000 6TH ST STE 100
FORT BELVOIR VA 22060-5608

1 DIRECTOR
US ARMY RESEARCH LAB
IMNE ALC IMS
2800 POWDER MILL RD
ADELPHI MD 20783-1197

1 DIRECTOR
US ARMY RESEARCH LAB
AMSRD ARL CI OK TL
2800 POWDER MILL RD
ADELPHI MD 20783-1197

1 DIRECTOR
US ARMY RESEARCH LAB
AMSRD ARL CI OK T
2800 POWDER MILL RD
ADELPHI MD 20783-1197

ABERDEEN PROVING GROUND

1 DIR USARL
AMSRD ARL CI OK TP (BLDG 4600)

NO. OF
COPIES ORGANIZATION

ABERDEEN PROVING GROUND

25 DIR USARL
 AMSRD ARL CI HC
 P CHUNG (5 CPS)
 AMSRD ARL WM MA
 W NOTHWANG (5 CPS)
 AMSRD ARL WM TD
 J CLAYTON (10 CPS)
 M GREENFIELD (5 CPS)