

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 2008		2. REPORT TYPE		3. DATES COVERED 00-00-2008 to 00-00-2008	
4. TITLE AND SUBTITLE Effects of Perturbing B-Field Orientation on Magnetic Priming of a Relativistic Magnetron				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Plasma, Pulsed Power, and Microwave Laboratory, Department of Nuclear Engineering and Radiological Sciences, University of Michigan, Ann Arbor, MI, 48109				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES See also ADM002087. Proceedings of the 2008 IEEE International Vacuum Electronic Conference (9th) (IVEC 2008) Held in Monterey, CA on April 22-24, 2008. U.S. Government or Federal Rights License					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 2	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

P2.34: Effects of Perturbing B-Field Orientation on Magnetic Priming of a Relativistic Magnetron

Brad W. Hoff, Ronald. M. Gilgenbach, Nick M. Jordan, Yue Y. Lau, Edward Cruz, David French, Matthew R. Gomez, Jacob C. Zier, Thomas A. Spencer^{a)}, David Price^{b)}

Plasma, Pulsed Power, and Microwave Laboratory
Department of Nuclear Engineering and Radiological Sciences
University of Michigan
Ann Arbor, MI 48109

^{a)} Air Force Research Laboratory, Kirtland AFB, Albuquerque, NM

^{b)} L-3 Communications, Pulse Sciences Division, San Leandro, CA

ABSTRACT

Experiments have been performed testing magnetic-priming [1, 2] at the cathode of a relativistic magnetron to study the effects on high power microwave performance [3]. Magnetic perturbations were imposed utilizing three, high-permeability nickel-iron wires embedded beneath the emission region of a 1.27 cm diameter cathode, spaced 120 degrees apart (for N/2 symmetry in an N (6) cavity magnetron). These three, high-permeability wires perturb both the axial and radial magnetic fields near the emission region of the cathode. Magnetic priming was demonstrated at UM to increase the percentage of π -mode shots by 15% over the baseline case in the relativistic magnetron. Improvements in microwave power, pulse width and start-oscillation time were also observed.

Earlier experimental research by Neculae [2] and recent simulation work suggest that using permanent magnets with radially-directed remanence fields centered under the cathode emission region instead of high permeability wires can yield improved magnetron performance.

I. INTRODUCTION AND MODELING

The magnetic priming simulations used in this study were constructed using a combination of the Field Precision Magnum magnetostatics code and MAGIC PIC. The anode vanes of the simulation magnetron were designed to approximate the rounded vanes in the University of Michigan/L-3 relativistic magnetron anode block, as shown in Figures 1(a) and 1(b).


The simulation magnetron uses a larger diameter cathode (3.18 cm) than the previous cathodes employed in the experiment. This was done both to reduce simulation run time and to allow for comparison with larger cathode experiments planned in the future.

Priming magnets were modeled in the cathode as described previously and as shown in Figure 2. The magnetic field data for the cathode priming magnets were calculated using the Magnum code for remanent fields that are achievable in commercially available permanent magnets (0.5T). For these initial, idealized calculations, the magnetic permeability of the permanent magnets was assumed to be

equal to that of free space. B Field data were calculated for two axial orientations (+z, -z) and two radial orientations (+r, -r).



(a)

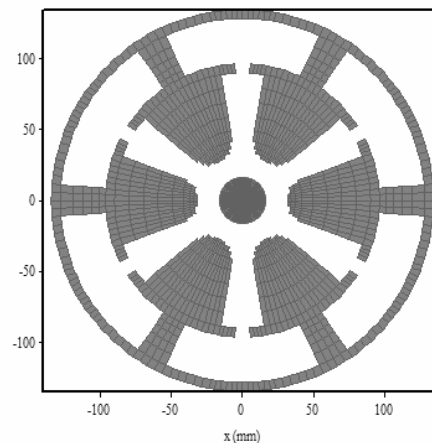

(b)

Figure 1: (a) UM/L-3 magnetron anode block (coupling cavities not shown), (b) Simulation magnetron anode block and coupling cavities.

The final magnetic priming fields used in the PIC simulations, the magnetic field calculated by Magnum was then superposed on the global, uniform +z magnetic field imposed in the Magic PIC code.

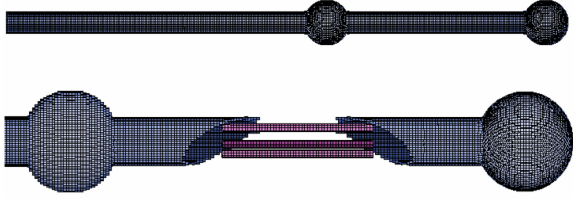


Figure 2: Wire frame schematic of the modeled magnetic priming cathode, showing magnet placement.

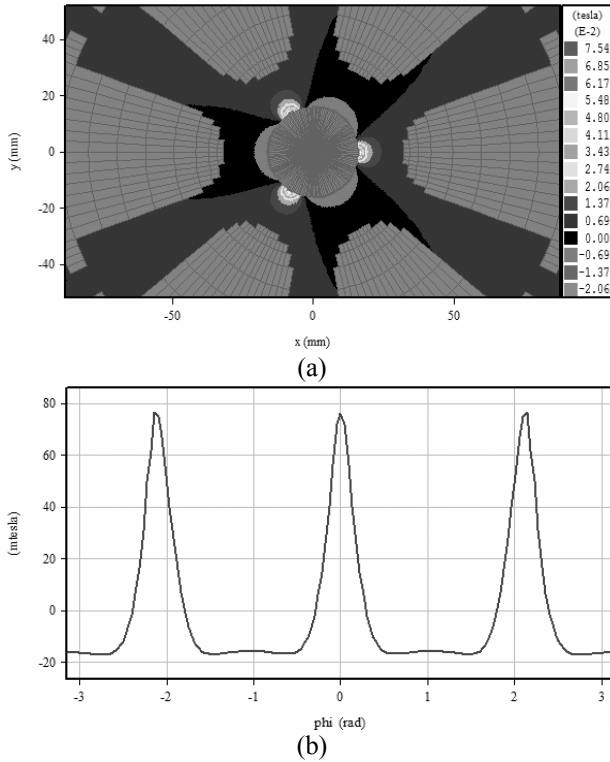


Figure 3: (a) Calculated contour plot of the radial component of the magnetic field near the cathode for the +r case. (b) Plot of the radial magnetic field component at the cathode surface for the +r case.

Figures 3(a) and 3(b) illustrate a contour plot of the radial component of the magnetic field and a plot of the radial component of the magnetic field close to the cathode surface for the +r remanent magnetic field orientation case.

III. RESULTS AND CONCLUSIONS

Figure 4 presents simulated RF electric fields for each of the five magnetic-priming cases explored. Magnetically primed magnetron performance in the case utilizing permanent magnets with +r directed remanence B fields was observed to perform better than either of the simulated, axially-directed remanent field cases (+z, -z).

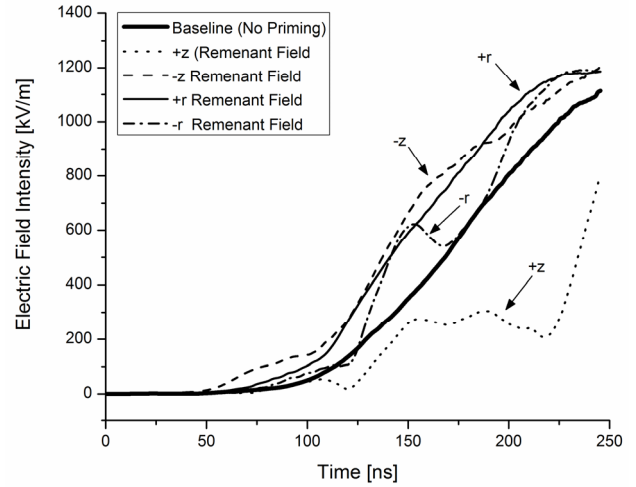


Figure 4: Simulated RF electric field for the four magnetically primed cases versus the baseline (no magnetic priming) case.

The +r directed remanence field case exhibited the fastest microwave startup, reaching saturation before the baseline case or either of the two axial-perturbation cases. Additionally, the +r case showed the least mode competition of the studied cases.

Experimental work is currently in progress to test the simulation results using magnetically-primed cathodes of various diameters. Both simulation and experimental results will be presented for these magnetic priming configurations.

ACKNOWLEDGEMENTS

This research was supported by the Air Force Office of Scientific Research, Air Force Research Laboratory and AFOSR MURI on Cathodes and RF Window Breakdown.

REFERENCES

- [1] V.B. Neculaes, R.M. Gilgenbach, and Y.Y. Lau, "Low noise crossed field devices such as a microwave magnetron having an azimuthally varying axial magnetic field and microwave oven utilizing same"; U.S. Patents 6,872,929, issued March 29, 2005 and 6,921,890, issued July 26, 2005.
- [2] V.B. Neculaes, "Magnetron Magnetic Priming for Rapid Startup and Noise Reduction", Doctoral Dissertation, University of Michigan, 2005
- [3] B.W. Hoff, R.M. Gilgenbach, N.M. Jordan, Y.Y. Lau, E. Cruz, D. French, M.R. Gomez, J.C. Zier., T.A. Spencer, D. Price, "Magnetic Priming at the Cathode of a Relativistic Magnetron." *IEEE Trans. Plasma Sci. Special Issue on High Power Microwave Generation* (2008) (In Press)