

SPACECRAFT-SPACECRAFT DOPPLER TRACKING AS A XYLOPHONE INTERFEROMETER DETECTOR OF GRAVITATIONAL RADIATION

Massimo Tinto
Jet Propulsion Laboratory
California Institute of Technology
4800 Oak Grove Drive
Pasadena, California 91109, USA

Abstract

We discuss spacecraft-spacecraft Doppler tracking as a detector of gravitational radiation, in which one-way and two-way Doppler data recorded onboard the two spacecraft are time-tagged and telemetered back to Earth. By linearly combining the four Doppler data sets^[1], we derive a method for reducing by several orders of magnitude, at selected Fourier components, the frequency fluctuation due to the clocks onboard the spacecraft. The nonzero gravitational wave signal remaining at these frequencies makes this spacecraft-spacecraft Doppler tracking technique the equivalent of a xylophone interferometer detector of gravitational radiation.^[2,3] In the assumption of calibrating the frequency fluctuations induced by the interplanetary plasma, a strain sensitivity of 3.7×10^{-19} at 10^{-3} Hz is estimated.

Experiments of this kind could be performed by future interplanetary multi-spacecraft missions planned by the National Aeronautics and Space Administration (NASA).

MOTIVATIONS

- The New Millenium Program is planning to launch multi-spacecraft missions.
- Doppler/ranging measurements between spacecraft can potentially decrease reliance on ground-based tracking.^[4]
- Possible backup option for space-based laser interferometers in case of failure.

WHAT IS A XYLOPHONE?

- A detector displaying a significantly enhanced sensitivity at selected Fourier components!
- How can we make a "narrowband" detector out of Doppler tracking?^[5]

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE DEC 1996		2. REPORT TYPE		3. DATES COVERED 00-00-1996 to 00-00-1996	
4. TITLE AND SUBTITLE Spacecraft-Spacecraft Doppler Tracking as a Xylophone Interferometer Detector of Gravitational Radiation				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) California Institute of Technology,jet Propulsion Laboratory,4800 Oak Grove Drive,Pasadena,CA,91109				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES See also ADA419480. 28th Annual Precise Time and Time Interval (PTTI) Applications and Planning Meeting, Reston, VA, 3-5 Dec 1996					
14. ABSTRACT see report					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 6	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

TWO-WAY DOPPLER RESPONSE

$$\begin{aligned}\frac{\Delta\nu}{\nu_0}(t) &= \frac{(\mu-1)}{2} h(t) - \mu h(t-(1+\mu)L) + \frac{(1+\mu)}{2} h(t-2L) \\ &+ C_E(t-2L) - C_E(t) + T(t-2L) + T(t) + 2B(t-L) \\ &+ A_E(t-2L) + A_{sc}(t-L) + TR_{sc}(t-L) + EL_{E_2}(t) + P_{E_2}(t)\end{aligned}$$

where:

$$\mu = \cos(\theta) \quad ; \quad h(t) = h_+(t) \cos(2\phi) + h_-(t) \sin(2\phi)$$

(Estabrook and Wahlquist^[6]).

$$\begin{aligned}\widetilde{\frac{\Delta\nu}{\nu_0}}(f) &= \left[\frac{(\mu-1)}{2} - \mu e^{2\pi i f(1+\mu)L} + \frac{(1+\mu)}{2} e^{4\pi i fL} \right] \widetilde{h}(f) \\ &+ \widetilde{C}_E(f) [e^{4\pi i fL} - 1] + \widetilde{T}(f) [e^{4\pi i fL} + 1] + 2 \widetilde{B}(f) e^{2\pi i fL} \\ &+ \widetilde{A}_E(f) e^{4\pi i fL} + \widetilde{A}_{sc}(f) e^{2\pi i fL} + \widetilde{TR}_{sc}(f) e^{2\pi i fL} + \widetilde{EL}_{E_2}(f) + \widetilde{P}_{E_2}(f)\end{aligned}$$

(Armstrong^[7]).

XYLOPHONE INTERFEROMETER

The two one-way Doppler data are linearly combined to minimize the rms noise level.^[5]

$$y_{1a}(t) = y_{1a}^0(t) + C_b(t-L) - C_a(t) + B_b(t-L) + B_a(t) + A_b(t-L) + EL_{1a}(t)$$

$$y_{1b}(t) = y_{1b}^0(t) + C_a(t-L) - C_b(t) + B_a(t-L) + B_b(t) + A_a(t-L) + EL_{1b}(t)$$

By taking the Fourier transform of the following two linear combinations:

$$y_+(t) = (y_{1a}(t) + y_{1b}(t))/2$$

$$y_-(t) = (y_{1a}(t) - y_{1b}(t))/2$$

we derive the following expressions in the Fourier domain:

$$\begin{aligned}
 \widetilde{y}_+(f) &= \frac{1}{4} \left[(\mu - 1) (1 - e^{2\pi i(\mu+1)fL}) + (\mu + 1) (1 - e^{2\pi i(\mu-1)fL}) e^{2\pi i f L} \right] \widetilde{h}(f) \\
 &\quad + \frac{1}{2} \left[\widetilde{C}_a(f) + \widetilde{C}_b(f) \right] (e^{2\pi i f L} - 1) + \frac{1}{2} \left[\widetilde{B}_a(f) + \widetilde{B}_b(f) \right] (e^{2\pi i f L} + 1) \\
 &\quad + \frac{1}{2} \left[\widetilde{A}_a(f) + \widetilde{A}_b(f) \right] e^{2\pi i f L} + \frac{1}{2} \left[\widetilde{E L}_{1a}(f) + \widetilde{E L}_{1b}(f) \right] \\
 \widetilde{y}_-(f) &= \frac{1}{4} \left[(\mu - 1) (1 - e^{2\pi i(\mu+1)fL}) - (\mu + 1) (1 - e^{2\pi i(\mu-1)fL}) e^{2\pi i f L} \right] \widetilde{h}(f) \\
 &\quad + \frac{1}{2} \left[\widetilde{C}_a(f) - \widetilde{C}_b(f) \right] (e^{2\pi i f L} + 1) + \frac{1}{2} \left[\widetilde{B}_a(f) - \widetilde{B}_b(f) \right] (e^{2\pi i f L} - 1) \\
 &\quad + \frac{1}{2} \left[\widetilde{A}_b(f) - \widetilde{A}_a(f) \right] e^{2\pi i f L} + \frac{1}{2} \left[\widetilde{E L}_{1a}(f) - \widetilde{E L}_{1b}(f) \right]
 \end{aligned}$$

$\widetilde{y}_+(f)$, $\widetilde{y}_-(f)$ assume the following form at the Xylophone frequencies f_{2k} , f_{2k-1}

$$f_{2k} = \frac{2k}{2L} \pm \frac{\Delta f}{2}$$

$$f_{2k-1} = \frac{2k-1}{2L} \pm \frac{\Delta f}{2}; \quad k = 1, 2, 3, \dots$$

$$\begin{aligned}
 \widetilde{y}_+(f_{2k}) &= \frac{1}{2} \mu \left[1 - e^{2\pi i k \mu} \right] \widetilde{h}(f_{2k}) \pm \frac{1}{2} \left[\widetilde{C}_a(f_{2k}) + \widetilde{C}_b(f_{2k}) \right] (\pi i \Delta f L) \\
 &\quad + \left[\widetilde{B}_a(f_{2k}) + \widetilde{B}_b(f_{2k}) \right] + \frac{1}{2} \left[\widetilde{A}_a(f_{2k}) + \widetilde{A}_b(f_{2k}) \right] + \frac{1}{2} \left[\widetilde{E L}_{1a}(f_{2k}) + \widetilde{E L}_{1b}(f_{2k}) \right] \\
 \widetilde{y}_-(f_{2k-1}) &= \frac{1}{2} \mu \left[1 + e^{\pi i (2k-1) \mu} \right] \widetilde{h}(f_{2k-1}) + \left[\widetilde{B}_b(f_{2k-1}) - \widetilde{B}_a(f_{2k-1}) \right] \\
 &\quad + \frac{1}{2} \left[\widetilde{A}_a(f_{2k-1}) - \widetilde{A}_b(f_{2k-1}) \right] \frac{1}{2} \left[\widetilde{E L}_{1a}(f_{2k-1}) - \widetilde{E L}_{1b}(f_{2k-1}) \right] \\
 &\quad \pm \frac{1}{2} \left[\widetilde{C}_a(f_{2k-1}) - \widetilde{C}_b(f_{2k-1}) \right] (\pi i \Delta f L)
 \end{aligned}$$

If $L = 1 \text{ AU}$, and $\Delta f = 3 \times 10^{-7} \text{ Hz}$

$$\frac{\pi \Delta f L}{c} = 4.7 \times 10^{-4}$$

$L = 1 \text{ AU}$, $f = 5 \times 10^{-4} \text{ Hz}$, and $\Delta f = 3 \times 10^{-7} \text{ Hz}$, imply:

$$\Delta L = 1.0 \times 10^5 \text{ km}$$

$$\sigma(f_k) = \sqrt{S_v(f_k) \Delta f}$$

$S_v(f_k)$ = One-sided Power Spectral Density of the remaining noise sources at the Xylophone frequencies f_k .


CONCLUSIONS

- We have shown how frequency fluctuations due to the onboard clocks can be reduced by several orders of magnitude at selected Fourier components (*Xylophone Interferometer*)
- We will investigate how this technique can be extended to other tests of relativistic gravity.


REFERENCES

- [1] R.F.C. Vessot, and M.W. Levine, 1979, *General Relativity and Gravitation*, 10, 181.
- [2] M. Tinto 1996, *Physical Review*, D53, 5354.
- [3] M. Tinto, *Physical Review*, D, submitted.
- [4] R.D. Kahn, S. Thurman, and C. Edwards 1994, "*TDA Progress Report 42-17*," 15 May 1994.
- [5] M. Tinto 1996, "*Spacecraft Doppler tracking as a xylophone detector*," Proceedings of the 27th Annual Precise Time and Time Interval (PTTI) Applications and Planning Meeting, 29 November-1 December 1995, San Diego, California, USA (NASA CP-3334), pp. 467-478.
- [6] F.B. Estabrook, and H.D. Wahlquist 1975, *General Relativity and Gravitation*, 6, 439.
- [7] J.W. Armstrong 1987, *Gravitational Wave Data Analysis*, ed. B.F. Schutz (Kluwer, Dordrecht, Netherlands).


4-Links (Vessot's) Method

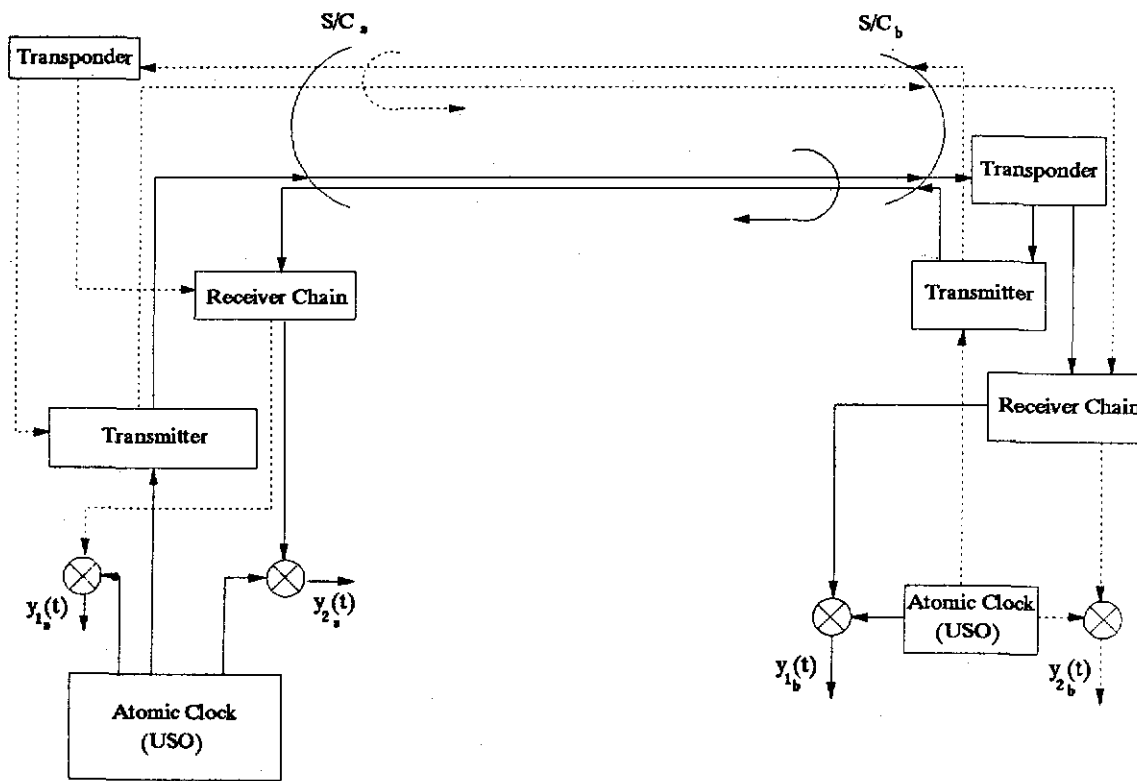

$L = 1/4 \text{ AU} - 1 \text{ m HGA}$

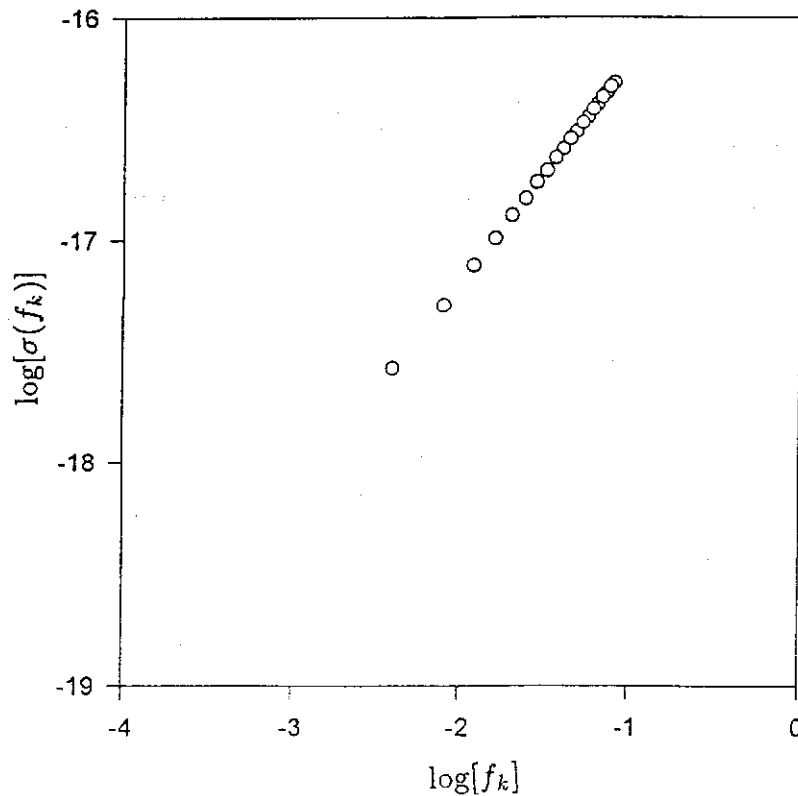

$L = 1/4 \text{ AU} - 4 \text{ m HGA}$

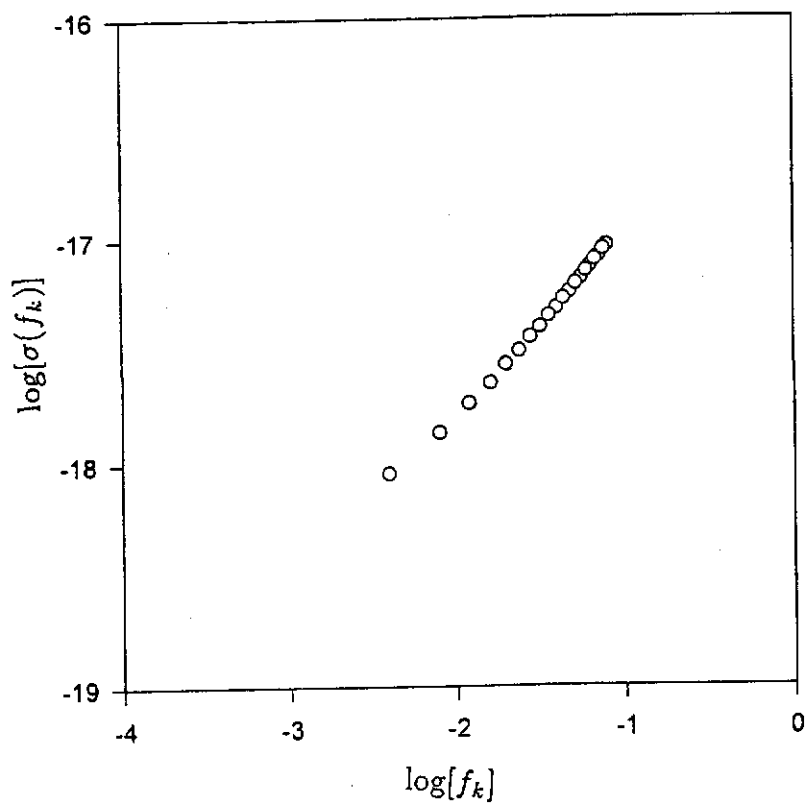

$L = 1 \text{ AU} - 4 \text{ m HGA}$

