

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) 14-08-2009		2. REPORT TYPE Technical Paper		3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE Remote Diagnostic Measurements of Hall Thruster Plumes				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Casey C. Farnell (Plasma Controls); Daniel L. Brown (AFRL/RZSS); Garret Willis & Richard Branam (AFIT)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER 33SP0708	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Air Force Research Laboratory (AFMC) AFRL/RZST 4 Draco Drive Edwards AFB CA 93524-7160				8. PERFORMING ORGANIZATION REPORT NUMBER AFRL-RZ-ED-TP-2009-312	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) Air Force Research Laboratory (AFMC) AFRL/RZS 5 Pollux Drive Edwards AFB CA 93524-7048				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S NUMBER(S) AFRL-RZ-ED-TP-2009-312	
12. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release; distribution unlimited (PA #09385).					
13. SUPPLEMENTARY NOTES For the 31 st International Electric Propulsion Conference to be held in Ann Arbor, MI from 20-24 September 2009.					
14. ABSTRACT This paper describes measurements of Hall thruster plumes that characterize ion energy distributions and charge state fractions using remotely located plasma diagnostics. Plume measurements were performed using electrostatic analyzers (ESAs) and ExB probes from Plasma Controls, LLC on ion and plasma sources at Colorado State University (CSU) and Hall thrusters operated at the Air Force Institute of Technology (AFIT) and the Air Force Research Laboratory (AFRL). Data are presented from ion source testing at CSU that demonstrated the performance of ESA and ExB probes to characterize energy and charge state. Next, energy and charge state measurements are described from testing of a 200 W Hall thruster at AFIT. Measurements showed variation in the ion energy distribution with changes in thruster power and an increase in the fractions of multiply charged ions with increasing azimuthal position. Finally, ExB probe charge state measurements are presented from a 6-kW laboratory Hall thruster operated at low discharge voltage levels at AFRL/RZSS. Like the 200 W Hall thruster measurements at AFIT, results from the 6-kW Hall thruster showed an increase in the fractions of multiply charged ions with increasing azimuthal position.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 29	19a. NAME OF RESPONSIBLE PERSON Dr. Daniel Brown
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (include area code) N/A

Remote Diagnostic Measurements of Hall Thruster Plumes

IEPC-2009-031

*Presented at the 31st International Electric Propulsion Conference,
University of Michigan • Ann Arbor, Michigan • USA
September 20 – 24, 2009*

Casey C. Farnell¹
Plasma Controls, LLC, Fort Collins, CO, 80526, USA

Daniel L. Brown²
Air Force Research Laboratory, Edwards AFB, CA, 93524, USA

Garret Willis³ and Richard Branam⁴
Air Force Institute of Technology, Wright-Patterson AFB, OH, 45433, USA

and

John D. Williams⁵
Electric Propulsion and Plasma Engineering Laboratory, Colorado State University, Fort Collins, CO 80523, USA

This paper describes measurements of Hall thruster plumes that characterize ion energy distributions and charge state fractions using remotely located plasma diagnostics. Plume measurements were performed using electrostatic analyzers (ESAs) and ExB probes from Plasma Controls, LLC on ion and plasma sources at Colorado State University (CSU) and Hall thrusters operated at the Air Force Institute of Technology (AFIT) and the Air Force Research Laboratory (AFRL). Data are presented from ion source testing at CSU that demonstrated the performance of ESA and ExB probes to characterize energy and charge state. Next, energy and charge state measurements are described from testing of a 200 W Hall thruster at AFIT. Measurements showed variation in the ion energy distribution with changes in thruster power and an increase in the fractions of multiply charged ions with increasing azimuthal position. Finally, ExB probe charge state measurements are presented from a 6-kW laboratory Hall thruster operated at low discharge voltage levels at AFRL/RZSS. Like the 200 W Hall thruster measurements at AFIT, results from the 6-kW Hall thruster showed an increase in the fractions of multiply charged ions with increasing azimuthal position.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

¹ Plasma Controls, LLC, Casey.Farnell@plasmacontrols.com.

² Experimental Research Scientist, High Power Electric Propulsion Group, Daniel.Brown@edwards.af.mil.

³ Department of Aeronautics and Astronautics, Garret.Willis@afit.edu.

⁴ Assistant Professor, Department of Aeronautics and Astronautics, Richard.Branam@afit.edu.

⁵ Assistant Professor, Department of Mechanical Engineering, John.D.Williams@colostate.edu.

Nomenclature

AFIT	=	Air Force Institute of Technology
AFRL	=	Air Force Research Laboratory
B	=	magnetic field strength
CSU	=	Colorado State University
d	=	plate separation distance
ESA	=	electrostatic analyzer
E	=	energy or electric field
ExB	=	Electric field crossed with magnetic field
ϕ	=	plate voltage
IEDF	=	ion energy distribution function
q	=	ion/electron charge
m	=	mass of given ion
r	=	radius
v	=	velocity
V	=	voltage/potential
z	=	ion charge state (1,2,3, etc.)

I. Introduction

ELECTRIC propulsion devices, such as ion thrusters and Hall thrusters, have functional applications in space for primary and auxiliary propulsion of satellites, with over 100 satellites currently employing electric propulsion devices^{1,2,3}. As part of increasing the application and performance capabilities of these EP devices, characterizing the plasma plume is both useful and necessary, such as for calculating thrust parameters (thrust direction, plume divergence) and determining possible plume interactions with nearby satellite components. Important plume parameters of interest include the ion energy distribution function (IEDF) along with charge state measurements for accurate characterization of ion exhaust velocities. It is of further use if this data can be obtained in a spatially resolved manner to yield information about thrust direction. The measurements and diagnostics described in this paper are useful for characterizing specific thruster models as well as for validating/improving numerical models such as COLISEUM which predict plasma/spacecraft interactions⁴.

II. Diagnostics

We first describe the details and method of operation for two remotely located plasma probes: an electrostatic analyzer (ESA) and ExB probe. Then, each facility is described along with applicable testing and results from the plasma diagnostics. Three facilities are described that include plasma measurements of 1) ion and plasma sources operated at the CEPPE lab at Colorado State University (CSU), 2) a 200 W Hall thruster operated the Air Force Institute of Technology (AFIT), and 3) a 6 kW laboratory model Hall thruster operated at the Air Force Research Laboratory (AFRL), Edwards, AFB.

A. Electrostatic Analyzer (ESA)

An electrostatic analyzer is a diagnostic tool that can be used to measure ion energy distributions of plasma devices. The ESAs used in the studies of this paper are manufactured by Plasma Controls, LLC for specific use in the plume of plasma devices such as ion and Hall thrusters. A schematic and picture of the ESA is shown in Figure 1. The approximate dimensions of the probe are 10.8 cm deep by 18.3 cm wide by 5.0 cm high. The main components of the ESA are the body housing, collimators, segments, and the collector apparatus. The stainless steel housing is used to shield out unwanted plasma and to mount the probe apparatus. The energy-to-charge state ratio selection is accomplished by electrically biasing two spherical segments that are fabricated in a 120 degree arc^{5,6}. The field of view of the device is limited by an entrance and exit collimator placed at each end of the spherical segments. The collimators are designed to produce an acceptance angle of ± 2.5 degrees. The collector plate is located at the downstream end of the exit collimator. The calculated resolution of the ESA is approximately $\Delta E/E_{\text{trans}} = 0.015$.

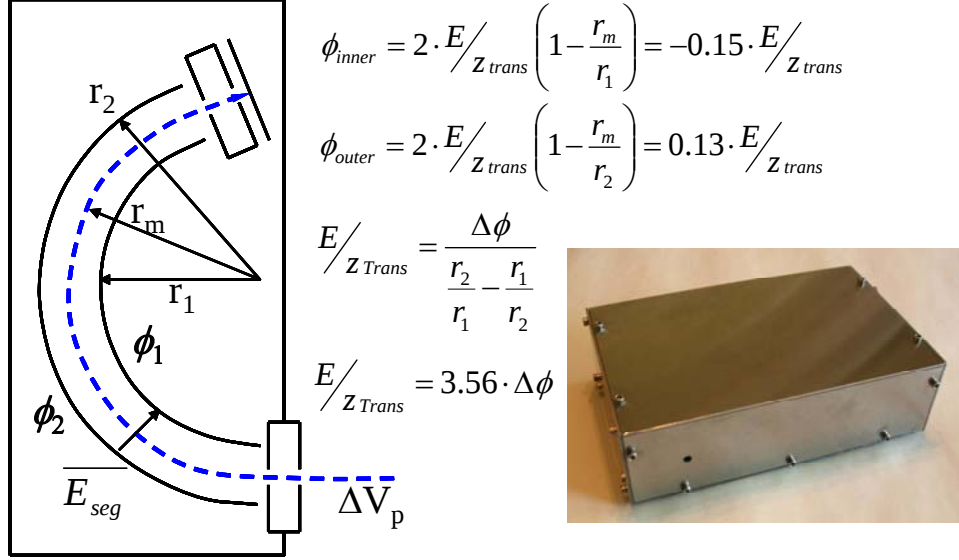


Figure 1: ESA electrical schematic and picture.

The electrostatic analyzer is designed to separate ions according to their energy-to-charge ratio (E/z). This is done by applying voltage biases to two spherically nested segments so that ions entering the probe feel an electrostatic force. The velocity, v , of an ion entering the ESA (neglecting initial thermal velocities), can be described in terms of ion energy by:

$$E = z \cdot q \cdot \Delta V_p = \frac{1}{2} \cdot m \cdot v^2 \quad \text{or} \quad v = \sqrt{\frac{2 \cdot z \cdot q \cdot \Delta V_p}{m}} \quad (1)$$

Where E is ion energy, z is charge state, q is electronic charge, m is ion mass, and ΔV_p is a potential difference between the ion creation point in the plasma and the entrance collimator of the ESA. Solving these equations in spherical coordinates for the electrostatic force due to the ESA segments gives a relation between the plasma potential difference and the plate voltages on the ESA, $\Delta \phi$:

$$\Delta V_p = \frac{\Delta \phi}{\frac{r_2}{r_1} - \frac{r_1}{r_2}} = 3.56 \cdot \Delta \phi \quad (2)$$

Note that the charge state, z , and mass, m , cancel out of the equation, thus the ESA does not differentiate between different ion species. Also, the ESA detects only the energy-to-charge ratio, E/z , so that a singly charged ion and a doubly charged ion that go through the same potential difference ΔV_p are measured at the same segment voltage difference, $\Delta \phi$. The constant transmission mode of operation is generally preferred to obtain the ion energy distribution function (IEDF). This mode works by applying a constant $\Delta \phi$ between the spherical segments and sweeping the entrance and exit collimators (along with the spherical segments) with respect to the vacuum facility ground. The current to the collector plate is recorded as a function of the bias voltages, which determines the selected ion energy-to-charge ratio (E/z).

B. Diagnostic - ExB Probe

Another useful device in measuring properties of plasma plumes is the ExB probe (or Wein filter), which has the ability to separate ions according to their energy (E), mass (m), and charge state (z)^{5,6,7,8}. The ExB probe utilizes a magnetic field placed normal to the axis of an electric field to separate ions. The ExB probes utilized in this paper were manufactured by Plasma Controls, LLC. The approximate dimensions of the probe are 27.0 cm deep by 6.9 cm wide by 4.7 cm high. The main components of the ExB probe are the body housing, entrance collimator, ExB separator section, drift tube, and the collector apparatus. The stainless steel housing is used to shield out unwanted plasma. The entrance to the probe is equipped with a small orifice diameter collimator that is designed to give a narrow acceptance angle of ± 0.30 degrees. The ExB section is where the electric and magnetic fields are applied to separate the ions. The collector plate is located at the downstream end of the drift tube.

A diagram of the ExB probe is shown in Figure 2. Ions that are able to pass through the entrance collimator enter the separation region where the ions feel a force from both electric and magnetic fields according to the Lorentz force equation:

$$\vec{F} = q \cdot (\vec{E} + \vec{v} \times \vec{B}) \quad (3)$$

F is the force on the ion, q is the electronic charge, E is the electric field strength, v is the ion velocity, and B is the magnetic field strength.

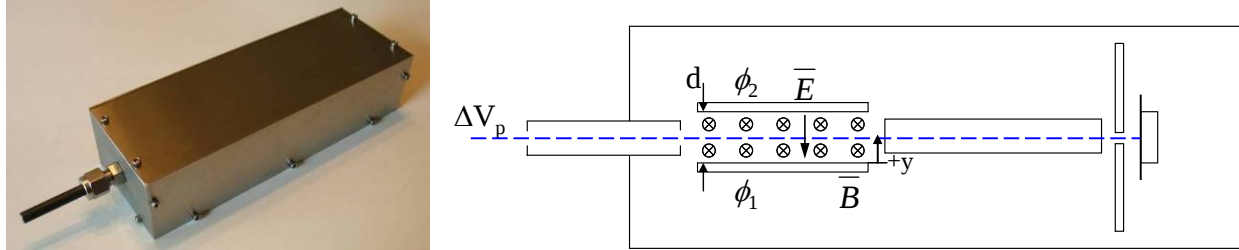


Figure 2: ExB probe schematic showing the electric field and magnetic field separation section. The amount of direction change the ion undergoes depends on its entrance energy and the applied electric and magnetic field strengths.

In order to pass through the probe to the collector plate, the net force on an ion must be (near) zero so that the ion is not pushed off the drift axis. Setting the force equal to zero and rearranging the equation yields:

$$\vec{E} = -\vec{v} \times \vec{B} \quad (4)$$

Inserting equations for the electric field and velocity, the resulting equation for the ions that are measured by the probe is:

$$\Delta\phi = B \cdot d \cdot \sqrt{\frac{2 \cdot z \cdot q \cdot \Delta V_p}{m}} \quad (5)$$

Where $\Delta\phi$ is the voltage difference between the plates, B is the magnetic field strength, d is the separation distance between the plates, and all other parameters are the same as defined previously.

When taking measurements, the plate voltage difference, $\Delta\phi$, is swept while recording the current to the collector plate. The magnetic field, B, is produced using a permanent magnet. The plate separation distance and the magnetic field are constant, such that each ion is separated according to the mass, m, charge state, z, and the potential difference between the ion creation point in the plasma and the entrance collimator of the ExB, ΔV_p .

III. Facilities and Test Results

C. Colorado State University CEPPE Lab (CSU)

At Colorado State University (CSU), ESA and ExB measurements were performed on two ion sources. The first ion source was an 8-cm diameter, filament ion source that could be operated on a combination of argon and xenon gases. The second ion source was one that was operated on argon as well as bismuth to produce bismuth metal propellant ions. These arrangements were chosen to verify both the operation of the ESA with respect to ion energy as well as the ExB probe with respect to differentiation of ion mass and charge state.

1. CSU Source 1 – Argon/Xenon Ion Source

The first CSU ion source setup is shown in Figure 3 with an 8-cm ion source mounted vertically at the top of a vacuum chamber. The ESA and ExB probes were mounted separately in the downstream centerline plume region of the source at a distance of 30 cm from the ion optics.

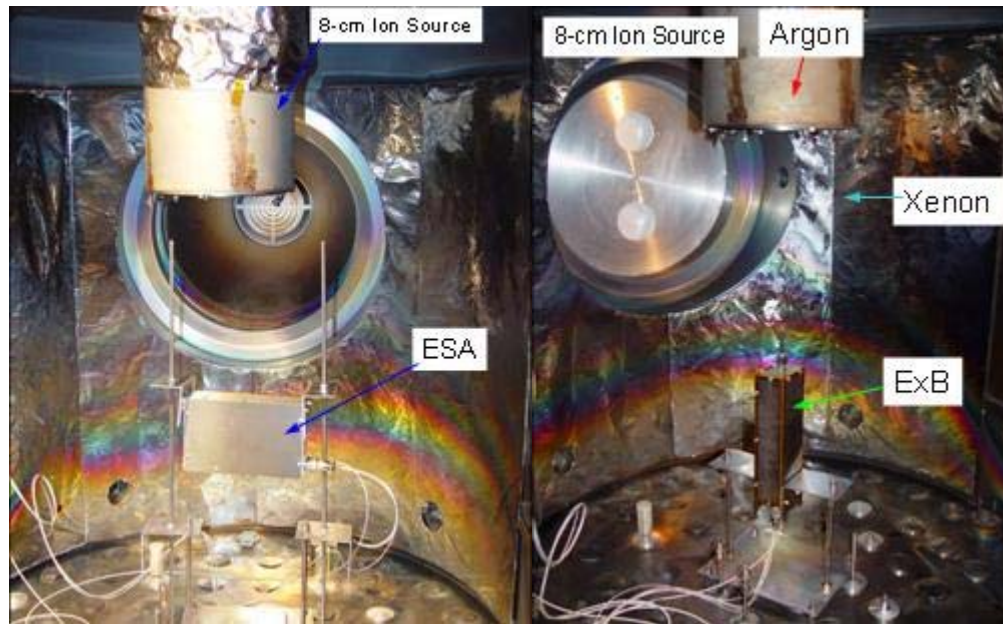


Figure 3: Setup of the ESA (left picture) and ExB (right picture) relative to an 8-cm diameter ion source.

To test the characteristics of the ESA, the ion source was operated on argon gas at selected beam voltages of 250, 400, and 550 V. The beam current was held constant at 40 mA and the pressure in the vacuum chamber was 1.9×10^{-5} Torr. The segment potentials on the ESA were set to transmit ions with energy-to-charge ratios (E/z) equal to 300 eV ($\Delta V_{\text{segments}} = 84.4$ V). With the transmission energy of the ESA set to a constant value, the probe voltages were swept over a wide voltage range to record the ion energy distribution (E/z). At each of the selected beam voltages, the ESA IEDFs indicated peak current magnitude ion energies that were a few volts (5 to 10 eV) below the set beam voltage on the ion source power supply (Figure 4). Since the peak energy was not exactly equal to the beam voltage set point, two reasons may be briefly considered. First, it is reasonable to think that the peak energies of the ion beam were not equal to the set beam voltage, either from differences in applied voltages to the ion source or plasma discharge voltages that were below the discharge voltage. The second reason might be that the ESA was not giving proper measurements due to slight probe error. The second concern can be addressed by observing the locations of the energy peaks on other ion sources and thrusters presented in this paper, which show the measured peak of the IEDFs occurring at or slightly above the voltage set points. The evidence of consistent energy readings relative to beam voltages over a wide range of plasma devices gives confidence in the correctness of the probe theory, assembly, and measurements.

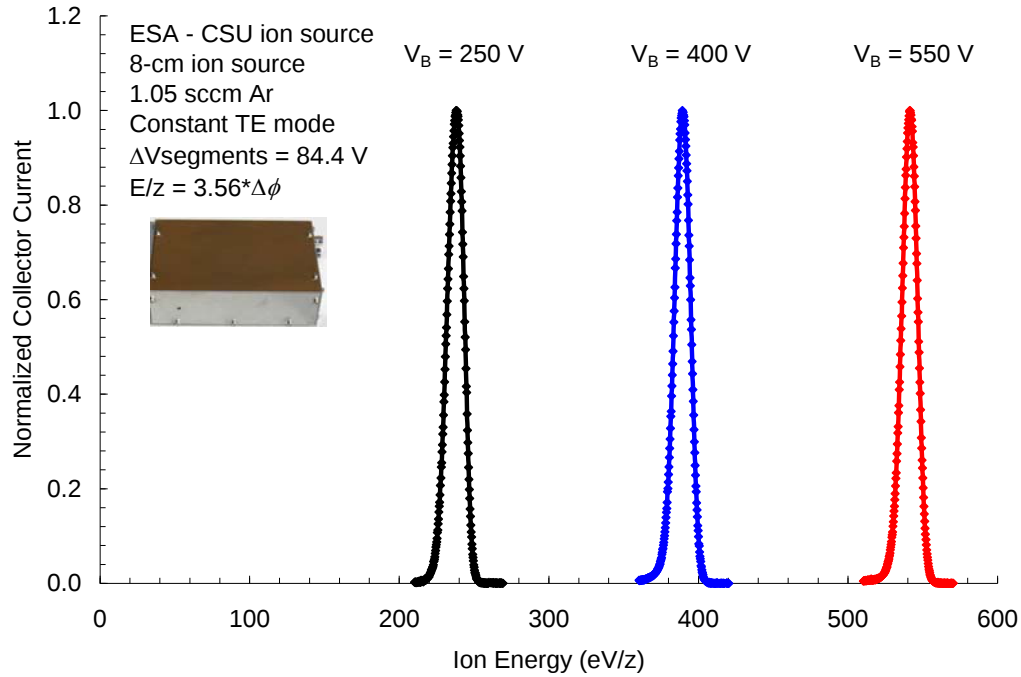


Figure 4: Data taken with the ESA for argon ions originating from an 8-cm diameter ion source at CSU. The peak of the distributions occurred a few eV lower than the ion source power supply set point.

For testing of the ExB probe, the ion source was operated on multiple gases to demonstrate the ability to differentiate ion mass constituents as well as charge state fractions. Argon gas was fed directly into the ion source discharge chamber while additional xenon gas was separately injected into the vacuum chamber as backflow. The xenon gas backflow was sufficient to allow some of xenon gas to be injected into and ionized within the ion source. Figure 5 shows the measurements from the ExB probe with the ion source beam voltage set to 550 V. Signals of both xenon (131.3 amu) and argon (39.95 amu) were seen for both singly and doubly charged ions. In addition, small amounts of nitrogen (N_2) were ionized in the source when measurements were made shortly after crossover to high vacuum.

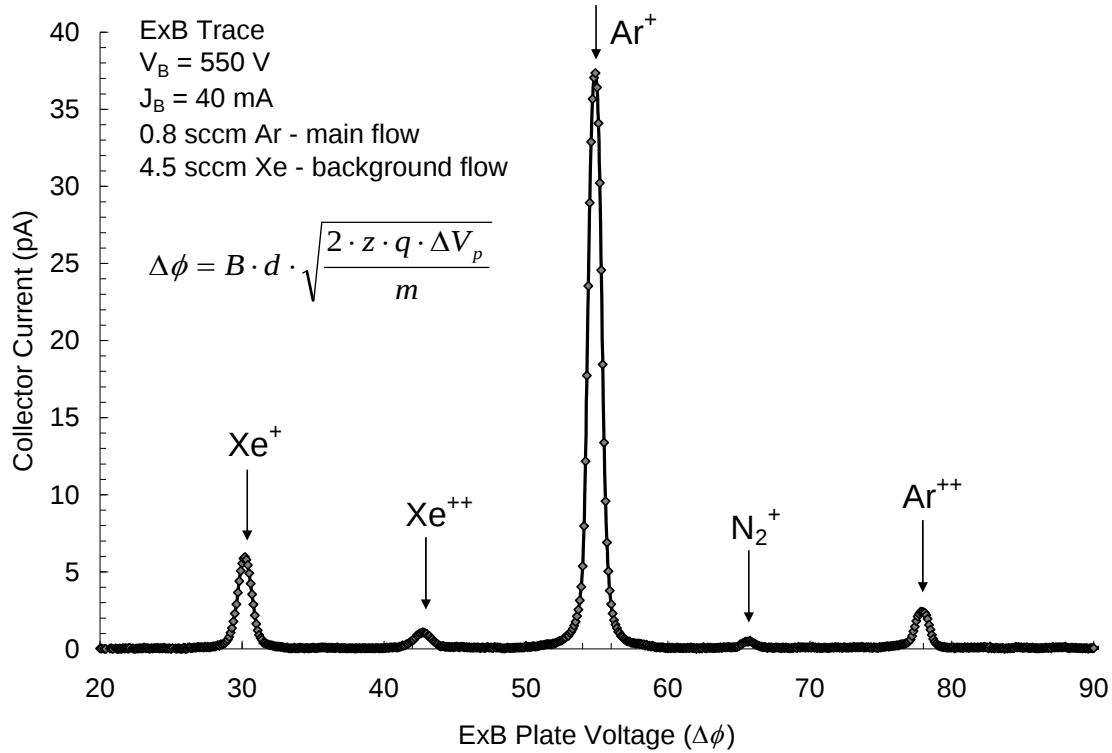


Figure 5. Data taken with the ExB probe of argon and xenon ions from an 8-cm diameter argon ion source at CSU.

2. CSU Source 2 – Argon/Bismuth Ion Source

The second setup at CSU involved the ESA and ExB probes placed 15 cm downstream of a filament ion source operated on argon and bismuth metal propellant⁹. The ESA was used to measure IEDFs at three beam voltages of 200, 250, and 300 V, shown in Figure 6. In each case, the energy at the peak current magnitude of the distribution was a few eV above the beam voltage set point. The data of Figure 6 compare favorably with ion energy results from the other CSU ion source tested (CSU source 1) and Hall thruster measurements from the other facilities.

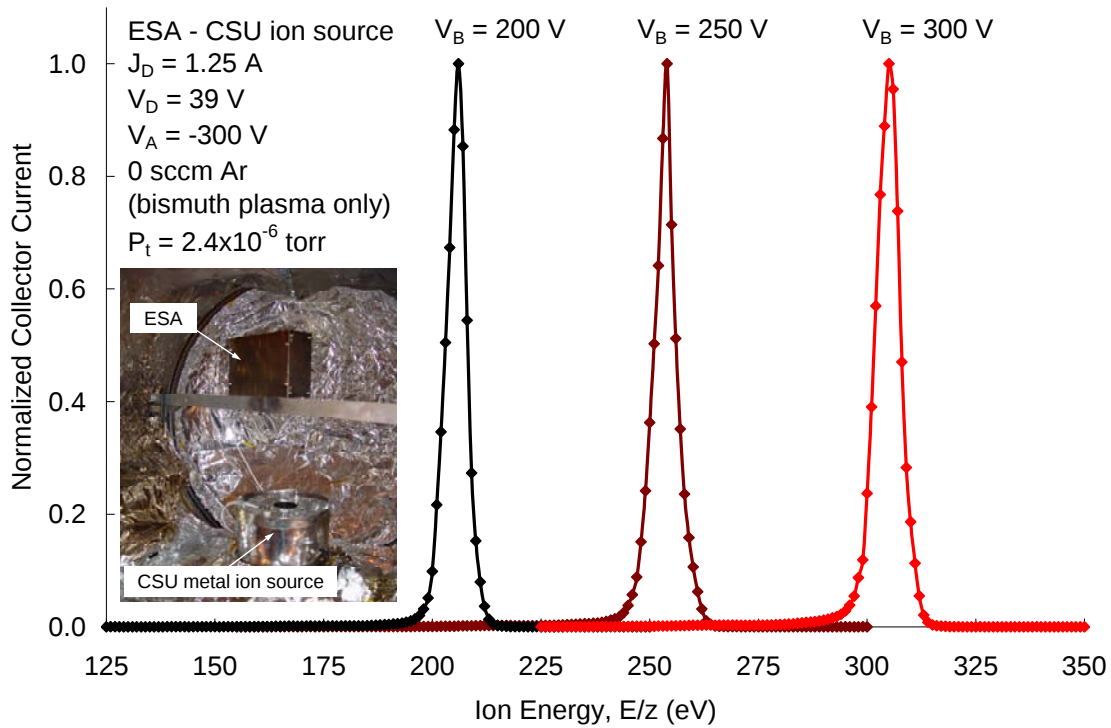


Figure 6: IEDFs of ions produced within a CSU metal ion source. The ion source was operated on bismuth propellant at beam voltages of 200, 250, and 300V.

The ExB probe was used to measure ions that were produced from the source, as shown in Figure 7. The beam voltage was set to 300 V while an argon and bismuth plasma was produced by flowing argon at 2.0 sccm and heating bismuth metal to produce bismuth vapor inside the discharge chamber. With this operating condition, both argon and bismuth ions were produced with most of the ions being singly charged (Ar^+ and Bi^+). There were also doubly charged ions of each constituent along with a small signal of triply charged bismuth. Interestingly, a number of Bi_2^+ ions were also formed in the discharge plasma. Some nitrogen (N_2^+) and water (H_2O^+) ions were seen as well due to a small air leak in the argon flow system and residual water in the ion source. The water signal decreased as the source was operated over a span of tens of minutes.

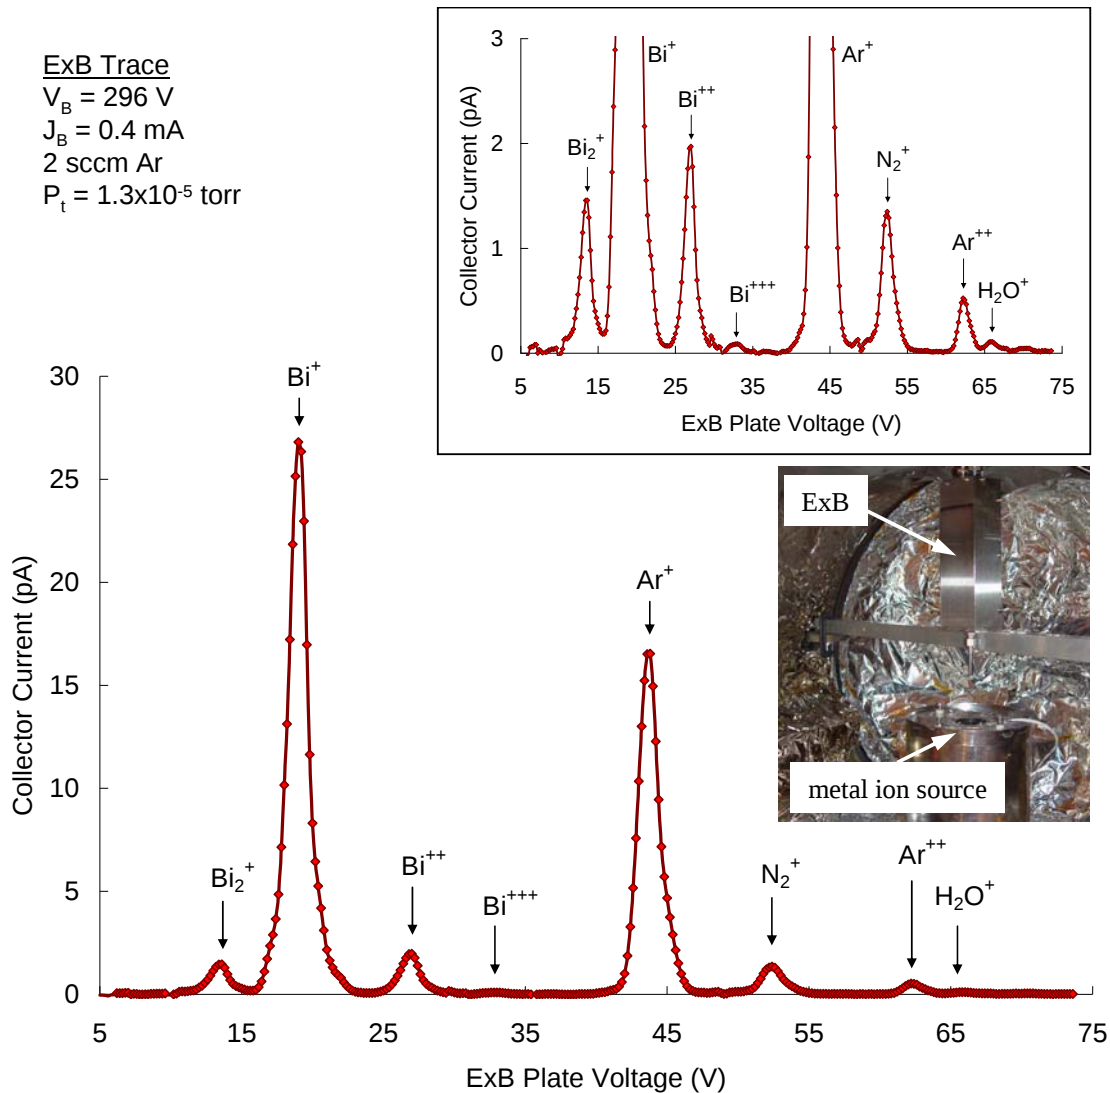


Figure 7: ExB measurement of ions produced within a CSU metal ion source. The source was operated on a combination of argon and bismuth propellants. Inset shows data on expanded y-axis to show the Bi^{+3} peak.

D. Air Force Institute of Technology (AFIT)

Testing of a 200 W Hall thruster was performed at the Air Force Institute of Technology (AFIT) in the Space Propulsion Analysis and System Simulator (SPASS) Lab, at Wright-Patterson Air Force Base. Figure 8 shows a picture of the Hall thruster and probe positioning system within the vacuum chamber. The Hall thruster was operated at three power conditions on xenon gas: at a nominal 200 W power level (condition A), at a lower 150 W power level (condition B), and at a higher 250 W power level (condition C). The ESA and ExB probes were separately mounted to a three-axis positioning system that could move the probes within the downstream plume region of the Hall thruster. Two linear stages were used for translational movement in the r-z directions (1m by 1m travel) and a third motor (theta rotation) was used for rotational movement to point the probes along desired sight lines. The vacuum chamber interior measured 2.54 meters in length and 1.80 meters in diameter. During operation of the Hall thruster, with xenon flowing, chamber pressure typically ranged from $1\text{E}-6$ to $1\text{E}-5$ Torr.

Condition	B	A	C
Power Setting (W)	150	200	250
Discharge Voltage, V_D (V)	186	248	294
Discharge Current, J_D (A)	0.80	0.78	0.86
Main Flow (sccm Xe)	0.84	0.84	0.84
Cathode Flow (sccm Xe)	0.07	0.07	0.07
Magnet Current (A)	1.50	1.50	1.95


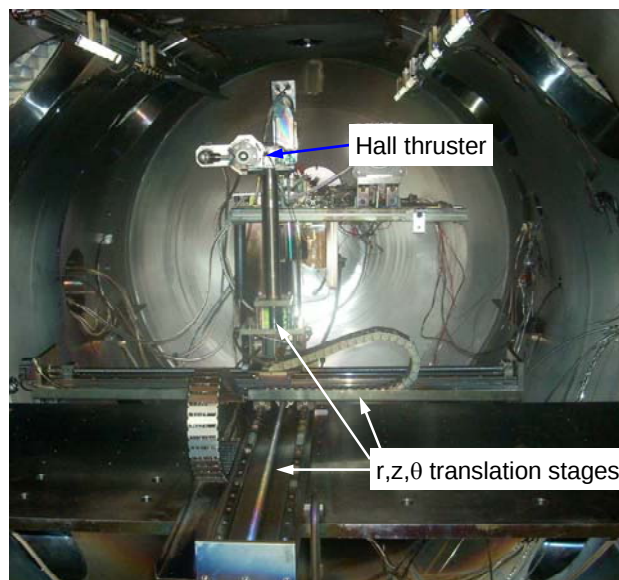


Figure 8. Setup of the 200 W Hall thruster and probe positioning system at the AFIT facility.

The ESA was positioned at a constant spherical distance of 57 cm from the Hall thruster. The ESA was rotated azimuthally to point at angles of 0, 15, 30, 45, and 80 degrees relative to the thruster centerline axis. High resolution ESA sweeps were performed at each location and the results are shown in Figure 9 for operating conditions A, B, and C. As expected, the largest ion signals were seen along the thruster centerline axis at 0 degrees with ions having energies from 100 to 300 eV. As the power (anode voltage/current) was increased from condition A to condition C, the energy of the ions increased with the peak of the ion energy distributions matching the discharge voltage. At off axis angles, there was evidence of a low energy shoulder having energies from 50 to 150 eV below the peak ion energies. The low energy shoulder became more prominent as the power/discharge voltage was increased from condition A to condition C. Looking at the energy distribution taken at a wide azimuthal angle of 80 degrees (condition A inset), the energy distribution was broad with a peak at 60 eV and a tail extending to 200 eV. At the 80 degree angle, the peak current magnitudes were roughly 2% of the peak centerline currents.

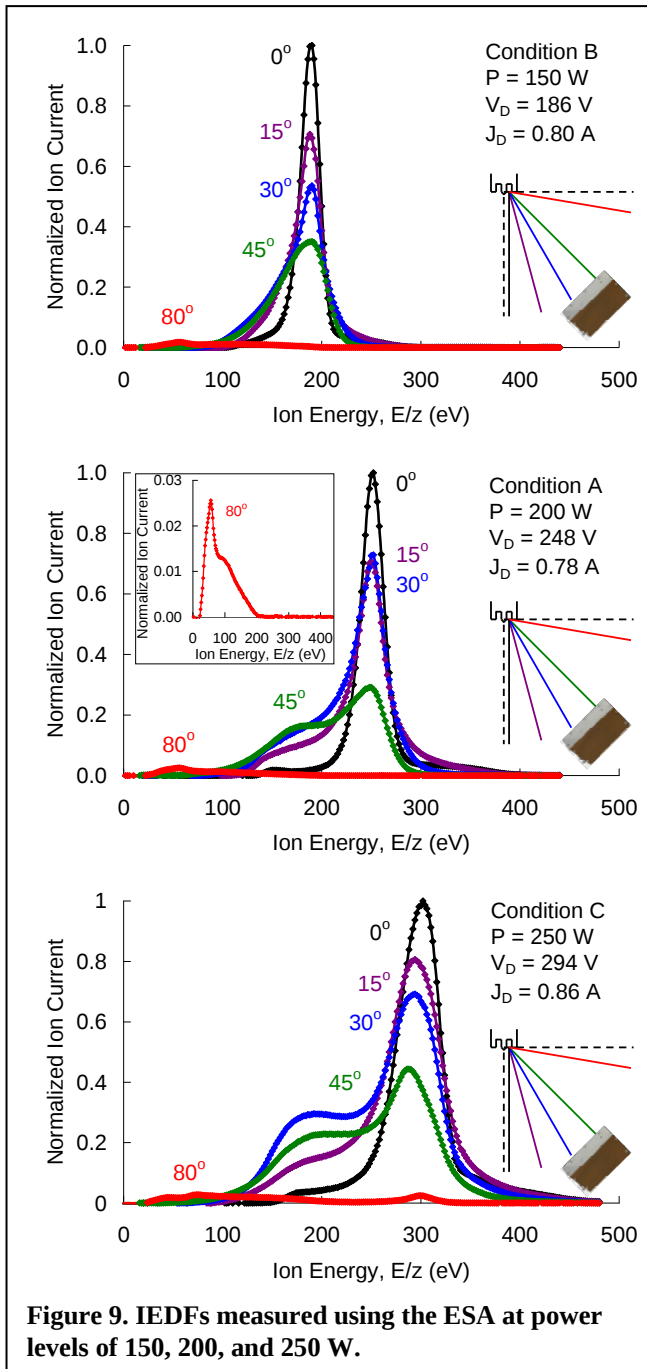

Like the ESA, the ExB probe was mounted to the positioning system and charge state measurements were made at selected azimuthal locations of 0, 15, 30, 45, and 60 degrees at a constant spherical distance of 57 cm from the thruster. To compare the ion fractions of singly, doubly, and triply charged ions, each ExB probe sweep was analyzed by finding a rectangular area under each ion group according to the half-width-half-maximum (HWHM) and peak of the ion current, similar to a method followed by Beal¹⁰. The ion current fractions for operating conditions A, B, and C are shown in Figure 10. The plot shows two important trends. The first trend is that a higher percentage of multiply charged ions were seen at off centerline angles. The presence of significant fractions of multiply charged ions emphasizes the importance of accurately measuring plume ion distributions at high azimuthal angles due to the possible increase in sputtering and/or contamination of nearby spacecraft components. The second trend is that the percentage of multiply charged ions increased as the thruster power (anode voltage/current) was

increased. This effect is feasible given the expected increase in plasma electron temperatures with increased discharge voltage and current.

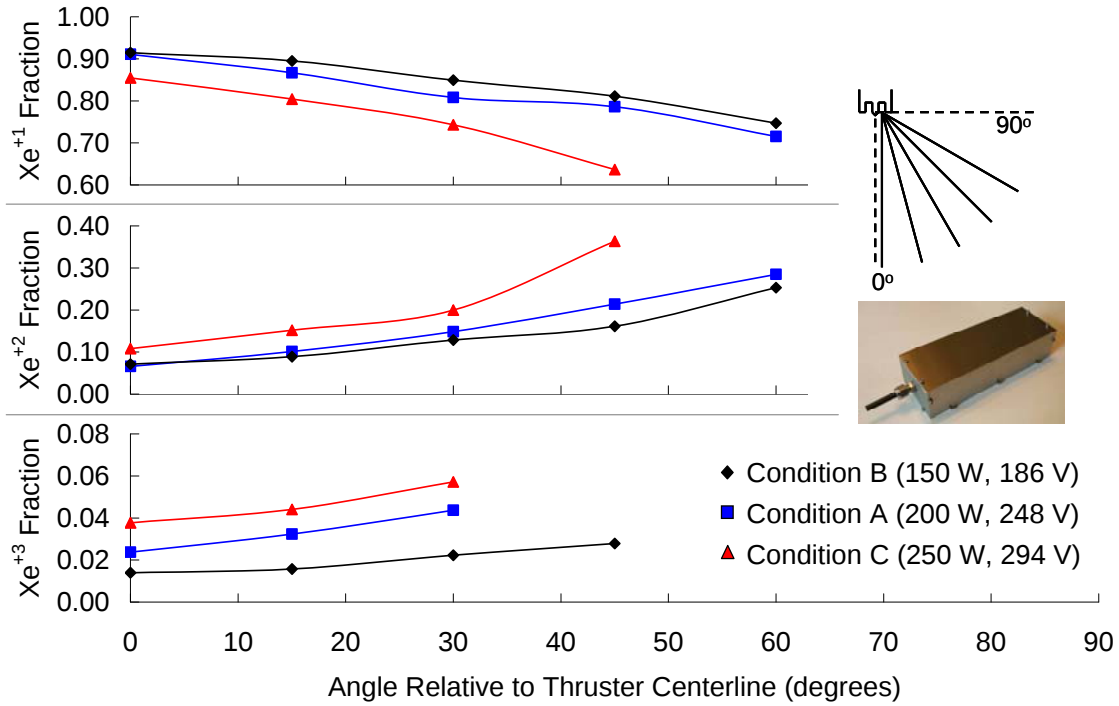


Figure 10. Ion current fractions as a function of azimuthal position for operating conditions A, B, and C. The fractions of multiply charged ions increased with increasing azimuthal angle.

E. Air Force Research Laboratory (AFRL/RZSS)

Testing of low discharge voltage operation of a nominal 6-kW laboratory model Hall thruster was carried out at the AFRL Spacecraft Branch division at Edwards AFB, CA. The laboratory model Hall thruster, shown in Figure 11, was developed at AFRL in collaboration with JPL and the University of Michigan to serve as a standardized test-bed for research of Hall thruster physics. This 6-kW thruster model has similarities to the P5 and NASA173M thruster designs, and has been characterized at AFRL, PEPL, and JPL^{11,12,13}. The magnetic circuit consists of eight outer electromagnets, one inner electromagnet, and an internal trim coil for fine-tuning the magnetic field within the boron nitride (BN) discharge channel. A large channel diameter enabled the placement of a centrally mounted, high-current LaB6 hollow cathode designed by JPL. Auxiliary flow line 1 injected xenon flow through the thruster backplate and around the cathode keeper. This additional flow is utilized to inject a fraction of the cathode neutral flow into the near-cathode region. The schematic in Figure 11 illustrates the internal cathode configuration and auxiliary propellant flow injection.

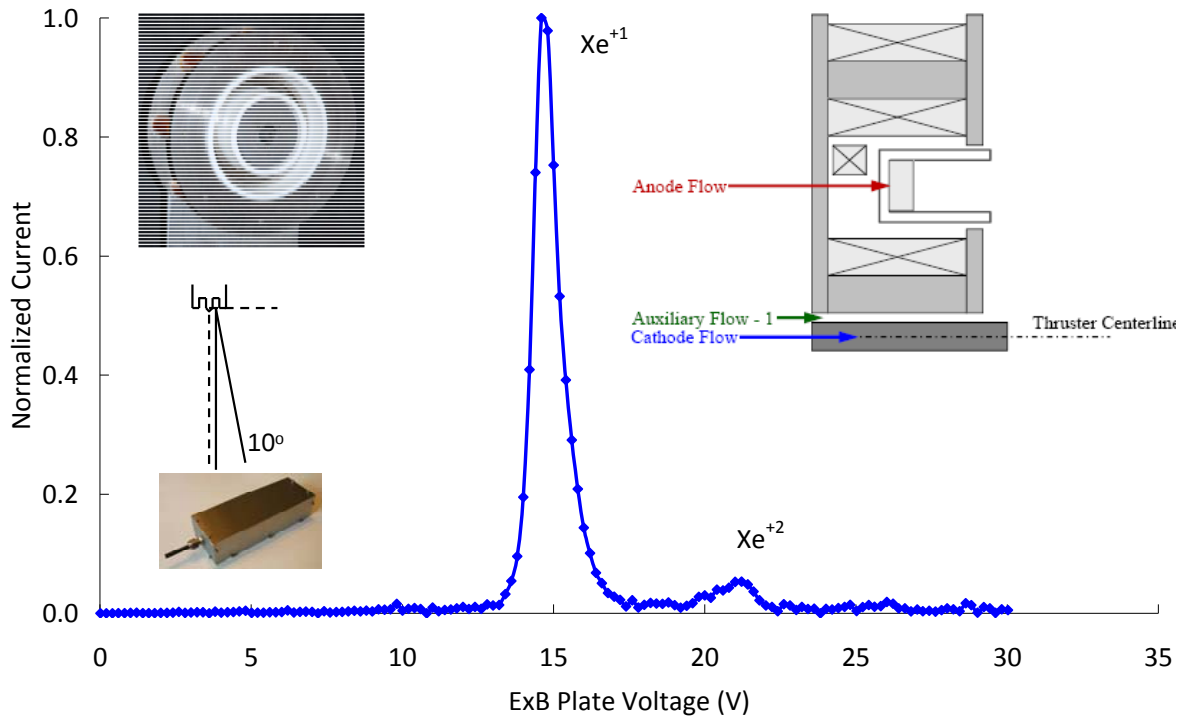


Figure 11. Photograph and schematic of the 6-kW laboratory Hall thruster with a centrally mounted LaB6 hollow cathode. The ExB trace shows relative amounts of singly and doubly charged xenon at a 10 degree zenith angle, 120 cm from the thruster.

The 6 kW Hall thruster was operated at low power with xenon gas at a discharge voltage of 150 V and a discharge current of 9.25 A. Charge state measurements were taken with the ExB probe over a range of 1.0 to 1.3 m downstream of the thruster and angles of 0 to 20 degrees relative to the thruster centerline. The ExB measurements were analyzed using a method described by Shastry et al.¹⁴ of fitting a triangle to each ion group using the peak current and half-width-half-maximum (HWHM), and correcting for effects of CEX reactions in the plume of the Hall thruster. The results, shown in Figure 12, indicate an increase in the percentages of multiply charged ions as the angle was increased from 0 to 20 degrees off axis. This result is in agreement with the charge state data recorded on the 200 W Hall thruster at AFIT.

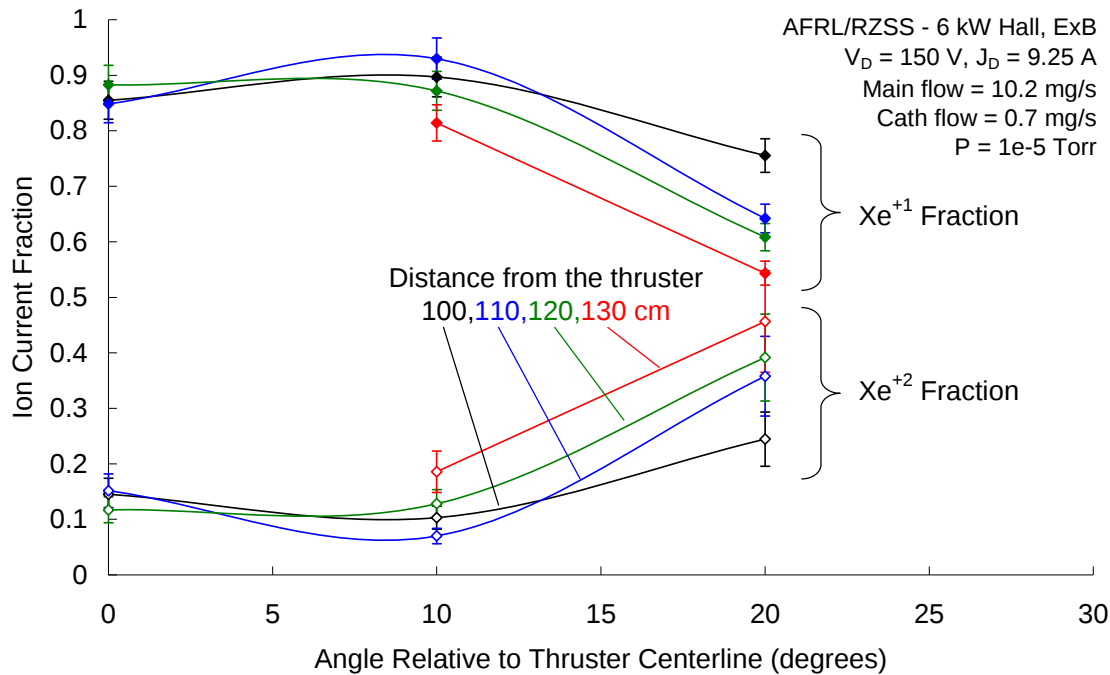


Figure 12. Charge state measurements of the 6 kW laboratory Hall thruster showing an increase in the fraction of multiply charged ions with increasing angles from the thruster centerline.

IV. Conclusion

Remotely located ESA and ExB diagnostic measurements were operated that yielded energy and charge state information on ion sources and Hall thrusters from three test facilities. At CSU, testing of two ion sources demonstrated the performance of ESA and ExB probes to characterize energy and charge state. The ESA showed good agreement between measured ion energy distribution peaks and the indicated beam voltages of both ion sources. ExB data demonstrated the ability to differentiate ions with respect to mass (argon/xenon/bismuth ions) as well as charge state.

At AFIT, ESA measurements of a 200 W Hall thruster showed variations in ion energy distributions with azimuthal probe position. As the ESA was moved further off the centerline axis, the average energy of the distributions decreased along with the magnitude of the ion current. Data taken at angles of 80 degrees from centerline showed the presence of low energy (60 eV peak) ions with a tail extending to 200 eV. Charge state measurements showed an increase in the fractions of multiply charged ions, both doubly charged and triply charged, with increasing azimuthal position.

Finally, ExB charge state measurements were described from testing of a 6-kW laboratory model Hall thruster at AFRL/RZSS. The low power Hall thruster study at AFRL showed similarities to the 200 W thruster tests at AFIT in that the percentages of multiply charged ions increased when rotating the probe over azimuthal angles from 0 to 20 degrees.

Acknowledgments

We would like to thank members of the laboratories at CSU, AFIT, and AFRL for providing technical support. Financial support is gratefully acknowledged from both the Air Force Institute of Technology and the Air Force Research Laboratory. A portion of this material is based upon work supported under Contract No. FA9300-08-M-3007, directed by Dr. Brian Beal, through the Air Force Research Laboratory, Edwards AFB, CA.

References

- ¹Goebel, D. M., Katz, I., *Fundamentals of Electric Propulsion: Ion and Hall Thrusters*, Jet Propulsion Laboratory, California Institute of Technology, JPL Space Science & Technology Series, March 2008, pp. 2-3, 429-446.
- ²Tighe, W.G., Chien, K.R., Ahn, J., Hurtado, J., Solis, E., and Spears, R., "Update on the XIPS 8-cm Thruster Prototype," AIAA 2008-4912, 44th Joint Propulsion Conference and Exhibit, Hartford, CT, July 21-23, 2008.
- ³Hofer, R.R., Randolph, T.M., Oh, D.Y., Snyder, J.S., and Grys, K.H., "Evaluation of a 4.5 kW Commercial Hall Thruster System for NASA Science Missions," AIAA-2006-4469, 42nd Joint Propulsion Conference and Exhibit, Sacramento, CA, July 9-12, 2006.
- ⁴Niemela, C.S., Brieda, L., Nakles, M.R., Ekholm, J.M., and Hargus, Jr., W.A., "Comparison of Hall Thruster Plume Expansion Model with Experimental Data," AIAA-2006-4480, 42nd Joint Propulsion Conference and Exhibit, Sacramento, CA, July 2006.
- ⁵Moore, J.H., Davis, C.C., and Coplan, M.A. *Building Scientific Apparatus: A Practical Guide to Design and Construction*. Boulder, Colorado: Westview Press, 2002.
- ⁶Farnell, C.C., "Plasma Flow Field Measurements Downstream of a Hollow Cathode," Ph.D. Dissertation, Department of Mechanical Engineering, Colorado State University, Fall 2007.
- ⁷Vahrenkamp, R.P., "Measurement of Double Charged Ions in the Beam of a 30 cm Mercury Bombardment Thruster," AIAA-73-1057, 10th Electric Propulsion Conference, Lake Tahoe, NV, October-November 1973.
- ⁸Hofer, R.R. and Gallimore, A.D., "Ion Species Fractions in the Far-Field Plume of a High-Specific Impulse Hall Thruster," AIAA-2003-5001, 39th Joint Propulsion Conference and Exhibit, Huntsville, AL, July 2003.
- ⁹Wilbur, P.J. and Wei, R., "High-Current-Density Metal-Ion Implantation," Review of Scientific Instruments, 63 (4), pp.2491-2493, April 1992.
- ¹⁰Beal, B.E., "Clustering of Hall Effect Thrusters for High-Power Electric Propulsion Applications," Ph.D. Dissertation, Department of Aerospace Engineering, University of Michigan, 2004.
- ¹¹Brown, D.L., "Investigation of Low Discharge Voltage Hall Thruster Characteristics and Evaluation of Loss Mechanisms," Ph.D. Dissertation, Department of Aerospace Engineering, University of Michigan, 2009.
- ¹²Reid, B. M., Shastry, R., Gallimore, A. D., Hofer, R. R., "Angularly-Resolved ExB Probe Spectra in the Plume of a 6-kW Hall Thruster," Proceedings of the 44th AIAA Joint Propulsion Conference, AIAA-2008-5287, Hartford, CT, July 20-23, 2008.
- ¹³Jameson, K.K., Goebel, D.M., Hofer, R.R., and Watkins, R.M., "Cathode Coupling in Hall Thrusters," IEPC-2007-278, 30th International Electric Propulsion Conference, Florence, Italy, September 17 – 20, 2007.
- ¹⁴Shastry, R., Hofer, R. R., Reid, B. M., Gallimore, A. D., "Method for Analyzing ExB Probe Spectra from Hall Thruster Plumes," Proceedings of the 44th AIAA Joint Propulsion Conference, AIAA-2008-4647, Hartford, CT, July 20-23, 2008.

REMOTE DIAGNOSTIC MEASUREMENTS OF HALL THRUSTER PLUMES

IEPC-2009-031

*Presented at the 31st International Electric Propulsion Conference,
University of Michigan • Ann Arbor, Michigan • USA
September 20 – 24, 2009*

Casey C. Farnell

Plasma Controls, LLC, Fort Collins, CO, 80526, USA

Daniel L. Brown

Air Force Research Laboratory, Edwards AFB, CA, 93524, USA

Garret Willis and Richard Branam

Air Force Institute of Technology, Wright-Patterson AFB, OH, 45433, USA

John D. Williams

Electric Propulsion and Plasma Engineering Laboratory, Colorado State University, Fort Collins, CO 80523, USA



Distribution A: Approved for public release; Unlimited distribution

Overview

1. Background and Motivation
2. Experimental Apparatus – Diagnostics and Facilities
3. Probe Calibration
4. Investigation at AFIT
5. Investigation at AFRL
6. Summary and Conclusions

Background and Motivation


- ExB probe and Electrostatic Analyzer (ESA) used to study ion species composition, ion energy distributions, and ion energy per charge distribution
- Enhance understanding of plasmadynamic phenomenon and performance loss mechanisms
- Plasma plume studies require accurate determination of ion energy characteristics
- Standardized diagnostic design and analysis
- Comparison of plume properties and plasma parameters
- Probes designed and constructed by Plasma Controls, LLC

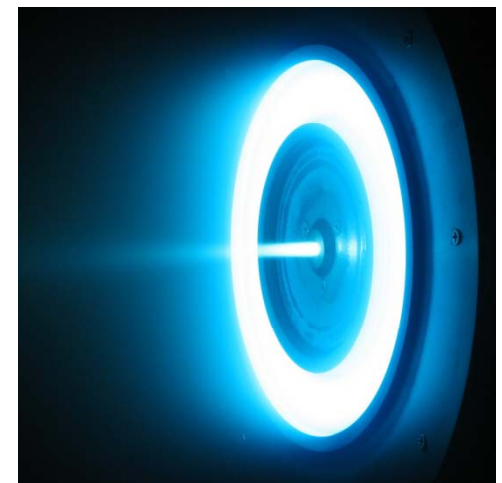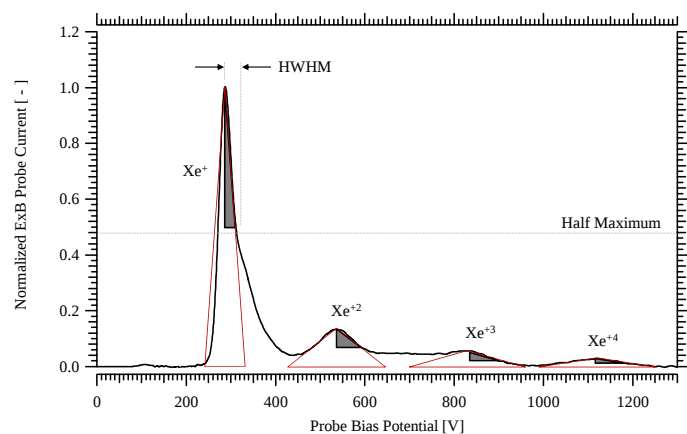

Distribution A: Approved for public release; Unlimited distribution

Electrostatic Analyzer

Determines ion energy distribution through ion energy to mass filter

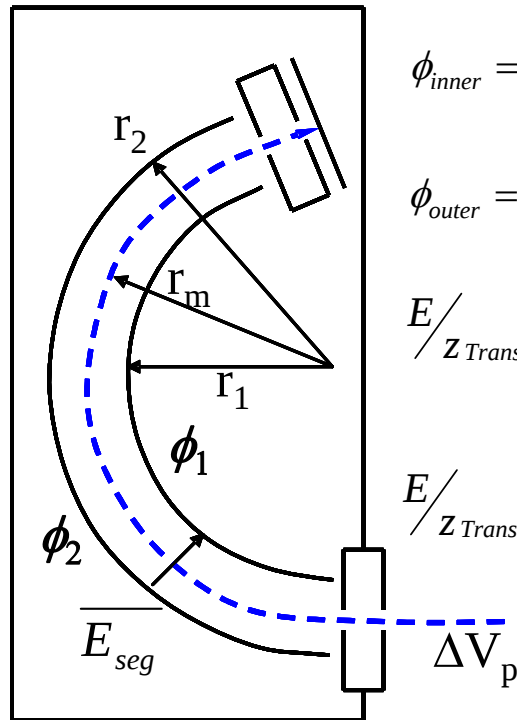


$$\phi_{inner} = 2 \cdot \frac{E}{z_{trans}} \left(1 - \frac{r_m}{r_1} \right) = -0.15 \cdot \frac{E}{z_{trans}}$$

$$\phi_{outer} = 2 \cdot \frac{E}{z_{trans}} \left(1 - \frac{r_m}{r_2} \right) = 0.13 \cdot \frac{E}{z_{trans}}$$

$$\frac{E}{z_{Trans}} = \frac{\Delta\phi}{\frac{r_2}{r_1} - \frac{r_1}{r_2}}$$

$$\frac{E}{z_{Trans}} = 3.56 \cdot \Delta\phi$$

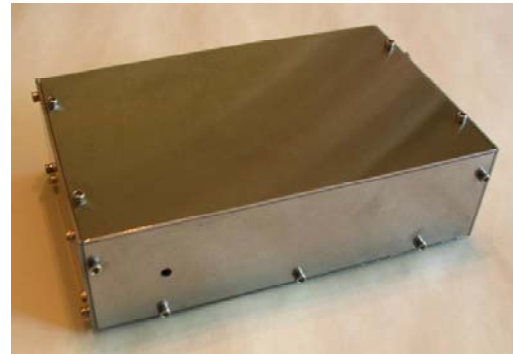



$$\Delta V_p = \frac{\Delta\phi}{\frac{r_2}{r_1} - \frac{r_1}{r_2}} = 3.56 \cdot \Delta\phi$$

$$v = \sqrt{\frac{2 \cdot z \cdot q \cdot \Delta V_p}{m}}$$

$$E = z \cdot q \cdot \Delta V_p = \frac{1}{2} \cdot m \cdot v^2$$

ExB Probe


Determines ion energy distribution through ion velocity filter

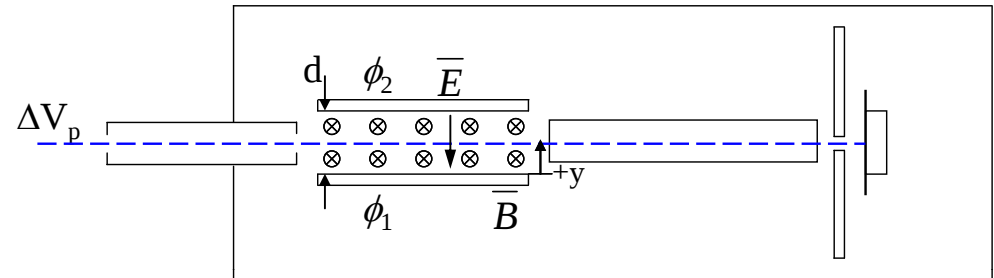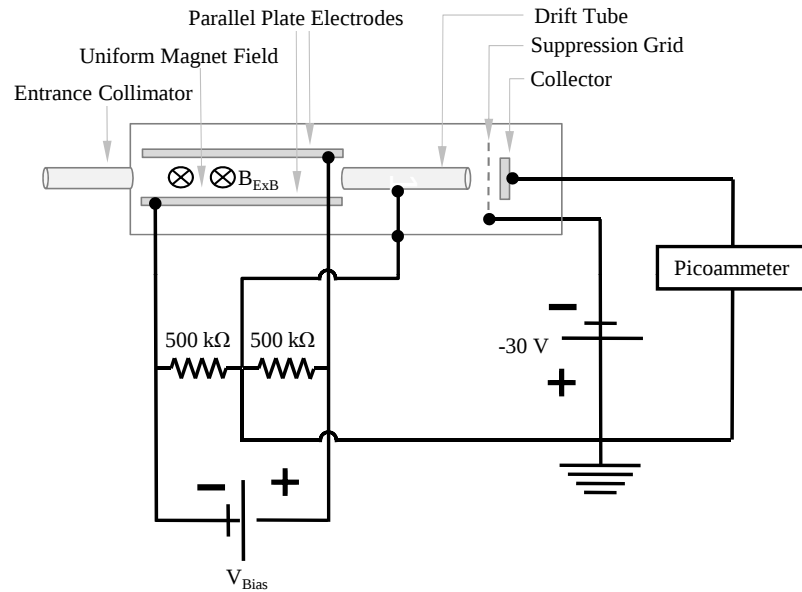





$$\bar{F} = q \cdot (\bar{E} + \bar{v} \times \bar{B})$$

$$\bar{E} = -\bar{v} \times \bar{B}$$

$$\Delta\phi = B \cdot d \cdot \sqrt{\frac{2 \cdot z \cdot q \cdot \Delta V_p}{m}}$$

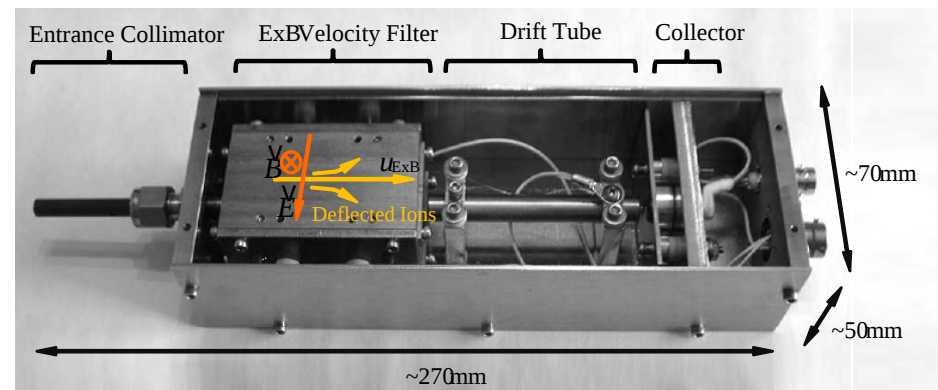


ESA and ExB Calibration at CSU

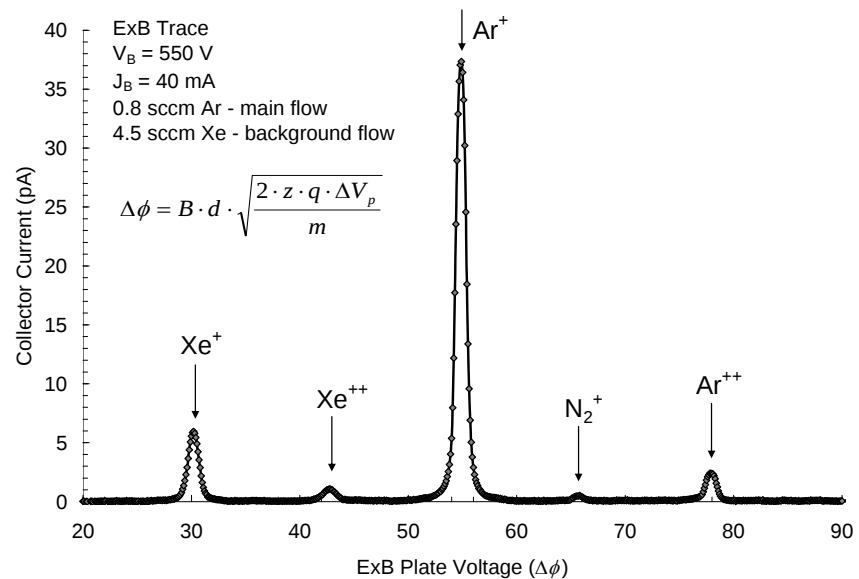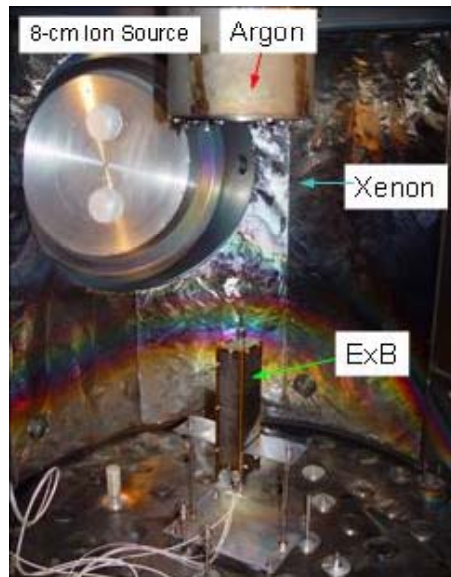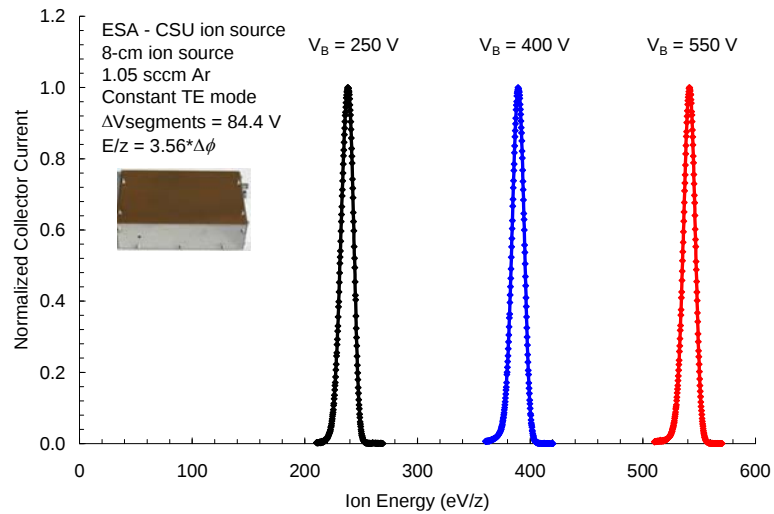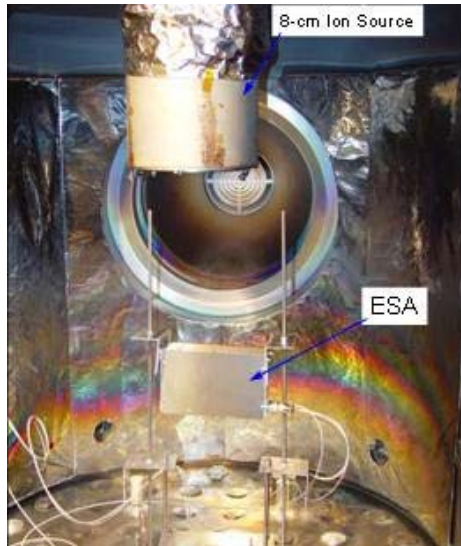


ESA Calibration at CSU

Argon and Bismuth plasma ion source

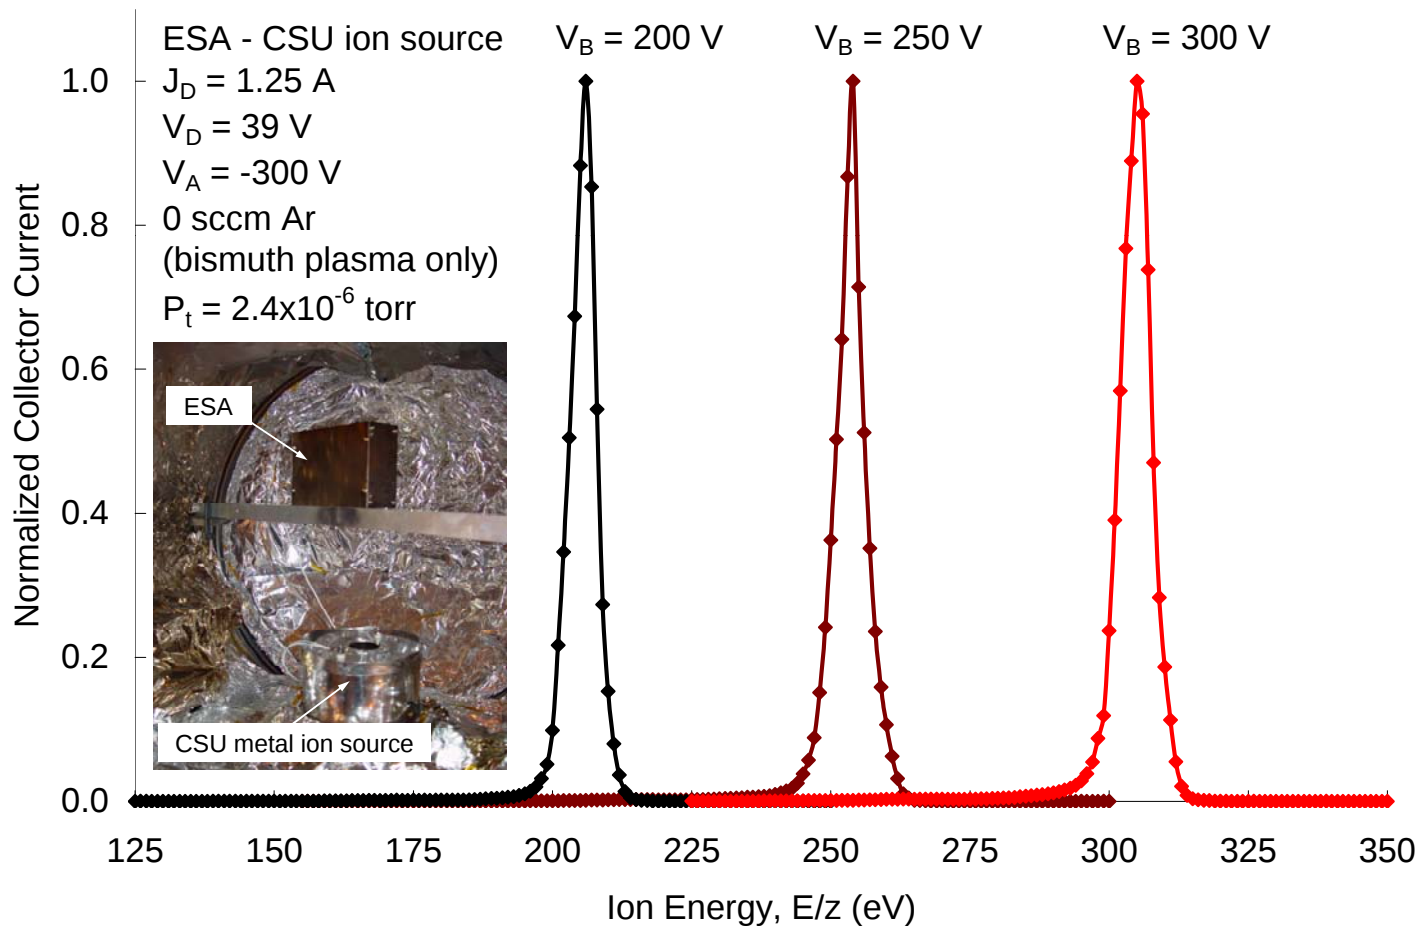

ExB Calibration at CSU




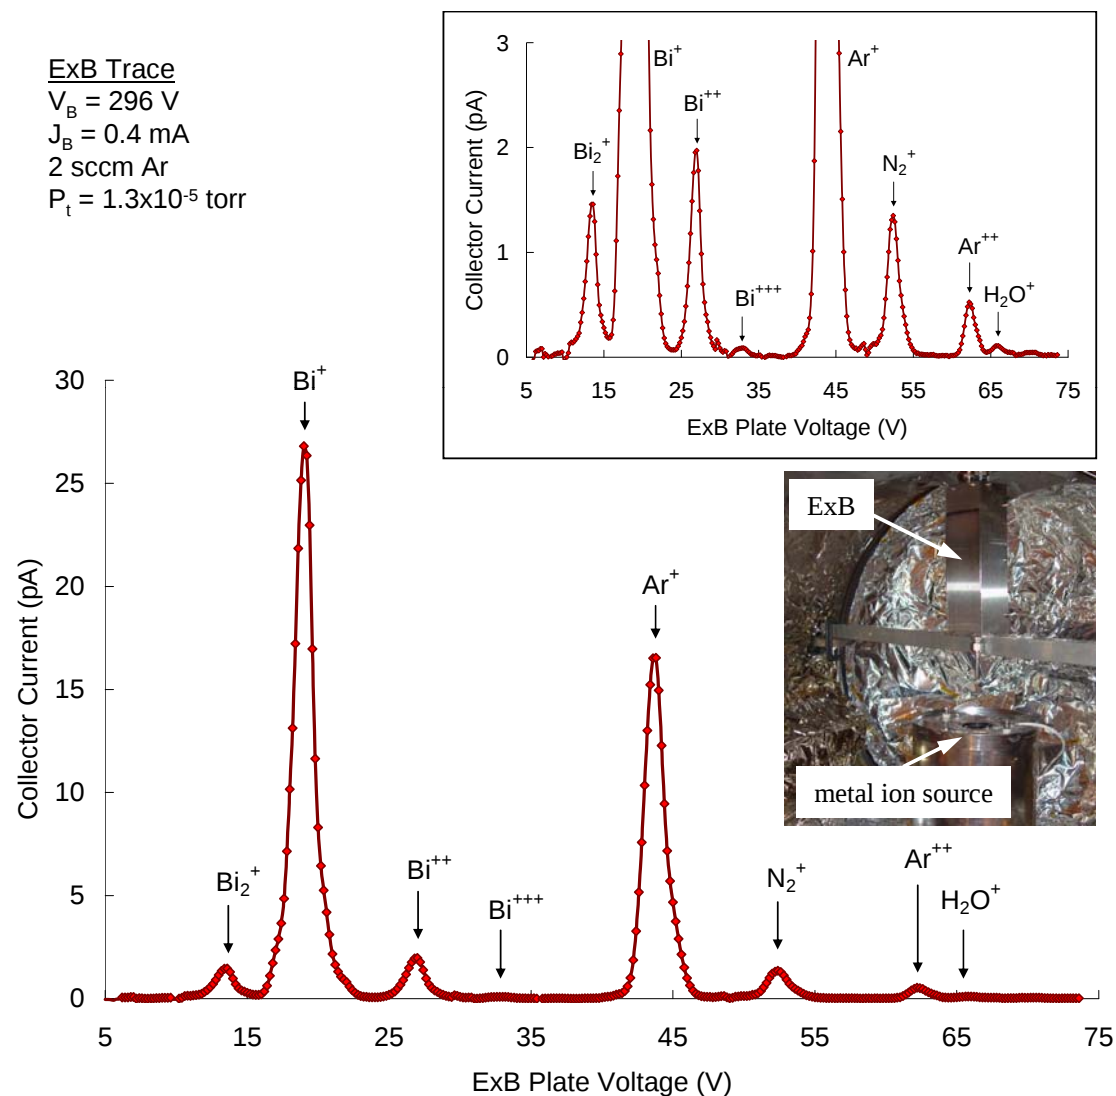


200W HET Testing at AFIT

ESA Results

Condition	B	A	C
Power Setting (W)	150	200	250
Discharge Voltage, V_D (V)	186	248	294
Discharge Current, J_D (A)	0.80	0.78	0.86
Main Flow (sccm Xe)	0.84	0.84	0.84
Cathode Flow (sccm Xe)	0.07	0.07	0.07
Magnet Current (A)	1.50	1.50	1.95


Low energy shoulder develops at higher power

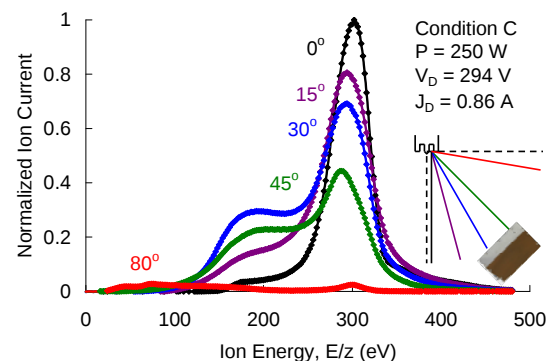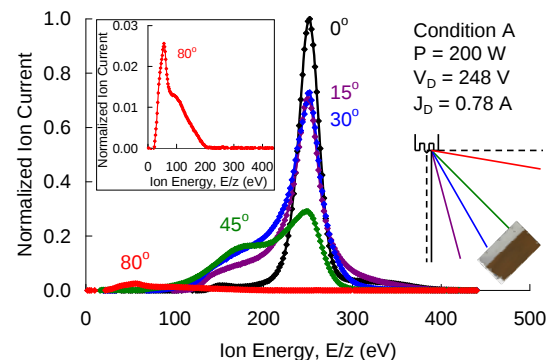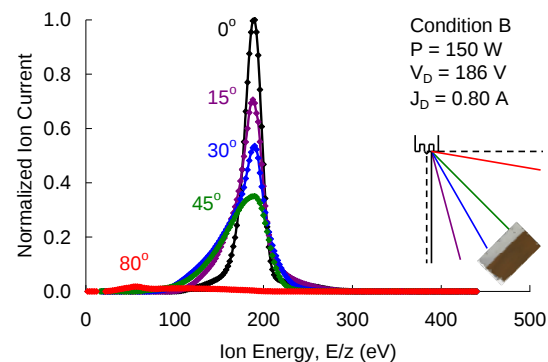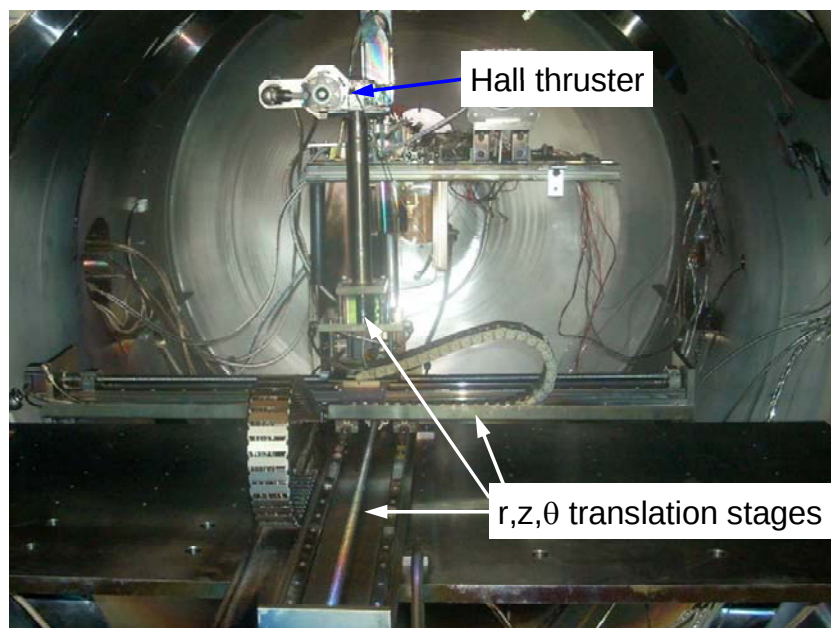

200W HET Testing at AFIT


ExB Results

Increased multiply charged ions beyond thruster plume core (>20 degrees)

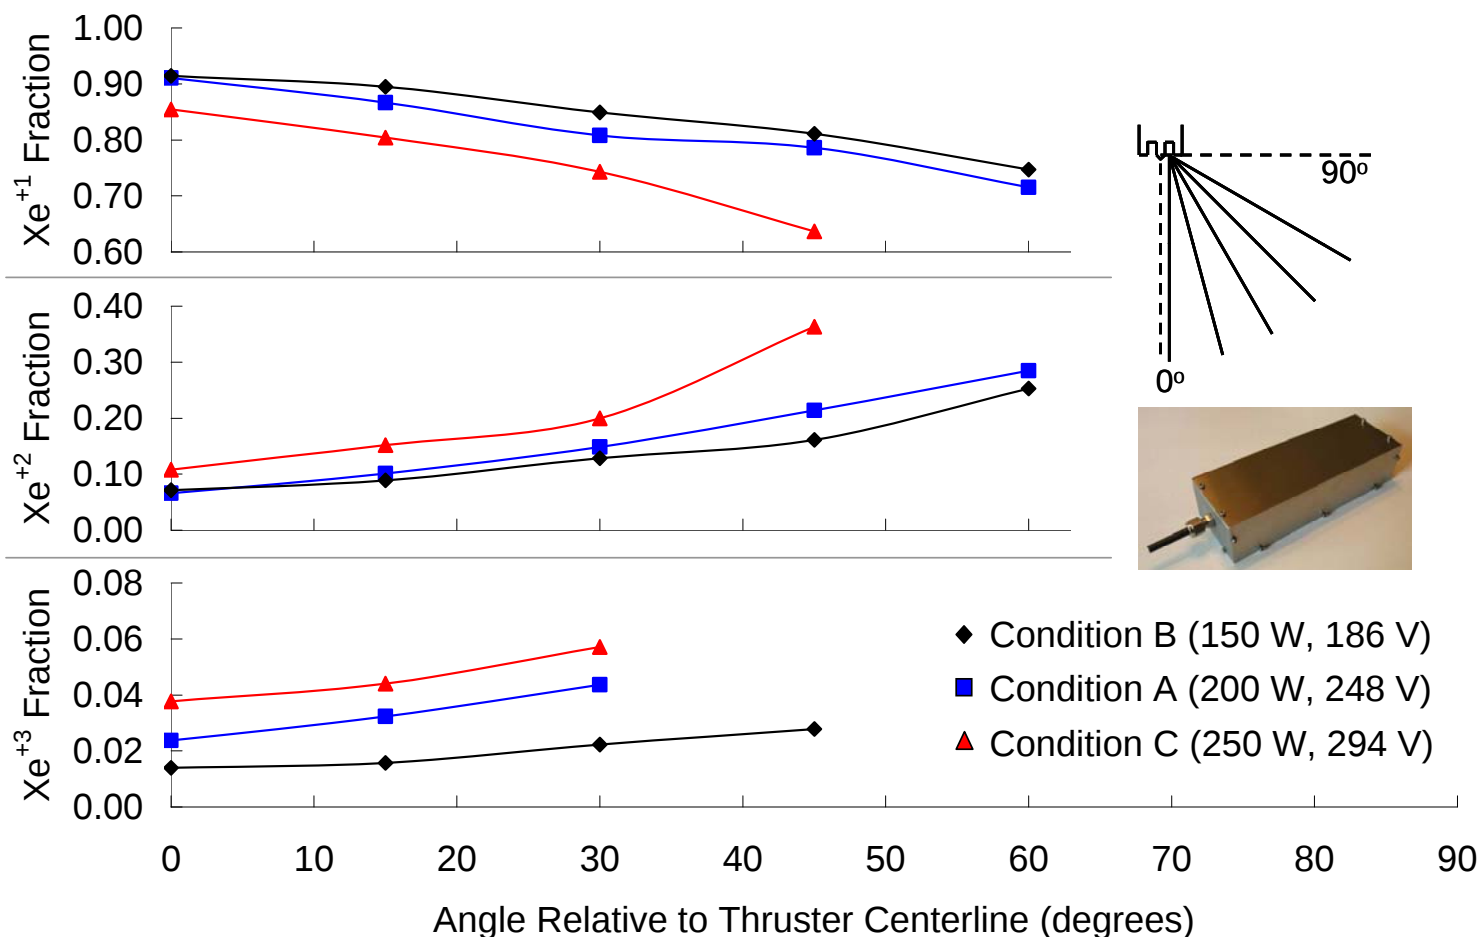

6kW HET Testing at AFRL

ExB Results

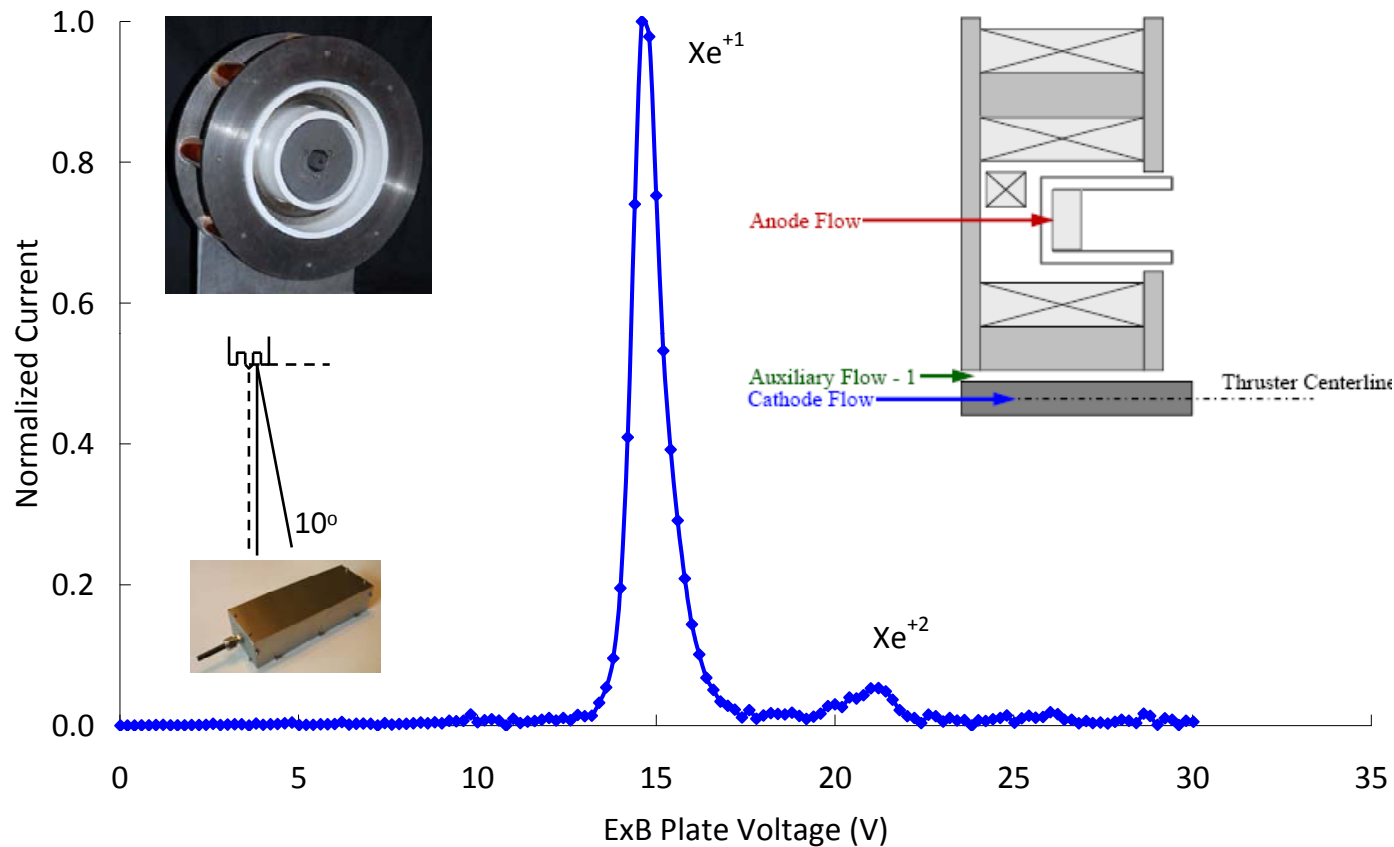


**Diagnostics successfully validated with different thrusters at different facilities.
Probes resolve variations in ion mass and charge**

6kW HET Testing at AFRL

ExB Results

- Increased multiply charged ions beyond thruster plume core (>10 degrees)
- Consistent with 200W investigation at AFIT
- Attributed to creation of multiply charged ions further downstream in the channel

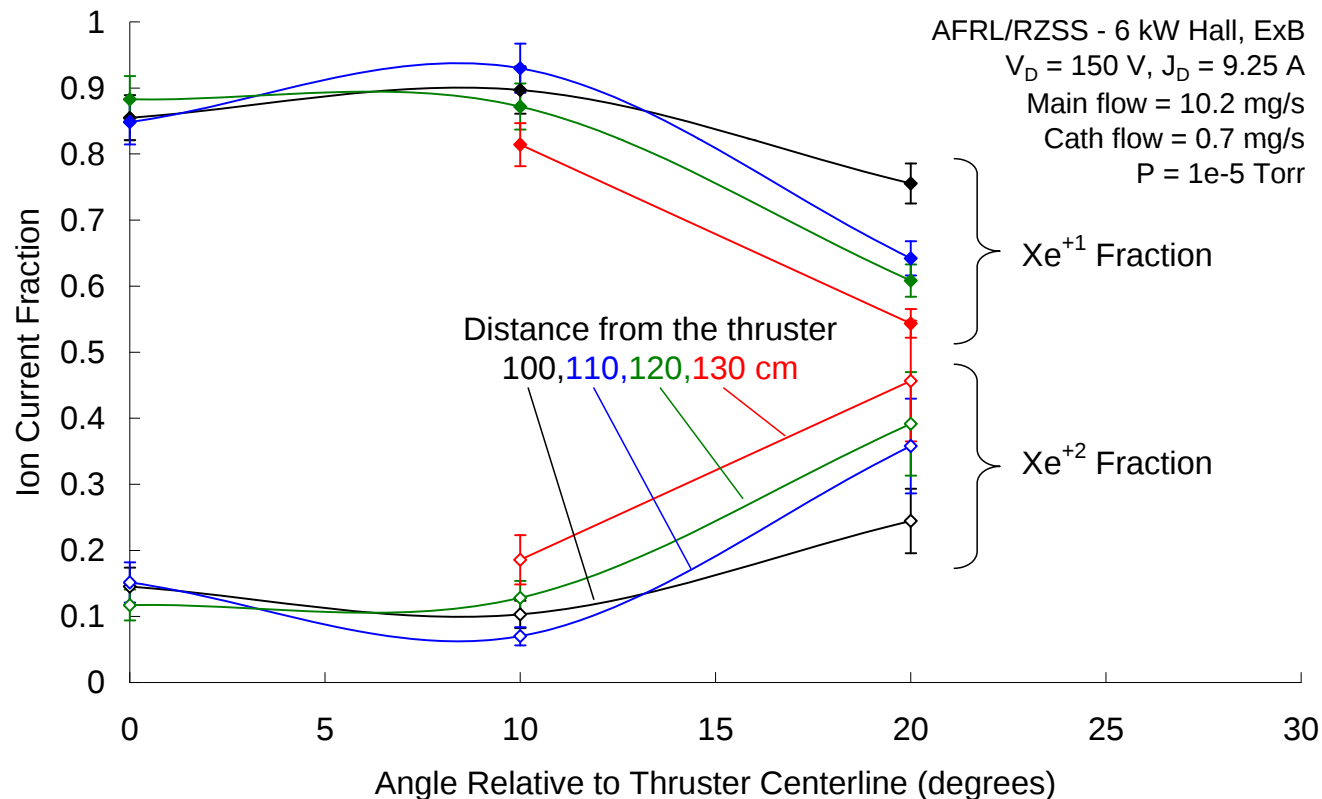

Summary and Conclusions

1. Plasma diagnostics designed, developed, and fabricated
2. Calibrated with two ion sources at CSU (8-cm ion source and liquid metal source)
3. High fidelity ion energy measurements obtained, differentiate with respect to charge and mass (for xenon, argon, and bismuth ions)
4. Demonstrated higher fraction of multiply charged ions on the ion plume wings that increase with downstream distance