

REPORT DOCUMENTATION PAGE*Form Approved*
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Washington Headquarters Service, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188) Washington, DC 20503.

PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.**1. REPORT DATE (DD-MM-YYYY)**

MARCH 2010

2. REPORT TYPE

Conference Paper Postprint

3. DATES COVERED (From - To)

January 2008 – June 2009

4. TITLE AND SUBTITLE

COGNITIVE CDMA CHANNELIZATION

5a. CONTRACT NUMBER

In-House

5b. GRANT NUMBER

FA8750-08-1-0063

5c. PROGRAM ELEMENT NUMBER

62702F

6. AUTHOR(S)

Kanke Gao, Stella Batalama, Dimitris Pados, and John Matyjas

5d. PROJECT NUMBER

ANCL

5e. TASK NUMBER

62

5f. WORK UNIT NUMBER

07

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)

AFRL/RIGF State University of New York at Buffalo
525 Brooks Road Department of Electrical Engineering
Rome, NY 13441-4505 332 Bonner Hall
Buffalo, NY 14260-2050

8. PERFORMING ORGANIZATION REPORT NUMBER

N/A

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)

AFRL/RIGF
525 Brooks Road
Rome NY 13441-4505

10. SPONSOR/MONITOR'S ACRONYM(S)

N/A

11. SPONSORING/MONITORING AGENCY REPORT NUMBER
AFRL-RI-RS-TP-2010-13**12. DISTRIBUTION AVAILABILITY STATEMENT**

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED. PA #: 88ABW-2009-3921 Date Cleared: September 4, 2009

13. SUPPLEMENTARY NOTES

© 2009 IEEE. This work has been published in the 43rd Asilomar Conference on Signals, Systems and Computers Conference Proceedings '09. U.S. copyright held by IEEE. One or more of the authors is a U.S. Government employee working within the scope of their Government job; therefore, the U.S. Government is joint owner of the work and has the right to copy, distribute, and use the work. All other rights are reserved by the copyright owner.

14. ABSTRACT

We consider the problem of simultaneous power and code-channel allocation of a secondary transmitter/receiver pair coexisting with a primary code-division-multiplexed (CDM) system. Our objective is to find the optimum transmitting power and code sequence of the secondary user that maximizes the signal-to-interference-plus-noise ratio (SINR) at the output of the maximum SINR linear receiver while, at the same time, the SINR of all primary users at the output of their max-SINR receiver is maintained above a certain threshold. This is an NP-hard non-convex optimization problem. In this paper, we propose a novel feasible suboptimum solution using semidefinite programming. Simulation studies illustrate the theoretical developments.

15. SUBJECT TERMS

Code-division multiplexing, secondary users, non-convex optimization

16. SECURITY CLASSIFICATION OF:**a. REPORT**
U**b. ABSTRACT**
U**c. THIS PAGE**
U**17. LIMITATION OF ABSTRACT**

UU

18. NUMBER OF PAGES

18

19a. NAME OF RESPONSIBLE PERSON

Michael J. Medley

19b. TELEPHONE NUMBER (Include area code)

N/A

Cognitive CDMA Channelization

Kanke Gao, Stella N. Batalama, Dimitris A. Pados

John D. Matyjas

Department of Electrical Engineering

Air Force Research Laboratory/RIGE

State University of New York at Buffalo

525 Brooks Rd

Buffalo, NY 14260

Rome, NY 13441

Email: {kgao, batalama,pados}@eng.buffalo.edu

E-mail: John.Matyjas@rl.af.mil

ABSTRACT

We consider the problem of simultaneous power and code-channel allocation of a secondary transmitter/receiver pair coexisting with a primary code-division-multiplexed (CDM) system. Our objective is to find the optimum transmitting power and code sequence of the secondary user that maximizes the signal-to-interference-plus-noise ratio (SINR) at the output of the maximum SINR linear receiver while, at the same time, the SINR of all primary users at the output of their max-SINR receiver is maintained above a certain threshold. This is an NP-hard non-convex optimization problem. In this paper, we propose a novel feasible suboptimum solution using semidefinite programming. Simulation studies illustrate the theoretical developments.

I. INTRODUCTION

Recent experimental studies [1] indicate that most of the licensed radio spectrum experiences low utilization. Cognitive radio (CR) [2] emerged as a promising technology that improves spectrum efficiency and utilization by allowing the secondary users/networks to share the spectrum that is licensed by primary users. As licensees, the primary users have always higher priority to use the spectrum [3]. The underlying challenge of this technology is to guarantee the Quality-of-Service (QoS) requirements of the primary system yet to maximize

QoS for the secondary users [4]-[7]. Power control for cognitive CDM systems was considered in [8] where

This work was supported by the U.S. Air Force Research Laboratory under Grant FA-8750-0801-0063. Approved for Public Release; distribution unlimited:
88ABW-2009-3921, 04 Sep 09

the proposed method does not take full advantage of signal processing at the receiver end, and thus restricts the throughput of secondary users. Joint beamforming and power allocation algorithms for cognitive radio networks were presented in [9], [10], while auction mechanism for power control were developed in [11].

In this paper, we consider a secondary system with a code division multiplexed (CDM) mode coexisting with a primary CDM system. We study the problem of designing a power and code-channel allocation scheme for the secondary user that maximizes the output SINR of the maximum-SINR linear receiver filter under SINR QoS constraints for all primary users and a peak transmission power constraint for the secondary user. This is a non-convex NP-hard problem. In this paper, we propose a novel, realizable suboptimum solution using semidefinite programming.

The rest of the paper is organized as follows. Section II is devoted to CR system model specifics and the formulation of the optimization problem. In Section III, we present our proposed solution while in Section IV we propose an iterative procedure based on semidefinite programming solution, which converges to a suboptimal feasible solution. The performance of the proposed scheme is evaluated through simulations in Section V. A few concluding remarks are drawn in Section VI.

II. SYSTEM MODEL AND PROBLEM STATEMENT

We consider a primary CDM network with K users and processing gain (code sequence length) L . We also consider a secondary system (with CDM mode of operation) in the uplink spectrum band of the primary system (Fig. 1). For simplicity in presentation, we assume that all signals propagate over a plain (no multipath) additive white Gaussian noise channel. We denote by h_i and q_i , $i = 1, 2, \dots, K$, the path coefficients from user i to the base station and the secondary receiver, respectively. The path coefficients from the secondary transmitter to the base station and to the secondary receiver are denoted by h_s and q_s , respectively. All path coefficients are modeled as Rayleigh distributed random variables that are independent across user signals and remain constant during several symbol intervals (quasi-static fading). After chip-matched filtering and

sampling at the chip rate, the received signal at the primary base station can be represented as

$$\mathbf{r} = \sum_{i=1}^K \sqrt{E_i} h_i \mathbf{s}_i b_i + \sqrt{E_s} h_s \mathbf{s}_s b_s + \mathbf{n}_p, \quad (1)$$

while the secondary received signal is

$$\mathbf{y} = \sum_{i=1}^K \sqrt{E_i} q_i \mathbf{s}_i b_i + \sqrt{E_s} q_s \mathbf{s}_s b_s + \mathbf{n}_s, \quad (2)$$

where E_i , b_i and $\mathbf{s}_i$ denote the bit energy, the information bit, and the normalized signature vector of the primary user i , respectively; E_s , b_s and $\mathbf{s}_s$ denote the bit energy, the information bit and the normalized signature vector of the secondary user, respectively; $\mathbf{n}_p$ and $\mathbf{n}_s$ represent AWGN $\mathcal{N}(\mathbf{0}, \sigma^2 \mathbf{I})$ at the base station and at the secondary receiver, correspondingly.

The linear filters at the base station and secondary receiver, which exhibit maximum output SINR, can be represented, respectively, as

$$\mathbf{w}_{MSINR,i} = c \mathbf{R}^{-1} \mathbf{s}_i, \quad k = 1, 2, \dots, K$$

$$\mathbf{w}_{MSINR,s} = \tilde{c} \tilde{\mathbf{R}}^{-1} \mathbf{s}_s,$$

where $\mathbf{R} = E\{\mathbf{r}\mathbf{r}^T\}$, $\tilde{\mathbf{R}} = E\{\mathbf{y}\mathbf{y}^T\}$, $c, \tilde{c} > 0$ and $E\{\cdot\}$ denotes statistical expectation. The output SINR of primary user i at the base station and the secondary user at the receiver can be expressed as in (4) and (5) at the top of the following page, where $\mathbf{R}_{/i}$ and $\mathbf{R}_{/s}$ are the “exclude i ” or “exclude s ” data autocorrelation matrix, defined as

$$\begin{aligned} \mathbf{R}_{/i} &\triangleq \sum_{k=1, k \neq i}^K E_k h_k^2 \mathbf{s}_k \mathbf{s}_k^T + E_s h_s^2 \mathbf{s}_s \mathbf{s}_s^T + \sigma^2 \mathbf{I} \\ \mathbf{R}_{/s} &\triangleq \sum_{k=1}^K E_k q_k^2 \mathbf{s}_k \mathbf{s}_k^T + \sigma^2 \mathbf{I}. \end{aligned}$$

In a cognitive radio setup, the secondary transmitter has to guarantee the QoS of all primary users. Hence, our objective is to find the transmission bit energy E_s and the real-valued signature $\mathbf{s}_s$ that maximize $SINR_s$

$$SINR_i = \frac{E\{|\mathbf{w}_{MSINR,i}^T(\sqrt{E_i}h_i b_i \mathbf{s}_i)|^2\}}{E\{|\mathbf{w}_{MSINR,i}^T(\sum_{k=1, k \neq i}^K \sqrt{E_k}h_k \mathbf{s}_k b_k + \sqrt{E_s}h_s \mathbf{s}_s b_s + \mathbf{n}_p)|^2\}} = E_i h_i^2 \mathbf{s}_i^T \mathbf{R}_{/i}^{-1} \mathbf{s}_i, \quad (4)$$

$$SINR_s = \frac{E\{|\mathbf{w}_{MSINR,s}^T(\sqrt{E_s}q_s b_s \mathbf{s}_s)|^2\}}{E\{|\mathbf{w}_{MSINR,s}^T(\sum_{k=1}^K \sqrt{E_k}q_k \mathbf{s}_k b_k + \mathbf{n}_s)|^2\}} = E_s q_s^2 \mathbf{s}_s^T \mathbf{R}_{/s}^{-1} \mathbf{s}_s. \quad (5)$$

under the constraints that $SINR_i$, $i = 1, 2, \dots, K$, are above a certain threshold α , i.e.

$$\begin{aligned} & \max_{E_s, \mathbf{s}_s} E_s \mathbf{s}_s^T \mathbf{R}_{/s}^{-1} \mathbf{s}_s \\ & \text{subject to } E_i h_i^2 \mathbf{s}_i^T \mathbf{R}_{/i}^{-1} \mathbf{s}_i \geq \alpha, \quad i = 1, 2, \dots, K \\ & \mathbf{s}_s^T \mathbf{s}_s = 1, \quad E_s \leq E_{max} \end{aligned} \quad (3)$$

where E_{max} denotes the maximum bit energy for the secondary user. The optimization problem in (3) is a NP-hard nonconvex optimization problem. In the next section, we propose a novel realizable suboptimum solution to this problem.

III. PROPOSED SCHEME

Using the matrix inversion lemma, we can express $\mathbf{s}_i^T \mathbf{R}_{/i}^{-1} \mathbf{s}_i$ as

$$\mathbf{s}_i^T \mathbf{R}_{/i}^{-1} \mathbf{s}_i = \frac{\mathbf{s}_i^T \mathbf{R}^{-1} \mathbf{s}_i}{1 - E_i h_i^2 \mathbf{s}_i^T \mathbf{R}^{-1} \mathbf{s}_i}, \quad i = 1, 2, \dots, k. \quad (6)$$

Then (4) and (6) imply that

$$\mathbf{s}_i^T \mathbf{R}^{-1} \mathbf{s}_i \geq \frac{\alpha}{E_i h_i^2 + \alpha E_i h_i^2} \triangleq \gamma_i, \quad i = 1, 2, \dots, K. \quad (7)$$

Thus, the optimization problem in (3) can be written as follows:

$$\begin{aligned} & \max_{E_s, \mathbf{s}_s} E_s \mathbf{s}_s^T \mathbf{R}_{/s}^{-1} \mathbf{s}_s \\ & \text{subject to } \mathbf{s}_i^T \mathbf{R}^{-1} \mathbf{s}_i \geq \gamma_i, \quad i = 1, 2, \dots, K \\ & \mathbf{s}_s^T \mathbf{s}_s = 1, \quad E_s \leq E_{max}. \end{aligned} \quad (8)$$

Using, once again, the matrix inversion lemma on $\mathbf{R}^{-1}$, i.e.

$$\mathbf{R}^{-1} = \mathbf{R}_{p+n}^{-1} - \frac{E_s h_s^2 \mathbf{R}_{p+n}^{-1} \mathbf{s}_s \mathbf{s}_s^T \mathbf{R}_{p+n}^{-1}}{1 + E_s h_s^2 \mathbf{s}_s^T \mathbf{R}_{p+n}^{-1} \mathbf{s}_s}, \quad (9)$$

and then combining (7) and (9), we can express the optimization constraints in (3) as explicit functions of the code sequence of the secondary user $\mathbf{s}_s$, i.e.

$$\mathbf{s}_i^T \mathbf{R}_{p+n}^{-1} \mathbf{s}_i \geq \frac{E_s h_s^2 \mathbf{s}_i \mathbf{R}_{p+n}^{-1} \mathbf{s}_s \mathbf{s}_s^T \mathbf{R}_{p+n}^{-1} \mathbf{s}_i}{1 + E_s h_s^2 \mathbf{s}_s^T \mathbf{R}_{p+n}^{-1} \mathbf{s}_s} + \gamma_i, \quad i = 1, 2, \dots, K. \quad (10)$$

In (9), $\mathbf{R}_{p+n}$ is the autocorrelation matrix of the primary signals and noise at the base station, i.e.

$$\begin{aligned} \mathbf{R}_{p+n} &\triangleq E\left\{\left(\sum_{i=1}^K \sqrt{E_i} h_i \mathbf{s}_i b_i + \mathbf{n}_p\right)\left(\sum_{i=1}^K \sqrt{E_i} h_i \mathbf{s}_i b_i + \mathbf{n}_p\right)^T\right\} \\ &= \sum_{i=1}^K E_i h_i^2 \mathbf{s}_i \mathbf{s}_i^T + \sigma^2 \mathbf{I}. \end{aligned}$$

For notational simplicity, let us define the $L \times L$ matrix

$$\mathbf{B}_i \triangleq h_s^2 \mathbf{R}_{p+n}^{-1} \mathbf{s}_i \mathbf{s}_i^T \mathbf{R}_{p+n}^{-1} - \beta_i h_s^2 \mathbf{R}_{p+n}^{-1}$$

where $\beta_i \triangleq \mathbf{s}_i^T \mathbf{R}_{p+n}^{-1} \mathbf{s}_i - \gamma_i$. Then, the optimization problem (8) can be written as

$$\begin{aligned} &\max_{\mathbf{x}} \quad \mathbf{x}^T \mathbf{R}_{/s}^{-1} \mathbf{x} \\ &\text{subject to} \quad \mathbf{x}^T \mathbf{B}_i \mathbf{x} - \beta_i \leq 0, \quad i = 1, 2, \dots, K \\ &\quad \mathbf{x}^T \mathbf{x} \leq E_{max} \end{aligned} \quad (11)$$

where $\mathbf{x}$ is the transmitted signal vector of the secondary user, i.e. $\mathbf{x} = \sqrt{E_s} \mathbf{s}_s$. We note that $\mathbf{B}_i$, $i = 1, 2, \dots, K$, is not positive semidefinite, and the problem in (11) is a nonconvex quadratically constrained quadratic program (nonconvex QCQP).

We observe that if we use the property $Tr\{\mathbf{AB}\} = Tr(\mathbf{BA})$, we are able to represent the objective function in (11) as

$$\mathbf{x}^T \mathbf{R}_{/s}^{-1} \mathbf{x} = Tr\{\mathbf{R}_{/s}^{-1} \mathbf{X}\}, \quad (12)$$

where $\mathbf{X} = \mathbf{x}\mathbf{x}^T$. Thus, the optimization problem in (11) can take the following form:

$$\begin{aligned} & \max_{\mathbf{X}} \quad Tr\{\mathbf{R}_{/s}^{-1}\mathbf{X}\} \\ & \text{subject to} \quad Tr\{\mathbf{B}_i\mathbf{X}\} \leq \beta_i, \quad i = 1, 2, \dots, K \\ & \quad \quad \quad Tr\{\mathbf{X}\} \leq E_{max}, \quad \mathbf{X} \succeq \mathbf{0}, \quad rank(\mathbf{X}) = 1, \end{aligned} \tag{13}$$

where $\mathbf{X} \succeq \mathbf{0}$ denotes that the matrix $\mathbf{X}$ is positive semidefinite. To solve this problem, we propose to relax the rank constraint in (13) and proceed by solving the following problem instead

$$\begin{aligned} & \max_{\mathbf{X}} \quad Tr\{\mathbf{R}_{/s}^{-1}\mathbf{X}\} \\ & \text{subject to} \quad Tr\{\mathbf{B}_i\mathbf{X}\} \leq \beta_i, \quad i = 1, 2, \dots, K \\ & \quad \quad \quad Tr\{\mathbf{X}\} \leq E_{max}, \quad \mathbf{X} \succeq \mathbf{0}. \end{aligned} \tag{14}$$

Then, (14) can be solved using semidefinite programming. Strictly speaking, we can solve (14) in polynomial time only within an error ϵ from the optimum solution. More specifically, let $f_o \triangleq Tr\{\mathbf{R}_{/s}^{-1}\mathbf{X}\}|_{\mathbf{X}=\mathbf{X}_o}$ where $\mathbf{X}_o$ is the optimum point, i.e. f_o is the optimal value of the objective function in (14). Then for any given $\epsilon > 0$, semidefinite programming guarantees that we can converge in polynomial time (polynomial in the input size L and in $\log 1/\epsilon$) to a solution that lies in $(f_o - \epsilon, f_o)$. In this paper, for the semidefinite programming problem in (14), we propose to use a primal-dual interior-point method [12], [13]. In particular, we consider the problem in (14) as the primal optimization problem, we create a differently parameterized equivalent dual problem and then solve both problems iteratively in a coupled fashion. Then, each iterations can be implemented in $O(L^3)$ and the algorithm converges after a small number of iteration to the matrix $\mathbf{X}^*$ that makes the objective function $Tr\{\mathbf{R}_{/s}^{-1}\mathbf{X}\}$ attain a value within $(f_o - \epsilon, f_o)$. The proposed method is outlined in the appendix. We note that relaxing the rank constraint of the NP-hard problem in (13) leads to the optimization problem in (14) that can be solved in polynomial time (by semidefinite programming methods) as described in the appendix. However, because of the constraint relaxation itself, the objective function evaluated at the

convergence point of the proposed method described above, $Tr\{\mathbf{R}_{/s}^{-1}\mathbf{X}\}$, is just a lower bound on the optimal value of the objective function in (13). To compute a good feasible solution for our problem in (11), we propose to proceed with following randomization procedure.

Let $\mathbf{X}^*$ be the convergence point of our proposed method described in the appendix. If we select $\mathbf{x}$ as a Gaussian random vector with $\mathbf{0}$ mean and correlation matrix $\mathbf{X}^*$, i.e. $\mathbf{x} \sim f_{\mathcal{N}}(\mathbf{x}) \triangleq \mathcal{N}(\mathbf{0}, \mathbf{X}^*)$, then $\mathbf{x}$ is the optimum solution of the nonconvex QCQP in (11) “on average” over all possible distribution of $\mathbf{x}$, i.e.

$$\begin{aligned} f_{\mathcal{N}}(\mathbf{x}) &= \arg \max_{f(\mathbf{x})} E\{\mathbf{x}^T \mathbf{R}_{/s}^{-1} \mathbf{x}\} \\ \text{subject to } & E\{\mathbf{x}^T \mathbf{B}_i \mathbf{x}\} \leq \beta_i, \quad i = 1, 2, \dots, K \\ & E\{\mathbf{x}^T \mathbf{x}\} \leq E_{max}, \end{aligned} \tag{15}$$

where $f(\mathbf{x})$ denotes the probability density function of $\mathbf{x}$. Implementation wise, a “good” feasible vector can be obtained by sampling $\mathbf{x}$ a sufficient number of times and then, among the feasible solutions (i.e. the ones that satisfy the constraints in (15)) we simply choose the vector that maximizes the objective function $\mathbf{x}^T \mathbf{R}_{/s}^{-1} \mathbf{x}$. However, global optimality can be guaranteed only if $\mathbf{x}$ is sampled an infinite number of times, which is not realistic. Our extensive studies indicate that if we sample $\mathbf{x}$ until we obtain the first feasible point, then we can use this vector as the initial point of an iterative procedure that converges to a good feasible solution. The iterative procedure is outlined below and its performance is evaluated by simulations in the next section. First we express $\mathbf{R}_{/s}$ as

$$\mathbf{R}_{/s} = \mathbf{S}\Sigma\mathbf{S}^T + \sigma^2\mathbf{I}, \tag{16}$$

where $\mathbf{S} \triangleq [\mathbf{s}_1, \mathbf{s}_2, \dots, \mathbf{s}_K]$ denotes the matrix that has the signatures of primary users as columns, and $\Sigma = \text{diag}(E_1 q_1^2, E_2 q_2^2, \dots, E_K q_K^2)$. Using the matrix inversion lemma, $\mathbf{R}_{/s}$ can be expanded as

$$\mathbf{R}_{/s}^{-1} = \frac{1}{\sigma^2}\mathbf{I} - \frac{1}{\sigma^4}\mathbf{S}(\Sigma^{-1} + \mathbf{S}^T\mathbf{S})^{-1}\mathbf{S}^T. \tag{17}$$

Substitution of (17) into (11) leads to maximization of the following objective function

$$\frac{1}{\sigma^2} \mathbf{x}^T \mathbf{x} - \frac{1}{\sigma^4} \mathbf{x}^T \mathbf{Q} \mathbf{x}, \quad (18)$$

where the matrix $\mathbf{Q} \triangleq \mathbf{S}(\Sigma^{-1} + \mathbf{S}^T \mathbf{S})^{-1} \mathbf{S}^T$. In (18), the first term $\frac{1}{\sigma^2} \mathbf{x}^T \mathbf{x}$ is a convex function while the second term $-\frac{1}{\sigma^4} \mathbf{x}^T \mathbf{Q} \mathbf{x}$ is a concave function (the latter implies that $\frac{1}{\sigma^4} \mathbf{x}^T \mathbf{Q} \mathbf{x}$ is convex). Based on the first-order conditions of convex functions [14], we have

$$\mathbf{x}^T \mathbf{x} \geq 2\mathbf{x}^{(0)T} \mathbf{x} - \mathbf{x}^{(0)T} \mathbf{x}^{(0)}, \quad (19)$$

where $\mathbf{x}^{(0)}$ denotes an initial feasible vector. Then we combine (18) and (19) and form an optimization problem that maximizes the following concave function

$$\frac{2}{\sigma^2} \mathbf{x}^{(0)T} \mathbf{x} - \frac{1}{\sigma^4} \mathbf{x}^T \mathbf{Q} \mathbf{x} - \frac{1}{\sigma^2} \mathbf{x}^{(0)T} \mathbf{x}^{(0)} \quad (20)$$

that leads to a suboptimum solution for our original problem in (11). To solve (20) we restrict all nonconvex constraints into convex sets (linearization). In particular, we consider the nonconvex constraints

$$\mathbf{x}^T \mathbf{B}_i \mathbf{x} - \beta_i \leq 0, \quad i \in \mathcal{I}_{nc}, \quad (21)$$

where $\mathcal{I}_{nc}$ denotes the set of all indices where $\mathbf{x}^T \mathbf{B}_i \mathbf{x}$ is a nonconvex function. Then we decompose the matrix $\mathbf{B}_i$ into its positive and negative parts as

$$\mathbf{B}_i = \mathbf{B}_i^+ - \mathbf{B}_i^- \quad (22)$$

where $\mathbf{B}_i^+ = h_s^2 \mathbf{R}_{p+n}^{-1} \mathbf{s}_i \mathbf{s}_i^T \mathbf{R}_{p+n}^{-1}$ and $\mathbf{B}_i^- = \beta_i h_s^2 \mathbf{R}_{p+n}^{-1}$ are all positive semidefinite. Therefore, the original constraints (21) can be written as

$$\mathbf{x}^T \mathbf{B}_i^+ \mathbf{x} - \beta_i \leq \mathbf{x}^T \mathbf{B}_i^- \mathbf{x}, \quad i \in \mathcal{I}_{nc} \quad (23)$$

where both sides of the inequality are convex quadratic functions. Linearization of the right-hand side of (23) around the vector $\mathbf{x}^{(0)}$ leads to

$$\mathbf{x}^T \mathbf{B}_i^+ \mathbf{x} - \beta_i \leq \mathbf{x}^{(0)T} \mathbf{B}_i^- \mathbf{x}^{(0)} + 2\mathbf{x}^{(0)T} \mathbf{B}_i^- (\mathbf{x} - \mathbf{x}^{(0)}), \quad i \in \mathcal{I}_{nc}. \quad (24)$$

In (24), the right-hand side is an affine lower bound on the original function $\mathbf{x}^T \mathbf{B}_i^- \mathbf{x}$. It is thus implied that the resulting constraints are convex and more conservative than the original ones, hence the feasible set of the linearized problem is a convex subset of the original feasible set. Thus, by linearizing the concave parts of all constraints, we obtain a set of convex constraints that are tighter than the original nonconvex ones. Now, the original optimization problem takes the form

$$\begin{aligned}
& \max_{\mathbf{x}} \quad \frac{2}{\sigma^2} \mathbf{x}^{(0)T} \mathbf{x} - \frac{1}{\sigma^4} \mathbf{x}^T \mathbf{Q} \mathbf{x} - \frac{1}{\sigma^2} \mathbf{x}^{(0)T} \mathbf{x}^{(0)} \\
& \text{subject to} \quad \mathbf{x}^T \mathbf{B}_i^+ \mathbf{x} - \mathbf{x}^{(0)T} \mathbf{B}_i^- (2\mathbf{x} - \mathbf{x}^{(0)}) - \beta_i \leq 0, \quad i \in \mathcal{I}_{nc} \\
& \quad \mathbf{x}^T \mathbf{B}_i \mathbf{x} - \beta_i \leq 0, \quad i \in \bar{\mathcal{I}}_{nc} \\
& \quad \mathbf{x}^T \mathbf{x} \leq E_{max}.
\end{aligned} \tag{25}$$

The problem in (25) is a convex QCQP problem and can be solved efficiently by standard convex system solvers [15] to produce a new feasible vector $\mathbf{x}^{(1)}$ (the objective function in (11) evaluated at $\mathbf{x}^{(1)}$ takes a value that is larger than the value that is based on $\mathbf{x}^{(0)}$). Repeating the linearization method, we can obtain a sequence of feasible vectors with non-decreasing values of the objective function in (11). This procedure converges after few iterations. Our proposed scheme for power and code allocation for the secondary user is outlined in Fig. 2.

V. SIMULATION STUDIES

We consider a primary DS-CDMA system with K synchronous users and a pair of secondary transmitter and receiver with CDM mode, and the system processing gain is $L = 16$. At the base station, the transmitted SNRs of K users are all equal to $10dB$ while the maximum transmitted SNRs for the secondary user is set to $8dB$. All signatures for primary users are generated from the optimum binary signature set, which achieves the Karystinos-Pados bound with the length L . The SINR threshold for primary users is set to $3dB$. The channel coefficients h_n and q_n , $n = 1, 2, \dots, K$, are considered as complex Gaussian random variables with

mean 0 and variance 1, while h_s and q_s are set to 0.9. In the randomized procedure, the Gaussian variable is sampled 1000 times, and the first and best feasible vectors are denoted by $\mathbf{x}^{(0)}$ and $\mathbf{x}_{max}$, respectively. In the linearization procedure, we pick $\mathbf{x}^{(0)}$ as the initial vector, and the output convergence vector is denoted by $\mathbf{x}_{out}$.

In Fig. 3, we plot secondary transmission percentage of the SDP solution $\mathbf{X}^*$ with rank 1 and rank more than 1 as a function of the number of primary users. We observe that the total secondary transmission percentage decrease as the number of primary users increases. Most secondary transmissions can be realized with the SDP solution $\mathbf{X}^*$ with rank 1, which means that the optimal vector $\mathbf{x}$ can be directly generated from the SDP solution $\mathbf{X}^*$ without the randomized and linearization procedure. The secondary transmissions achieved by the linearization procedure are below 5%, especially almost zero when the number of primary users is greater than 19. It means that most secondary transmissions can be realized without the linearization procedure, then the large complexity of linearization is avoided.

For comparison purposes, we evaluate the SINR loss, $SINR(\mathbf{x}_{R-OPT}) - SINR(\mathbf{x})$, of $\mathbf{x} = \mathbf{x}^{(0)}$, $\mathbf{x}_{max}$ and $\mathbf{x}_{out}$, with respect to the SINR of the optimal real vector $\mathbf{x}_{R-OPT} = \sqrt{E_{max}}\mathbf{q}_1$, where $\mathbf{q}_1$ denotes the eigenvector of $\mathbf{R}_{/s}^{-1}$ with the largest eigenvalue.

In Fig. 4, we plot the SINR loss of $\mathbf{x}^{(0)}$, $\mathbf{x}_{max}$ and $\mathbf{x}_{out}$ as a function of the number of primary users. Under a limited number of samples, the linearized output vector $\mathbf{x}_{out}$ has a less SINR loss than the “best” vector $\mathbf{x}_{max}$. We observe that the SINR losses of both $\mathbf{x}_{max}$ and $\mathbf{x}_{out}$ are much better than $\mathbf{x}^{(0)}$. The linearization procedure improved the SINR performance from the initial point, and meanwhile realized the derandomization.

V. CONCLUSION

In this paper, we developed a power and code allocation for a secondary user that coexists with a primary CDM network. First, we formulated the task as a NP-hard nonconvex constraint optimization problem (3). Then relaxation of the rank-1 constraint led to a problem that can be solved by semidefinite programming.

To do that, we proposed a primal-dual interior-point method that leads to a matrix solution ($\text{rank} \geq 1$). A subsequent randomization procedure made it possible to obtain a “good”, on average, feasible solution after searching over several feasible sampled solutions. To reduce the computational complexity associated with the randomization procedure, we developed an alternative method that iteratively solves the original nonconvex optimization problem by restricting all nonconvex constraints into convex sets and by initializing itself at any feasible solution of the randomized procedure (e.g. the first feasible sampled solution encountered in the randomization process).

APPENDIX

Interior point algorithm

(i) Formulate the pair of primal and dual SDP problems:

Primal	Dual
$\max_{\mathbf{X}} \text{Tr}\{\mathbf{R}_{/s}^{-1}\mathbf{X}\}$	$\max_{\mathbf{y}, \mathbf{Z}} \mathbf{b}^T \mathbf{y}$
<i>subject to</i> $\text{Tr}\{\mathbf{B}_i \mathbf{X}\} \leq \beta_i, \quad i = 1, 2, \dots, K$	<i>subject to</i> $\sum_{i=1}^K \mathbf{y}_i \mathbf{B}_i + \mathbf{y}_{K+1} \mathbf{I} = \mathbf{R}_{/s}^{-1} + \mathbf{Z}$
$\text{Tr}\{\mathbf{X}\} \leq E_{max}, \quad \mathbf{X} \succeq \mathbf{0}$	$\mathbf{y} \geq \mathbf{0}, \quad \mathbf{Z} \succeq \mathbf{0}.$

(ii) Choose $0 \leq \delta < 1$ and define $\mu = \sigma \frac{\text{Tr}\{\mathbf{XZ}\}}{L}$.

(iii) Determine $\Delta \mathbf{X}$, $\Delta \mathbf{y}$ and $\Delta \mathbf{Z}$ by the method in [13].

(iv) Using $\mathbf{XZ}$ method, replace ΔX by $\frac{1}{2}(\Delta X + \Delta X^T)$.

(v) Choose steplengths α, β and update the iterates by

$$\mathbf{X} \leftarrow \mathbf{X} + \alpha \Delta \mathbf{X}$$

$$\mathbf{y} \leftarrow \mathbf{y} + \beta \Delta \mathbf{y}$$

$$\mathbf{Z} \leftarrow \mathbf{Z} + \alpha \Delta \mathbf{Z}$$

(vi) Repeat (ii)-(v) until $\mathbf{X}$ is feasible for the primal, $(\mathbf{y}, \mathbf{Z})$ is feasible for the dual, and the primal and dual objective values agree to a specified number.

REFERENCES

- [1] Federal Comm. Commission, Spectrum Policy Task Force, Report ET Docket no. 02-135, Nov. 2002.
- [2] J. Mitola and G. Q. Maguire, "Cognitive radios: Making software radios more personal," *IEEE Pers. Commun.*, vol. 6, no. 4, pp. 13-18, Aug. 1999.
- [3] S. Haykin, "Cognitive radio: brain-empowered wireless communications," *IEEE J. Select. Areas Commun.*, vol. 23, no. 2, pp. 201-220, Feb. 2005.
- [4] A. Ghasemi and E. S. Sousa, "Fundamental limits of spectrum-sharing in fading environments," *IEEE Trans. Wireless Commun.*, vol. 6, no. 2, pp. 649-658, Feb. 2007.
- [5] S. Srinivasa and S. A. Jafar, "The throughput potential of cognitive radio: a theoretical perspective," *IEEE Commun. Magazine*, vol. 45, pp. 73-79, May. 2007.
- [6] G. Ganesan and Y. Li, "Cooperative spectrum sensing in cognitive radio, part I: two user networks," *IEEE Trans. Wireless Commun.*, vol. 6, no. 6, pp. 2204-2213, Jun. 2007.
- [7] Q. Qu, L. B. Milstein, and D. R. Vaman, "Cognitive Radio Based Multi-User Resource Allocation in Mobile Ad Hoc Networks Using Multi-Carrier CDMA Modulation," *IEEE J. Select. Areas Commun.*, vol. 26, no. 1, pp. 70-82, Jan. 2008.
- [8] Y. Xing, C. Mathur, M. A. Haleem, R. Chandramouli and K. P. Subbalakshmi, "Dynamic spectrum access with QoS and interference temperature constraints," *IEEE Trans. Mobile Computing*, vol. 6, no. 4, pp. 423-433, Apr. 2007.
- [9] L. Zhang, Y. C. Liang, and Y. Xin, "Joint beamforming and power allocation for multiple access channels in cognitive radio networks," *IEEE J. Select. Areas Commun.*, vol. 26, no. 1, pp. 38-51, Jan. 2008.
- [10] M. Islam, Y. Liang, and A. Hoang, "Joint Power Control and Beamforming for Cognitive Radio Networks," *IEEE Trans. Wireless Commun.*, vol. 7, no. 7, pp. 2415-2419, Jul. 2008.
- [11] J. Huang, R. Berry, and M. L. Honig, "Auction-Based Spectrum Sharing," *ACM/Springer Mobile Networks and Applications J. (MONET)*, vol. 11, no. 3, Jun. 2006.
- [12] F. Alizadeh, J. Haeberly, and M. Overton, "Primal-dual Interior point methods for semidefinite programming: convergence rates, stability and numerical results," *SIAM J. Optimiz.*, vol. 8, no. 3, pp. 746-768, Aug. 1998.
- [13] F. Rendl, R. Vanderbei, and H. Wolkowicz, "Interior point methods for max-min eigenvalue problems," Report 264, Technische Universität Graz, Graz, Austria 1993.
- [14] S. Boyd and L. Vandenberghe, *Convex Optimization*. Cambridge, UK: Cambridge University Press, 2004.

[15] M. Grant and S. Boyd, CVX Version 1.2–A MATLAB software, Feb. 2009.

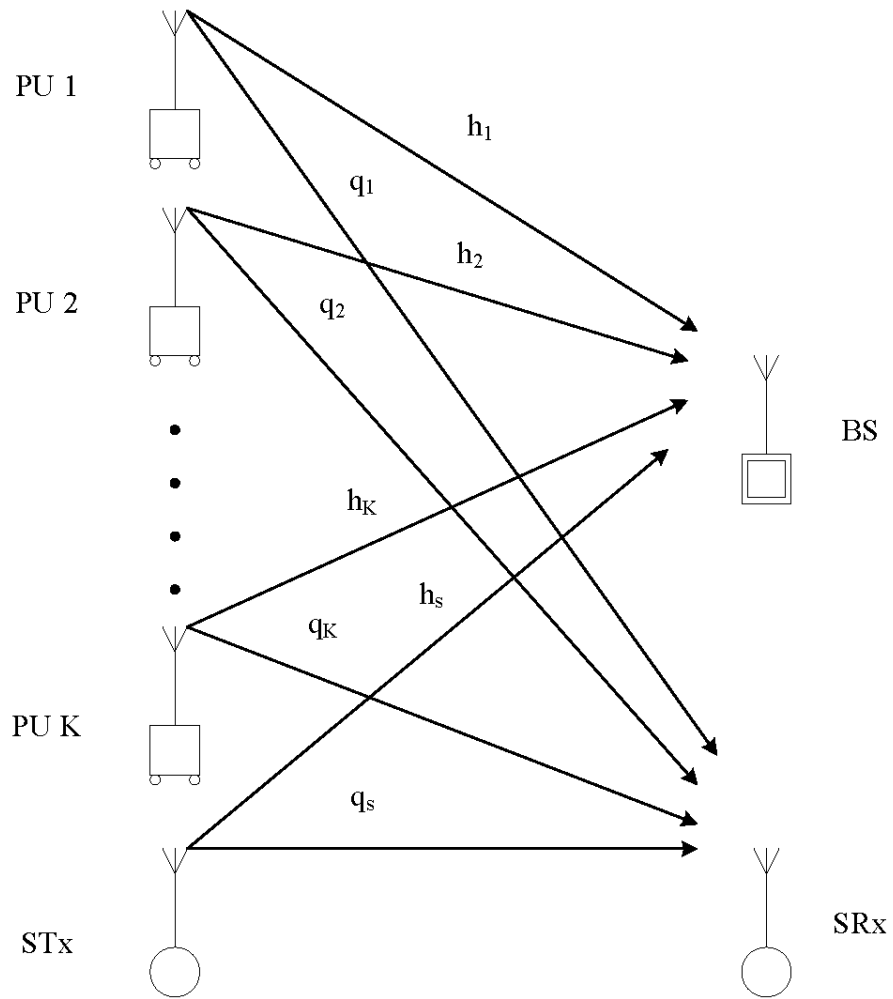


Fig. 1. System model

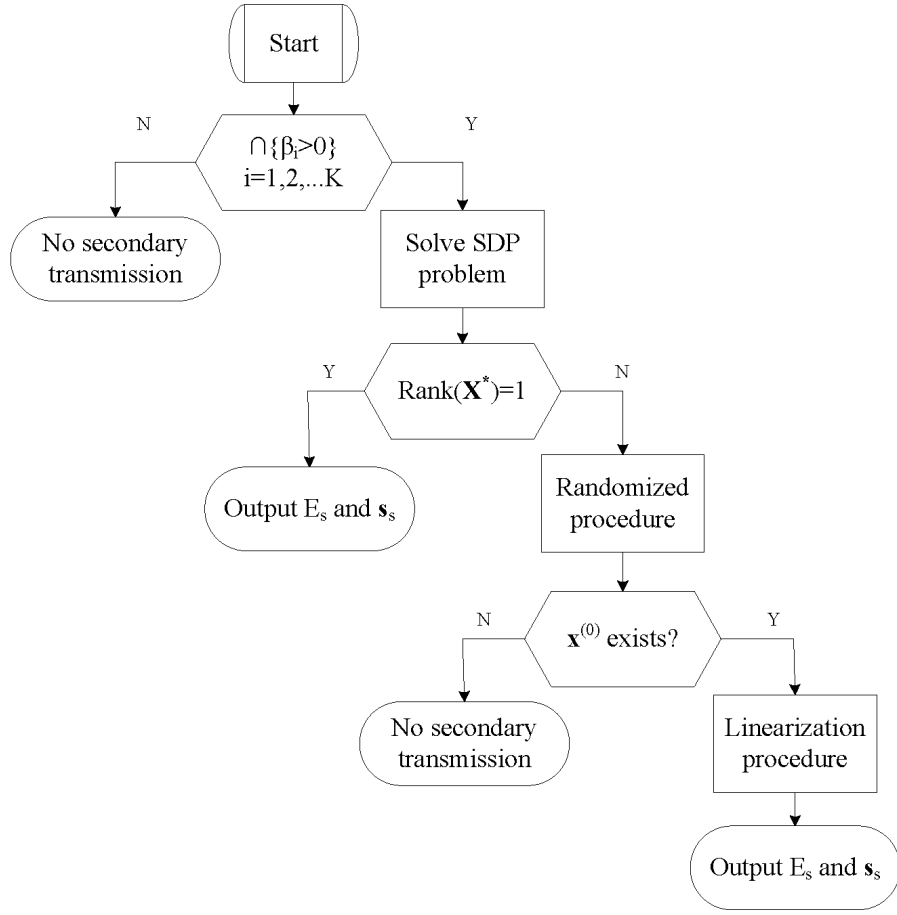


Fig. 2. The flow chart of the proposed power and code allocation for the secondary user

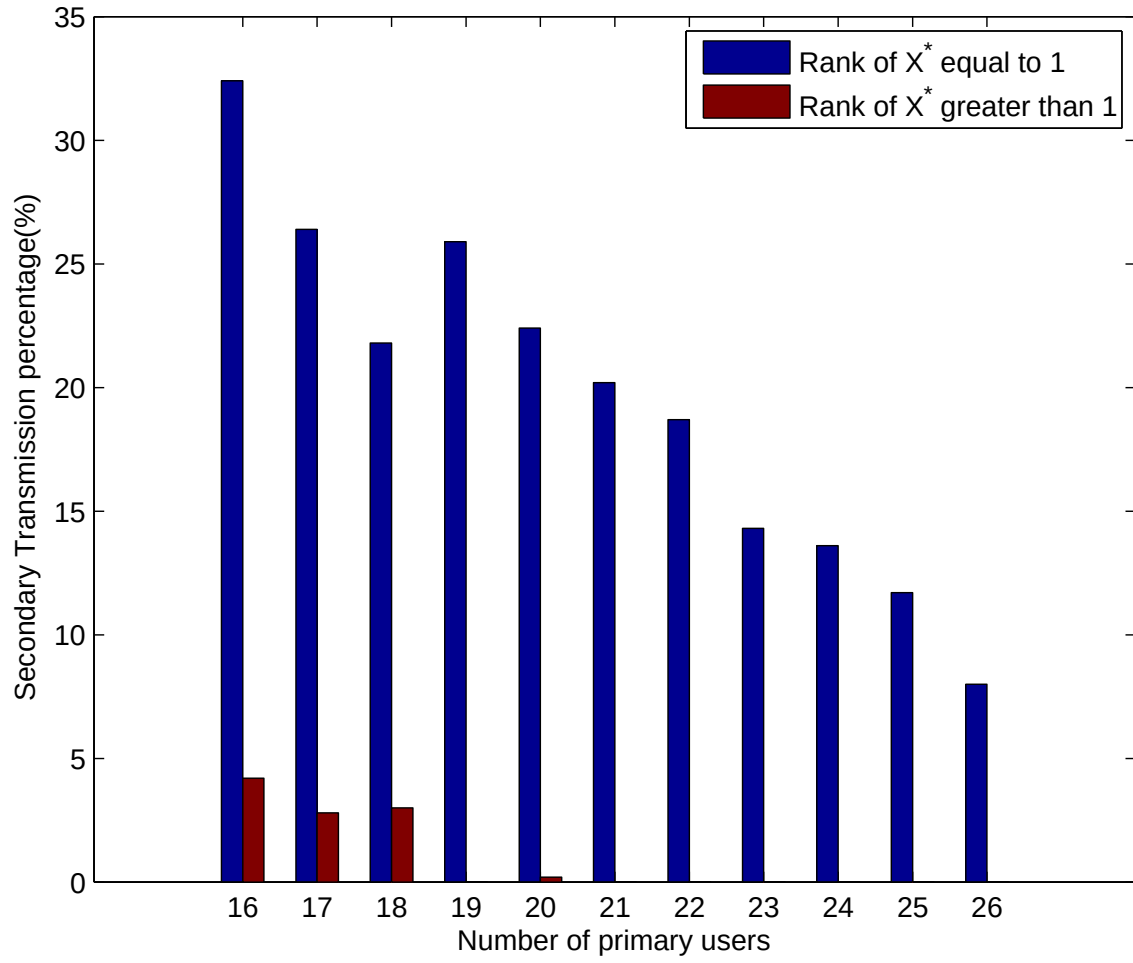


Fig. 3. Secondary transmission percentage of the SDP solution X^* with rank 1 and rank more than 1 versus of the number of primary users.

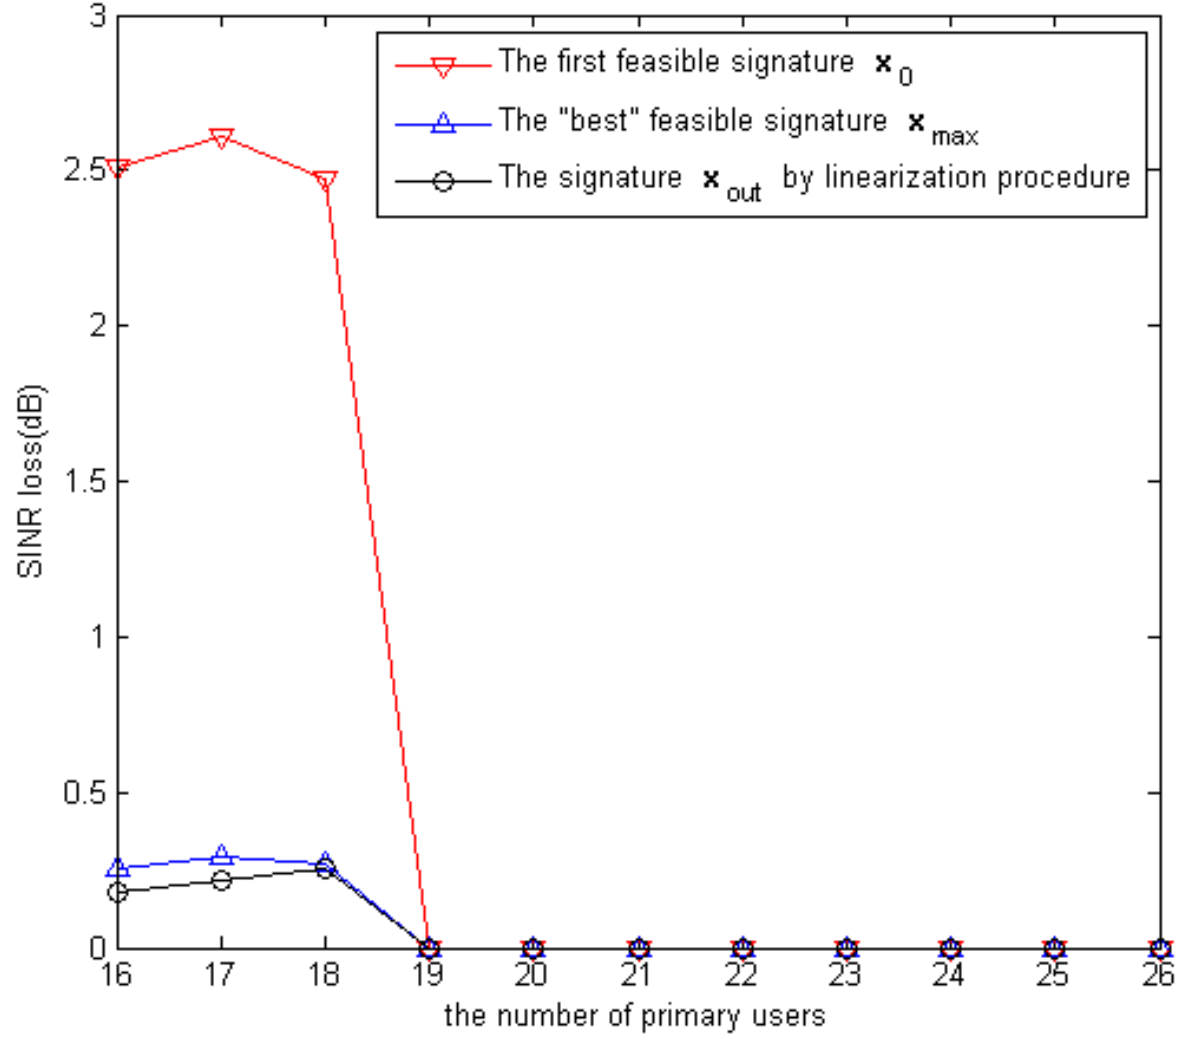


Fig. 4. SINR loss of $\mathbf{x}^{(0)}$, $\mathbf{x}_{\max}$ and $\mathbf{x}_{\text{out}}$ versus the number of primary users.