



What are we looking for?
Research being conducted.




TECHNOLOGY DRIVEN. WARFIGHTER FOCUSED.

Luis A. Villahermosa
Team Leader, Fuels and Lubricants Technology Team
luis.a.villahermosa@us.army.mil

Unclassified: Dist A. Approved for public release.

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 17 FEB 2010		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE What are we looking for? Research being conducted				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Luis A. Villahermosa				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) US Army RDECOM-TARDEC 6501 E 11 Mile Rd Warren, MI 48397-5000, USA				8. PERFORMING ORGANIZATION REPORT NUMBER 20558RC	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S) TACOM/TARDEC	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) 20558RC	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES The original document contains color images.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 20	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

- Force Projection Technology Organization
- Ground Fleet Primary Issues
- Independent Laboratory Independent Research (ILIR) Projects
 - Nanoparticle modeling in coolant systems
 - Heat Transfer Molecular Simulations of Nanofluids
- Single Lube in the Battlefield
 - What have we demonstrated
- Fuels – Alternative fuels and how they fit in the military

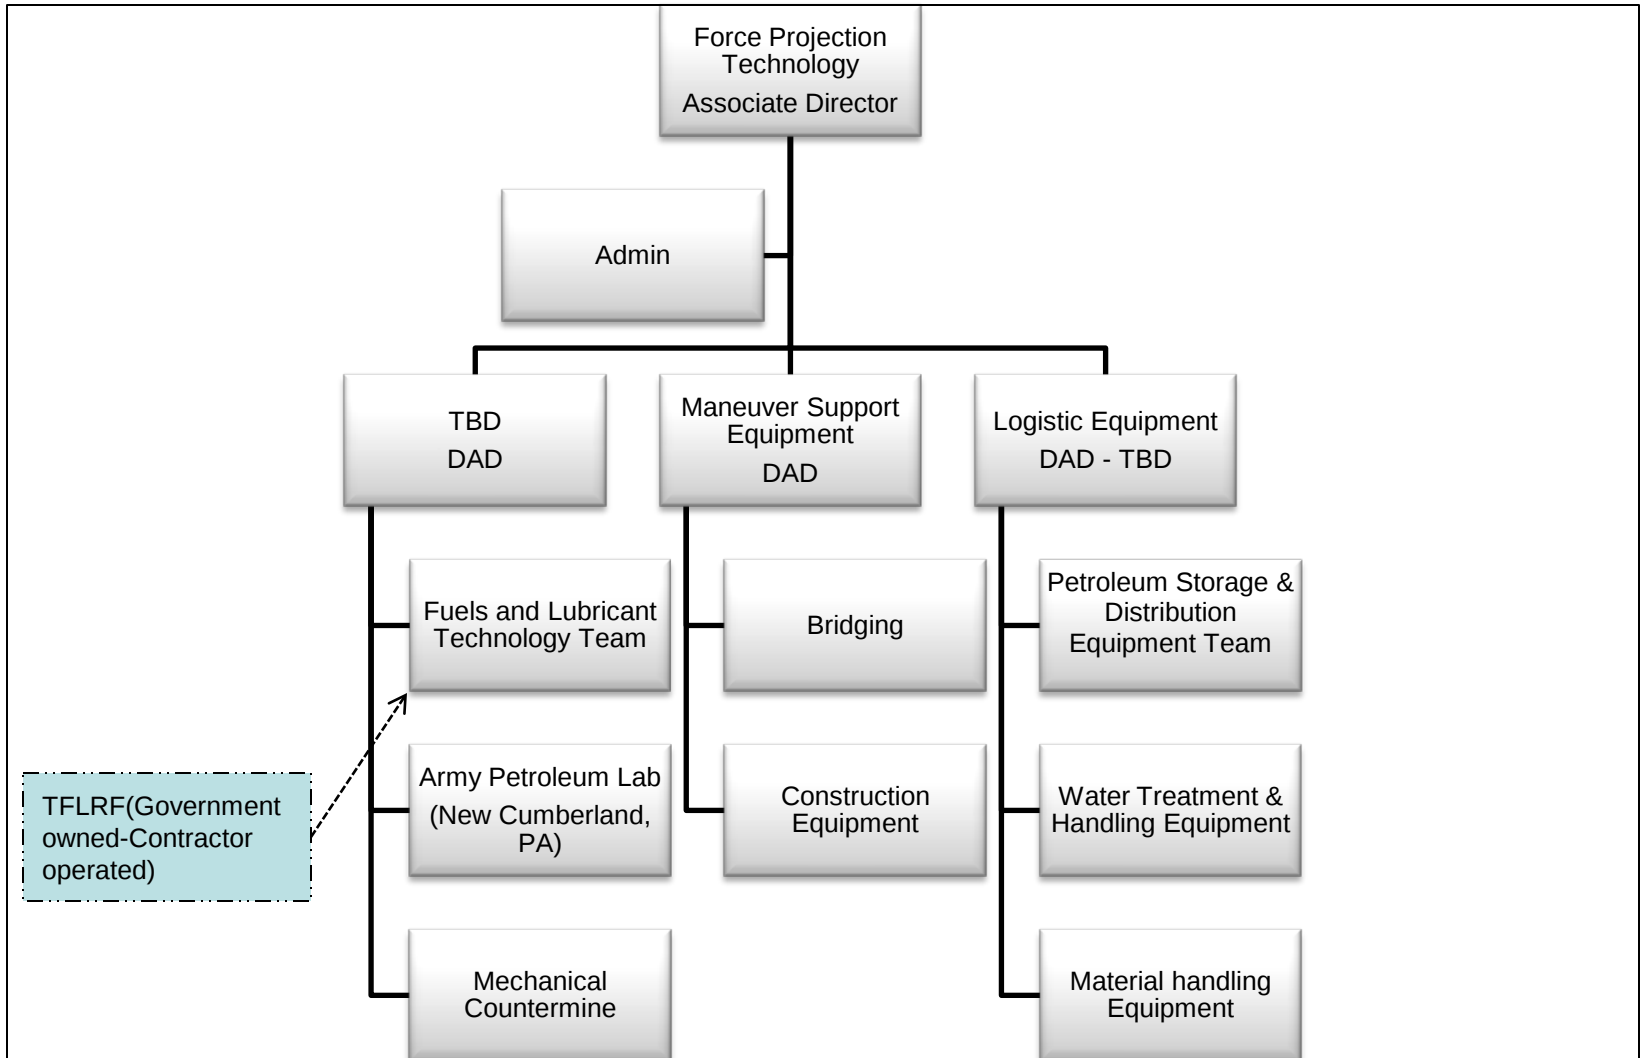



Ground Fleet Interest POL Perspective



- Fuel Economy
- World Wide World Operability : -40F to 140F ambient
- Improved Reliability
- Sensors for Condition Based Maintenance (CBM)
- Reduce Logistics
 - Reduce Fuel consumption
 - Extend Fluid Drain Intervals
 - Reduce waste generation
 - Simplify maintenance requirements
- Thermal Management
 - Improve thermal efficiency
- Use of Alternative Fuels – Minimize petroleum dependency

In-house Laboratory Independent Research (ILIR)

- The objectives of this research are to develop a new model for predicting thermal conductivity of nanoparticle fluids by incorporating particle properties, and develop suitable analytical methods to experimentally investigate the nanofluid systems, particle characteristics, and preparation methods for controlling nanofluid properties.

Thermal Conductivity

$$k_f = \frac{Q}{4\pi} \frac{d \ln t}{d \Delta T}$$

- How/What do we include the contribution of nanoparticles?
 - Agglomeration impact?
 - Particle Size?
 - Particle type?



Heat Transfer Molecular Simulations of Nanofluids



- GENERAL:
 - Understanding of the underlying mechanisms for thermal transfer and friction and wear of nanofluids is limited. Work will conduct molecular dynamics simulation to elucidate the underlying atomic scale behavior responsible for these phenomena.
- OBJECTIVE:
 - Develop a molecular model and conduct simulations of the following fluids and mixtures:
 - Water
 - Ethylene glycol
 - Water and aluminum oxide nanoparticles
 - Ethylene glycol and aluminum oxide nanoparticles
 - Identify the fundamental mechanism of heat transfer and quantify transport properties such as the effective thermal conductivity and kinematic viscosity. The model and simulation should also elucidate the role of thermal contact resistance between solvent and particle and help to investigate other proposed heat transfer mechanisms such as Brownian motion induced convection.

Single Common Powertrain Lubricant (SCPL)



Single Common Powertrain Lubricant



- One Grade only
 - likely 0W-30 (20/or 40 are being considered)
- Improve Fuel Efficiency
 - As little as 0.5% improvement in fuel economy can result in saving more 1 million gallons of fuel per year
- Arctic-to-Desert application
- Multi-component Use
 - Engine
 - Transmission
 - Hydraulics
- Reduce number of stock numbers needed from 15 to 3
 - Each different grade can have 3 or more NSN listed in the inventory
- Engine and transmission testing supports the technical feasibility of such an oil



TECHNOLOGY DRIVEN. WARFIGHTER FOCUSED.

Unclassified: Dist A. Approved for public release.

- First generation SCPL completed:
 - High Fluid temperature using 210hr Tactical Wheel Vehicle Cycle
 - Avg 265°F oil sump
 - Avg 215°F coolant
 - Engines tested
 - 6.5 L HMMWV Engine
 - In-Line, 6 cyl, 14.0 L Engine
 - In-Line, 6 cyl, 7.2L Engine
- Series of transmission tests not currently in specification
 - Assessment on performance of fluids in transmission:
 - Various automatic & heavy-duty transmission tests; brake chatter test also
 - Potential to include another test in spec
 - Overall results showed military qualified oils behave better than anticipated.
 - Although parameters of some of the tests were considered fail, failure was due to being only slightly out of the limits. No catastrophic or serious problems.
 - Only one oil had to be stopped on the Brake Chatter test – Formulation not currently available.



Single Common Powertrain Lubricant (SCPL) Program

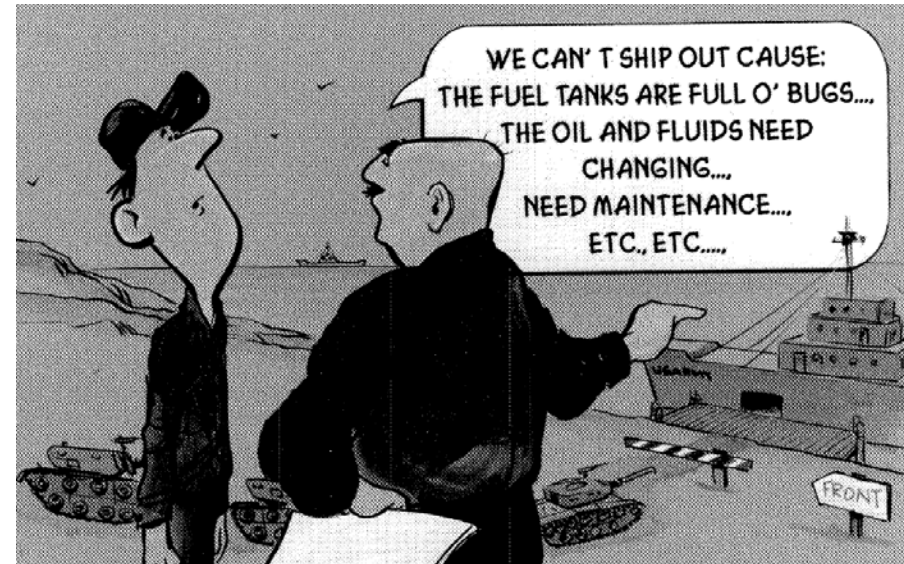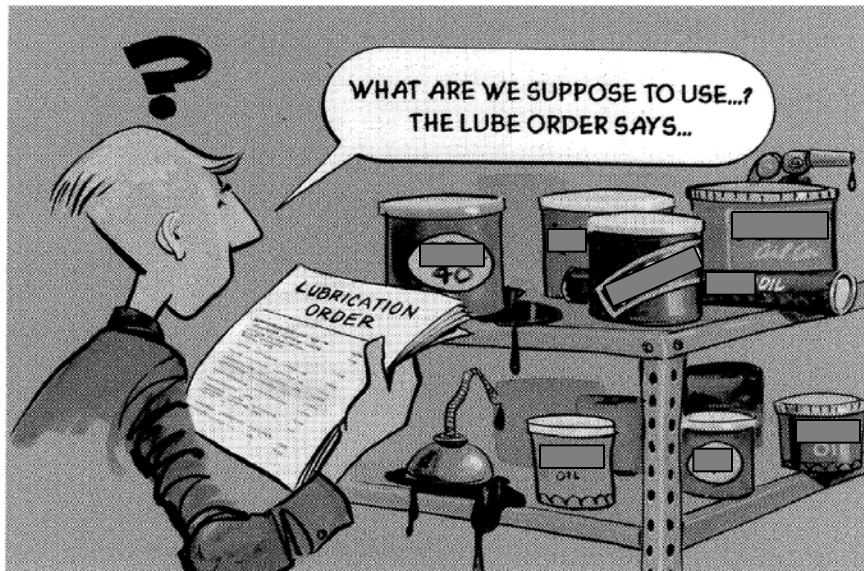

TECHNOLOGY DRIVEN. WARFIGHTER FOCUSED.

Unclassified: Dist A. Approved for public release.

Alternative Fuels

- Synthetic SPK
- Biodiesel

These tests have been completed: (WD 23)

TWV Pilot Demonstration at Ft. Bliss, TX (2009)
half fleet on JP-8, half fleet on SPK/JP-8 blend
miles driven per training protocol
no issues

HMMWV Test Track Evaluation (2009)
6.5L non-turbo evaluated
loaded vs. unloaded
uphill vs. flat vs. downhill
on-road vs. off-road
DF2 / JP-8 / S8 / 1:1 blend
noticeable acceleration loss using blend

In-Line, 6-cyl, 7.2L Engine Performance Test (2007)
ULSD / JP-8 / S-8 / 1:1 blend
2 x 210 hr TWV dyno test performed on S-8
no issues



TARDEC photo by R. Alvarez,
TARDEC Fuels & Lubricants Research Facility





Alternative Fuels: SPK



Laboratory Evaluations at Contractor and F&L Labs (2006 – 2009)

O-Ring Swelling

Lubricity Database

Properties of Fuel Blends

Cetane Evaluations

Laboratory

Engine

Derived

Generator Set testing at Contractor (2007)

three 10-kW gen sets

1000 hrs total test time

JP-8 / S-8 / 1:1 blend

no issues

Engine Performance Comparison at Contractor (2008)

7.2L and 6.5L engines tested

same fuel as from TWV Pilot Demo

JP-8 and 1:1 blend compared

power curves obtained

7.2L – no loss

6.5L – noticeable loss

Rotary Fuel Pump Tests at Contractor (2004)

S-5 vs. LSD

pump operated for up to 500-hrs

untreated S-5 failed the pump after ~150 hrs

TECHNOLOGY DRIVEN. WARFIGHTER FOCUSED.

- Engines are evaluated for power before, during, and after 400-hr NATO test
- Elevated temperatures used in all tests (except 6.5L engine test) to simulate desert conditions

Completed Tests: (2008 - 2009)

- ✓ 6.5 L Turbo SPK blend
HMMWV
- ✓ 7.2L SPK blend
Stryker

Engines Currently Being Tested:

- ✓ In-Line, 6 cyl, 8.3L SPK blend
Bradley
- ✓ V-8, 12.1L SPK blend
HEMTT

All engine testing performed at TARDEC
Ground Vehicle Power and Mobility
Propulsion Laboratory, Warren, MI

Engines Still to be Tested:

- V-12, 4-stroke, diesel???
Recovery Vehicle
- In-Line, 6 cyl, 7.6/9.3L ???
MRAP

Power curves taken after break-in and after each 100 hrs operation. Test requires WOT operation as well as part-throttle, max load and idle. Desert conditions include ~170° F fuel and 120° F ambient conditions.

Gen sets use the most fuel in the Army during wartime

Met with CERDEC to determine which gen sets to test and how

MIL-STD-705C

2-kW

15-kW (2 types)

3-kW

60-kW

10-kW

100-kW



Tests to be Conducted

Electrical Characteristics

TM 608.1

TM 608.2 (new temps req'd)

TM 630.1

Rated Load

TM 720.1

Altitude Operation

at 4000 ft, 95° F

Maximum Power

at 10,000 ft, 95° F

Reliability

TM 695.1

Environmental

TM 710.1 at 125° F

Fuel Consumption

TM 670.1

Where to test?

Aberdeen PG

Aberdeen PG

Aberdeen PG

Aberdeen PG

Contractor lab

Aberdeen PG

Aberdeen PG

- More work to be done
- Support equipment needs to be addressed
- Other synthetics coming up – HRJ, 2nd gen biodiesels
- Knowledge of current equipment and fuels still needed
 - Defining what are key/performance parameters in the fuel as they impact operation, performance, efficiency of vehicles/engines
- Currently working to include cetane and viscosity at 40° C in JP-8 spec
 - Only for SPK portion
 - Tested SPK fuels have high cetane (except for one) and desired visc at 40° C
 - Influenced by manufacturing process!

- US Army has not approved the use of biodiesel blends in tactical equipment
- Only one Army location officially field testing biodiesel in tactical vehicles
 - Site visit showed unofficial controls by all participants contribute to success of test. This cannot be viewed as representative for all potential locations
- Air Force and Navy has had problems when using biodiesel blends across their fleets
 - Filter plugging
 - Microorganism growth
 - Gelling at low temperatures
- Tri-Service POL Users Group recommended biodiesel should not be used in tactical equipment until identified areas of concerns are addressed and corrected(solutions ID)



- Environmental Security Technology Certification Program (ESTCP) – On-going
 - Field Demonstration of biodiesel use in tactical vehicles
 - Proposed by Navy Environmental Group
 - Not directly addressing issues identified by Tri-Service
 - Army interest to ID parameters, requirements, and controls that would need to be in place for a successful use of bio-diesel.
- Locations :
 - Port Huaneme
 - 29 Palms
 - Moody AFB
 - Crane Naval Warfare Center
- Issues:
 - Variety of manufacturing techniques
 - Fuel crossing seasons creating gelling problems
 - Cholesterol and glycerides ID as problematic components