

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 2007		2. REPORT TYPE		3. DATES COVERED 00-00-2007 to 00-00-2007	
4. TITLE AND SUBTITLE IR Photonic Bandgap Fibers for Missile Defense				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Research Laboratory, 4555 Overlook Avenue SW, Washington, DC, 20375				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 2	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

IR Photonic Bandgap Fibers for Missile Defense

I.D. Aggarwal, J.S. Sanghera, D. Gibson, F. Kung,
L.E. Busse, L.B. Shaw, V.Q. Nguyen, and P.C. Pureza
Optical Sciences Division

The Application: IR-transmitting fibers fabricated at the Naval Research Laboratory (NRL) have low optical loss (~ 0.2 dB/m) and have been successfully used in aircraft missile defense system demonstrations for the 2 to 5 μm region to replace bulk optics connecting the laser to the jam head as well as being “wired” inside the jam head.¹ These conventional, solid-core fibers result in significant weight reduction. They reduce system size and complexity as well as cost of both installation and maintenance, and are capable of laser power input typical of current systems. However, advanced infrared threats require much higher laser power, which these solid-core fibers cannot tolerate.

The Solution: A new type of fiber, called the hollow-core photonic bandgap (or HC-PBG) fiber, has been developed and demonstrated using silica glass. These fibers consist of a hollow air core, surrounded by an ordered series of holes (formed by hollow tubes) and then an outer solid glass protective clad (Fig. 4). Theoretical predictions show that greater than 99% of the light transmits through air, with the so-called “microstructured” region around the core serving as a type of Bragg grating to maintain propagation at specific ranges of wavelengths that are determined by the small holes’ spacing and diameter.

HC-PBG fibers are very attractive for the very high laser power transmission needed in missile defense systems currently under development to defeat advanced IR threats. However, even with only 1% of the light interacting with the glass, the losses for silica HC-PBG fibers are inherently too high to make them useful in the infrared. At NRL we are developing PBG fibers based on IR-transmitting materials by leveraging in-house expertise with materials purification and fabrication techniques.

Design and Fabrication: We have designed PBG fiber structures by solving Maxwell’s equations in a periodic structure as an eigenvalue problem with the electromagnetic field expanded in a basis of plane waves.² One example of a structure modeled for transmission at around 4 μm using a sulfide-based glass consists of a hole size and spacing in the micro-structured region of 3.2 and 6.4 μm , respectively, and the air fill factor in that region is 89%. By adjusting the micro-structure hole size, spacing, and fill factor, different wavelength regions for transmission can be obtained. The PBG fiber produces a uniform Gaussian modal output,² providing a low divergence output needed for systems that are increasingly requiring high brightness and spatial quality.

High purity glasses have been fabricated and made into high precision tubes using NRL’s extrusion technology. These tubes are then stretched and stacked into the appropriate geometry (Fig. 5), to make a preform that also has an outer glass surrounding the tubes to keep them fixed and to provide mechanical strength. The whole assembly is then drawn into HC-PBG fiber on a draw tower with special adaptations for this purpose, and within a clean room environment. Figure 6 shows a stacked preform and preliminary fibers made from sulfide-based materials.

NRL has confirmed that HC-PBG fibers have negligible loss upon bending. This was demonstrated by no change in output from HC-PBG fiber with and without 11 half-inch bends around a mandrel. These remarkable results show the flexibility and utility of these fibers for practical systems where they may need to be routed through tight spaces.

Summary: Future missile defense systems currently under development to protect military or civilian aircraft require higher output power due to advanced infrared threats. For the more advanced systems, we are developing infrared-transmitting HC-PBG fibers, which are capable of at least 100 times more power handling capability due to 99% of the power being transmitted through the hollow core. They possess a




FIGURE 4

Endface view of the hollow core photonic bandgap fiber (HC-PBG) showing the microstructured region surrounding the core, as well as the protective outer layer of glass.

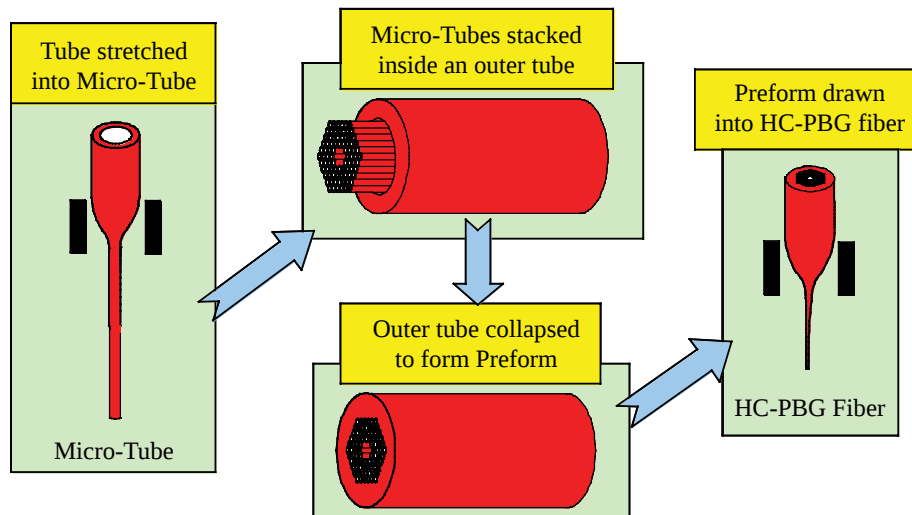


FIGURE 5
Tube stacking to make preform and drawing of HC-PBG fiber.

low divergence output, and furthermore, antireflection coatings are not needed. Fibers have been designed for transmission within the mid-IR (2 to 5 μm) region. High purity glasses have been fabricated using NRL's world class facilities, and novel extrusion technology has been developed to make microstructured preforms that have been drawn into HC-PBG fibers. The fibers exhibit high strengths comparable to their solid core counterparts. The availability of these fibers will impact next generation missile defense systems using ultra-high-power IR lasers.

[Sponsored by NRL]

References

- ¹ L.E. Busse, J.S. Sanghera, I.D. Aggarwal, A. Carbonaro, and T.H. Evans, "Infrared-Transmitting Fibers for Advanced IRCM System Demonstrations," Proc. 39th MSS Specialty Group Meeting on Infrared Countermeasures, Volume I, Laurel, MD, 1-3 May 2001.
- ² L.B. Shaw, J.S. Sanghera, I.D. Aggarwal, and F.H. Kung, "As-S and As-Se Based Photonic Bandgap Fiber for IR Laser Transmission," *Opt. Express* **11** (25), 3455-3460 (2003). ◆

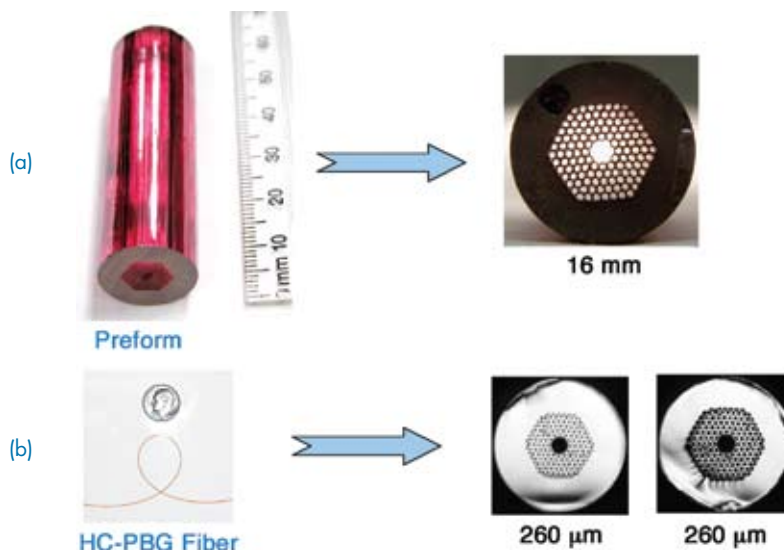


FIGURE 6
(a) Microstructure preform and (b) HC-PBG fiber made from IR transmitting sulfide glass.