

REPORT DOCUMENTATION PAGE					Form Approved OMB No. 0704-0188	
The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.						
1. REPORT DATE (DD-MM-YYYY) 24-11-2008		2. REPORT TYPE Final Report		3. DATES COVERED (From - To) 1 April 07 to 31 March 08		
4. TITLE AND SUBTITLE Final Report for ONR Grant No. N00014-07-1-0197 "The Distribution of Breaking Waves in the Open Ocean"				5a. CONTRACT NUMBER		
				5b. GRANT NUMBER N00014-07-1-0197		
				5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S) Andrew T. Jessup				5d. PROJECT NUMBER		
				5e. TASK NUMBER		
				5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Applied Physics Laboratory - University of Washington 1013 NE 40th Street Seattle, WA 98105-6698				8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Office of Naval Research (ONR 322) 875 North Randolph Street Arlington, VA 22203-1995				10. SPONSOR/MONITOR'S ACRONYM(S) ONR		
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release						
13. SUPPLEMENTARY NOTES None						
14. ABSTRACT The purpose of this grant was to participate in a one-year planning effort to develop the experimental plan for the remainder of the DRI. The main tasks were to participate in planning meetings and to contribute to the science plan document. A proposal based on the contribution to the science plan was declined. The remainder of this document is the contribution to the DRI science plan						
15. SUBJECT TERMS surface displacement, breaking waves, infrared techniques						
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 2	19a. NAME OF RESPONSIBLE PERSON Andrew T. Jessup	
a. REPORT U	b. ABSTRACT U	c. THIS PAGE U			19b. TELEPHONE NUMBER (Include area code) 206-685-2609	

Final Report for ONR grant No. N00014-07-1-0197
The Distribution of Breaking Waves in the Open Ocean
Participation in the Planning Year for High Resolution Air-Sea Interaction DRI
Andrew T. Jessup
Applied Physics Laboratory, University of Washington
1013 NE 40th St., Seattle, WA 98105-6698
jessup@apl.washington.edu, 206-685-2609
November 21, 2008

The purpose of this grant was to participate in a one-year planning effort to develop the experimental plan for the remainder of the DRI. The main tasks were to participate in planning meetings and to contribute to the science plan document. A proposal based on the contribution to the science plan was declined. The remainder of this document is the contribution to the DRI science plan.

Contribution to DRI Science Plan

Helikite-based Measurements for Surface Displacement and Wave Breaking

We will make measurements of surface displacement and the distribution of breaking wave crests as a function of crest speed. Measurements will be made using infrared (IR) and video techniques with a large field of view. Measurements with image dimensions $O(100\text{ m})$ will be made from a tethered helium-filled kite, or *helikite*, deployed either from FLIP or a ship. The large area measurements will be used to gather wave breaking statistics and track individual events for comparison to radar measurements of the wave field made from FLIP or the ship. The *helikite* instrumentation will include a sensor to measure surface displacement.

A key requirement to achieve the DRI objectives is the ability to derived phase-resolved surface displacement from the radar measurements. This requirement implies that the ability to measure surface displacement from the *helikite* within the footprint of the radar will be extremely valuable. We will use a combination of GPS, attitude sensors, and a laser ranging device to provide surface displacement at a point below the *helikite*.

The *helikite* system is being developed under a FY07 DURIP. The photographs in Figure 1 show examples of a commercially available *helikite* and sensor mounting platform. In order for the *helikite* measurements to be coincident with the useable footprint of the radar on FLIP, we will need to be able to image the surface at least 100 m from FLIP. A FLIP-based deployment scheme to achieve this requirement is shown in Figure 2. The *helikite* is designed to fly with the tether at a 45° angle and the nominal field of view of the cameras is 40° . With these parameters, flying the *helikite* at an altitude of 200 m will provide a horizontal image dimension of 150 m beginning approximately 125 m from FLIP. An alternative deployment scheme would be to fly the *helikite* at a lower altitude and aim the cameras at an oblique incidence angle. The choice of scenario will be made based on local testing of the *helikite* before deployment on FLIP.

The possibility of deploying the *helikite* from a ship that may be on station will also be considered. However, since the ship will likely be deployed outside of the range of the FLIP-base radar, this arrangement may not be suitable. Furthermore, this ship is likely to be tasked

20100622234

with a significant amount of operational maneuvering that may not be compatible with deploying the helikite.

During the FAIRS experiment on FLIP in 2000, we used a CO₂ laser to heat a small patch on the surface within the IR field of view in order to investigate the correlation of the temperature decay time scale and breaking-generated turbulence. We found that the use of a single spot did not provide enough spatial coverage to sample all the breaking events that passed through the field of view. For the Hi-Res DRI, we will use a programmable scanning galvanometer to provide larger area coverage for the laser-heating. We will investigate the use of multiple spots to increase the area coverage, which we have done successfully in laboratory experiments. We will also evaluate lines and an area-extensive patch by using a scanner and beam expander.

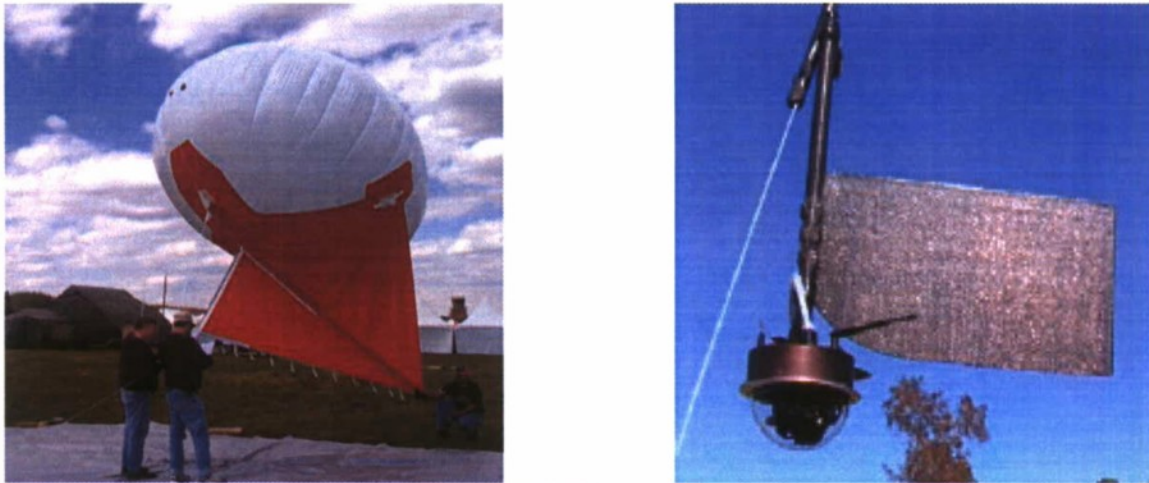


Figure 1. Helikite (left) and candidate sensor platform (right) for deployment of surface displacement and imaging sensors.

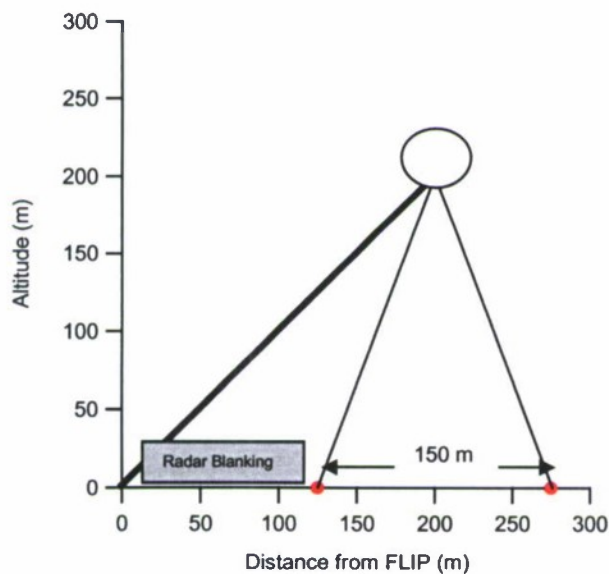


Figure 2. Schematic diagram showing possible configuration for deploying the helikite from FLIP, which provides measurements within the useable footprint of the FLIP-base radar.