

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 2006		2. REPORT TYPE		3. DATES COVERED 00-00-2006 to 00-00-2006	
4. TITLE AND SUBTITLE Self-Optimizing Adaptive Antenna				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Research Laboratory, 4555 Overlook Avenue SW, Washington, DC, 20375				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 2	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Self-Optimizing Adaptive Antenna

C.K. Oh and B.K. Hanley

Tactical Electronic Warfare Division

Introduction: Currently, in dynamically changing and highly uncertain electronic warfare (EW) environments it is not possible to design in advance EW hardware that can adapt in real-time to these complex environments autonomously. Particularly, the real-time adaptation of EW to rapid changes in hostile activity poses a technological challenge. The ability of combining reconfigurable hardware devices with optimization software capable of executing real-time autonomous reconfiguration opens up a new approach to many difficult EW problems. This paper describes a real-time implementation of Genetic Algorithms (GAs)¹ demonstrated in a specific hardware configuration.

Background: We assume that the structure of a reconfigurable hardware device or system can be changed in real-time through altering bit strings ("configuration bits"). GA theory indicates that an optimal solution can be found over a vast and diverse nonlinear space at reasonable computational costs. The GA treats the "configuration bits" of the reconfigurable hardware devices as a chromosome and optimizes the chromosome through evolutionary computation. If the GA fitness function is properly designed for the task, then the GA can autonomously find the best hardware configuration in terms of chromosomes (i.e., configu-

ration bits). Since the fitness landscape unpredictably changes in EW environments, the sensors that detect the changes in the environment should be in the loop of a real-time adaptable EW system. In this study, a low cost V-dipole ("rabbit ear") antenna system was used to demonstrate this real-time approach in a readily available, inexpensive three degrees of freedom hardware.

Self-Optimizing Adaptive Antenna System

Validation: The V-dipole antenna system consists of two elements that can rotate through two different axes (two degrees of freedom) on a rotating mount (one degree of freedom). In this demonstration we used the V-dipole antenna for television reception. Even though the antenna has a simple structure, finding the optimal position of the two telescoping elements for the best signal reception on a rotating mount is a complex task because the three degrees of freedom encompasses a very large set of possible position combinations. Also, the V-dipole antenna system must adapt to changes in the signal environment due to weather, terrain, and other interference. Figure 1 is a diagram of the real-time self-optimizing adaptive antenna system. The GA on the computer controls the positions of three servo motors through the servo controller in antenna positioning circuitry. The conventional GA, which typically requires off-line, non-real-time processing, was modified to provide a real-time computational capability. The computational flow chart of the modified GA is shown in Fig. 2. The

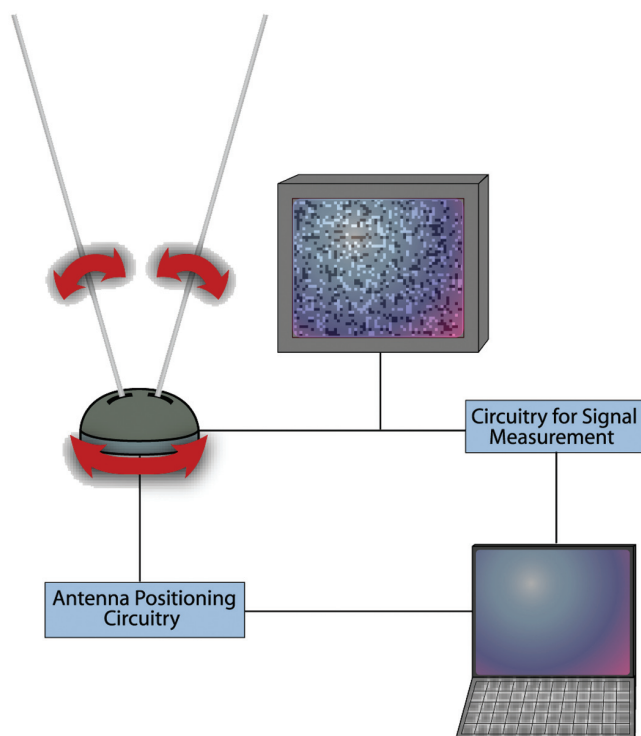


FIGURE 1
Self-optimizing adaptive
antenna system.

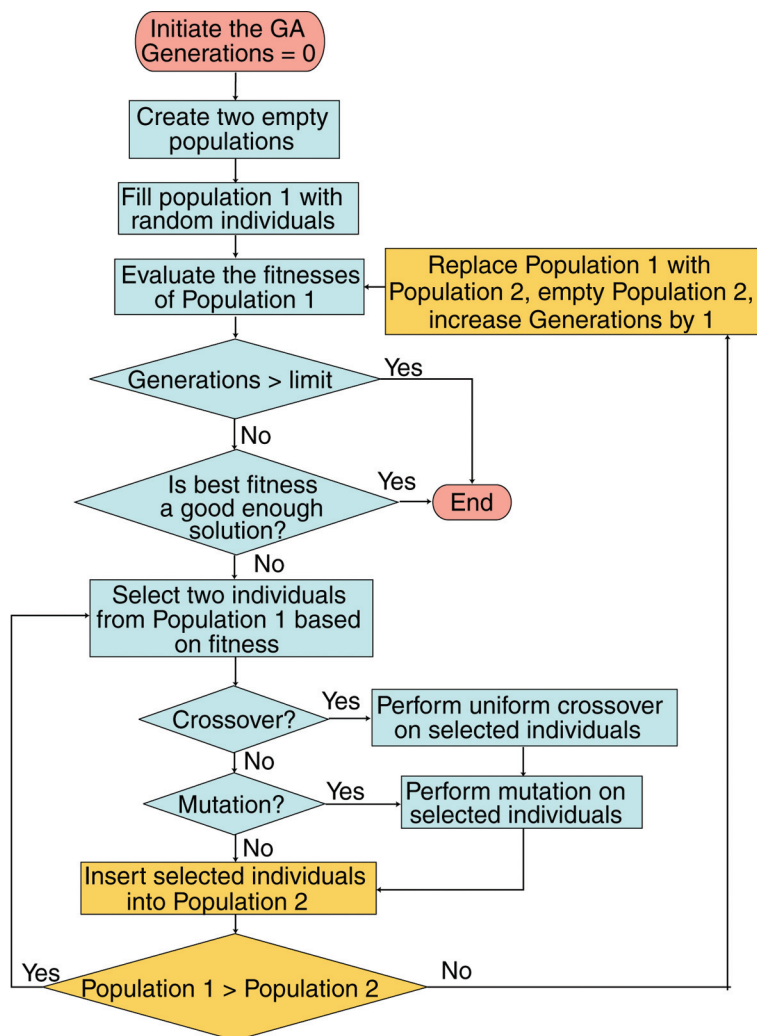


FIGURE 2
Flow chart of compact GA computational procedures.

modifications to the standard GA flow are shown in the yellow blocks. These modifications allowed the GA to be implemented in real time in the feedback circuit. The three angular positions of the servo are encoded in a chromosome of the GA population. The raw value of signal strength is measured as a fitness to estimate the performance of each position. This single value can incorporate all interference and noise in the signal. The raw signal value is digitized to provide discrete values to the new real-time GA algorithm. At the end of the computation, the system moves the elements to the best position as determined by the GA. In the validation experiment, as the television channels were changed, the GA adjusted the V-dipole antenna position to find optimal reception. The initial test hardware of the antenna system that validates this novel real-time solution is shown in Fig. 3.

Summary: An autonomous, real-time adaptive system combining GA and reconfigurable hardware was demonstrated using a low-cost, simple V-dipole antenna system. This system was controlled through a feedback loop that used evolutionary computation in real time to find antenna positioning that optimized received signal strength. Although this application was rudimentary, we project that chip-level real-time GA processing can be applied to

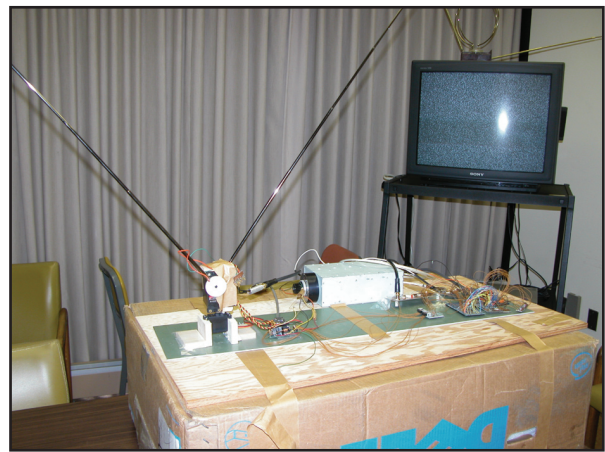


FIGURE 3
The initial test hardware of the self-optimizing antenna system.

more complex reconfigurable hardware such as field programmable gate arrays (FPGAs) to support more complex applications in autonomous and adaptable EW systems.

[Sponsored by ONR]

Reference

¹ D.E. Goldberg, *Genetic Algorithm in Search, Optimization & Machine Learning* (Addison-Wesley, 1989).

