

ATEC



Future Trends and Needs for Distributed T&E Infrastructure

Site Initiatives and Vision

Kenneth G. LeSueur, Ph.D.

Redstone Test Center

13 January 2010

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 13 JAN 2010		2. REPORT TYPE		3. DATES COVERED 00-00-2010 to 00-00-2010	
4. TITLE AND SUBTITLE Future Trends and Needs for Distributed T&E Infrastructure				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) US Army Redstone Test Center,Redstone Arsenal,AL,35808				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES International Test and Evaluation Association (ITEA) Live-Virtual-Constructive Conference 2010, 11-14 Jan, El Paso, TX					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 20	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			



Panel Discussion



“Outline issues, initiatives and vision that sites are engaged with to provide future LVC capabilities”

Three Initiatives are Included in this Brief

1. Cross Domain Solutions
2. Environmental Effects Servers
3. Emulated Tactical Networks




CROSS DOMAIN SOLUTION NEED



- LVC-DE Cross Domain Solutions (CDS) will allow **unclassified test assets** to interface with **classified networks** without the added expense and time of transforming and maintaining the assets as classified operations
- Unclassified data can be passed down from the classified network to the unclassified network allowing for the **data reduction and analysis** to be conducted and distributed in an unclassified format
- Allow the interface of classified **DoD assets** to unclassified **civilian resources**
- The Test & Evaluation community needs both tactical CDSs as well as **TENA based CDSs** for **instrumentation** and **LVC** interfacing


CY 09 UAS in NAS LVC-DE Network Architecture

- The RTC SimShield CDS allows **real-time bi-directional** connection between classified and unclassified test networks passing only approved unclassified **TENA** data between the two networks.
- High-Side LVC assets can only communicate to Low-Side DREN assets through the CDS
- The current CDS ruleset is accredited to pass **TSPI** (Time Space Position Information), **Air Transponder** data, and **TENA Engagement Messages** needed to support the UAS in NAS test event but can be adjusted to accommodate different test missions

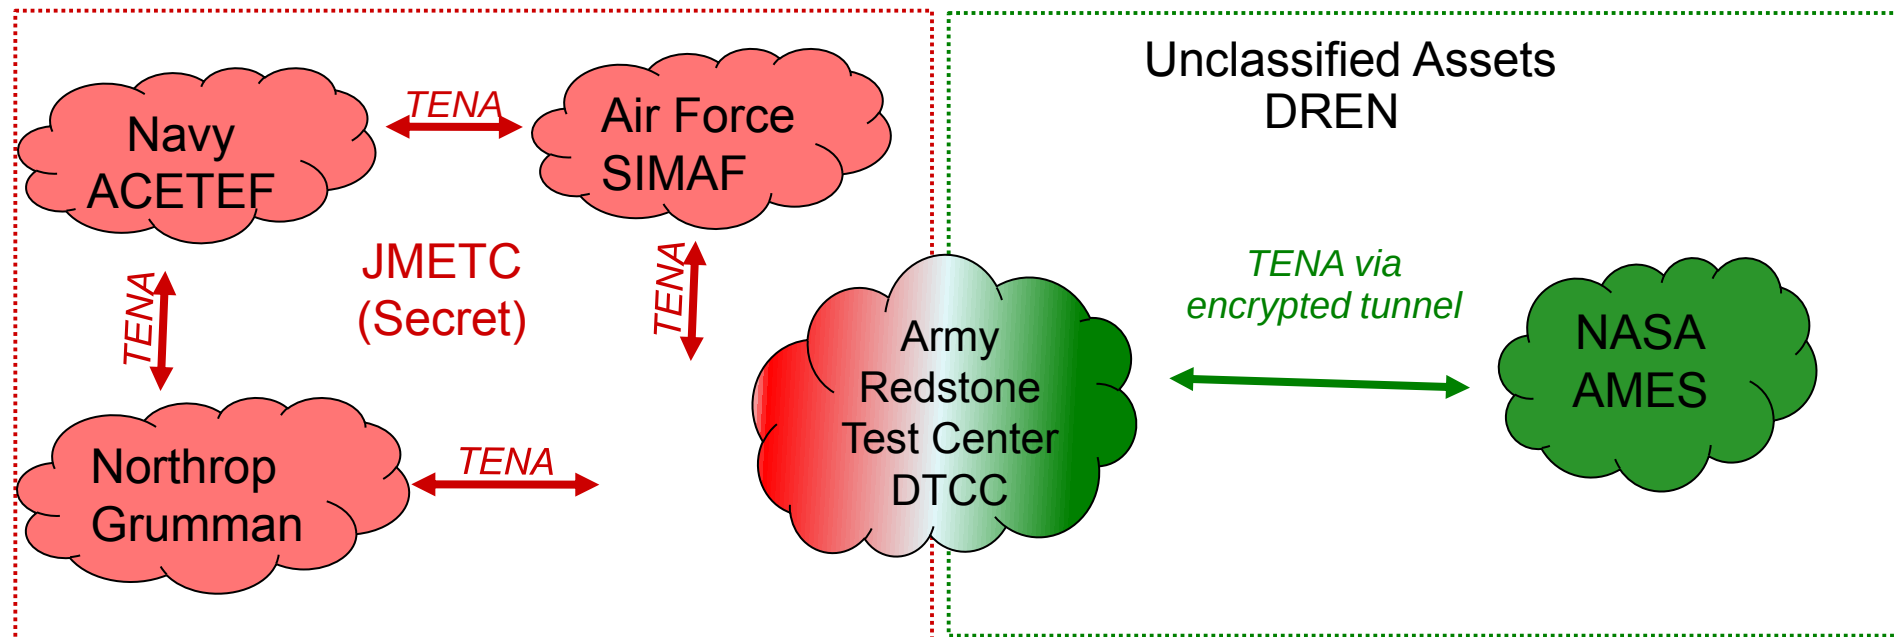

CDS Testbed


Measuring CDS Latency

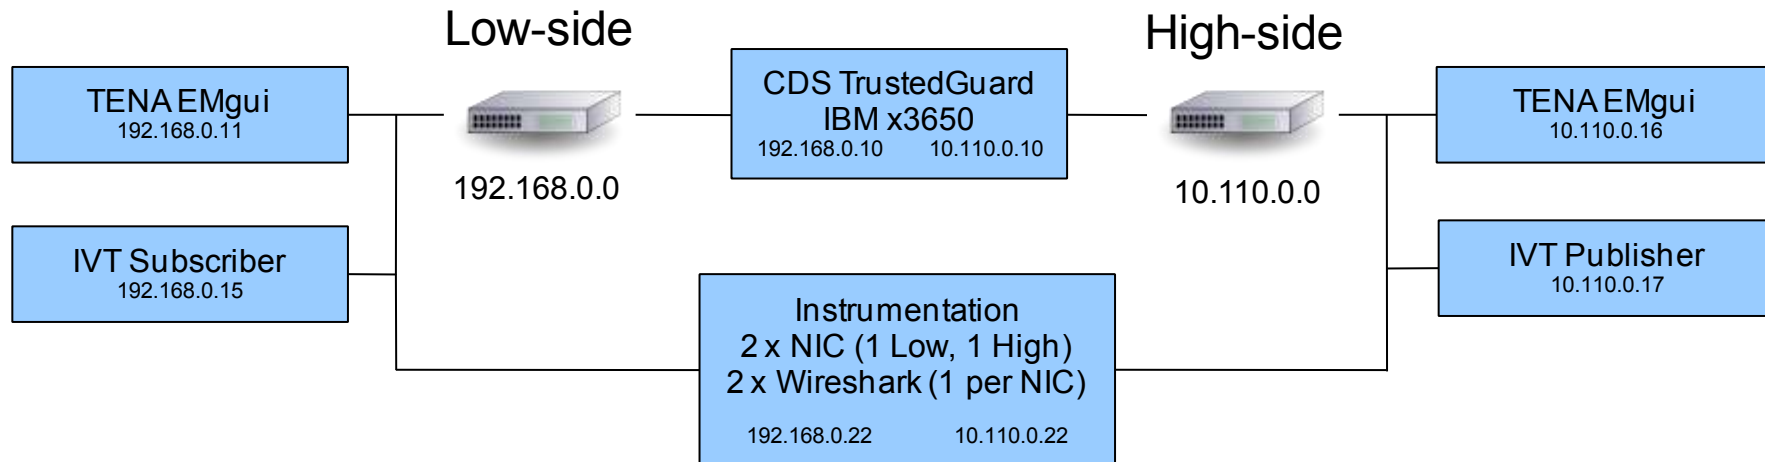


- Two switches, two separate networks
- Instrumentation system with dual NICs, one interface connected to each network
- Two instances of Wireshark, one sniffing packets from Low-side network, one from High-side network
- CDS configured to pass Platform SDOs between High and Low networks

CROSS DOMAIN SOLUTION Performance Data

Measured CDS Latency (ms)

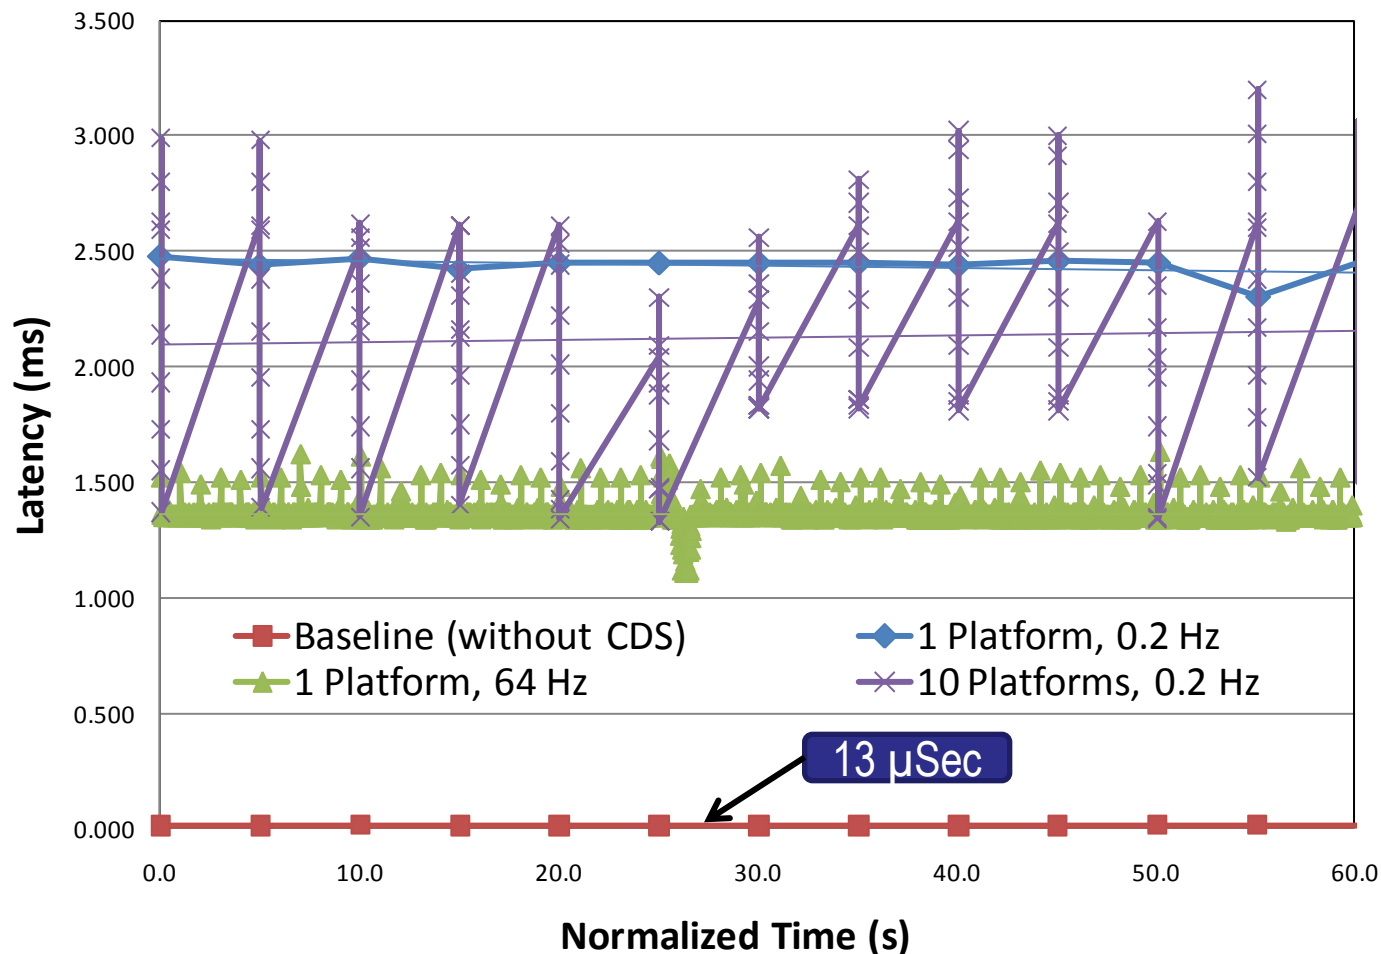

CROSS DOMAIN SOLUTION WAN One-Way Latency (mSec)

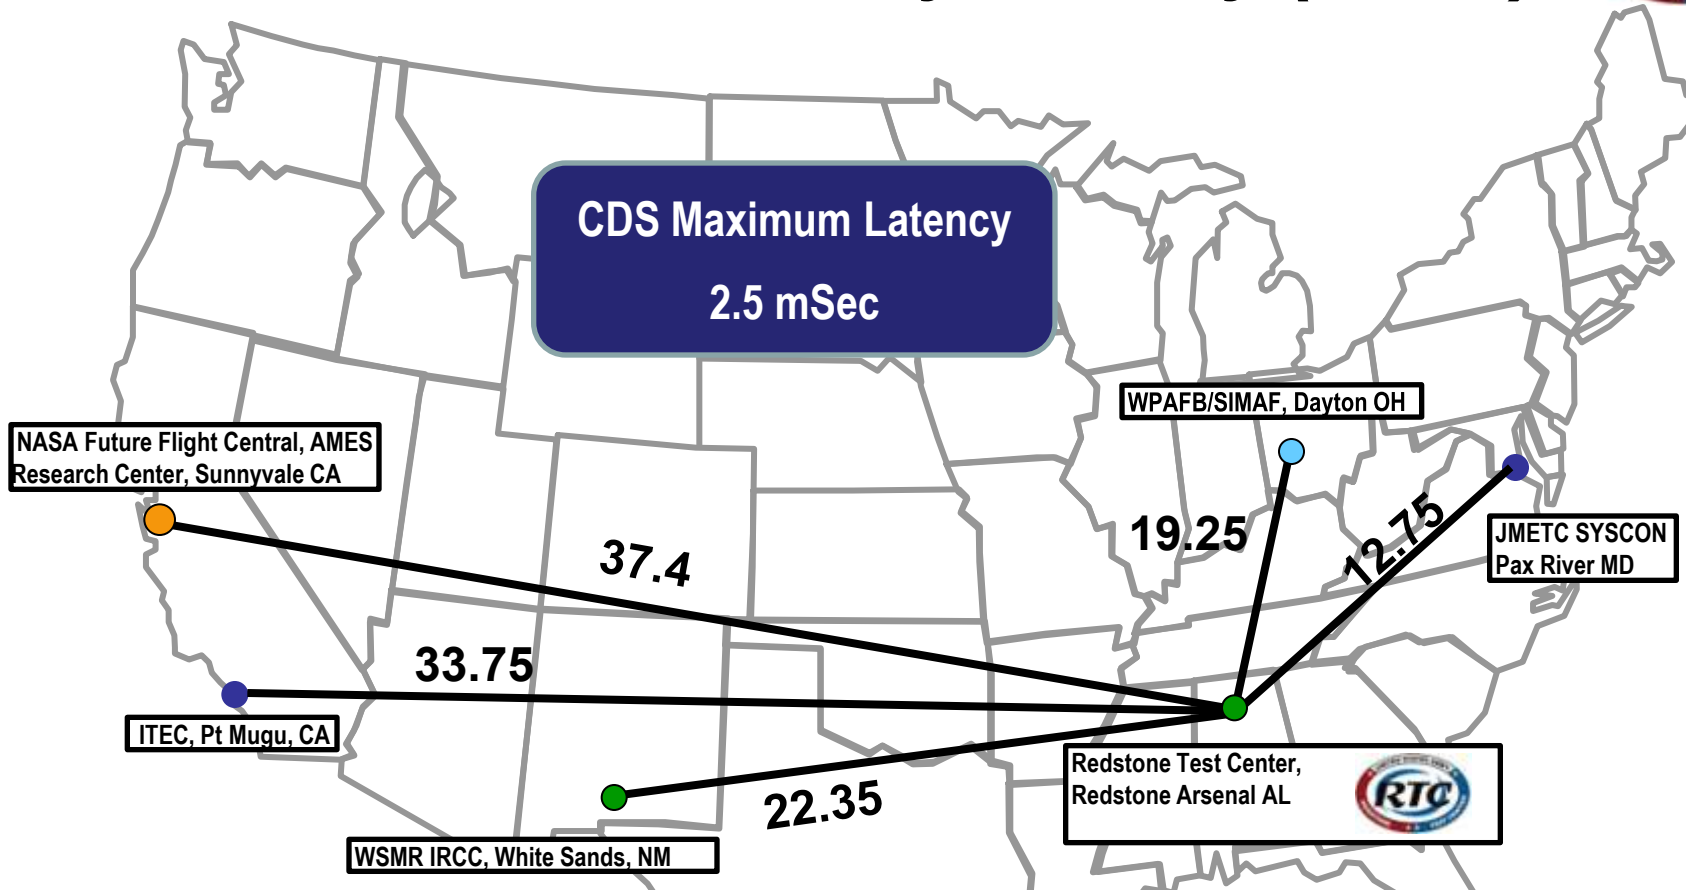

When conducting distributed testing, the latency through the CDS is much smaller than the Wide Area Network (WAN) latency in most cases.



CROSS DOMAIN SOLUTION Challenges



- TENA Upgrades
 - The CDS Guard is currently certified to use TENA 5.2.2
 - Upgrading the system to TENA 6.0 will require NSA CT&E
 - TENA-TENA Gateways on the High and Low side are necessary to use TENA 6.0

- Approval Schedule
 - Network Architecture or Ruleset Changes requires NSA and CDTAB review and DSAWG approval (Approx. 2-6 Months)
 - The CDS Ruleset must be locked down early in the LVC-DE design process



Terrain Induced Vehicle Vibration Effects Server (TIVVE) Need



- Dynamic testing is required to ensure hardware will survive and successfully perform in their expected dynamic environments
- Increased realism is required during distributed training and test exercises to evaluate the influence of the vibration environment on operator decisions. For example, forcing the operator to adjust maneuvers as needed to achieve its mission objectives
- Subject matter expertise in dynamics testing is required to add validity to the outcome while achieving this capability in a real-time or near-real-time manner

TIVVE Vibration Profiles

- Field Data from Laboratory Vibration Specification (LVS) Development Efforts is used to populate a database for various standard vehicles over eight terrain types and speed profiles listed below

– Cross Country	5-25 mph
– Paved	5-45 mph
– Gravel	5-45 mph
– Belgium Block	5-30 mph
– 2" Washboard	5-15 mph
– 6" Washboard	5-15 mph
– Radial Washboard	5-15 mph
– Embedded Rock	5-15 mph



TIVVE Terrain Mapper


Using operator input, a Terrain mapper application overlays existing terrain with pre-defined terrain that corresponds to one of eight types of terrain categories.




TIVVE Summary




**Measured set of
Field Data**



**Disturbance
Vibration Data**



TIVVE Server

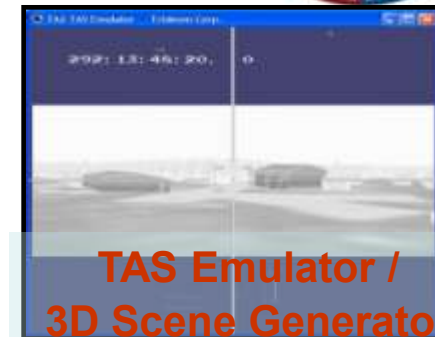

**TAS Emulator /
3D Scene Generator**

**Other TENA
"Subscriber"
Applications**



**Platform Sim +
TIVVE Client**



Terrain Mapper

The TIVVE Server distributes representative disturbance vibration data through a TENA enabled architecture to provide realistic environmental effects for elements in a LVC-DE



Terrain Induced Vehicle Vibration Effects Server (TIVVE) Challenges



- To overcome the lack of realistic sensor disturbances generated by maneuvers across the simulated terrain the solution must:
 - Leverage measured environmental effects data effects
 - Overcome bandwidth limitation inherent in distributed environments when dealing with high resolution data to provide effects
 - Provide expandable architecture that can support customer requirements and allow for growth to include other mission profiles or effects



Emulated Tactical Networks NEED



- Wireless Networks are pervasive throughout the battlefield
- Application performance must be tested over realistic wireless networks
- A real-time network emulation with interfaces to real systems
- Real-time core network emulation capability based on validated communications models and engineering/physics-level propagation models
- Scalable solution to emulate a Brigade size battle




Emulated Tactical Networks Requirements




- Support *hardware interfaces* to actual network nodes
- Provide a *high fidelity simulation* of the wireless network environment
- Provide *scalability* to handle large wireless networks and perform the simulation/emulation calculations within *hard real-time* constraints
- Interface to *test scenario drivers* such as Computer Generated Forces (CGF) models

RTC Infrastructure to Support Emulated Tactical Networks

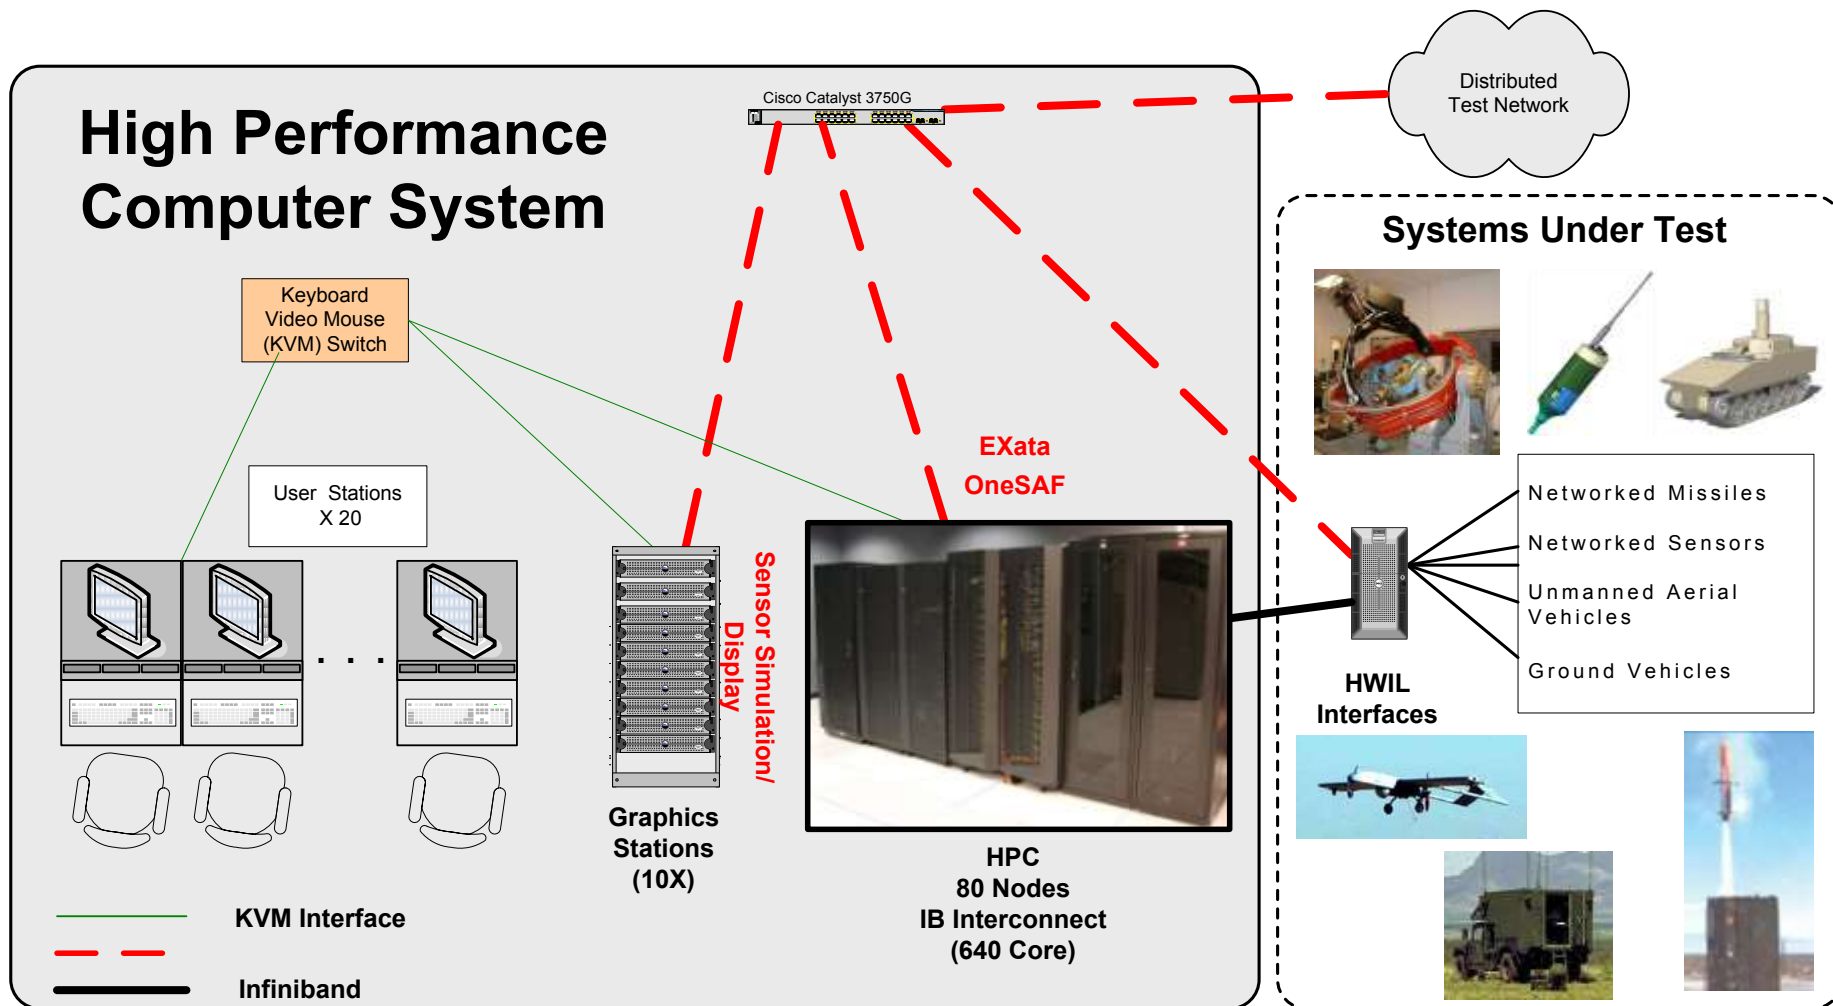


Emulated Tactical Networks Example Scenario

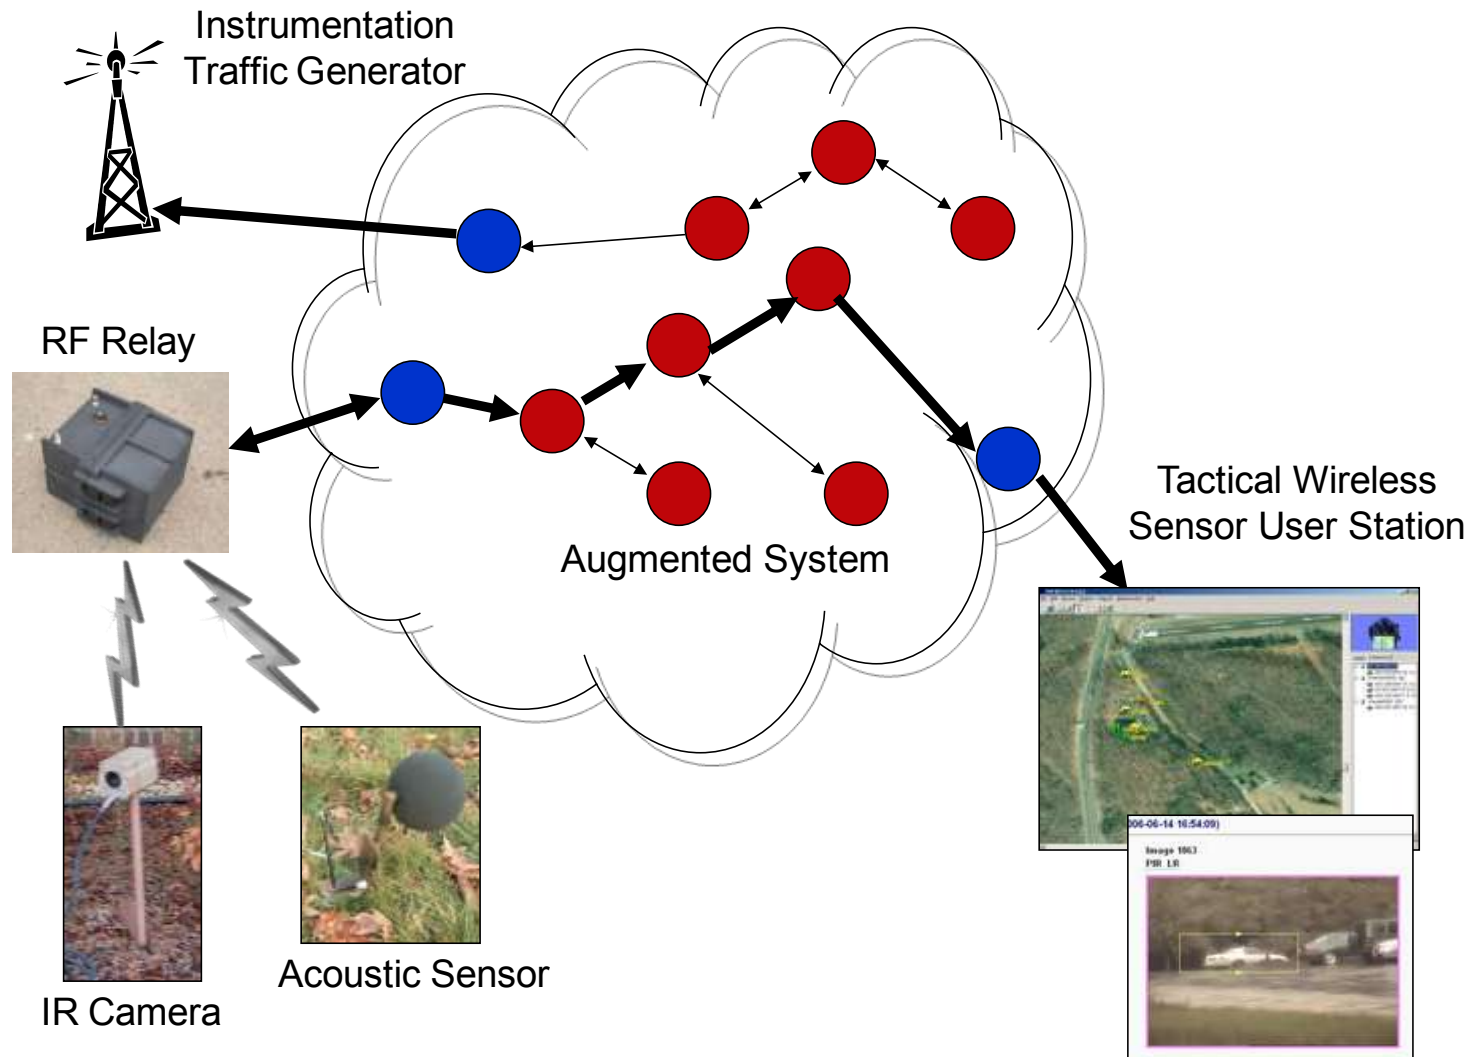



Emulated Tactical Networks

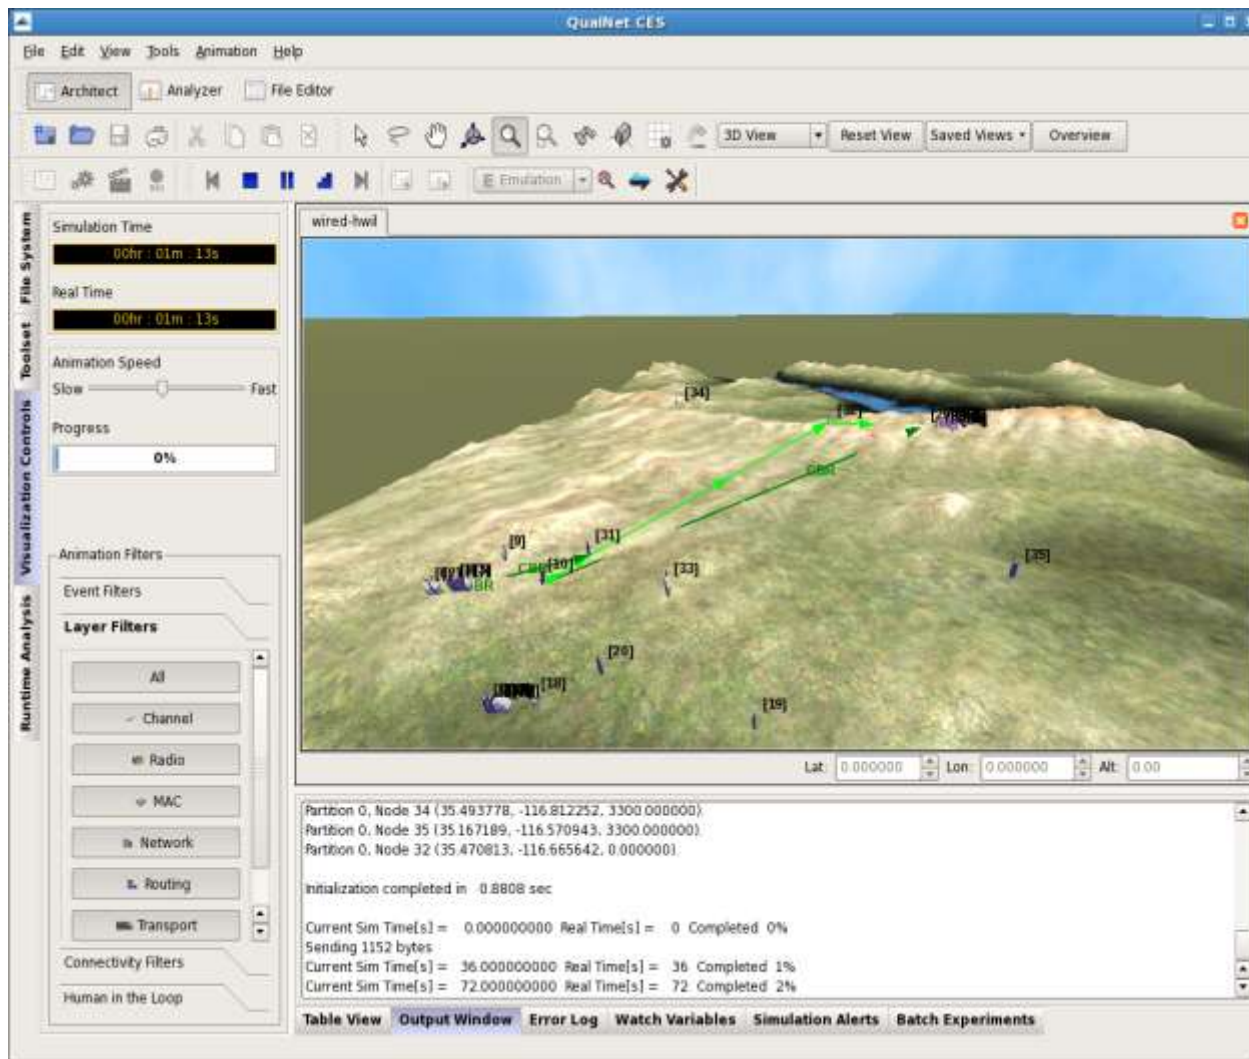



Emulated Tactical Networks Challenges



- Real-Time Operation at Large Scale
- HWIL Interfaces
- Latency with Distributed Operations
- High Resolution Urban Environment Models
- Verification and Validation

SUMMARY



- LVC distributed testing has advanced considerably in the recent years and is proving to be a very beneficial method of testing in certain cases.
- Advancements in the fidelity of tactical network emulations and the use of realistic vibration effects on elements in the environment are enhancing the LVC-DE test methods.
- The use of real-time Cross Domain Solutions are allowing the advantages of distributed LVC testing to be realized by an increasing customer base