



TECHNOLOGY DRIVEN. WARFIGHTER FOCUSED.

Hybrid Components: Motors and Power Electronics

Wes Zanardelli, Ph.D., Electrical Engineer

August 9, 2010

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 09 AUG 2010		2. REPORT TYPE N/A		3. DATES COVERED	
4. TITLE AND SUBTITLE Hybrid Components: Motors and Power Electronics				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Wes Zanardelli Ph.D.				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) US Army RDECOM-TARDEC 6501 E 11 Mile Rd Warren, MI 48397-5000, USA				8. PERFORMING ORGANIZATION REPORT NUMBER 21073	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) TACOM/TARDEC				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 14	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

- **Introduction**
- **Military payoff**
- **Challenges**
- **HE research interests**
 - Motors / generators
 - Power conversion and controls
 - High temperature SiC materials

BENEFITS FOR HYBRID


- Improved acceleration & available boost power
- Added Silent watch capability
- Available Silent mobility for short distances
- Improved hull design and enhanced survivability
- Limp home capability through redundancy
- Hybrid architecture facilitates both stationary and on-the-move: On-board & Export power generation
- Potential gain in fuel economy (duty cycle dependent)
- Synergy with pulsed loads (electric weapons and EM armor)
- Flexibility and Improved packaging efficiency
- Added power management capability

OBSTACLES FOR HYBRID

- Added cost burden (Hybrid Architecture dependent)
- Unproven reliability
- Low temperature components necessitate 2-3 cooling circuits
- Increased total cooling system size and power draw from the engine
- Energy storage limitations
- Maintenance; personnel & soldiers will require additional safety training

- **Motors / generators**
 - ISG
 - Dual voltage
- **SiC**
- **University Efforts**
 - University of Michigan
 - Michigan State University
- **System Evaluation (SIL)**

- **Motor programs**
 - SPM in-hub wheel motor
 - IPM motor
 - Dual-Voltage ISG
- **Motor/generator control**
 - New in-house initiative
 - O/S development
 - Control algorithm development
 - Hybrid features
 - Optimize efficiency
 - Diagnostics

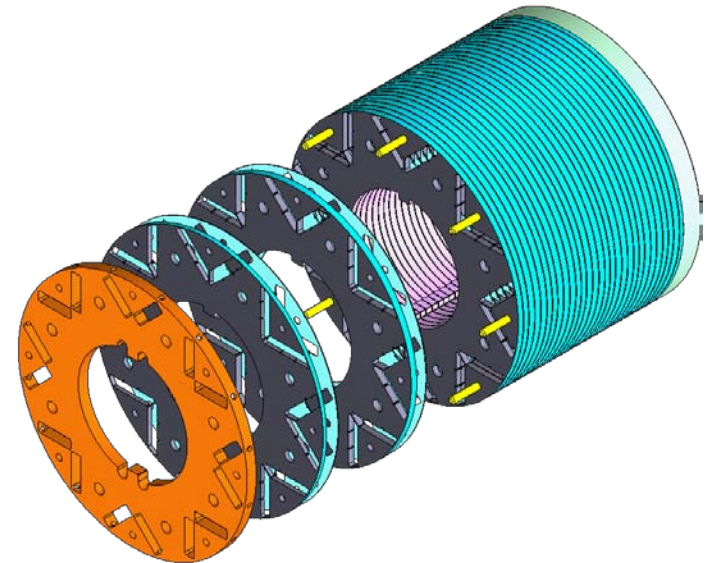


Silicon Carbide is a “Game Changing” Technology over Silicon Based Power Electronics:

- **Higher operating temperature:**
 - SiC can operate at $\geq 100^{\circ}\text{C}$ versus 70°C
 - Enables one thermal management cooling loop
- **Higher efficiency:**
 - Switching and conduction characteristics result in approx. 40% reduction in losses for a SiC versus silicon-based power converter *
 - Lower thermal burden reduces energy required to cool system
- **Reduced size and weight:**
 - For 4x higher operating electrical frequency permits:
 - 50% volume reduction in transformer size
 - 30% decrease in power converter size
 - 30% reduction in component weight

* J. D. Scofield, J. N. Merrett (AFRL), J. Richmond, A. Agarwal (CREE), and S. Leslie (Powerex), “Performance and Reliability Characteristics of 1200 V, 100 A, 200°C Half-Bridge SiC MOSFET-JBS Diode Power Modules,” International Conference on High Temperature Electronics, May 2010.

- **Challenges**
 - Material development
- **Device/module development**
- **Power converter development**
 - ARRA projects
 - Inverters
 - DC/DC converters
 - SSCB

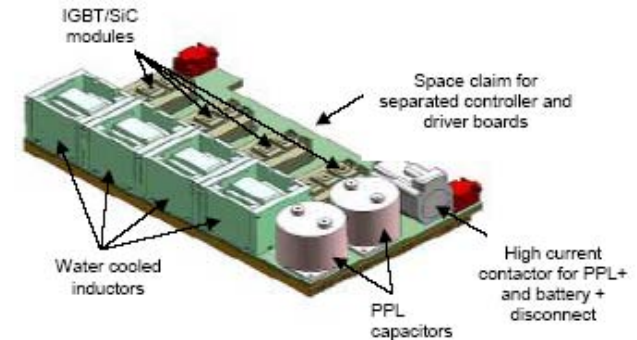

100 kW Si/Si-C hybrid
DC-DC converter



DC/DC Converter

Power Electronics Bench Testing

- Baseline and Test Power Electronics in Controlled Bench Environment.

Power Electronics HERMIT Testing

- Integrate Power Electronics into the Hybrid Electric Reconfigurable Moveable Integrated Testbed (HERMIT) for a "Vehicle Like" evaluation.

Automotive and Environmental Testing

- Testing power electronic devices for shock and vibration in vehicle platform.



Backup





HEVEA Statistical Models for Conventional & HE HMMWVs -- Munson & Churchville B



MUNSON (Improved gravel, paved):


- Hybrid 4.2% improvement over Conventional
(averaged over common speed range of 5.1-30.7 mph)

CHURCHVILLE B (Hilly cross-country):

- Hybrid 10.9% improvement over Conventional
(averaged over common speed range of 5.1-25.0 mph)

Vehicle & Course	Statistical Model ($\Delta SOC = 0$)
MUNSON:	
XM1124	$y = 5.332 + 0.524x - 0.012x^2 - 0.222 \Delta SOC$
M1113	$y = 2.974 + 0.717x - 0.016x^2$
CHURCHVILLE B:	
XM1124	$y = 2.109 + 0.417x - 0.010x^2 - 0.031 \Delta SOC$
M1113	$y = 2.321 + 0.417x - 0.013x^2$


Key Test Vehicle Characteristics	M1113	XM1124
Type	Conv Mech	Series Hybrid
Company	AM Genl	AM Genl
Test wt (lbs)	11,500	11,500
Engine	6.5L Turbo 190 hp	2.2L Turbo 139 hp
Battery capacity	1 kWh Pb Acid	15 kWh Li ion
On-bd pwr (DC)	5.6 kW	2.8 kW
Export pwr (AC)	N/A	30 kW

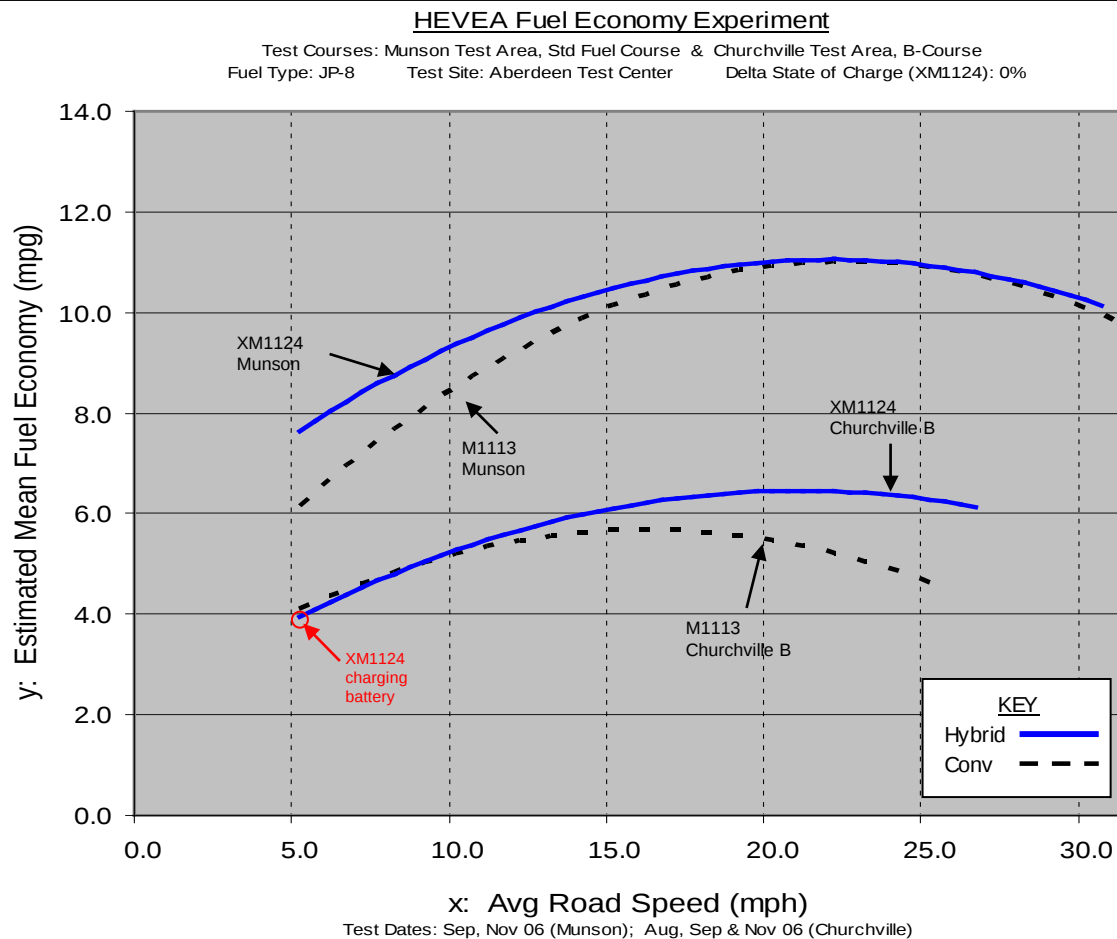

Notes:

- The hybrid HMMWV provides a significant amount of silent watch capability
- HE does better on Munson up to 20 mph because the efficiency gain in the electric drive system is higher at low speeds; at >20 mph, there is an increased cooling load on the hybrid, which allows the mechanical drive to be more efficient. The hybrid does better up to the first 5 mph because there is a great deal of loss due to the hydrokinetic transmission in the conventional vehicle that the hybrid vehicle does not experience. After the torque converter locks up, conventional drivetrain efficiency improves significantly.
- The HE system demonstrates more benefit on Churchville B due to the hilly terrain. The system captures energy on downhill runs (re-gen) and can use the energy on uphill runs. At low speeds the hybrid electric is using all of the power from the battery and engine to make it up the hill, then using fuel and the engine to charge the battery. At higher speeds, the hybrid system reaches steady state and becomes more efficient.

Fuel Economy Percent Comparisons (% Δ Mean FE vs. Avg Road Speed)

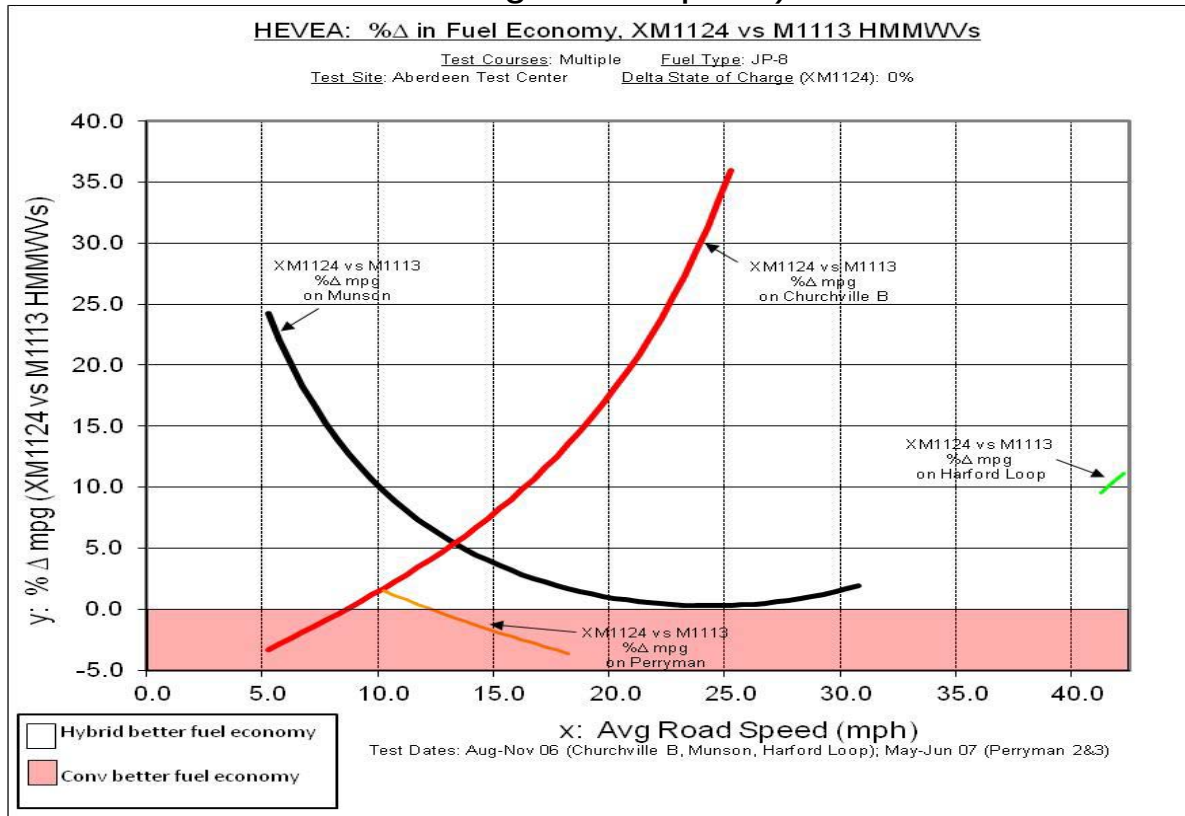

Interpretation of Results. Based on the given statistical models of the test data over the range of speeds, the hybrid HMMWV showed, on the average, the following % improvement in mean fuel economy over the conventional HMMWV: 4.2% on Munson over the common interval of 5.1 - 30.7 mph; 10.9% on Churchville B over the common interval of 5.1 – 25.0 mph.


Military Vehicles Require Very High Torque and Power

- System integration and Packaging
 - Power densities of components
 - ❖ Motors, generators, energy storage
 - ❖ Power electronics
- Thermal management
 - Low operating temperature
 - ❖ Large space claims
 - ❖ High power demand from the engine/generator
- Silent Watch requirement
 - Energy storage shortfalls
 - Control strategy and limited power budget
- Onboard Exportable power
 - Clean power for Tactical Operating Centers (TOC)
 - Power supply from mobile platforms for other applications
- Reliability and safety assessment requires additional SIL and vehicle testing
- High development cost




High Power density motor

High temperature power electronics




SiC MOSFET

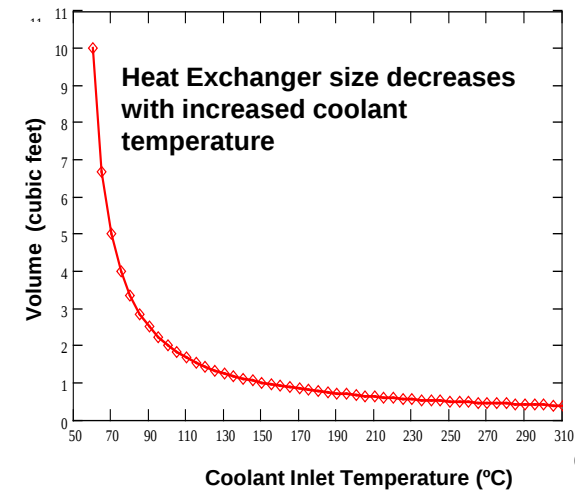

C4ISR TOC



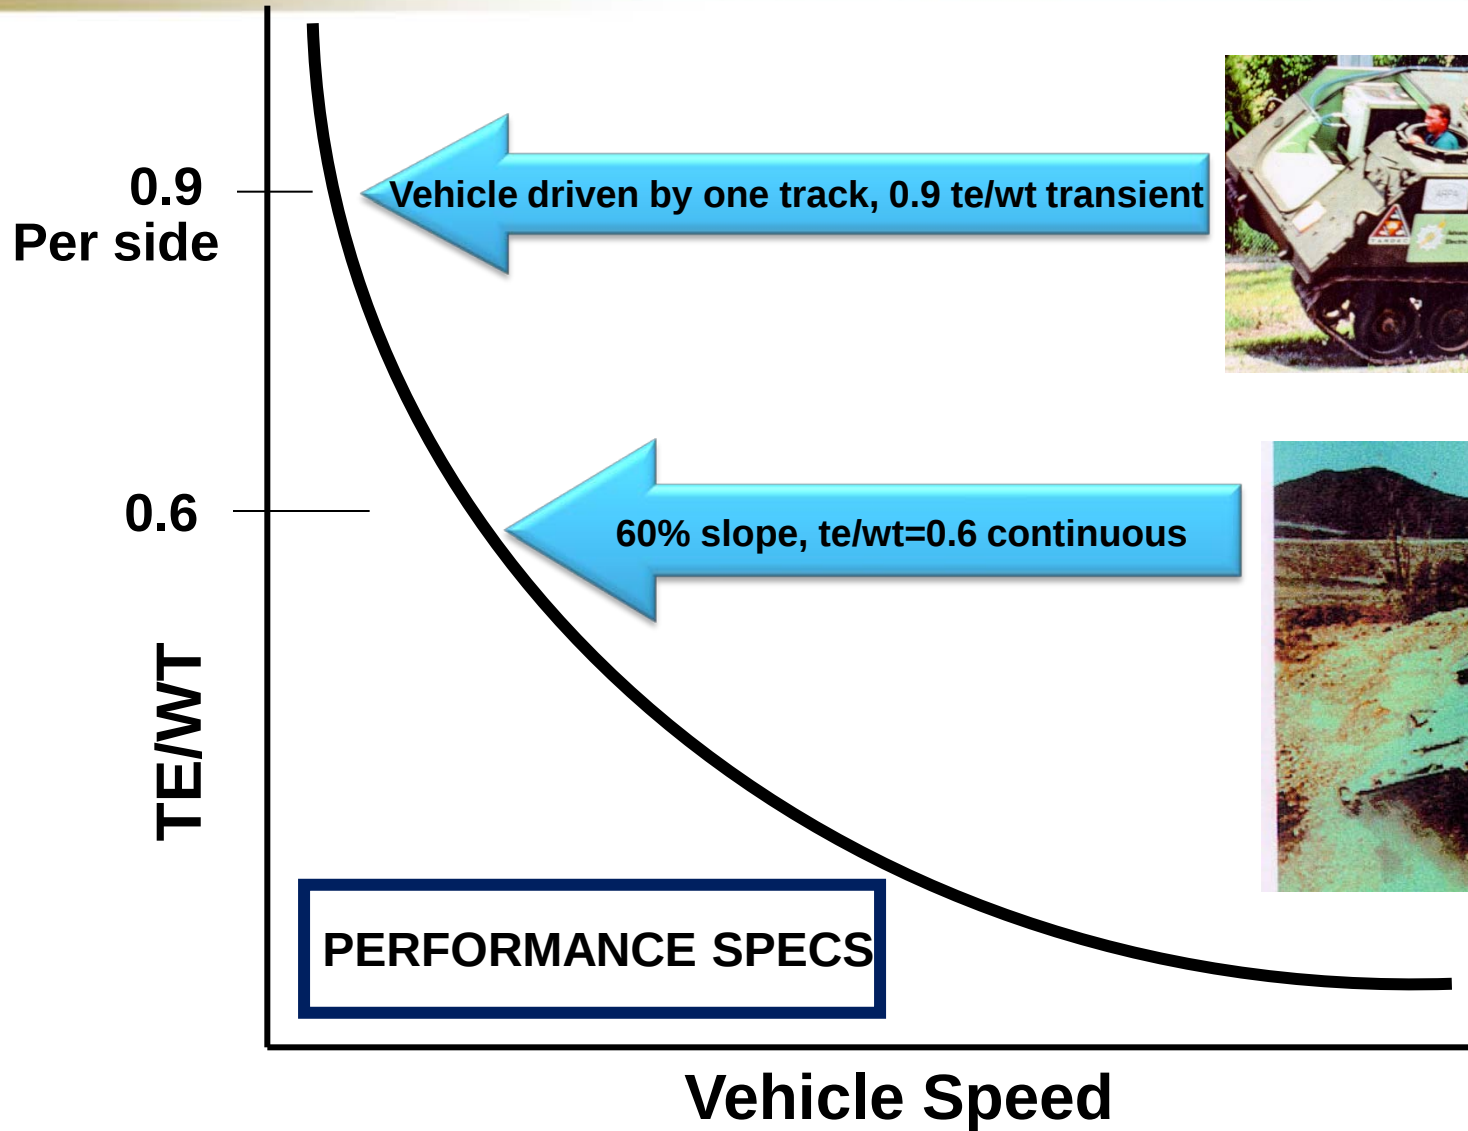



Hybrid vs. Non-Hybrid Component Comparison



Hybrid Version – JLTV

Major Components

1. Prime Mover-Diesel Engine
2. Generator and Generator Inverter
3. Traction motor(s) and Inverter(s)
4. DC-DC Convertor
5. Integrated Starter Generator algorithm
6. Energy Storage System and BMS
7. Low Temperature cooling circuit
8. Multi cooling circuits
9. Power Management Modules
10. EMI Filtration devices

Non-Hybrid Version - JLTV

Common Components

1. Prime Mover-Diesel Engine
2. Generator and Generator Inverter
3. DC-DC Convertor
4. Integrated Starter Generator algorithm
5. Energy Storage System and BMS
6. Low Temperature cooling circuit
7. Multi cooling circuits
8. EMI Filtration devices
9. Added Software/Controls
10. Mechanical path (Drivetrain)

- If the Non-hybrid version were to meet all of the requirements including silent watch the architecture would include the mass majority of the components required for hybrid.
- The components that are known to be unreliable would be apparent in both configurations.
- Incorporating all of these components into current JLTV is one step short of a mild hybrid