

Continental Controls Tiny Buoy: Evaluation at the Field Research Facility

Kent Hathaway
USACE Field Research Facility
1261 Duck Road
Kitty Hawk, NC 27949
phone: (252) 261-6840 x224 fax: (252) 261-4432
email: Kent.K.Hathaway@usace.army.mil

MIPR Number: N0001408MP20129
<http://frf.usace.army.mil>

LONG-TERM GOALS AND OBJECTIVES

The goal of this study was to evaluate the performance of a small wave measuring buoy developed by Continental Controls & Design, Inc. The Tiny Wave Buoy (TWB) transmits directional wave spectra via an Iridium satellite link. The objective was to test the TWD at the Army Corps of Engineers Field Research Facility (USACE-FRF) in Duck, NC. This site provided the capability to deploy and retrieve the TWB and has a long history of making directional wave measurements and instrument testing as well as existing wave measuring infrastructure.

APPROACH

The FRF has a 15-element array of near-bottom pressure sensors in 8m depth approximately 800m offshore (8m array) from which high resolution directional wave measurements are made. The FRF also maintains and collects data from a Datawell directional Waverider buoy located in 17m depth water approximately 3km offshore. The TWB was planned to be deployed at both of these locations, making simultaneous measurements with the FRF gauges providing ground truth. Three or four deployments were desired with waves as large as possible where the TWB could be safely deployed and retrieved. The first deployments were planned to be tethered to a moored surface buoy in order to stay co-located with the comparison gauges. At least one deployment was to be free floating for evaluating the tether effect. Figure 1 shows the tethered TWB.

WORK COMPLETED

Two deployments were made. The first was located over the 8m array on 11 Jun 2008 when a 12 second swell was building in significant wave height from approximately 0.5 meter to 0.9 meter. The second deployment was at the seaward end of the FRF pier (nominal depth of 7 meters and about 590 meters offshore) during a storm that was too extreme for a ship deployment. Significant wave height exceeded 2.6 meters during the second test. Both deployments were made with the TWB tethered to an anchored surface

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 30 SEP 2008		2. REPORT TYPE Annual		3. DATES COVERED 00-00-2008 to 00-00-2008	
4. TITLE AND SUBTITLE Continental Controls Tiny Buoy: Evaluation At The Field Research Facility				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) USACE Field Research Facility,1261 Duck Road,Kitty Hawk,NC,27949				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES code 1 only					
14. ABSTRACT The goal of this study was to evaluate the performance of a small wave measuring buoy developed by Continental Controls & Design, Inc. The Tiny Wave Buoy (TWB) transmits directional wave spectra via an Iridium satellite link. The objective was to test the TWD at the Army Corps of Engineers Field Research Facility (USACE-FRF) in Duck, NC. This site provided the capability to deploy and retrieve the TWB and has a long history of making directional wave measurements and instrument testing as well as existing wave measuring infrastructure.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 5	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			



Figure 1. Tethered TWB during 11 Jun 2008 deployment

float with a 30 meter monofilament fishing line (300 pound test). Unfortunately, the tether line broke shortly into the second deployment and the TWB was not recovered. Data was received after the tether line broke and likely provided and assessment of free-floating characteristics.

RESULTS

The first deployment was 11 Jun 2008 lasted about six hours. The 8m array spectra are computed every 3 hours from a 2 hour 16 minute timeseries, whereas the TWB spectra update every 30 minutes. For this comparison consecutive TWB spectra were averaged for times overlapping the 8m array sampling. Three comparisons showed good comparison between the TWB and 8m array (Table 1 and Figure 2). Near-surface currents measured in the 8m array were about 0.3 m/s flowing southerly and winds were 7 m/s from the northeast.

Table 1. TWB and 8m array statistics for 11 Jun 2008

Time (UTC)	8m Hmo (m)	TWB Hmo (m)	8m Dir	TWB Dir
1305	0.46	0.53	72	115
1505	0.69	0.79	78	82
1805	0.79	0.83	72	89

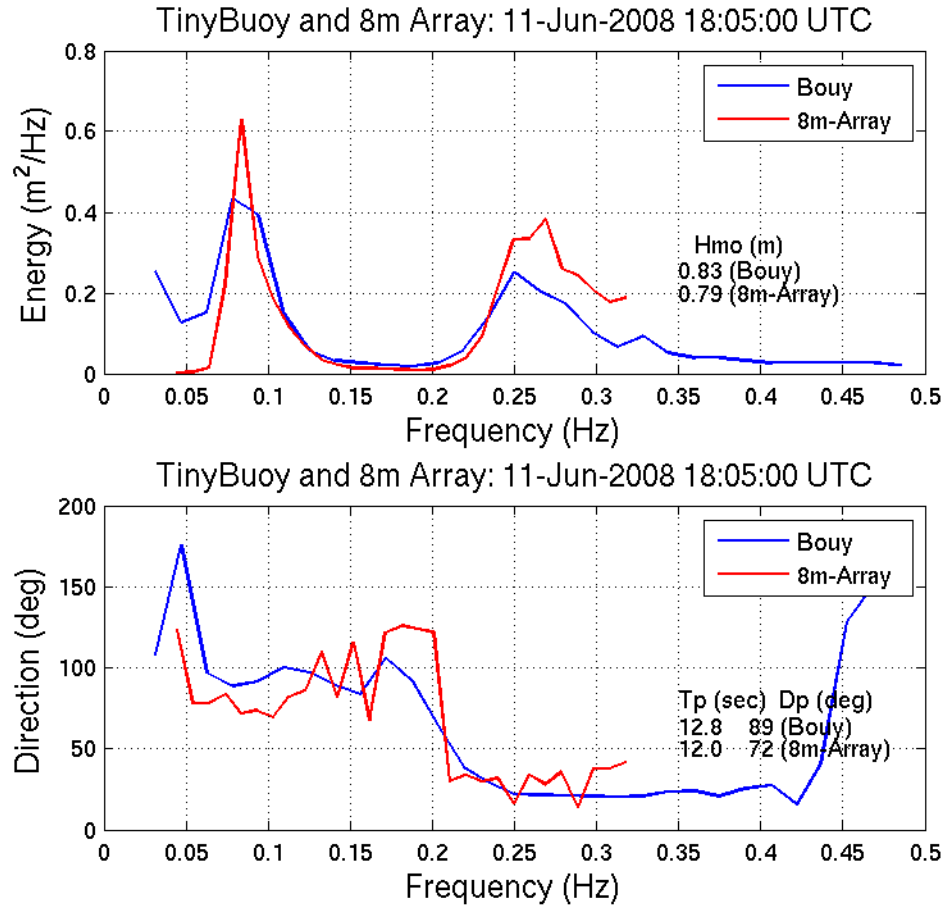


Figure 2. TWB and 8m array frequency and direction spectra on 11 Jun 2008.

The second deployment was made during a storm with significant wave height of 2.7 meters. Near-surface currents measured at approximately 300 meters north and the same cross-shore distance as the TWB were about 0.9 m/s flowing northerly and winds were 15 m/s from the south. Three spectra were obtained from the buoy before it stopped transmitting wave data. The first two spectra (1336 and 1438 UTC) were made when the buoy was tethered, both spectra show excessive low energy and overestimate the wave height (Table 2, Figure 3). The lowest frequency bin (0.0469 Hz, 21 second period) of the TWB was dropped from the plots and wave height computation since the high energy levels at the low frequencies were not believable, probably an error due to tethering in strong currents. Averaging TWB spectra was not done since only three non-consecutive spectra were received. Direction spectra closely matched the 8m array over the energetic portion of the spectra.

Table 2. TWB and 8m array statistics for 6 Sep 2008

Time (UTC)	8m Hmo (m)	TWB Hmo (m)	8m Dir	TWB Dir
1336	2.69	2.98	92	65
1438	2.23	3.35	96	299
1541	2.23	2.03	96	108

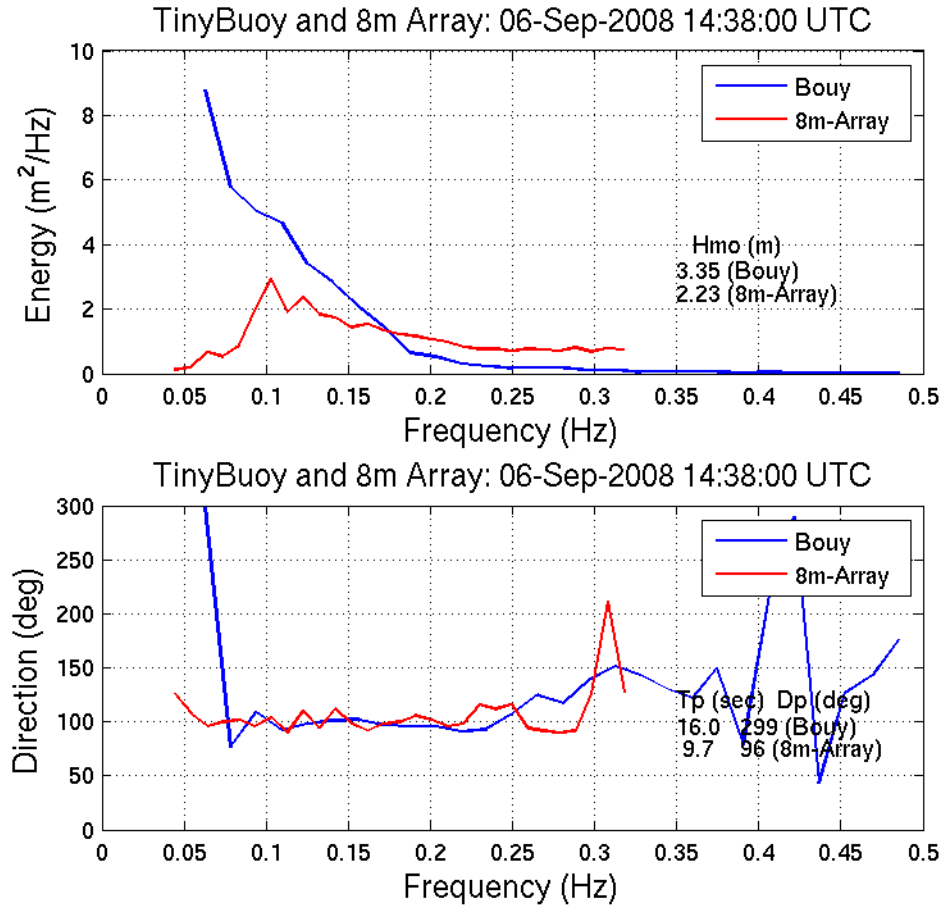


Figure 3. TWB (tethered) and 8m array frequency and direction spectra on 6 Sep 2008.

The third spectra (1541 UTC) was measured when the buoy was adrift, GPS location indicated it was about 4.5 km north (36.22433 N, 75.75715 W) of the FRF pier (36.1841 N, 75.74538 W) in a depth of 8 meters and 1 km from shore. The energy spectra from the drifting TWB was more realistic and matched the 8m array better than when tethered. Frequencies below 0.0625 Hz (periods greater than 16 seconds) were ignored in this spectra since it also was over estimated. The directional spectra did not match the 8m array as well as when tethered. The reason for this discrepancy is not clear but possibly due to the instruments no longer being co-located, or that the spectra are not doppler corrected for the currents, or wave refraction.

We suspect an object floating in the strong current hit the TWB, breaking the tether and damaged the GPS unit. That may account for only receiving one spectrum while drifting. Overall the TWB performed well but we recommend additional testing before considering the data to be research quality for models. Future versions should address the low-frequency amplification and improve data transmission. The size and ease of deployment of the TWB are attractive features.

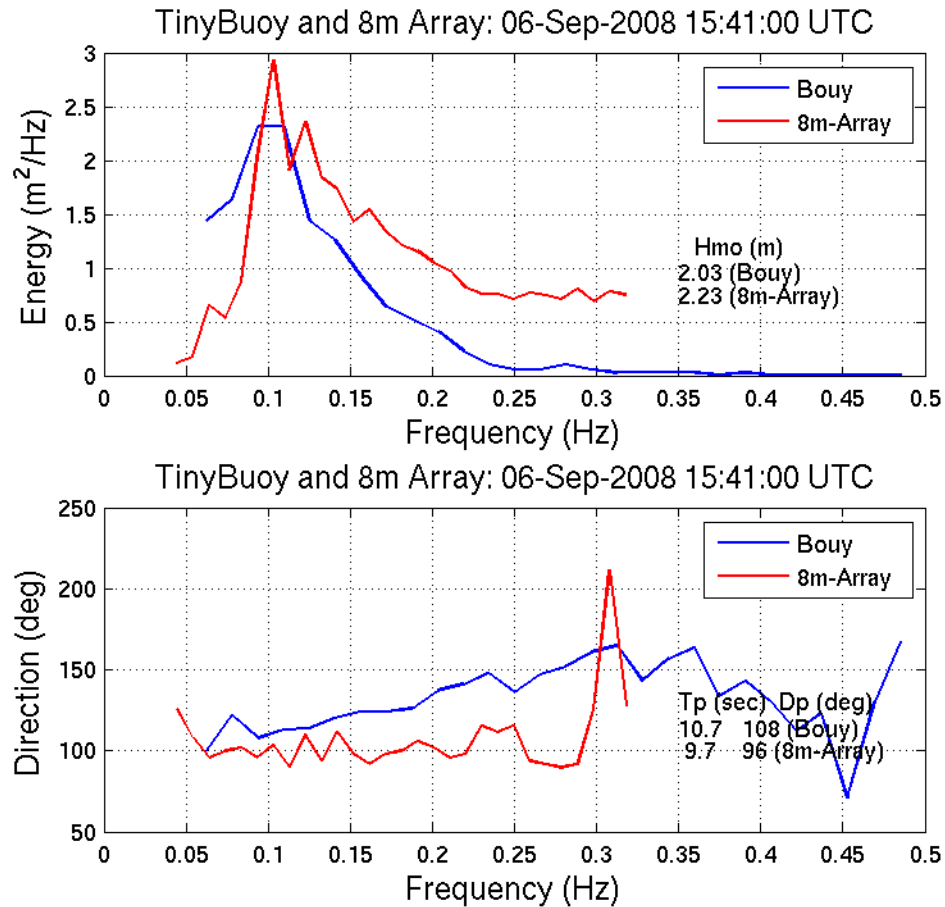


Figure 4. TWB (drifting) and 8m array frequency and direction spectra on 6 Sep 2008.

IMPACT/APPLICATIONS

The development of an inexpensive (~ \$5k-\$10k) directional wave buoy that is easily deployed, light weight, robust, and accurate would be of great value to coastal and ocean research. Such an instrument could be rapidly deployed in storm events or used in situations where a quick assessment of wave conditions are desired. The TWB could be an excellent research tool, and with Iridium transmission could be used worldwide.

RELATED PROJECTS

None.