

Aircraft-Launched High-Resolution Pressure Pod

James N. Moum
College of Oceanic & Atmospheric Sciences
Oregon State University
Corvallis, OR 97331-5503
ph: (541) 737-2553 fx: (541) 737-2064 email: moum@coas.oregonstate.edu

Award #: N00014-08-1-0426
<http://mixing.coas.oregonstate.edu/>

LONG-TERM GOALS

The long-term goal of this program is to understand the physics of small-scale oceanic processes including internal waves, hydraulics, turbulence and microstructure that act to perturb and control the circulation in coastal oceans and, in doing so, affect the propagation of sound and light. Ongoing studies within the **Ocean Mixing Group** at OSU emphasize observations, interaction with turbulence modelers and an aggressive program of sensor / instrumentation development and integration.

OBJECTIVES

The objectives of this proposal are to:

1. construct a rugged, high-resolution pressure pod that can be launched from an aircraft. This will sink to the seafloor for periods up to 3 months. A timed release will permit recovery and surface reporting of all data; and
2. test algorithms to objectively detect nonlinear internal waves from seafloor pressure signals.

APPROACH

We are in the process of modifying existing electronics hardware to count Paroscientific pressure and temperature frequencies and to integrate GPS receiver and Iridium and wireless transceivers.

Existing high-resolution seafloor pressure data are being assessed using detection algorithms and new data sets are being obtained by piggy-backing on other projects.

WORK COMPLETED

An inertial motion package has been installed in a full-scale mockup. The purpose is to measure directly the impacts on the body when the parachute opens and when the body hits the water. Preliminary tests were conducted by dropping the mockup off the Yaquina Bay bridge (46 m bridge height). Photographs of the operation are shown in Figure 1. Further tests from aircraft are planned for later in 2008. Seafloor deployment tests in Puget Sound are planned for March 2009.

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 30 SEP 2008		2. REPORT TYPE Annual		3. DATES COVERED 00-00-2008 to 00-00-2008	
4. TITLE AND SUBTITLE Aircraft-Launched High-Resolution Pressure Pod			5a. CONTRACT NUMBER		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Oregon State University, College of Oceanic & Atmospheric Sciences, Corvallis, OR, 97331-5503			8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSOR/MONITOR'S ACRONYM(S)		
			11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES code 1 only					
14. ABSTRACT The long-term goal of this program is to understand the physics of small-scale oceanic processes including internal waves, hydraulics, turbulence and microstructure that act to perturb and control the circulation in coastal oceans and, in doing so, affect the propagation of sound and light. Ongoing studies within the Ocean Mixing Group at OSU emphasize observations, interaction with turbulence modelers and an aggressive program of sensor / instrumentation development and integration.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 4	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			



Figure 1 – Impact tests. Inertial motion package dropped from Yaquina Bay bridge. This was repeated many times with different parachutes and internal sensor configurations.

A nonlinear wave detection algorithm using wavelets has been developed and tested on seafloor pressure data obtained on the continental shelf of NJ during the SW06 experiment (August 2006).

Three existing Ppods were lent to Jim Lerczak (OSU) and Kipp Shearman (OSU) for deployment in Massachusetts Bay as part of a separate project. These will be recovered in late September 2008. Data will be shared with Lerczak and Shearman and used by us to test nonlinear internal wave detection algorithms.

RESULTS

The goal of the bridge drop measurements is to aid in parachute design and determine the forces on our pressure sensor upon impact. Results will aid in package design. An example that shows how this is being quantified using inertial motion measurements is shown in Figure 2.

Both continuous (CWT) and discrete wavelet transform (DWT) techniques have been applied to the pressure signals measured over the NJ shelf (Moum and Nash, 2008). An example using a triple-sech² CWT are shown in Figure 3. While this shows promise in detection across multiple scales, we have found that DWTs are more practical.

The effectiveness of a sample detection scheme is shown in Figure 4. Here, the blue bars represent waves detected from the pressure signal. The red bars confirm waves through velocity measurements on co-located ADCPs. Below wave pressure amplitudes of 250 Pa, our wavelet scheme now detects 45% false positives. Above 250 Pa, detection is perfect, albeit with a limited number of samples. Further tests will be conducted on data obtained from Massachusetts Bay.

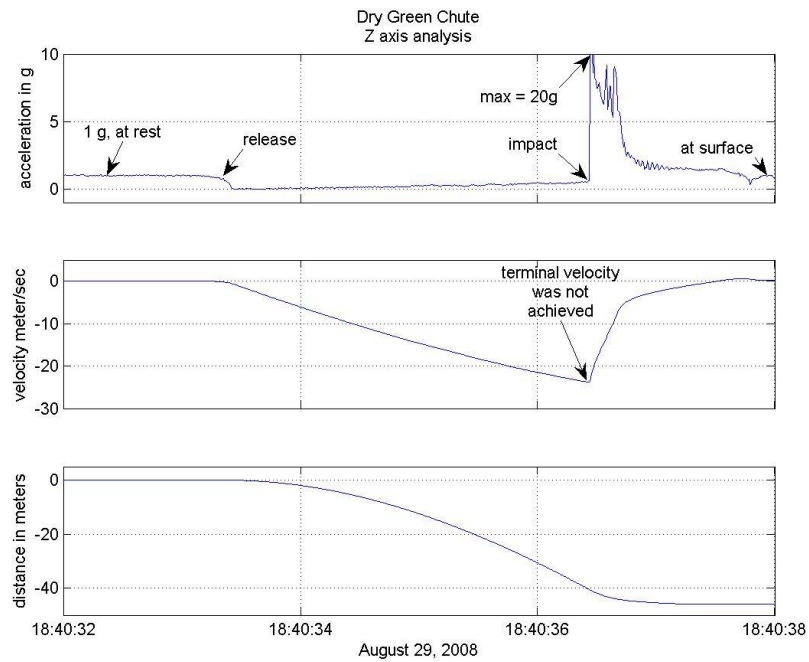


Figure 2 – Example bridge drop. The package senses 1 g at rest. As it is released, it initially senses 0 g. It does not reach terminal velocity with this particular parachute. It continues to accelerate to about 22 m/s until impact of 20 g with the water surface.

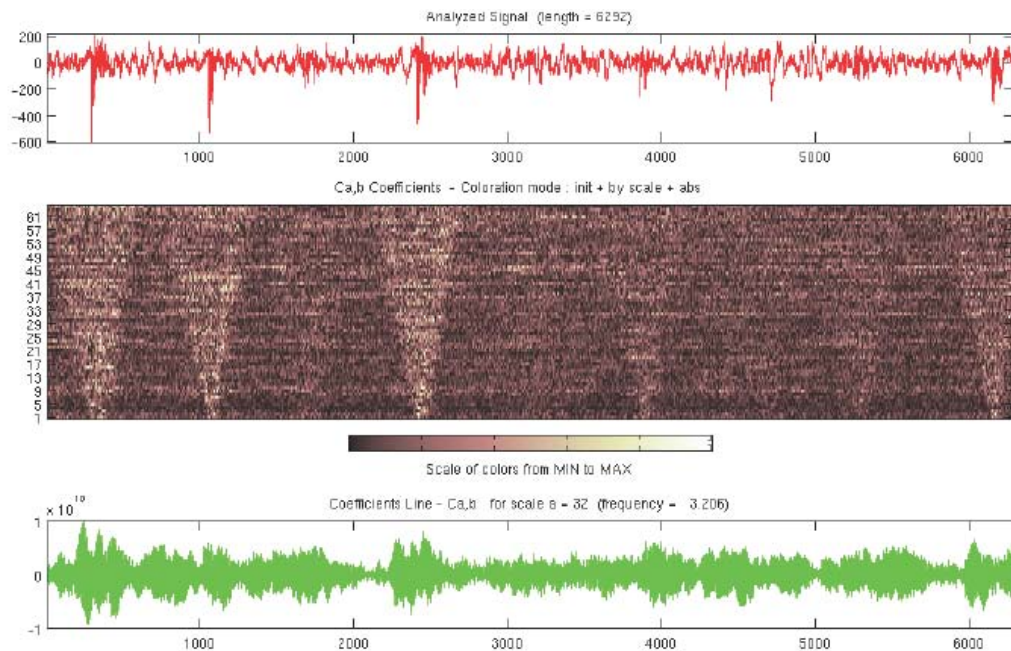


Figure 3 –Continuous wavelet transform (CWT) using a specially-defined KdV wavelet. Shown are the original signal (top), the CWT in time-scale space (middle), and the coefficients at scale 32 (bottom).

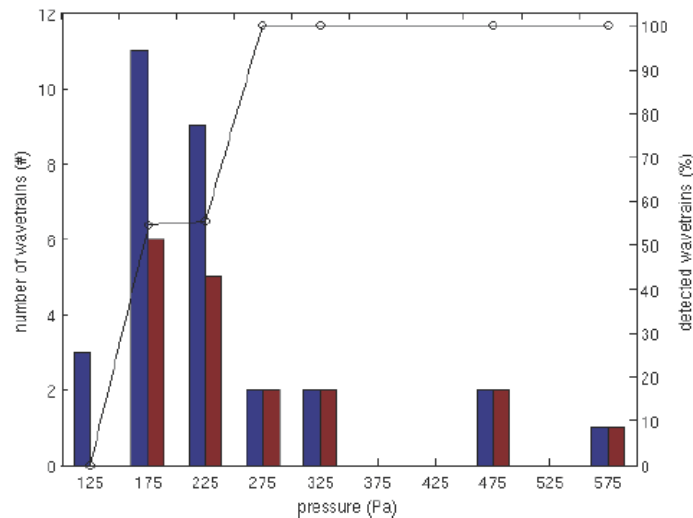


Figure 4 -Number of nonlinear internal wave trains detected in the pressure signal recorded at SW37 during SW06 (blue) and that have a counterpart in the vertical velocity signal (red), i.e. that are successfully identified. The black line shows the number of successfully detected wave trains in percent.

IMPACT/APPLICATION

The objective of this project is to develop an easy-to-deploy and inexpensive means to outfit continental shelves with seafloor-based nonlinear internal wave antennae. If successful, this will help in defining internal wave climates on continental shelves.

RELATED PROJECTS

Ppods have and are being used in related projects to help us gain experience with interpreting the measurement over a broad range of conditions. These have included measurements over Stonewall Bank (June 2008; Moum / Nash / MacCready / Skillingstad) and in Massachusetts Bay (July – October 2008; Lerczak / Shearman).

REFERENCES

- Moum, J.N., and W.D. Smyth, 2006: The pressure disturbance of a nonlinear internal wave train, *J. Fluid Mech.*, 558, 153-177.
- Moum, J.N. and J.D. Nash, 2008: Seafloor pressure measurements of nonlinear internal waves. *J. Phys. Oceanogr.*, 38, 481-491.