

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188		
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) 07-06-2010		2. REPORT TYPE CONFERENCE PROCEEDING		3. DATES COVERED (From - To) 2010-2010	
4. TITLE AND SUBTITLE Spherical Primary Optical Telescope (SPOT) Segment Fabrication			5a. CONTRACT NUMBER		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S) John Hagopian, Bruce Dean, and Jason Budinoff			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) NASA Goddard Space Flight Center			8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) NASA Goddard Space Flight Center			10. SPONSOR/MONITOR'S ACRONYM(S) NASA GSFC		
			11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION / AVAILABILITY STATEMENT DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES Presented at Mirror Technology Days, Boulder, Colorado, USA, 7-9 June 2010.					
14. ABSTRACT The Spherical Primary Optical Telescope (SPOT) is a simplified large segmented telescope concept. At this time three, 35 inch diameter, hexagonal mirror blanks have been cast. The blanks are made of Pyrex. One mirror (segment) was figured at GSFC and final figured at QED using Magnetorheological Finishing. Two other segments are in process. The mirror tip, tilt, piston, and radius of curvature control assemblies are complete for Segment 1 and 2. Segment 2 was installed on a second generation support with enhanced stiffness and improved interfaces. Software is being written for the control assemblies. The test bed should be operational in Winter 2010.					
15. SUBJECT TERMS Spherical Primary Optical Telescope, Segmented, Mirror, Pyrex, Radius of Curvature, Casting, Deformable Mirror					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 11	19a. NAME OF RESPONSIBLE PERSON Hans-Peter Dumm
a. REPORT UNCLASSIFIED	b. ABSTRACT UNCLASSIFIED	c. THIS PAGE UNCLASSIFIED			19b. TELEPHONE NUMBER (include area code) 505-853-8397



Spherical Primary Optical Telescope (SPOT) Segment Fabrication

John Hagopian - PI

Bruce Dean - WFSC Lead

Optics Branch, Code 551

Jason Budinoff - Mechanical

Design/Robotics Code 544

NASA Goddard Space Flight Center

Joe Howard, Code 551

Scott Smith, Code 551

Matt Balcors, Code 551

Carl Strojny, Code 551



GODDARD SPACE FLIGHT CENTER



SPOT - 10x Cheaper Telescopes

- **SPOT Architecture Simplifies Large Segmented Telescopes**
 - Spheres are easier to make and test
 - Fewer degrees of freedom to control
- **Real time WFSC with on-board star**
 - Enables operation in more challenging environments (ISS)
 - Allows use of less exotic mirror materials
- **SPOT mirror design enables real time ROC control**
 - Mirror is cast with shape that decreases WFE induced by ROC change by 10 X
 - Casting of mirror decreases cost of segment blanks 15 X
- **Spherical Primary Telescopes have decreased FOV**
 - SPOT is best utilized for:
 - Planetary camera, LIDAR, Laser Comm





SPOT Testbed Status

- 3 hexagonal mirror blanks (35" point to point) have been cast
- Segment 1 was figured at GSFC completed at QED using magnetorheological finishing (MRF)
- New GSFC figuring facility brought on-line to complete initial figuring on segments 2 and 3
 - New machine can handle segments as large as 1 meter
- Segment 2 is in final figuring at QED
- Segment 3 is in figuring at GSFC
- Mirror tip/tilt piston and ROC control assemblies complete and software for control is being developed
- Test Bed should be operational this winter in Bld 7
- Modification of SPOT hardware for flight is evolutionary rather than revolutionary





SPOT Design Concepts

Phase Retrieval Camera & Point Source


Secondary Mirror

Quaternary Mirror

Tertiary Mirror

Instrument Camera


Segmented Primary

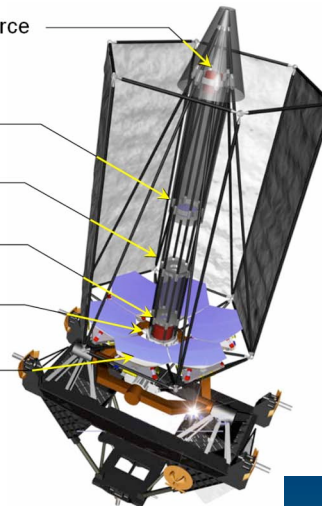


SPOT Testbed



**SPOT ISS
Attached Payload
or Free-flyer**

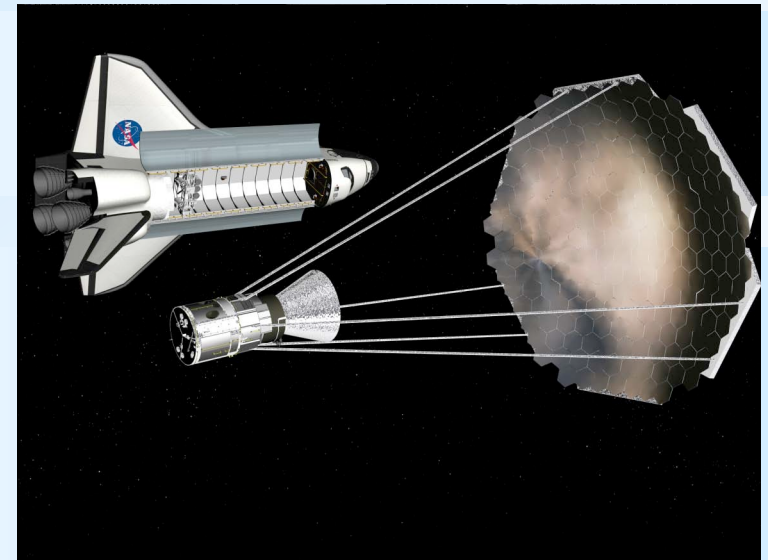

30 meter-Class SPOT

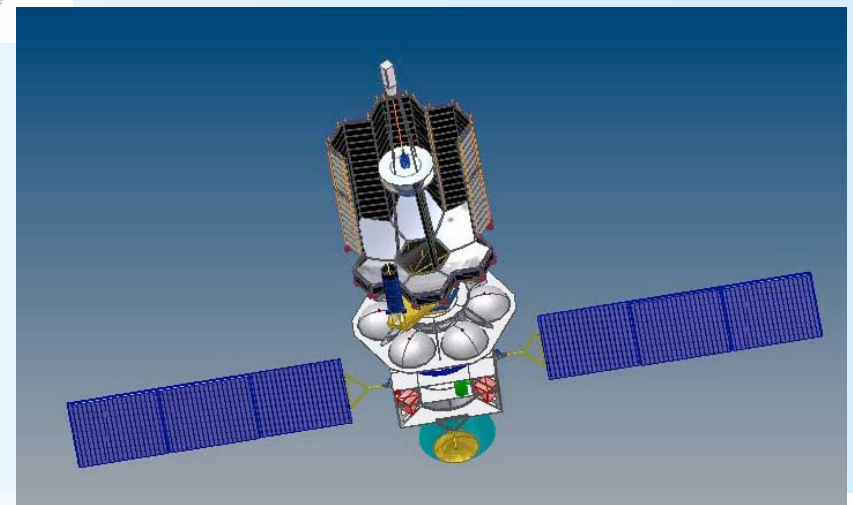

GODDARD SPACE FLIGHT CENTER






Accomplishments

SPOT Mirror Segment Design




- 35" Mirror Blanks to be cast in pyrex for 15 X cost savings
- ROC control relaxes radius matching tolerance for significant fab cost savings
- Design optimized from initial to current profile
- ROC control induced WFE decreased from 225 to 32 nm
- Mirror profile minimizes thermal equilibration time
- Further optimization to 20 nm WFE over ROC control range possible

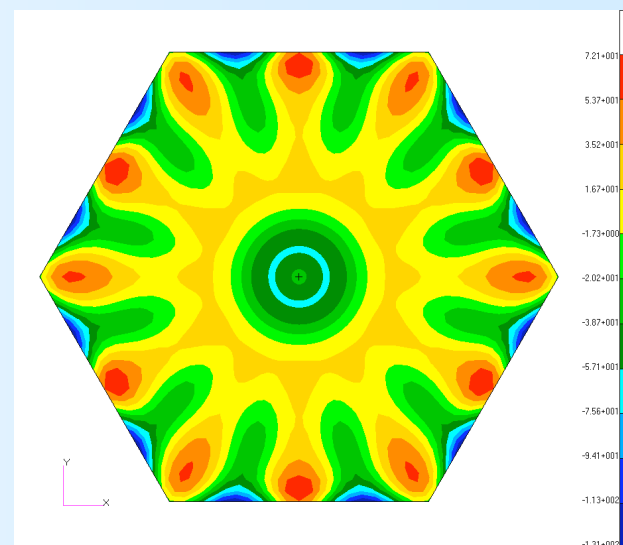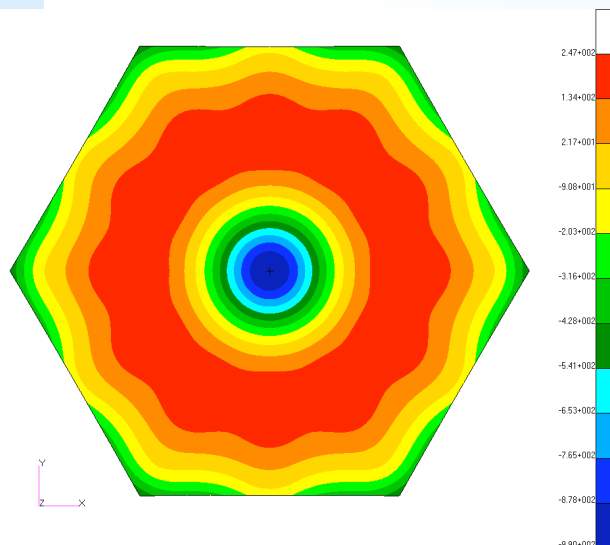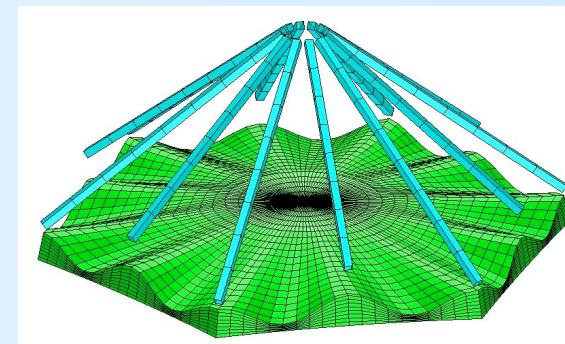



Accomplishments

SPOT Segment 1 Pathfinder Assembly

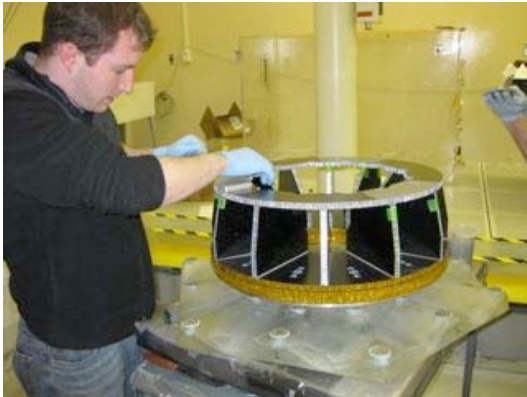




- **SPOT Mirror Composite Pathfinder Support Structure Assembled**

- **SPOT Segment 1 Figure Measured on Support Structure**

- **Segment 1 assembled to tip/tilt piston assembly and measured for MRF Hit Map for figuring**


- **Check of figure change when Radius of Curvature Actuator integrated**

- **As predicted effect of 20 lb actuator assembly is primarily focus change**

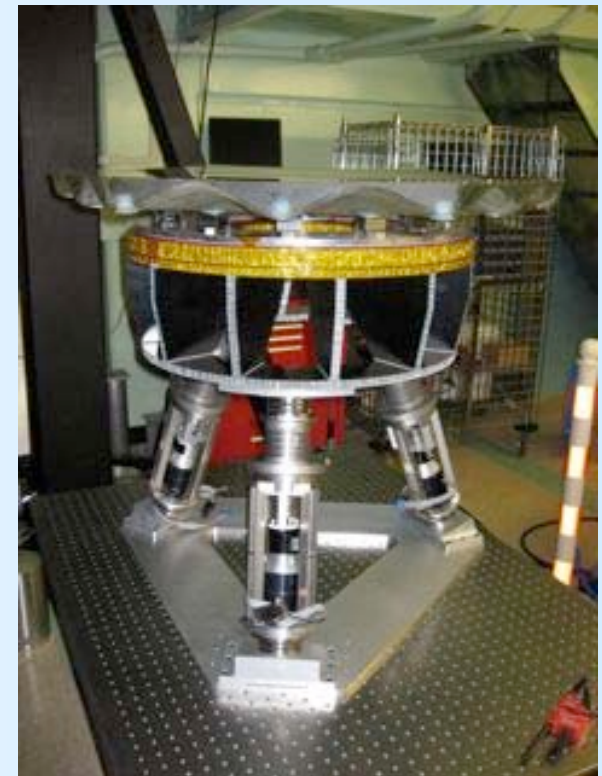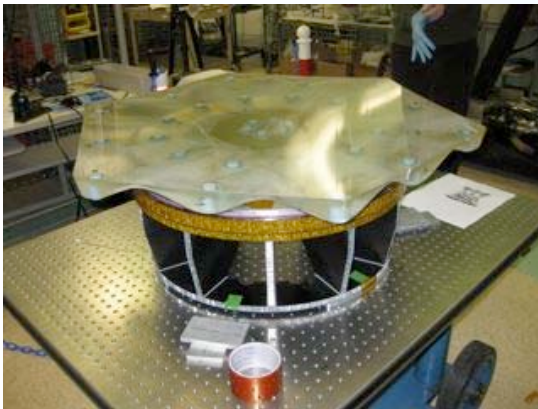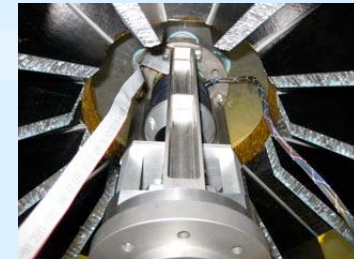





SPOT Segment 1 ROC Adjustment

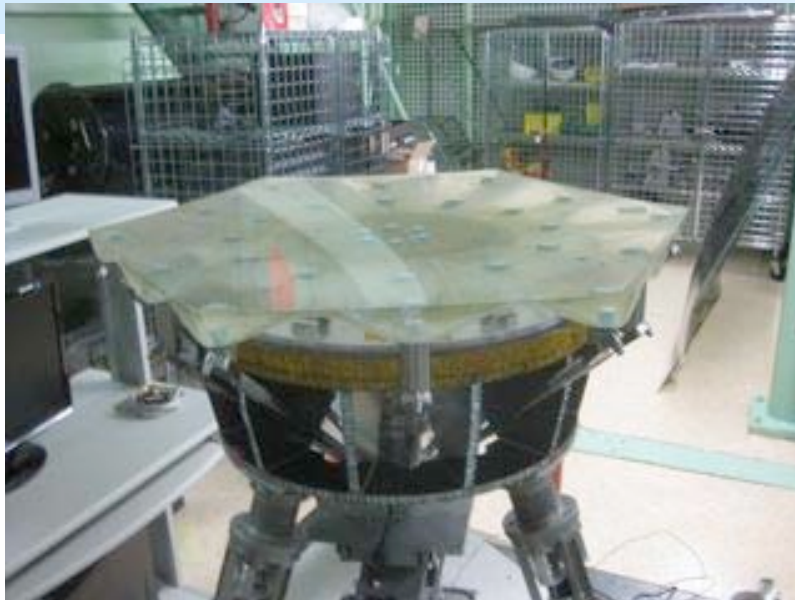

- SPOT Segment 1 radius adjusted by bending mirror
- This allows radius matching of segments in test bed
- Pathfinder segment had initial aberrations that limited performance




GODDARD SPACE FLIGHT CENTER

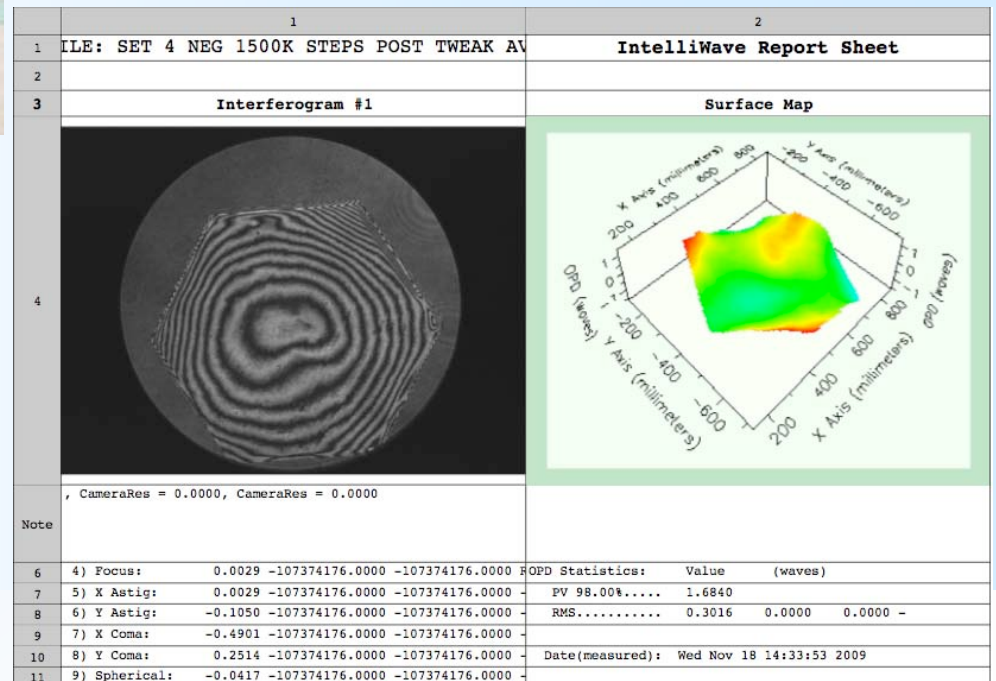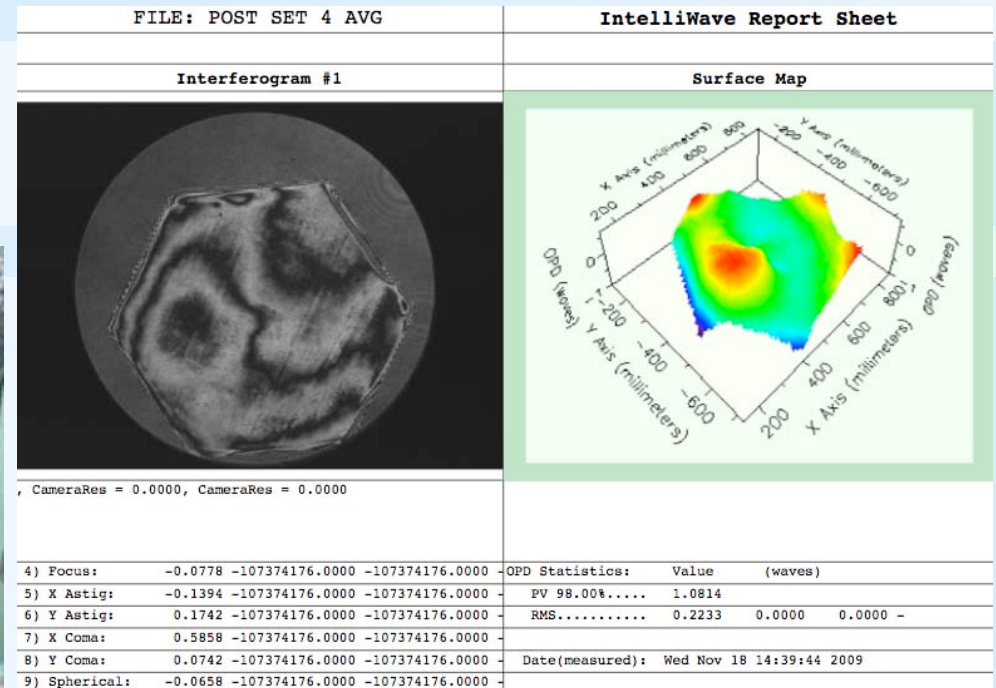



Accomplishments - Meter Class Optics at GSFC

Segment 2 Grinding and polishing

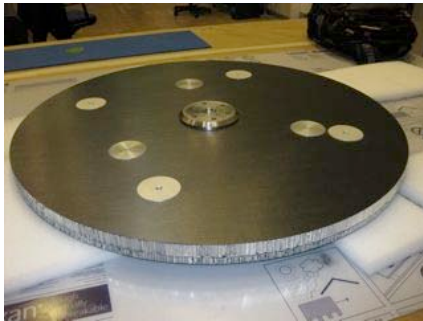

- **Bldg 7 Room 7 Reconfigured for Polishing Lab**
- **Composite Polishing Fixture fabricated (>10 x lighter than previous fixture)**
- **Pitch pucks installed on polishing fixture**
- **Mirror polishing on new Strasbaugh 6-O machine**
- **Mirror being inspected**
- **Segment 2 surround removal**
- **4 Fabrication and Test related NTR's generated**





Accomplishments

Segment 2 Installed on Generation 2 Box



- **Fabricated in Composites Shop Bld 5**
- **Designed by J. Budinoff/540**
- **10-20x stiffer than Gen1**
- **Flexure interface**
- **Segment 2 Mounted**
- **Mirror fab 10x faster than Segment 1**
- **Mounted Figure 4 x better**
- **Next step final figuring at QED Technologies with MRF**









SPOT Segment 2



- Better initial figure at GSFC
- Lower Mounting Error
- Optimized MRF Process at QED



GODDARD SPACE FLIGHT CENTER

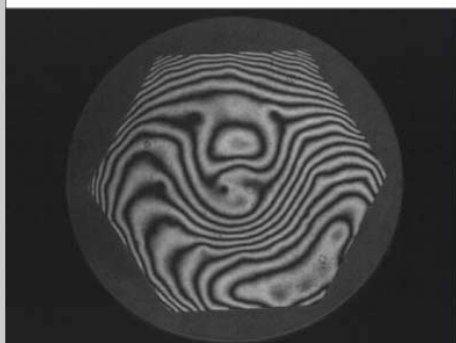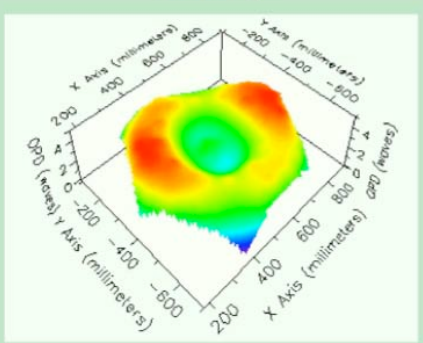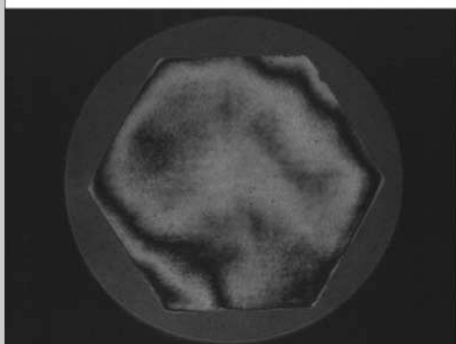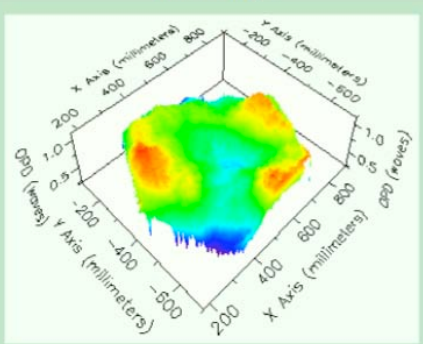1				2			
FILE: 3_17				Segment 2 Pre MRF1			
Interferogram #1				Wave Report Sheet			
Surface Map							
							
Note							
, CameraRes = 0.0000, CameraRes = 0.0000, CameraRes = 0.0000, CameraRes = 0.0000							
Date(measured): Thu Mar 18 17:20:21 2010				OPD Statistics: Value Min Max (waves)			
4) Focus: -0.7409 0.0000 0.0000 Removed				PV..... 4.9911			
5) X Astig: 0.9883 0.0000 0.0000 -				RMS..... 0.7546 0.0000 0.0000 -			
6) Y Astig: 0.8883 0.0000 0.0000 -							
7) X Coma: 0.3086 0.0000 0.0000 -							
8) Y Coma: 0.2403 0.0000 0.0000 -							
9) Spherical: -1.6143 0.0000 0.0000 -							
1				2			
: 5_27 SEG2 MRF2 F				Segment 2 Post MRF2			
Interferogram #1				Wave Report Sheet			
Surface Map							
							
Note							
, CameraRes = 0.0000, CameraRes = 0.0000							
Date(measured): Thu May 27 13:57:40 2010				OPD Statistics: Value Min Max (waves)			
4) Focus: -0.0592 0.0000 0.0000 Removed				PV..... 1.2185			
5) X Astig: 0.0923 0.0000 0.0000 -				RMS..... 0.1372 0.0000 0.0000 -			
6) Y Astig: 0.1719 0.0000 0.0000 -							
7) X Coma: 0.0393 0.0000 0.0000 -							
8) Y Coma: 0.1290 0.0000 0.0000 -							
9) Spherical: -0.1414 0.0000 0.0000 -							



Next Steps

- Segment 2 gets an additional 1 MRF at QED
- Segment 3 figuring at GSFC is within .05% of nominal radius (need to get to .025%)
 - Delivery to QED for at least 2 MRF runs
- Segments 1 and 2 will begin phasing experiments after delivery of Segment 2 from QED
 - Integration of tip/tilt piston control with WFSC module
 - Completion of WFSC module (WISH)
 - Completion of WFSC algorithms