

Fluid Mud in Energetic Systems: FLUMES II

Gail C. Kineke
Dept of Geology and Geophysics
Devlin Building 213
Boston College
140 Commonwealth Ave.
Chestnut Hill, MA 02167
Phone: (617) 552-3655 fax: (617) 552-2462 email: kinekeg@bc.edu
Grant # N00014-06-1-0325

Timothy G. Milligan
Fisheries and Oceans Canada
Bedford Institute of Oceanography
1 Challenger Drive
Dartmouth, Nova Scotia, CANADA B2Y 4A2
Phone: (902) 426-3273 fax: (902) 426-6695 email: timothy.milligan@dfo-mpo.gc.ca
Grant # N00014-08-1-0389

LONG-TERM GOALS

The goal of this research is to develop greater understanding of the dynamics of fluid mud and its role in the transport and deposition of sediment in coastal environments. In particular, we seek greater understanding of the processes that influence the formation and maintenance of fluid mud in energetic environments.

OBJECTIVES

The research is a process-based study that addresses three primary objectives:

- Determine controlling factors in the formation and destruction of fluid mud under a sheared flow
- Verify Richardson number dependence for suppression of turbulence and carrying capacity of a high-concentration suspension
- Evaluate effects of mixed grain size on high-concentration suspensions

APPROACH

To evaluate the controls on fluid-mud formation and the influence of sediment-induced stratification on flow, a suite of instrumentation has been assembled to make in situ measurements of vertical gradients of velocity, suspended-sediment concentration (SSC), and fluid density throughout the water column. In addition to these parameters, the thickness of a fluid mud layer through accelerating and decelerating flows has been measured in an environment characterized by high concentration bottom suspensions.

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 2011		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE Fluid Mud in Energetic Systems: FLUMES II				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Dept of Geology and Geophysics Devlin Building 213 Boston College 140 Commonwealth Ave. Chestnut Hill, MA 02167				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES FY10 Annual Reports of S & T efforts sponsored by the Ocean Battlespace Sensing S & T Department of the Office of Naval Research., The original document contains color images.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 8	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

The Petitcodiac River located in the Upper Bay of Fundy was selected as the study site. The Petitcodiac Estuary is a macro-tidal environment that has been modified by the construction of a causeway in the late 1960s. During construction, depositional rates downstream of the causeway were on the order of 1 cm day^{-1} resulting in a decrease in the cross-sectional area of up to 90% within one year of closure. Typical maximum tidal currents are on the order $1\text{--}2 \text{ m s}^{-1}$ and suspended-sediment concentrations regularly exceed 10 g l^{-1} and can reach 300 g l^{-1} (Curran et al., 2004). At slack tide, sediment settles rapidly forming fluid mud layers on the order of 1–2 m thick. In April 2010, the causeway gates were permanently opened to re-establish tidal flow throughout the estuary. The effect of the increase in tidal flow on the formation and resuspension of the dense bottom layer will be examined in November 2010.

The Petitcodiac River near Moncton, New Brunswick serves as an ideal natural lab where the formation and destruction of fluid mud can be studied under a sheared flow with a quasi-steady current and without the complicating effect of waves. Measurements are carried out from a bridge that provides a solid framework for instrument deployment thus eliminating many of the challenges of shipboard operations in high-current environments. The Petitcodiac has a distinct advantage over laboratory studies in terms of scale and avoids the practical issues of dealing with the quantities of mud required to create a fluid mud layer and maintaining flume equipment at these high concentrations of suspended sediment.

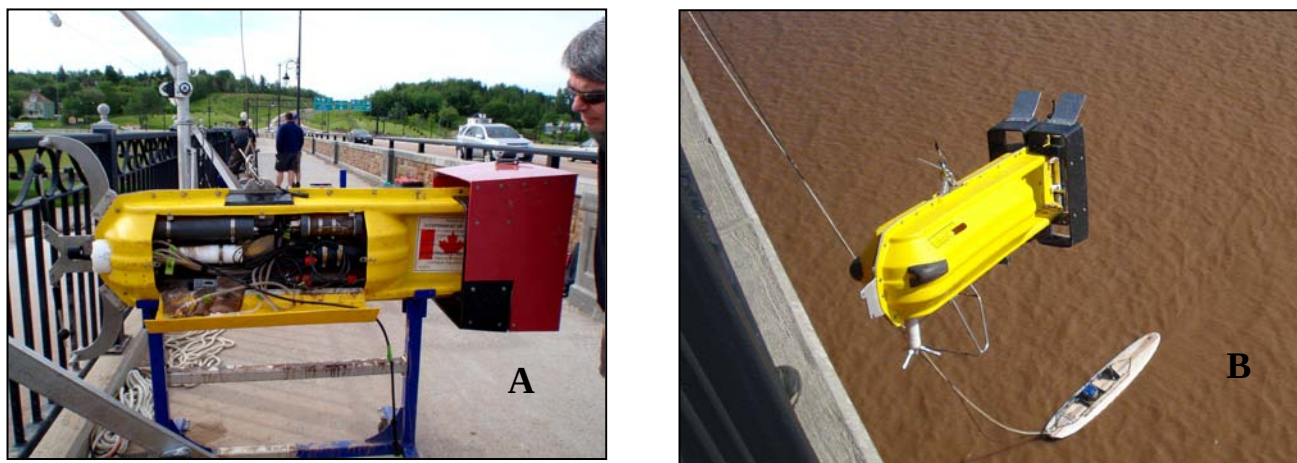


Figure 1: Photographs of the modified SUBS packages deployed in the Petitcodiac River. Left panel (A) shows the interior of SUBS I with the RBR CTD and sample bags exposed. The Marsh McBirney electromagnetic current meters are located on the front of the package near the railing and the OBS and sample port are situated on the opposite side near the front. The right panel (B) shows a SUBS modified to hold a Sontek ADV at the front, a D&A OBS5 in the center and a downward looking Nortek AquaDopp at the tail (SUBS II). Also seen in this panel is a surfboard with a 1.2 MHz RDI ADCP and dual frequency Knudsen sounder.

For water-column sampling in high flow conditions, a streamlined underwater buoyancy (SUBS) package designed at the Bedford Institute of Oceanography was modified for use as an instrument profiler (Fig. 1A; SUBS I). The addition of lead weights to the package in place of the normal buoyancy permits vertical profiling from a bridge at current speeds in excess of 1 m s^{-1} . A CTD and an optical backscatterance sensor (OBS) are mounted through the front and side of the package respectively. A sample port is co-located with the OBS and connected to a series of pumps to provide suspended sediment for OBS calibration and grain size analysis. Current shear was initially determined using two Marsh McBirney electromagnetic current meters (EMCMs) mounted 60 cm apart on the

front of the CTD sampling package. In 2009 these measurements were augmented with the addition of a second SUBS package that was modified to accept a Sontek ADV, a D&A OBS5, and a Nortek Aquadopp profiler (Fig. 1B; SUBS II). To observe the formation of the lutocline and continuously monitor flow velocities, a dual frequency Knudsen echo sounder and an 1.2 MHz RD Instruments ADCP were mounted on a surfboard tethered to the bridge next to the location of the profiling package. In 2009 a second 1.2 MHz ADCP and a 2.5 MHz rotary sonar were deployed using a second surfboard (Fig. 2). The ADCPs and Knudsen echo sounder sample continuously, SUBS I (CTD/OBS/EMCMs/in situ samples) was deployed approximately every 30 minutes, and SUBS II (ADV/Aquadopp/OBS5) was deployed nearly continuously (every 15 minutes).



Figure 2: Photo of the instrumented surfboards deployed from the bridge in the Petitcodiac River. Upper board consists of a 1.2 MHz RDI ADCP and a Dual Frequency (50 and 200 kHz) Knudsen sounder. The lower board has a 2.5 MHz rotary sonar and 1.2 MHz RDI ADCP mounted on it. The wake between the boards is caused by a SUBS package just below the surface.

All work is being conducted collaboratively between Tim Milligan and Brent Law of the Bedford Institute of Oceanography (BIO), Gail Kineke of Boston College (BC) and Alex Hay (Dalhousie). Technical support in 2009 was provided by BIO Co-op students Vanessa Page and Karen Devitt, Boston College students Michele Leron (Masters) and Christie Hegermiller (undergraduate), and Dalhousie graduate student Richard Cheel.

WORK COMPLETED

The original SUBS profiling package was redesigned in 2008 to accept an RBR XRX-620 CTD and data logger, and a new control system was developed for the pump samplers. A second SUBS was

modified to accept a Sontek ADV, a D&A OBS5 through the bottom of the package and a downward looking Nortek AquaDopp profiler was mounted on the tail.

An experiment was conducted from June 17-22, 2009. From June 17-21, conditions were dominated by tidal flow with very low fresh water input. On June 22 fresh water was released from the control structure as part of a fish migration strategy. Conditions after June 22 were dominated by fresh water flow with salt water intrusion only occurring towards the end of the flood.

Initial casts with the CTD/OBS SUBS package were made just prior to the passage of the tidal bore and continued approximately every 30 minutes until water levels during the ebb were less than 1 m. The ADV/OBS5/AquaDopp SUBS was profiled nearly continuously over the tidal cycle with 1 minute integrated samples being collected approximately every 0.5 m.

Continuous observations of current speed and depth of the lutocline were made using the surfboard mounted ADCPs and the dual frequency Knudsen sounder. The combined measurements of the SUBS I package and the Knudsen profiler are summarized in Figure 3. The close comparison of water depth from the two different instrument packages ~ 10 m apart, as well as good agreement in the depth to the lutocline using acoustic (dual frequency echo sounder) and optical (optical backscatterance) methods is encouraging for combining measurements from different instruments to obtain coverage over a range of conditions. The acoustic instruments are helpful at defining gradients in the water column, e.g. the lutocline, but are limited by high concentrations for actual concentrations. The ADV potentially can provide turbulence measurements, however lab experiments suggest only to SSCs of $\sim 50 \text{ g l}^{-1}$ (Velasco and Huhta, 2008) and our field observations suggest to $\sim 30 \text{ g l}^{-1}$ or less.

Calibration of the OBS is accomplished using the in situ sediment samples that range from 170 mg l^{-1} to nearly 450 g l^{-1} . This calibration takes advantage of the non linear response of the OBS at concentrations greater than $\sim 5 \text{ g l}^{-1}$ that was demonstrated for fluid mud on the Amazon Shelf (Kineke and Sternberg, 1995). Disaggregated Inorganic Grain Size (DIGS) analysis for the suspended sediment samples was completed.

RESULTS

Conditions observed during the June 2009 experiment were similar to those in 2007. Initially the system was dominated by tidal flow which resulted in salinities ranging from 1 to 14 psu and near bottom SSC values in excess of 400 g l^{-1} . The passage of the tidal bore created mixed water column with SSC concentrations on the order of $30\text{-}100 \text{ g l}^{-1}$ (Fig. 4). As current velocity decreases, a lutocline forms and near bottom concentrations increase rapidly to greater than 100 g l^{-1} (Figs. 3, 4). The initial settling rate during the formation of the lutocline is $\sim 6 \text{ cm s}^{-1}$. The fluid mud layer remains coherent throughout the ebb. After the release of water from the head pond on June 22, salinities were below 1 psu and maximum near bottom SSC values decreased to 52 g l^{-1} .

Quality control analysis is currently underway to compare shear measurements from paired EMCs, ADV and ADCP mean profiles. Some differences between velocity results are under scrutiny in order to assimilate shear measurements with prior experiments, and complete calculations of gradient Richardson numbers. To date, the threshold condition suggested by Trowbridge and Kineke (1994) for the carrying capacity of a flow appears to hold, but implies a critical gradient Richardson number between 0.25 and 1 for the rapid formation of a high concentration layer (Heath 2009).

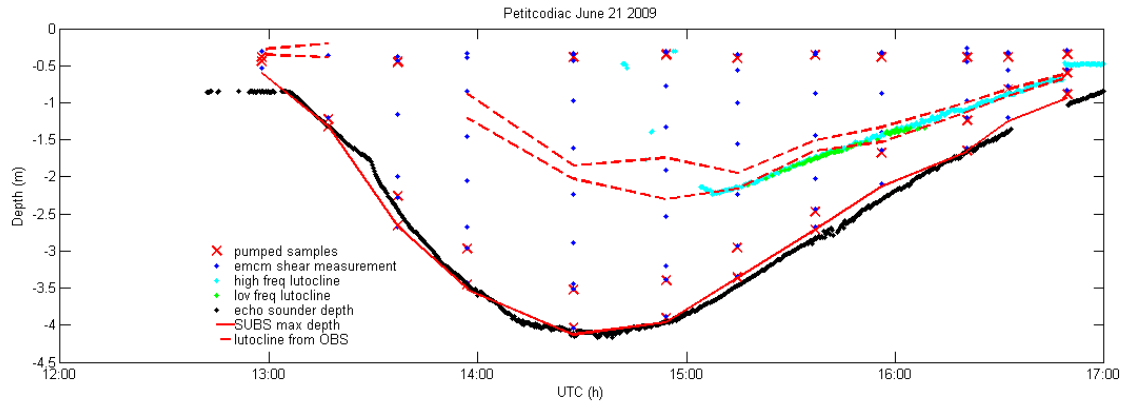


Figure 3: Summary of sampling from the SUBSI profiler and Knudsen dual frequency echo sounder mounted on a surfboard 10 m away. The close comparison of water depth from the two different instrument packages, as well as good agreement in the depth to the lutocline using acoustic (dual frequency echo sounder) and optical (optical backscatterance) methods is encouraging for combining measurements from different instruments to obtain coverage over a range of conditions.

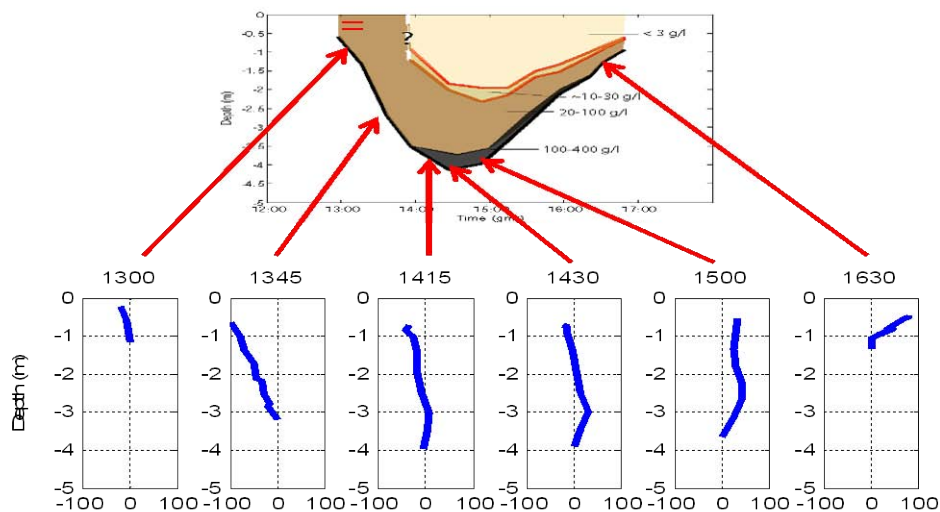


Figure 4: Pumped suspended samples were used to convert optical backscatterance measurements to suspended sediment concentration, although the calibration result was noisy, with large uncertainty at high concentrations. Mean velocity profiles obtained by the ADV profiling package (SUBSII) show strong flood currents, ~ 1 m/s at the surface at 1345, followed by rapid clearing of the upper water column and formation of a high concentration bottom layer by 1415. Currents reverse during the ebb at the bottom (beginning at 1415) yet unusually strong winds blowing up the channel delayed the change in direction at the surface.

The evolution of the DIGS during the period when the flood slows and reverses shows a dramatic difference between the normal flood current conditions with the causeway closed June 21 and the freshwater release event of June 22 (Fig.5). While the concentration immediately after the passage of the tidal bore varied by an order of magnitude (solid black lines in Fig. 5), the size distribution of the material suspended by flooding current was similar. Salinity on June 22 was on the order of 20 PSU but was <1 PSU during the discharge of river water. Key differences in settling behaviour following resuspension and mixing by the flood tide are the lack of floc settling on the 22nd shown by the approximately constant DIGS distribution and concentration over the period of low flow speed and the evolution of the modal peak in the distributions for the flocculated samples collected at 14:15, 14:30 and 15:00 on the 21st at 10 and 50 cm above bottom (blue and green curves, respectively). In the flocculated suspension below the lutocline, the concentration in the <20 μm size classes remains constant whereas the concentration in the >20 μm fraction increases. This would suggest that within the dense bottom layer floc settling is completely hindered but single grains can penetrate to the bottom, although their settling is also hindered. In the unflocculated suspension, there is sufficient time over the 45 minute sampling period for all particles >20 μm to be removed from suspension. The effective gelling of the flocs below the lutocline combined with the continued settling of the single grains through the dense bottom layer could explain the formation of the varves observed in the Petitcodiac Estuary (Fig. 6). These varves separate along a coarse silt layer which abruptly changes to fine grained, unsorted mud.

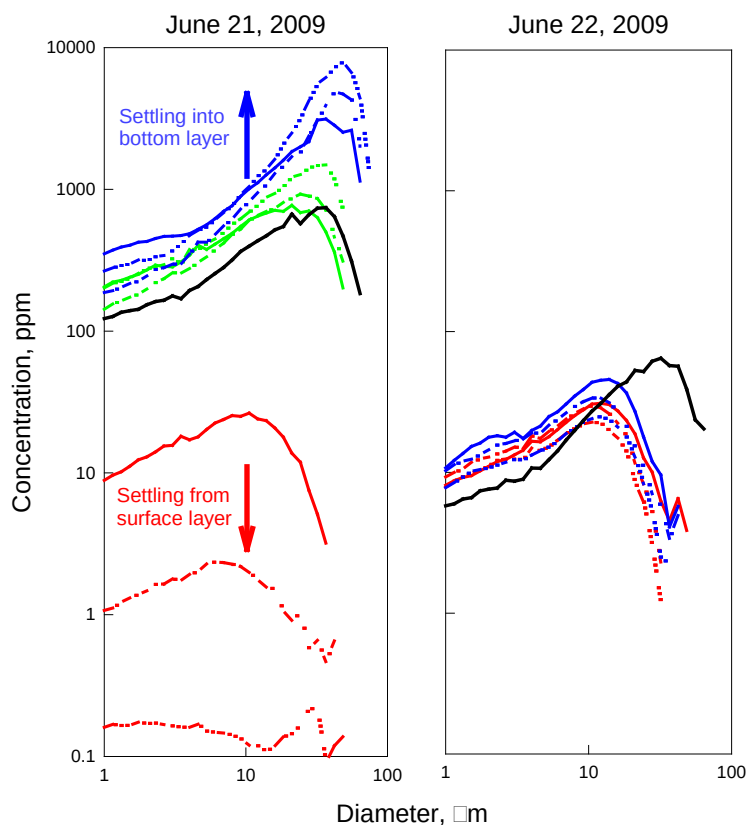


Figure 5: Disaggregated inorganic grain size distributions for samples collected at 30 cm below the surface (red), 10 cm above bottom (blue) and 50 cm above bottom (green) during maximum flood when flow speeds went from approximately -0.25 (solid line) to 0 (dashed line) to $+0.25 \text{ cm s}^{-1}$ (dashed and dotted line). The black line is the size distribution of the suspension immediately after the passage of the tidal bore. The surface salinity range on June 21 was 14-19 and on June 22 was <1. Data for the 50 cm above bottom samples on June 22 were omitted for clarity but were the same as those for 10 cm above bottom.



Figure 6: Image of the varved sediment that accumulates on the banks of the Petitcodiac River at Moncton during periods of rapid accumulation. The varves separate along a coarse silt layer.

IMPACT/APPLICATION

Our recent observations are refining our understanding of current shear at the lutocline surface. These observations improve our understanding of the formation and maintenance of fluid mud in sheared flows and to further test threshold conditions for the suppression of turbulence and carrying capacity of turbulent flows (Trowbridge and Kineke, 1994). Multiple measurements with different instruments provide a unique dataset on how acoustic instruments behave in high concentration sediment suspensions. Our data confirm the importance of salinity and sediment concentration in the formation of fluid mud layers and provide a basis for investigating the dynamics of these layers in macrotidal estuaries.

RELATED PROJECTS

G. Kineke is a co-PI on an ONR MURI project, “Mechanisms of Fluid-Mud Interactions Under Waves.” This project includes investigators from Johns Hopkins (Dalrymple, Shen), Woods Hole Oceanographic Institution (Trowbridge, Traykovski), MIT (Liu, Mei, Yue) and Memorial University (Bentley). The major objective of this study is to examine the various mechanisms of water wave dissipation over muds and field, laboratory, and theoretical approaches will be employed.

T. Milligan is a co-PI on the ONR Tidal Flats project in Willapa Bay looking at sediment flux and its impact on sediment strength.

REFERENCES

- Curran, K.J., T.G. Milligan, G. Bugden, B. Law, and M. Scotney. (2004). Suspended Sediment, Water Quality, and Hydrodynamics of the Petitcodiac River Estuary, New Brunswick (2002–2003). Can. Tech. Rep. Fish. Aquat. Sci. 2516: xi + 88 p.
- Heath, K.M. (2009) Fluid Mud Formation in the Petitcodiac River, New Brunswick, Canada. Masters Thesis, Boston College, Chestnut Hill, MA. 125 pp.
- Kineke, G.C. and R.W. Sternberg (1992). Measurements of high concentration suspended sediments using the Optical Backscatterance Sensor. *Marine Geology*, 108:253-258.
- Trowbridge, J.H. and G.C. Kineke (1994). Structure and dynamics of fluid muds on the Amazon continental shelf. *Journal of Geophysical Research*, 99(C1):865-874.
- Velasco, D and Huhta, C. (2008). ADV performance in fluid mud. Poster presentation, Biennial Conference, *Physics of Estuaries and Coastal Seas*, Liverpool.