

Mid-Frequency Shallow Water Studies and SW06 (LEAR)

Peter H. Dahl
Applied Physics Laboratory
College of Ocean and Fisheries Sciences
University of Washington
Seattle, Washington 98105
phone: (206) 543-2667 fax: (206) 543-6785 email: dahl@apl.washington.edu

Award Number: N00014-04-1-0111

LONG-TERM GOALS

To develop a basis for the Navy to make decisions on what environmental parameters to measure, to what spatial and temporal scale they should be measured, and how to best select frequencies for sonar design. Emphasis is on the mid- to high-frequency range defined as frequencies nominally between 1 and 20 kHz.

OBJECTIVES

The primary objective this year was to complete the initial analysis of the LEAR (Littoral Environmental Acoustics Research) experiment that was conducted in August 2006 in collaboration with Dajun Tang of APL-UW and other Shallow Water 06 (SW06) participants.

APPROACH

The main item of experimental instrumentation, the Moored Receiving Array (MORAY 1+) included a horizontal line array, in addition to its two vertical line arrays, and focus this year was on the initial data evaluation of measurements obtained with this system (Fig. 1). These measurements were obtained at precise stations (Fig. 2), that allowed for the sampling of acoustic propagation effects at different ranges and directions with respect to the MORAY 1+.

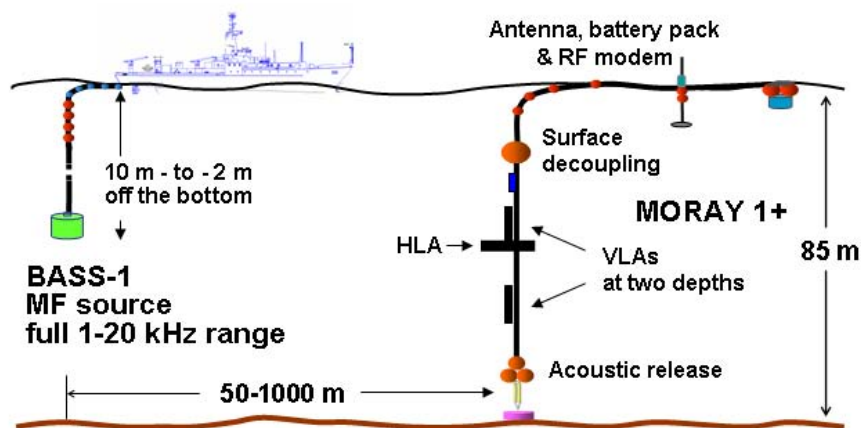


Figure 1. MORAY 1+ (Moored Receiving Array) and the BASS-1 source as deployed from the R/V Knorr during SW06.

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 30 SEP 2007		2. REPORT TYPE Annual		3. DATES COVERED 00-00-2007 to 00-00-2007	
4. TITLE AND SUBTITLE Mid-Frequency Shallow Water Studies And SW06 (LEAR)				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) University of Washington, College of Ocean and Fisheries Sciences, Seattle, WA, 98105				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES code 1 only					
14. ABSTRACT To develop a basis for the Navy to make decisions on what environmental parameters to measure, to what spatial and temporal scale they should be measured, and how to best select frequencies for sonar design. Emphasis is on the mid- to high-frequency range defined as frequencies nominally between 1 and 20 kHz.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 5	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

coherence, for which all ray paths (Fig. 5) are contributing. A model (solid line) for the data is developed based on the superposition of such paths.

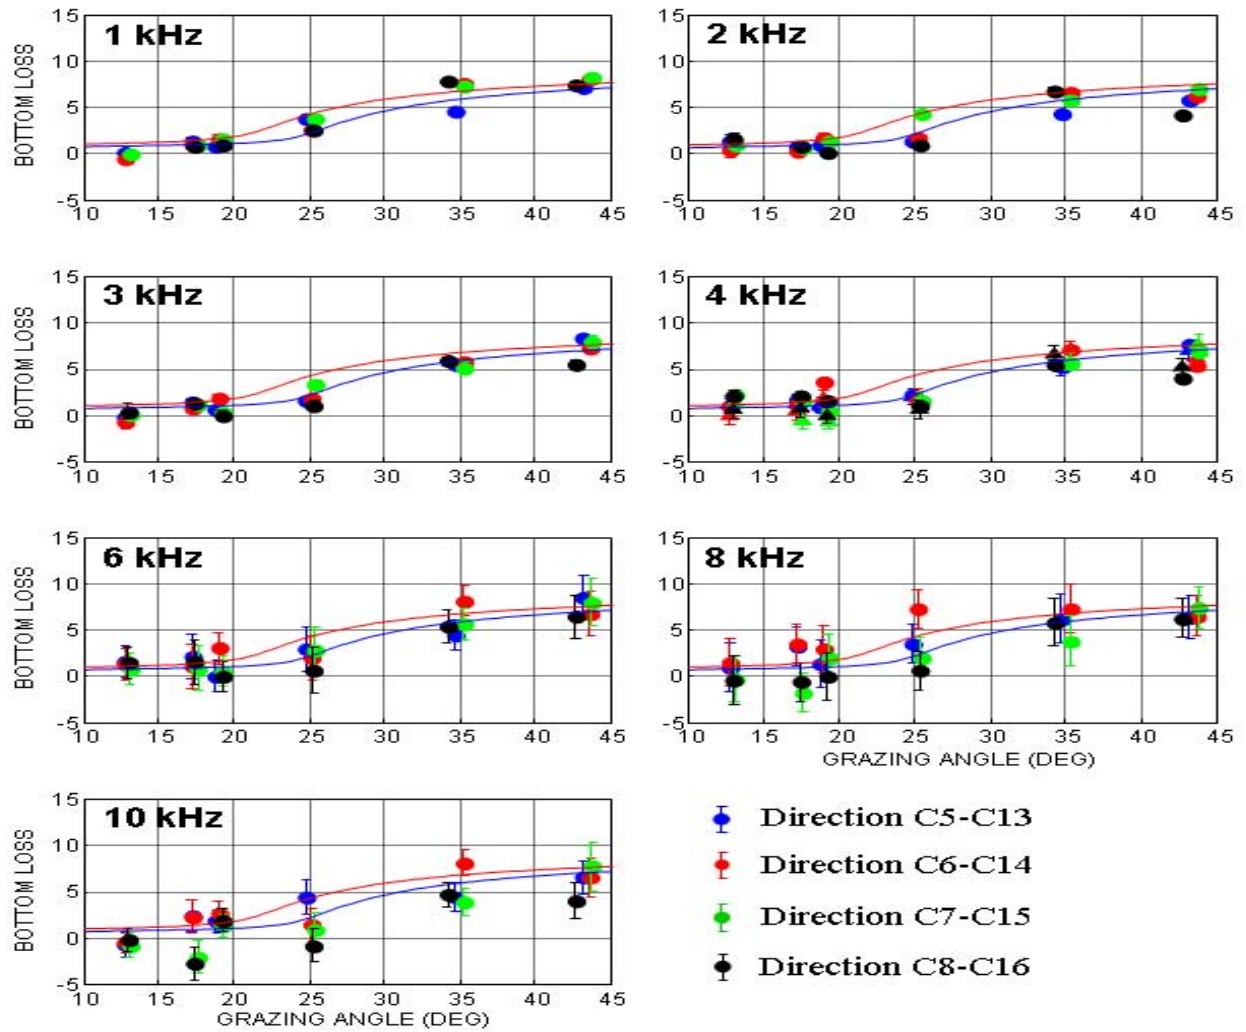


Figure 3. Estimates of bottom loss as a function of frequency, grazing angle, and direction. Directions refer to the station geometry as shown in Fig. 2. Red and blue curves represent two, preliminary models for the data.

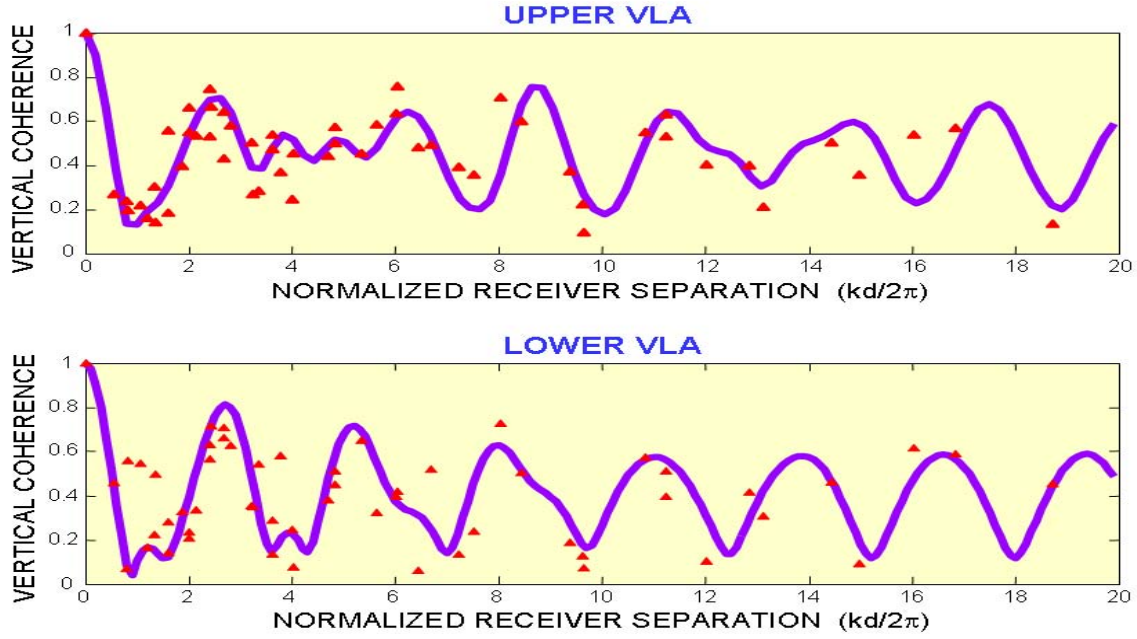


Figure 4. Vertical spatial coherence as measured on the upper and lower MORAY 1+ vertical line arrays (VLA). Red symbols represent data estimates plotted as function of normalized receiver separation, and solid lines represent a model of these data.

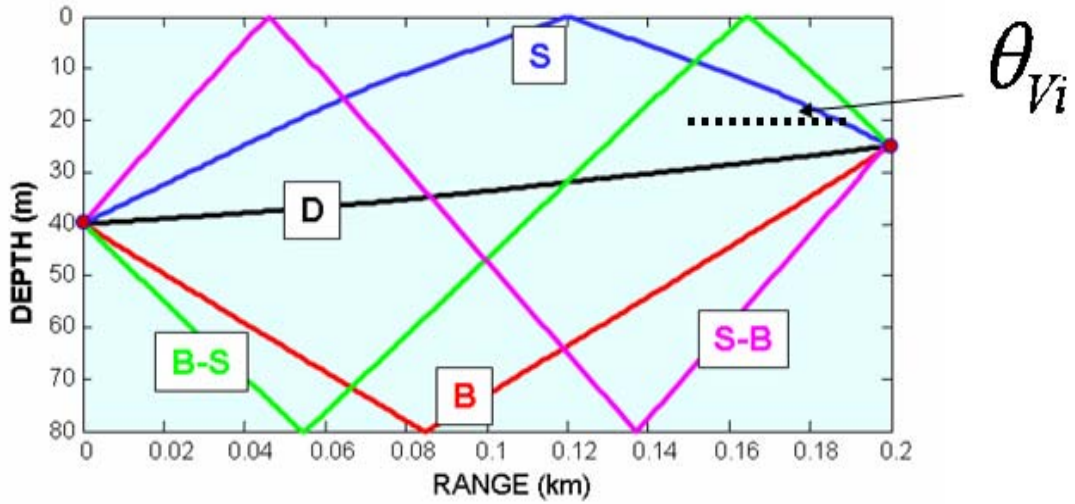


Figure 5. Ray diagram showing principal eigenrays between source and upper VLA. These eigenrays represent the direct path (D), surface bounce path (S), bottom bounce path (B), surface-bottom bounce paths (S-B), and bottom-surface bounce path (B-S). The vertical arrival angle of the surface path is identified.

IMPACT/APPLICATIONS

The SW06/LEAR data set, with its emphasis on simultaneous, co-located environment and acoustic measurements, will assist the Navy in making rational decisions on what environmental parameters to measure, to what spatial and temporal scale they should be measured, and how to best select frequencies for sonar design.

RELATED PROJECTS

This research is integrated together with those from several PIs involved in the SW06/LEAR program.

PUBLICATIONS

P. H. Dahl and J. W. Choi, “Spatial coherence of the Acoustic Field”, presented at the 152nd meeting of the Acoustical Society of America, Honolulu, HI, December 2006 (abstract)

P. H. Dahl, J. W. Choi and D. Dall’Osto “Properties of the non-propulsive ship noise field as measured from a research vessel holding station in the Yellow Sea and relation to sea bed parameters”, presented at the 1st Pacific Rim Underwater Acoustics meeting, Vancouver, B.C., September 2007.