

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 13 OCT 2010		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE Evaluation of Alternative Technologies to Measure Fuel Density			5a. CONTRACT NUMBER		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S) Joel Schmitgal; James Mainero			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) US Army RDECOM-TARDEC 6501 E 11 Mile Rd Warren, MI 48397-5000, USA			8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) US Army RDECOM-TARDEC 6501 E 11 Mile Rd Warren, MI 48397-5000, USA			10. SPONSOR/MONITOR'S ACRONYM(S) TACOM/TARDEC/RDECOM		
			11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES The original document contains color images.					
14. ABSTRACT The object of this effort was to evaluate portable technologies for measuring fuel density that can be utilized as an alternative to instrumentation required by ASTM D 1298.					
15. SUBJECT TERMS Density, API gravity, Fuel, JP-8, Diesel					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 11	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

INSTRUCTIONS FOR COMPLETING SF 298

1. REPORT DATE. Full publication date, including day, month, if available. Must cite at least the year and be Year 2000 compliant, e.g., 30-06-1998; xx-08-1998; xx-xx-1998.

2. REPORT TYPE. State the type of report, such as final, technical, interim, memorandum, master's thesis, progress, quarterly, research, special, group study, etc.

3. DATES COVERED. Indicate the time during which the work was performed and the report was written, e.g., Jun 1997 - Jun 1998; 1-10 Jun 1996; May - Nov 1998; Nov 1998.

4. TITLE. Enter title and subtitle with volume number and part number, if applicable. On classified documents, enter the title classification in parentheses.

5a. CONTRACT NUMBER. Enter all contract numbers as they appear in the report, e.g. F33615-86-C-5169.

5b. GRANT NUMBER. Enter all grant numbers as they appear in the report, e.g. 1F665702D1257.

5c. PROGRAM ELEMENT NUMBER. Enter all program element numbers as they appear in the report, e.g. AFOSR-82-1234.

5d. PROJECT NUMBER. Enter all project numbers as they appear in the report, e.g. 1F665702D1257; ILIR.

5e. TASK NUMBER. Enter all task numbers as they appear in the report, e.g. 05; RF0330201; T4112.

5f. WORK UNIT NUMBER. Enter all work unit numbers as they appear in the report, e.g. 001; AFAPL30480105.

6. AUTHOR(S). Enter name(s) of person(s) responsible for writing the report, performing the research, or credited with the content of the report. The form of entry is the last name, first name, middle initial, and additional qualifiers separated by commas, e.g. Smith, Richard, Jr.

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES). Self-explanatory.

8. PERFORMING ORGANIZATION REPORT NUMBER. Enter all unique alphanumeric report numbers assigned by the performing organization, e.g. BRL-1234; AFWL-TR-85-4017-Vol-21-PT-2.

9. SPONSORING/MONITORS AGENCY NAME(S) AND ADDRESS(ES). Enter the name and address of the organization(s) financially responsible for and monitoring the work.

10. SPONSOR/MONITOR'S ACRONYM(S). Enter, if available, e.g. BRL, ARDEC, NADC.

11. SPONSOR/MONITOR'S REPORT NUMBER(S). Enter report number as assigned by the sponsoring/ monitoring agency, if available, e.g. BRL-TR-829; -215.

12. DISTRIBUTION/AVAILABILITY STATEMENT. Use agency-mandated availability statements to indicate the public availability or distribution limitations of the report. If additional limitations/restrictions or special markings are indicated, follow agency authorization procedures, e.g. RD/FRD, PROPIN, ITAR, etc. Include copyright information.

13. SUPPLEMENTARY NOTES. Enter information not included elsewhere such as: prepared in cooperation with; translation of; report supersedes; old edition number, etc.

14. ABSTRACT. A brief (approximately 200 words) factual summary of the most significant information.

15. SUBJECT TERMS. Key words or phrases identifying major concepts in the report.

16. SECURITY CLASSIFICATION. Enter security classification in accordance with security classification regulations, e.g. U, C, S, etc. If this form contains classified information, stamp classification level on the top and bottom of this page.

17. LIMITATION OF ABSTRACT. This block must be completed to assign a distribution limitation to the abstract. Enter UU (Unclassified Unlimited) or SAR (Same as Report). An entry in this block is necessary if the abstract is to be limited.

Registration No.

21953



Evaluation of Alternative Technologies to Measure Fuel Density

Joel Schmitigal
James Mainero

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

October 2010

U.S. Army Tank Automotive Research,
Development, and Engineering Center
Detroit Arsenal
Warren, Michigan 48397-5000

UNCLASSIFIED

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

UNCLASSIFIED

UNCLASSIFIED

U.S. Army Tank Automotive Research Development and Engineering Center

Warren, Michigan 48397-5000

Evaluation of Alternative Technologies to Measure Fuel Density

Joel Schmitigal

James Mainero

Force Projection Technology

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Standard Form 298 (Rev. 8/98)

Prescribed by ANSI Std. Z39

UNCLASSIFIED

Contents

Contents	iv
List of Figures	v
List of Tables	v
1. Introduction	1
2. Approach	2
3. Analysis	2
3.1. Density Meter Analysis	2
3.2. Near-Infrared Property Prediction Evaluation	3
4. Conclusion	3
References	4

List of Figures

Figure 1. API Gravity as calculated by density meter vs. API gravity by ASTM D 1298.....	3
Figure 2. API gravity by Near-Infrared property prediction vs. API gravity by ASTM D 1298. ..	3

List of Tables

Table 1. Density and API gravity fuel classification limits.....	1
--	---

1. Introduction

Density generally increases with increasing molecular weight of the hydrocarbon molecules of fuel and therefore increases with the increasing number of carbons found in the compounds composing the fuel. The density of fuel, being a bulk property of a complex mixture, is the volume average of the densities of all the components that make up the fuel. Kerosene-type jet fuels are composed of a complex mixture of molecules with carbon number distributions between about 8 to 16 carbons while diesel fuels are composed of molecules with carbon distributions of between 10 and 22 carbon atoms each. Because density, commonly expressed as API gravity, changes with temperature, it is standard practice to convert the measurements to a standard temperature of 15°C or 60°F to be able to perform comparisons of the data.

FM 10-67-1 (1), Concepts and Equipment of Petroleum Operations, Appendix I describes a procedure for classifying fuel type by measuring the density of the fuel. Figure I-1 from FM 10-67-1 provides a graph of typical API gravity ranges for determining fuel type. The fuel densities summarized in Table 1 has been developed from Figure I-1 from FM 10-67-1 and specifications for fuels utilized by the Army. However, the overlap in the acceptable values for the densities of Diesel and Jet fuels prevents density from being the sole determining factor for fuel type identification.

	Density kg/L at 15 °C	API Gravity at 60 °F
Diesel 2 ¹	.8156 - .8762	30-42
JP-8 ²	0.775 - 0.840	37-51
JP-5 ³	0.788 - 0.845	36-48
Jet A and A1 ⁴	0.775 – 0.840	37-51

Table 1. Density and API gravity fuel classification limits.

Note: ¹ Diesel 2 limit derived from FM 10-67-1, ² JP-8 limit from MIL-DTL-83133E, ³ JP-5 limit from MIL-DTL-5624U, ⁴ Jet A and A1 limit from ASTM D 1655 – 06

In an effort to identify portable instrumentation with the ability to enhance performance or reduce lifecycle cost of Army petroleum quality surveillance and fuel handling equipment, the US Army's Tank Automotive Research, Development, and Engineering Center (TARDEC) identified several portable density meters and performed an evaluation of Anton Paar's DMA35N EX Petrol portable density meter. The Anton Paar DMA35N EX Petrol device was selected for evaluation due to its current use in theater (Iraq and Afghanistan) and the Aviation Fuel Contamination Test Kit (AFCTK) System Acquisition Manager (SAM) proposal to add it to new configurations of the AFCTK. The density meter's performance was also compared to the density property predictions of a Near Infrared Spectrometer (NIR), Bruker Optics's FuelEx spectrometer, that is being developed for used in the Petroleum Test Kit (PTK). For this reason a comparison of density data obtained from both instruments is provided.

2. Approach

The Anton Paar DMA35N EX Petrol portable density meter works on the Mass-Spring Model in which an oscillating U-tube is used to calculate the density of a fuel of interest. This technique derives the density of the fuel from an electronic measurement of the frequency of oscillation of a U tube filled with fuel (2). To evaluate the accuracy of the of the Anton Paar's DMA35N EX Petrol portable density meter 113 diesel and JP-8 fuels where tested sampled and the results compared to measurement data obtained ASTM D 1298 (3).

The Bruker Optics FuelEx Near Infrared spectrometer calculates the density of a sample by utilizing chemometric models developed with a library of fuels with known densities (4). To evaluate the accuracy of the NIR spectrometer measurements were taken on 113 Diesel and JP-8 fuels and compared against values obtained by testing the fuels against ASTM D 1298.

3. Analysis

3.1. Density Meter Analysis

The average difference in API gravity between the density meter reading and the ASTM D 1298 method for the fuels tested was 0.10 with a standard deviation of 0.18. The API gravity as calculated by the density meter plotted against the API gravity as measured by ASTM D 1298 is shown in Figure 1.

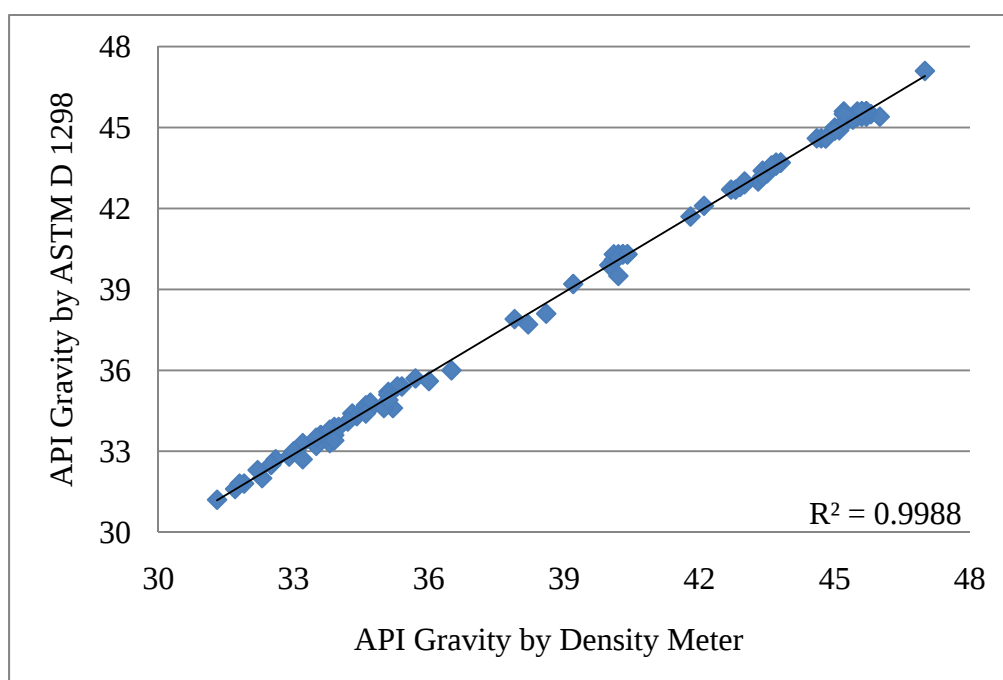


Figure 1. API Gravity as calculated by density meter vs. API gravity by ASTM D 1298.

3.2. Near-Infrared Property Prediction Evaluation

The predicted API gravity as calculated by the NIR spectrometer had an average difference in API gravity versus the ASTM D 1298 method of -0.11 and a standard deviation of 0.31. The predicted API gravity as calculated by the NIR spectrometer, of the 113 fuels, plotted against the API gravity as measured by ASTM D 1298 is shown in Figure 1.

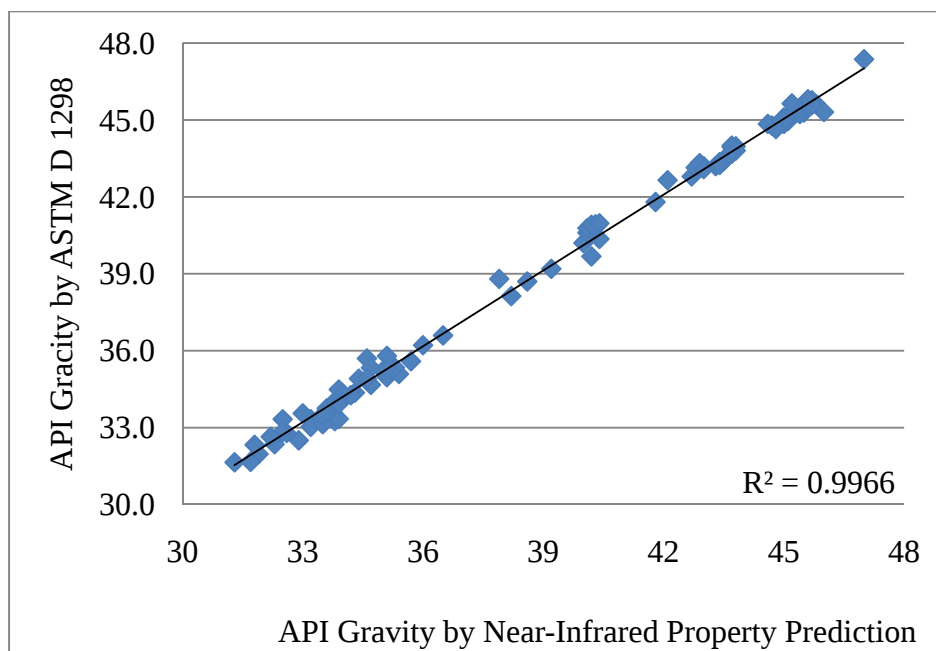


Figure 2. API gravity by Near-Infrared property prediction vs. API gravity by ASTM D 1298.

4. Conclusion

The Anton Paar DMA35N EX Petrol portable density meter and the Bruker Optics's FuelEx NIR spectrometer provided acceptable response to fuel densities in comparison to the density values obtained when utilizing ASTM D 1298. Both instruments are capable of providing a fuel density measurement that is accurate enough for the user to determine fuel type and track for fuel commingling, although it is recommended that density not be the sole factor in determining fuel type and quality.

References

1. **Department of the Army.** Concepts and Equipment of Petroleum Operations. Washington, DC : s.n., 1998. FM 10-67-1.
2. Oscillation type density meters - Part 1: Laboratory instruments. 1998. ISO 15212-1.
3. *Standard Test Method for Density, Relative Density (Specific.* West Conshohocken : American Society of Testing and Materials, 1999. ASTM D 1298-99.
4. **Schmitigal, Joel.** *Near-Infrared Spectroscopy and Chemometrics Instrumentation and Methodology for Field Evaluation of Diesel and Aviation Fuels by the U.S. Army.* Warren : TARDEC, 2010.