

16th ICCRTS

“Collective C2 in Multinational Civil-Military Operations”

“Modeling Operator Cognitive Capacity in Complex C2 Environments”

Title:

Evaluating Unmanned Systems’ Command and Control Technologies under Realistic Assumptions

Topic(s):

Modeling and Simulation, Collaboration, Shared Awareness and Decision Making, Information and Knowledge Exploitation

Name of Author(s):

Maria Olinda Rodas, Christian X. Szatkowski and Mark C. Veronda

Point of Contact:

Maria Olinda Rodas

Name of Organization: Space and Naval Warfare (SPAWAR) System Center (SSC) Pacific

Complete Address and/or Telephone: SPAWAR SSC Pacific, 53560 Hull Street, San Diego CA 92152-5001

E-mail Address: maria.rodas@navy.mil

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE JUN 2011		2. REPORT TYPE		3. DATES COVERED 00-00-2011 to 00-00-2011	
4. TITLE AND SUBTITLE Evaluating Unmanned Systems' Command and Control Technologies under Realistic Assumptions				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Space and Naval Warfare (SPAWAR) System Center (SSC) Pacific,53560 Hull Street,San Diego,CA,92152-5001				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES Presented at the 16th International Command and Control Research and Technology Symposium (ICCRTS 2011), Qu?c City, Qu?c, Canada, June 21-23, 2011.					
14. ABSTRACT The Department of Defense's future vision for Network Centric Operations (NCO) will increase combat power by networking relevant entities across the battlefield. This will result in highly complex mission scenarios in which the operator's workload will be easily overloaded if the system is not designed to support the mission requirements. New technologies for these complex command and control environments are currently being developed. However, little has been done to evaluate the adequacy of a particular technology for specific sets of mission requirements. There is neither a standard methodology to evaluate these new technologies, nor a research environment to test these technologies under realistic assumptions. This paper will introduce a new approach to evaluate these technologies and determine whether they can transition into practical applications for the Navy, and under which limitations.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 32	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

ABSTRACT

The Department of Defense's future vision for Network Centric Operations (NCO) will increase combat power by networking relevant entities across the battlefield. This will result in highly complex mission scenarios in which the operator's workload will be easily overloaded if the system is not designed to support the mission requirements. New technologies for these complex command and control environments are currently being developed. However, little has been done to evaluate the adequacy of a particular technology for specific sets of mission requirements. There is neither a standard methodology to evaluate these new technologies, nor a research environment to test these technologies under realistic assumptions. This paper will introduce a new approach to evaluate these technologies and determine whether they can transition into practical applications for the Navy, and under which limitations.

I. INTRODUCTION

The Department of Defense's future vision for Network Centric Operations (NCO) is intended to increase combat control by networking relevant entities across a battlefield [1]. This new vision implies large amounts of information sharing and collaboration across different entities. An example of a futuristic NCO scenario is one in which a group of heterogeneous Unmanned Vehicles (UVs) are supervised by a single operator using NCO technology. In this type of complex command and control (C2) scenario, UV operators will be subjected to vast amounts of information as compared to today's command and control scenarios. Therefore, this vision brings with it a new problem that must be addressed: How to maintain an adequate workload to avoid information overload and resulting loss of situation awareness. Currently, C2 technologies that allow the operator to control multiple UVs in a NCO scenario are rapidly increasing. The development of these new C2 technologies generates the tendency to exponentially increase the ratio of UVs to operators. However, if systems are inadequately designed or are used beyond their design capabilities, they will not adequately control for increased workload, which in turn will cause the operator to become overloaded and lose situation awareness. It is critical that military decision makers develop predictive models of human and system performance to evaluate the adequacy of a system's design to satisfy specific mission requirements.

II. BACKGROUND

Mental workload is a limiting factor in deciding how many UVs an operator can control or supervise. In the case of one operator supervising multiple vehicles, the operator's workload is measured by the effort required to supervise each vehicle and the overall task. The effort required to supervise an individual UV in a team depends on the efficiency of the system to reduce workload and increase situation awareness. Moreover, workload also depends on the complexity of the mission scenario. Some of the characteristics of a complex mission scenario as defined by military standards include: mission time constraints, precision constraints, repeatability in tasks (i.e., navigation, manipulations, etc.), level of collaboration required, concurrence and synchronization of events and behaviors, resource management (i.e., power, bandwidth, ammunition), rules of engagement, adversaries, and knowledge requirements [2]. The degree to which these characteristics are required also define workload. Consequently, if the system is not designed to achieve specific types of requirements, then when it is tested for those requirements the system may not perform them adequately.

Previous attempts to model operator capacity were developed to display temporal constraints associated with the system. The complexity of these measures progressed from measuring operator capacity in homogenous UVs controlled by one operator [3-7], to scenarios in which teams of heterogeneous UVs are supervised by one operator [8]. The first equation developed to predict operator capacity in homogenous UVs suggested that the operator capacity is a function of the Neglect Time (NT), or the time the UV operates independently, and Interaction Time (IT), or the time the operator is busy interacting, monitoring, and making decisions with the system [3]. Critics of this method suggested that the equation lacked two critical considerations: 1) the importance of including Wait Times (WTs) caused by human-vehicle interaction, and 2) how to link this equation to measure effective performance [6]. Hence, WTs were added to the equation to account for the times the UV has to perform in a degraded state because the operator is not able to attend to it or is not aware of a new incoming event. Three WTs were identified: Wait Times due to Interaction (WTI), Wait Times due to Loss of Situation Awareness (WTSA), and Wait Times due to Queue (WTQ).

Carl Nehme from the Massachusetts Institute of Technology (MIT) developed the Multiple Unmanned Vehicles Discrete Event Simulation (MUV-DES). He attempted to create a link to performance by using proxies to measure workload and situation awareness [8]. In this model, the researcher intended to model heterogeneity in UV systems in order to evaluate the system's design. The human was modeled as a server attending to vehicle-generated tasks – both exogenous and endogenous tasks – as defined by their arrival and service processes. The concept of utilization was introduced as a proxy for measuring mental workload. Utilization Time (UT) refers to the percentage of time the operator is busy. The concept of WTSA was used as a proxy to measure Situation Awareness. The UT and WTSA measures were computed as a type of aggregate effect of inefficiencies in information processing rather than being computed as individual measures of workload and situation awareness. The author of this model suggested that many other sources of cognitive inefficiencies, besides these two proxies, are manifested through cognitive delays. He emphasized that measures of UT and WTSA are extremely critical to determine supervisory performance and suggested that better methodologies to measure these variables need to be developed.

III. PROJECT GOALS

This study aims to develop a model of operator capacity in a complex mission scenario that converges all previous research in the area to create a more comprehensive model of operator capacity. This comprehensive model is intended to fill in the gaps of current research by introducing new variables and relationships to previous models. The model will be constructed in a way so prior knowledge about the relationship between variables will serve to better predict missing data, such as workload and situation awareness. Moreover, the model will be structured in a way that

will make it easy to determine which areas in the system design need improvement. The ultimate goal of this study is to develop a decision-making tool that will serve to evaluate and determine the effectiveness and limitations of a particular NCO technology in a complex mission scenario.

IV. METHODOLOGY

A. Approach

The approach taken by this research study was to model the decision-making process required to decide whether to increase a particular team size. This approach was taken in order to present decision makers with a decision-support tool that will ensure that knowledgeable decisions are made in regards to the adequacy of a given team size with a particular NCO technology. Modeling the decision-making process, as opposed to the environment, allows for more knowledgeable decisions because not only are the most important factors in the decision taken into account, but optimization of the recommended decision's outcome is also possible. This approach provides adequate information to the user to make a decision. And while the model is based on answering this particular question, the nature of the situation is manifested in the model, thus allowing users to draw more conclusions than only the adequacy of the team size.

B. The Model

i. Model Overview

A decision network was developed to model the decision-making process required to decide whether to increase a given team size with the selected NCO technology. Netica Software [9] was used to develop a Bayesian decision network that incorporates quantitative and qualitative information about the model. This software was chosen mainly because it can accommodate missing or incomplete data. Using Netica allows researchers to compute unobservable variables (i.e., missing data) based on measures that are observed (i.e., prior knowledge).

A decision network consists of nature, decision, and utility nodes. Nature nodes represent variables over which the decision maker has no control. Decision nodes represent variables over which the decision maker can make a decision (see blue nodes in Fig. 1). Utility nodes represent a measure of value, or the decision maker's preferences for the states of the variables in the model (see pink nodes in Fig. 1). In this type of network, the outcome of a decision node is maximized by finding a configuration of the various states of the sets of variables that maximize the values of the utility node. Therefore, based on a series of requirements, or utility values, a decision network provides the user with the correct decision. Additionally, the arrows in the model represent reasoning relationships and are detailed in the conditional probability tables

(CPTs) of the nature and utility nodes. In the CPT, the distribution of each node will be determined *a priori* based on the relationships specified in each conditional probability table.

ii. Model Assumptions

This model makes several assumptions. First, the type of UV system addressed by this model is one in which a single human operator is responsible for supervising a team of heterogeneous UVs. The human operator is assumed to act in a supervisory control style, interacting with the system at discrete points in time (i.e., there is no manual control). Second, in this model, the human operator is responsible for supervising a team of heterogeneous UVs defending an oil platform from potential enemies. Third, the human operator could be situated in a ground-based, sea-based, or airborne control station. Fourth, the model was built in a way such that decision makers will use this model to help them decide if a particular technology is adequate for specific mission requirements. Finally, the model assumes that the decision making process required to make this decision is hierarchical; therefore, later decisions are based on earlier ones. The model captures attributes from the Operator Performance Model, the System Performance Model, and the Operator Capacity Model as shown in Figure 1.

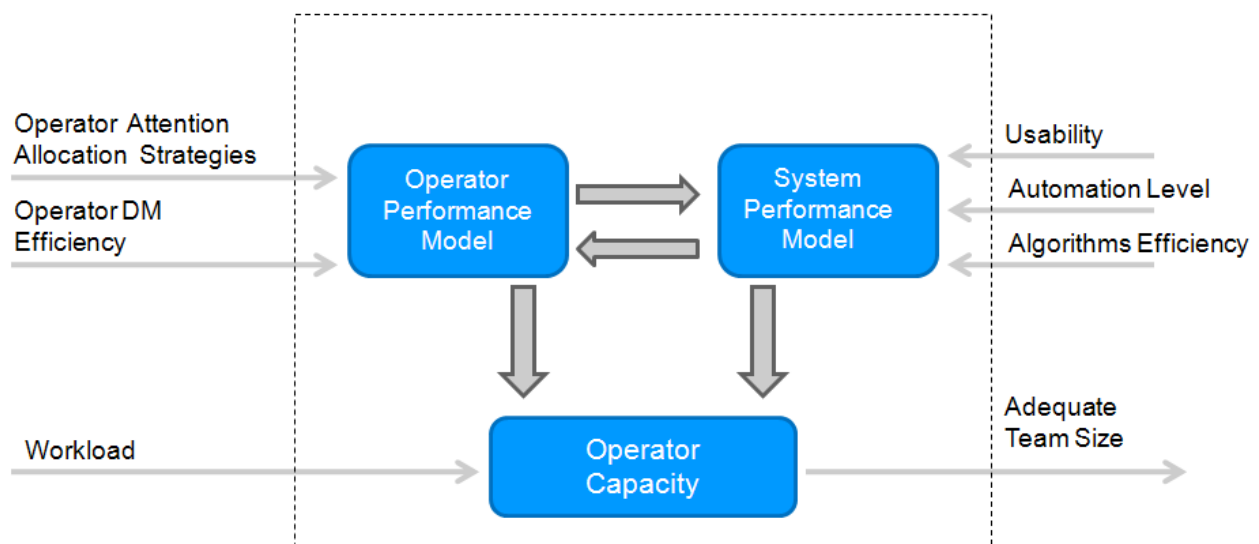


Fig. 1. A high level representation on the attributes the model captures. Notice that variables of interest in Operator Performance Model are Operator Attention Allocation Strategies and Operator Decision Making Efficiency, while in the System Performance model are Usability, Automation Level and Algorithm Efficiency. The output of the operator capacity model is to determine an adequate team size.

iii. Model Description

The model is based on three major areas of relevance for the decision to increase the team size: system performance, operator performance, and cognitive workload (See Fig. 2). These areas of relevance are represented in the model as sub-models; each of them contains one or more decision nodes that correspond to the decisions that must be made by the operator in each area to ensure that they are working adequately. The order in which the decision nodes have been organized represents the way in which decisions should be made (see blue nodes on Fig. 1). The model represents a sequence of decisions in which later decisions depend on the results of earlier ones. In this model, the last decision is shown at the end of the sequence. The last decision determines whether the team size should be increased.

The first sub-model, system performance, includes three decision nodes with the followings decisions: 1) Is the interface effective? 2) Does the system have an adequate level of automation? 3) Are the system algorithms efficient for the task? These three decisions were included in this sub-model because they represent areas that are important to ensure good system performance. Some of the utility nodes for each of these decision nodes were identified from the literature, while some others were included to ensure that specific mission requirements are satisfied. For example, if the system has good interface usability, the situation awareness of the operator will be high. Moreover, if the situation awareness is high, the system's automation level must be somehow effective to avoid loss of situation awareness and/or complacency. Then, to ensure that the mission requirements are satisfied, the algorithms used must be working efficiently toward achieving the mission goal. This efficiency is measured by the number of times the operator reassigns a mission that was previously assigned by the system, with a lower number signaling higher efficiency. Note that algorithm efficiency is defined in this model only as a result of the operator's perceived trustworthiness of the system. If the system is not perceived as trustworthy, then the operator will tend to override the system frequently and the algorithm efficiency will be low.

The second sub-model, operator performance, needs to ensure that the operator performs effectively with the system being evaluated, as more UVs are introduced to the team, and the mission scenario becomes more complex. Since this is a supervisory control environment, operator performance is defined in terms of the operator's decision making. There are two decisions (decision nodes) that are important to evaluate whether the operator's performance is adequate for the task: 1) Is the operator's task management strategy efficient? 2) Is the operator's decision making efficient? The first decision is necessary to evaluate whether operators will efficiently prioritize different tasks that arrive simultaneously. The second decision is necessary to evaluate whether the operator will successfully achieve the goals of the mission (i.e., protecting the asset from enemy attack). Together these two decisions summarize what is important to

ensure a satisfactory operator performance. Please note that by measuring task management efficiency, an attention inefficiency component is included in this model.

Finally, the last sub-model, cognitive workload, includes the final decision node: “Increase Team?” For this decision, it is important to ensure that operators are not overloaded, but instead their workload is adequate to successfully complete the mission scenario. This final decision node is the end of a sequence of decisions and therefore it depends on the outcomes of the previous decisions made in the system performance and operator performance sub-models. Hence, in order to avoid cognitive overload, not only does the system have to efficiently perform in the mission scenario, but the operator also has to perform efficiently to ensure that tasks are adequately managed and do not overload the operator. The cognitive workload and operator performance sub-models are strongly associated. If cognitive workload is too high, then the operator performance will be low. Therefore, the more inadequate management and tactical decisions operators make, the higher their workload will be.

System performance, operator performance, and cognitive workload are the foundation of this model. Most of the knowledge about the model relationships between variables was acquired from a literature review. Variables such as “Information Overload” and “System Interruption” were included to emphasize the need to evaluate these aspects of the usability of the system (see Fig. 2) in complex supervisory control tasks. These variables are relevant because they contribute to design interfaces, especially in the supervisory control environment in which large amounts of information, and large event queues can result in information overload and frequent system interruptions.

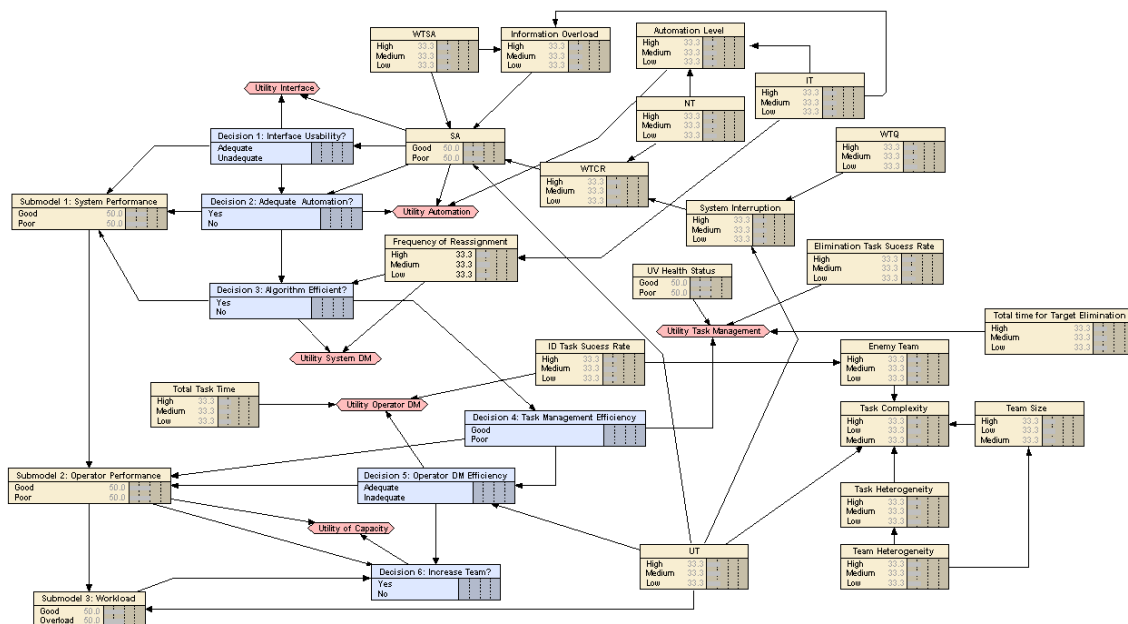


Fig. 2. Decision network representing the decision process involved in deciding whether to increase a particular team size. Notice that this picture displays the model with no data. When data are introduced into the model, the system provides the user with a recommended course of action that will be displayed as a percentage (i.e., Yes 90%).

iv. Model Measures

The model allows for measurement of several output variables. These variables include those implemented in the MUV-DES model, as well as specific user-defined metrics that the model allows to capture. Temporal measures such as UT and WT are used because they are critical in a system where the operator has limited attention resources that must be divided across multiple tasks. UT is used to capture the effects of alternate design variables on operator workload. Some researchers indicate that average UT and WT can allow for benchmarking and comparison to be made across applications [8, 10]. The level of autonomy in the model is captured through the NT. In addition to the basic metrics inherently captured by the MUV-DES model, this model also captures mission-specific metrics. Some of the mission-specific metrics include the rate at which tasks are successfully completed, the UVs' health status and the total time to complete the mission scenario. Furthermore, other measures being captured by the model include Information Overload, System Interruption, and Reassignment Rate. These three measures are important to evaluate the system performance. Information Overload and System Interruption are shown to be related to SA; therefore, they are used to help determine Situation Awareness (SA). For example, when the operator is overloaded with information, he/she is not able to focus on what is important, therefore vital SA is lost. Moreover, when the system is constantly interrupting the operator at any point in time, it drives the operator's attention away from one task to focus on another, therefore affecting their SA. The system's Frequency of Reassignment measure is used to evaluate the number of times the operator overrides the system. Identifying the amount of times the system has been overridden will help us determine how trustworthy the system is for the operator. The underlying assumption is that the more the operator overrides the system, the less reliable the algorithm for the system is. For a list of the performance measures used in the model, see Figure 3.

Performance Measures	MUV-DES	Others
Wait Times due To Situation Awareness(WTSA)	x	
Wait Times due to Queue (WTQ)	x	
Wait Times due to Cognitive Reorientation (WTCR)	x	
Interaction Times (IT)	x	
Neglected Times (NT)	x	
Utilization Times (UT)	x	
Total Task Time	x	
Information Overload		x
System Interruption		x
Target Elimination Task- Success Rate		x
Identification Task-Success Rate		x
Frequency of Reassignment		x
UV Health Status		x

Fig. 3. Performance measures used in the model. Notice table divides measures that are being used from the MUV-DES model and other measures that were developed specifically for this model.

C. Model Validation and Data Collection

i. Experimental Apparatus

Since there is no test bed available that portrays all the complexities of a futuristic mission scenario, the Research Environment for Supervisory Control of Heterogeneous Unmanned Vehicles (RESCHU) developed by MIT was acquired and later modified to be used as a test bed in this study. The RESCHU simulator [8] is a test bed that allows operators to supervise a team of Unmanned Aerial Vehicles (UAVs) and Unmanned Underwater Vehicles (UUVs) while conducting surveillance and identification tasks. This simulation was modified for this study to include the following requirements: 1) a complex mission scenario with an asset to protect and multiple simultaneous enemies to attack, 2) a highly automated system such as mission definition language (MDL) and 3) a highly heterogeneous team that is made of at least three different types of UVs. The new version of the simulation is called RESCHU SP.

It is important to mention that the Unmanned System technology selected as an example of a NCO's technology that allows one operator to supervise multiple UVs is the Collaborative Sensing Language (CSL) developed at the University of California, Berkeley. The CSL [11] is a high-level feedback control language for mobile sensor networks of UAVs. This system allows an operator to concentrate on high-level decisions, while the system takes care of low-level decisions, like choosing which UV to send for a particular type of task. A framework for the CSL was designed to integrate this technology into the complex mission scenario portrayed by the RESCHU SP simulator. The CSL version displayed in this simulation is only intended to illustrate one way to portray how this technology may work in more complex mission scenarios and with supervisory control of heterogeneous UVs (See Fig. 4).

ii. Vehicle Types and Functions

The team of UVs in the RESCHU SP simulator is composed of UAVs, UUVs, and Unmanned Surface Vehicles (USVs). There are two types of UAV, the MALE UAV and the HALE UAV; both travel to areas of interest to detect potential enemies. When a UAV detects a potential enemy, a USV is sent to the detection area to identify the vehicle (i.e., the unidentified vehicles appear as dark yellow numbered icons in map). Engaging the video payload that arrives at a detection area requires the operator to decide whether the vehicle detected is a potential enemy. If an enemy is identified, a UUV travels to the location to target the enemy. UUVs are slower than USVs and UAVs. UAVs are the fastest UVs.

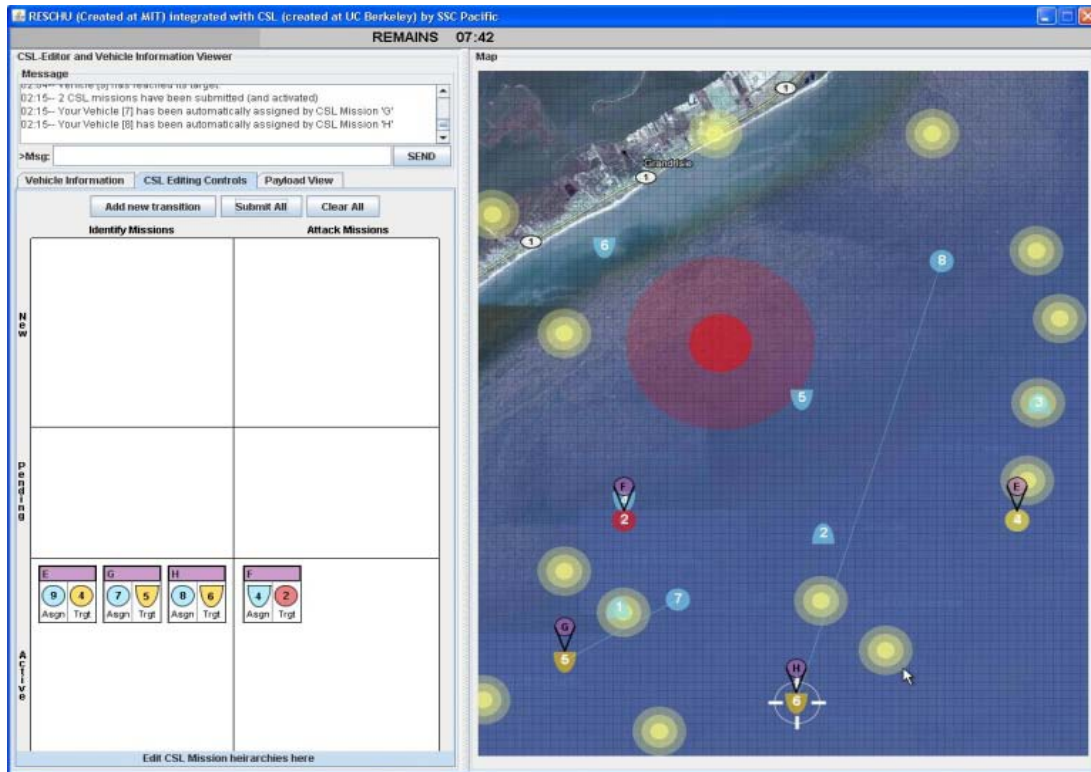


Fig. 4. RESCHU SP simulator displays a mission scenario with a team size of nine UVs (blue numbered icons on the map), three potential enemies (dark yellow numbered icons on the map), and one identified enemy (red numbered icon on the map). Notice that the big red circle is the asset to be protected (an oil platform, while the big yellow circles are threat areas that the UVs should avoid). The CSL tab shows how the technology handles missions. In the *Active* section of the tab, identify and attack missions that are currently active are displayed (i.e., box E displays that a mission to identify potential enemy 4 was assigned to USV 9).

iii. Operator Tasks

The operator's main task is to identify and target potential enemies while protecting an asset (i.e., oil platform). At the same time, the operator is responsible for supervising the path of the UVs, in order to avoid traveling through potential threat areas (bright yellow areas on the map). Threat areas are zones that operators should avoid in order to protect the health of their vehicles. Moreover, operators are also responsible for following chat messages which provide them with the necessary Intelligence and guidance to complete their missions.

When a UAV detects a potential enemy, a visual flashing alert is issued to warn the operator. This alert indicates that the operator should command the CSL system to assign a UV to complete the task. The operator commands the CSL to complete the task through a right-click interaction. The CSL system chooses a UV that is appropriate for the task and one that is also in close proximity to the potential target. The operator is in charge of approving the CSL selection by submitting the task through the *Submit All* button in the *CSL Editing Controls* tab. In the case of multiple identification tasks submitted to the CSL at the same time, the operator's task is to approve the CSL selection, and if applicable, determine the order in which the tasks should be conducted.

For example, in a situation in which there is only one UV available for the task, the operator has to determine the order in which tasks should be conducted to ensure a good mission performance. Once the order of tasks has been determined, the operator needs to submit the commands so that the CSL can complete the tasks. Once that a task has been submitted, a selected UV is sent to location, when it arrives, a visual flashing alert warns the operator that the video payload is ready to engage. Then, the operator engages the video payload through a right-click interaction. The detected vehicle is viewed through the video image displayed in the *Payload View* tab to determine whether the detection is identified as the enemy. The operator identifies the vehicle by clicking on the Yes or No button below the payload view. A supervisor will inform the operator via chat whether the identification is correct or not. If the operator correctly identifies the vehicle as an enemy, the vehicle icon on the map becomes red. If the operator incorrectly identifies a detected vehicle as the enemy, the supervisor will override the operator; therefore, the icon will not change to red. The next step for the operator is to inform the CSL that a vehicle should be assigned to complete the target mission. Once again, the CSL system chooses a UV and sends it to the target location. When on target, a visual flashing alert is issued to inform the operator that the UV is ready to engage. The operator confirms this through a right-click interaction, and the target is eliminated. In this way, the operator is responsible to identify all detections and eliminate all enemies in order to protect the asset.

iv. Participants and Experimental Procedure

Experiments are being conducted using the RESCHU SP test bed in order to provide data for model validation. The experiment was designed to generate a large data set suitable for model validation. The recruited participants are students from the Naval Postgraduate School (NPS). The online test bed includes: a background and exit survey, an interactive tutorial, a practice trial, and one of a set of possible experimental conditions.

The objective of conducting the first experiment was to validate the model. First, it is desired to have performance data associated with the different levels of team size, in order to build confidence in the model's accuracy at replicating human-UV-interaction under different conditions. Second, having team size as the independent variable, the model's ability to replicate statistically significant effects on the operator performance and/or mission performance could be evaluated. Finally, having data sets associated with the different levels of team size allows for predictive validation by selecting a single data set associated with one of the conditions and predicting the results observed for a second condition.

In order to ensure the validity of the variables and relationships represented in the model, the decision network was converted into a Bayesian Belief Network (BBN) to run validation analysis. The software's Test with Cases Analysis is used to validate the

network. The analysis examines if the predictions in the network match the actual cases. The goal of the test is to divide the nodes of the network into two types of nodes: observed and unobserved. The observed nodes are the nodes read from the case file, and their values are used to predict the unobserved nodes by using Bayesian belief updating. The test compares the predicted values for the unobserved nodes with the actual observed values in the case file and the successes and failures are then recorded. The report produced by this analysis has different measures that validate each node's predicted capabilities. After evaluating the validity of the model, we can determine which relationships are incorrect and we can make the network learn those relationships through the collected cases. Finally, we can run sensitivity analysis and predictive validation analysis to determine which variable has the biggest effect on team size and how each variable affects the overall result of the model.

The study design is a between-subject design with three conditions: high team size, medium team size, and low team size. The high team size condition is composed of 9 UVs: 3 UAVs, 3 USVs and 3 UUVs. The medium team size condition is composed of 7 UVs: 3 UAVs, 2 USVs and 2 UUVs. Finally, the low team size condition is composed of 5 UVs: 3 UAVs, 1 USV and 1 UUV. Notice that the UAV's number was kept constant through the different conditions because the UAVs produce little interaction with the operator (i.e., UAVs only patrol for detection and operators only have to supervise their flight path to avoid flying into threat areas). The number of USVs and UUVs was gradually incremented to investigate how they affect the performance measures and therefore the model outcome. Furthermore, the baseline of a team of 5 UVs was decided after pilot testing the simulation with different team sizes.

The experimental test bed was designed for a web-based delivery, with an interactive tutorial and practice trial. A web-based experimentation was chosen in order to obtain as much data as possible. The website was Common Access Card (CAC) protected and participation was via invitation. Data collected from the simulation is currently being recorded to an online database. Demographic information is collected via a background survey presented before the tutorial. Participants are being instructed to maximize their overall performance by: 1) avoiding threat areas that dynamically changed and therefore minimizing damage to the UVs, 2) correctly identifying enemies, 3) targeting enemies before they reach the asset, 4) overriding the system when necessary to minimize vehicle travel times and maximize mission performance, and 5) eliminating potential enemies as soon as possible. Participants have to go through the consent form and background survey before they can start the interactive tutorial. The estimated time to read through the consent form and complete the background survey is 10 minutes. Next, participants are allowed to go through the interactive tutorial and practice trial until they feel comfortable with the task and the interface. The estimated time to complete these two sessions is about 25 minutes. Once they are comfortable, participants can move to the test session, which lasts 10 minutes. After completing the

test session, participants are required to fill out an exit survey that last about 5 minutes. Participants are allowed to see their test score at the end of the test session.

v. Experimental Results

Experiments are currently being conducted at NPS, it is expected that the data collection will last until the end of May 2011.

ACKNOWLEDGEMENT

The authors wish to acknowledge the support of Dr. Mary Cummings (MIT) and Dr. Luca Bertuccelli (MIT) for providing guidance on the RESCHU code, Dr. Karl Hedrick (UC Berkeley) and Dr. Raja Sengupta (UC Berkeley) for providing guidance on the functionality of the CSL, Mr. John Falby (NPS) for recruiting participants for the pilot test, and Dr. Douglas Lange (SSC Pacific) for being a great mentor and helping us through the process.

REFERENCES

- [1] Department of Defense, "Network Centric Warfare: Department of Defense Report to Congress," Office of the Secretary of Defense, Washington, DC, 2001.
- [2] H.M. Huang, K. Pavsek, B. Novak, J. Albus, and E. Messina, "A Framework for Autonomy Levels for Unmanned Systems (ALFUS)," presented at *Proceedings of the AUUSI's Unmanned Systems North America*, pp. 849–863, Baltimore, MD, USA, 2005.
- [3] D.R. Olsen, Jr., and S.B. Woods. "Fan-Out Measuring Human Control of Multiple Robots", *CHI*, vol. 6 (1), pp. 231-238, 2004.
- [4] M.L. Cummings and P.J. Mitchell. "Predicting Controller Capacity in Supervisory Control of Multiple UAVs," *IEEE Systems, Man and Cybernetics, Part A System and Humans*, vol. 11(2), pp. 451-460, 2008.
- [5] J.W. Crandall and M.L. Cummings. "Identifying Predictive Metrics for Supervisory Control of Multiple Robots," *IEEE Transactions on Robotics – Special Issue on Human-Robot Interaction*, vol. 23(5), pp. 942-951, 2007.
- [6] M.L. Cummings, C.E. Nehme and J.W. Crandall. "Predicting Operator Capacity for Supervisory Control of Multiple UAV," *Innovations in Intelligent Machines*, vol. 70, Studies in Computational Intelligence J.S. Chahl, L.C. Jain, A. Mizutani, and M. Sato-Ilic, Eds., 2007.
- [7] J.W. Crandall and M.L. Cummings. "Developing Performance Metrics for the Supervisory Control of Multiple Robots," presented at *Proceedings of the 2nd Annual Conference on Human-Robot Interaction*, Washington, DC, 2007.
- [8] C.E. Nehme. "Modeling Human Supervisory Control in Heterogeneous Unmanned Vehicle Systems," Ph.D. Thesis, MIT Dept. of Aeronautics and Astronautics, Cambridge, MA, 2009.
- [9] Netica Software. Netica Bayesian Belief Network. Norsys Software Corporation (www.norsys.com). Vancouver, BC, Canada.
- [10] P.E. Pina, B. Donmez, M.L. Cummings. *Selective Metrics to Evaluate Human Supervisory Control Applications*. Technical Report HAL 2008-04, Massachusetts Institute of Technology, May 2008.
- [11] J. Love, J. Jariyasunant, E. Pereira, M. Zennaro, K. Hedrick, C. Kirsch and R. Sengupta. "CSL: A Language to Specify and Re-Specify Mobile Sensor Network Behavior," *15th IEEE Real-Time and Embedded Technology and Applications Symposium*, San Francisco, CA, April 2009.



Evaluating Unmanned Systems' Command and Control Technologies under Realistic Assumptions


Olinda Rodas, Christian Szatkowski and Marc Veronda
SPAWAR Systems Center Pacific
16th ICCRTS
Quebec City, Canada

The Future of Unmanned Systems


- ❖ The Department of Defense's future vision for Network Centric Operations (NCO) is intended to increase combat control by networking relevant entities across the battlefield [1].
 - ✓ In a future NCO scenario, one operator is going to supervise a team of heterogeneous Unmanned Vehicles (UVs) to work together towards a specific task.

C2 Transition

Today:
Manually control of one UV

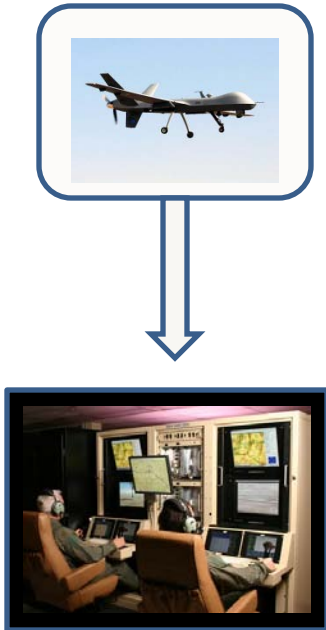


Future:
Supervisory control of a team of heterogeneous UVs

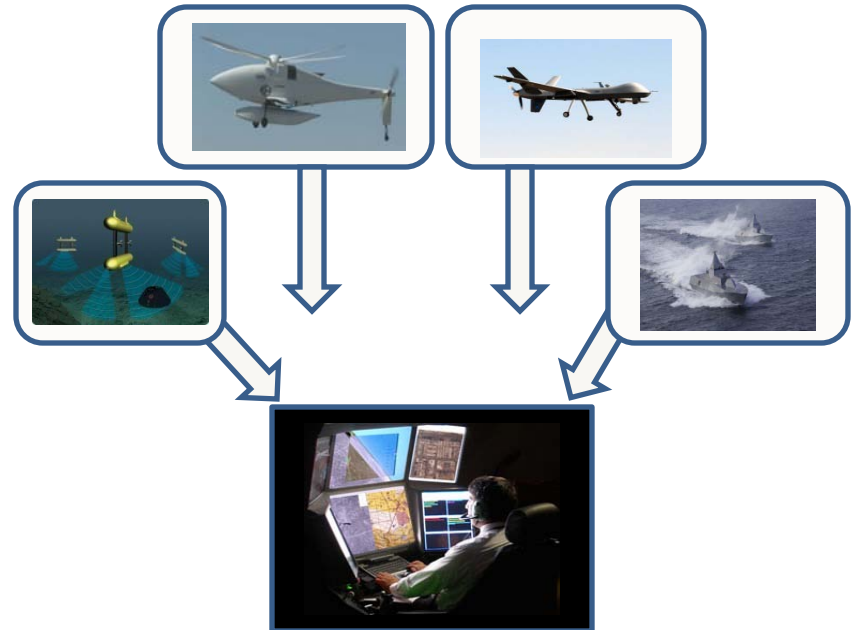


Workload Sources

Current C2 Workload

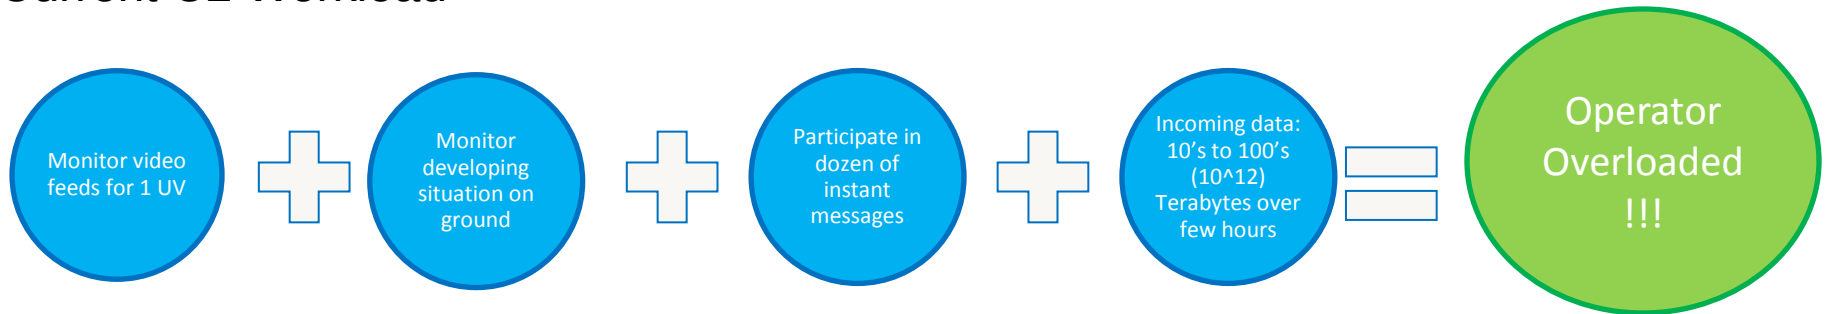

Future C2 Workload

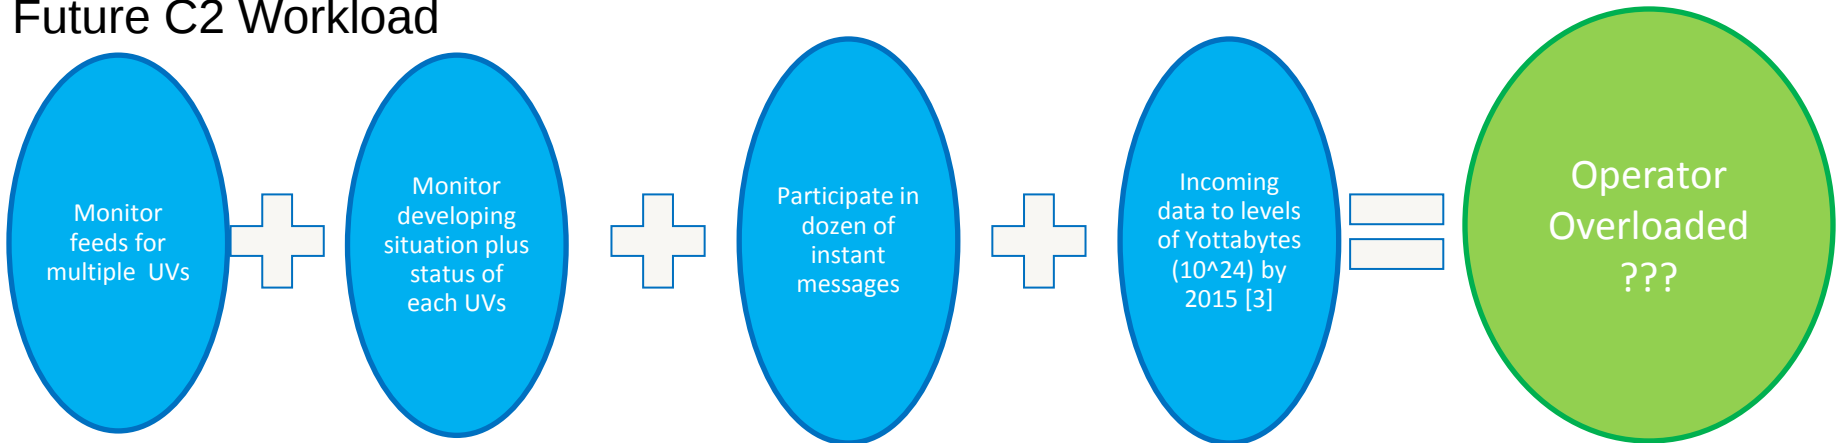

Design Challenges

- ❖ Information overload
- ❖ Attention allocation
- ❖ Task switching and interruption
- ❖ Trust and effectiveness of the system to match mission requirements

Motivation

- ❖ To successfully develop Unmanned System's technology for NCO scenarios the following is required:
 - ✓ Rigorous mathematical methods and tools for predicting the behavior of newly developed C2 technologies and the operator under realistic assumptions.
 - ✓ Field testing approaches to identify potential problems and prove the capabilities and robustness of the new technologies.

Questions of Interest

1. With the current overloaded state of the information of most C2 technologies, how can we ensure an adequate ratio of UVs to an operator in NCO scenarios?
2. Are new C2 technologies being developed for NCO scenarios truly reducing information overload and increasing operator performance for a given set of mission requirements?


Research Goals

- ❖ Develop a decision-making tool that will serve to help decision makers:
 - ✓ Select an adequate C2 technology for a complex mission scenario.
 - ✓ Determine the limitations of the C2 technology in terms of mission requirements (i.e., team size, performance level).
 - ✓ Determine areas that require improved designs in order to modify them and increase operator performance.
 - ✓ Develop a better understanding of what enables operator capacity in this type of mission scenario.

Research Approach

- ❖ A decision-making tool was developed using a Decision Network (DN).
 - ✓ DN uses decision theory, which is a close cousin of probability theory, to:
 - Specify the desirability of various outcomes and the cost of various actions that may be performed to affect the outcome.
 - Find an action or plan that maximizes the expected utility minus the cost.

Modeling Operator Capacity

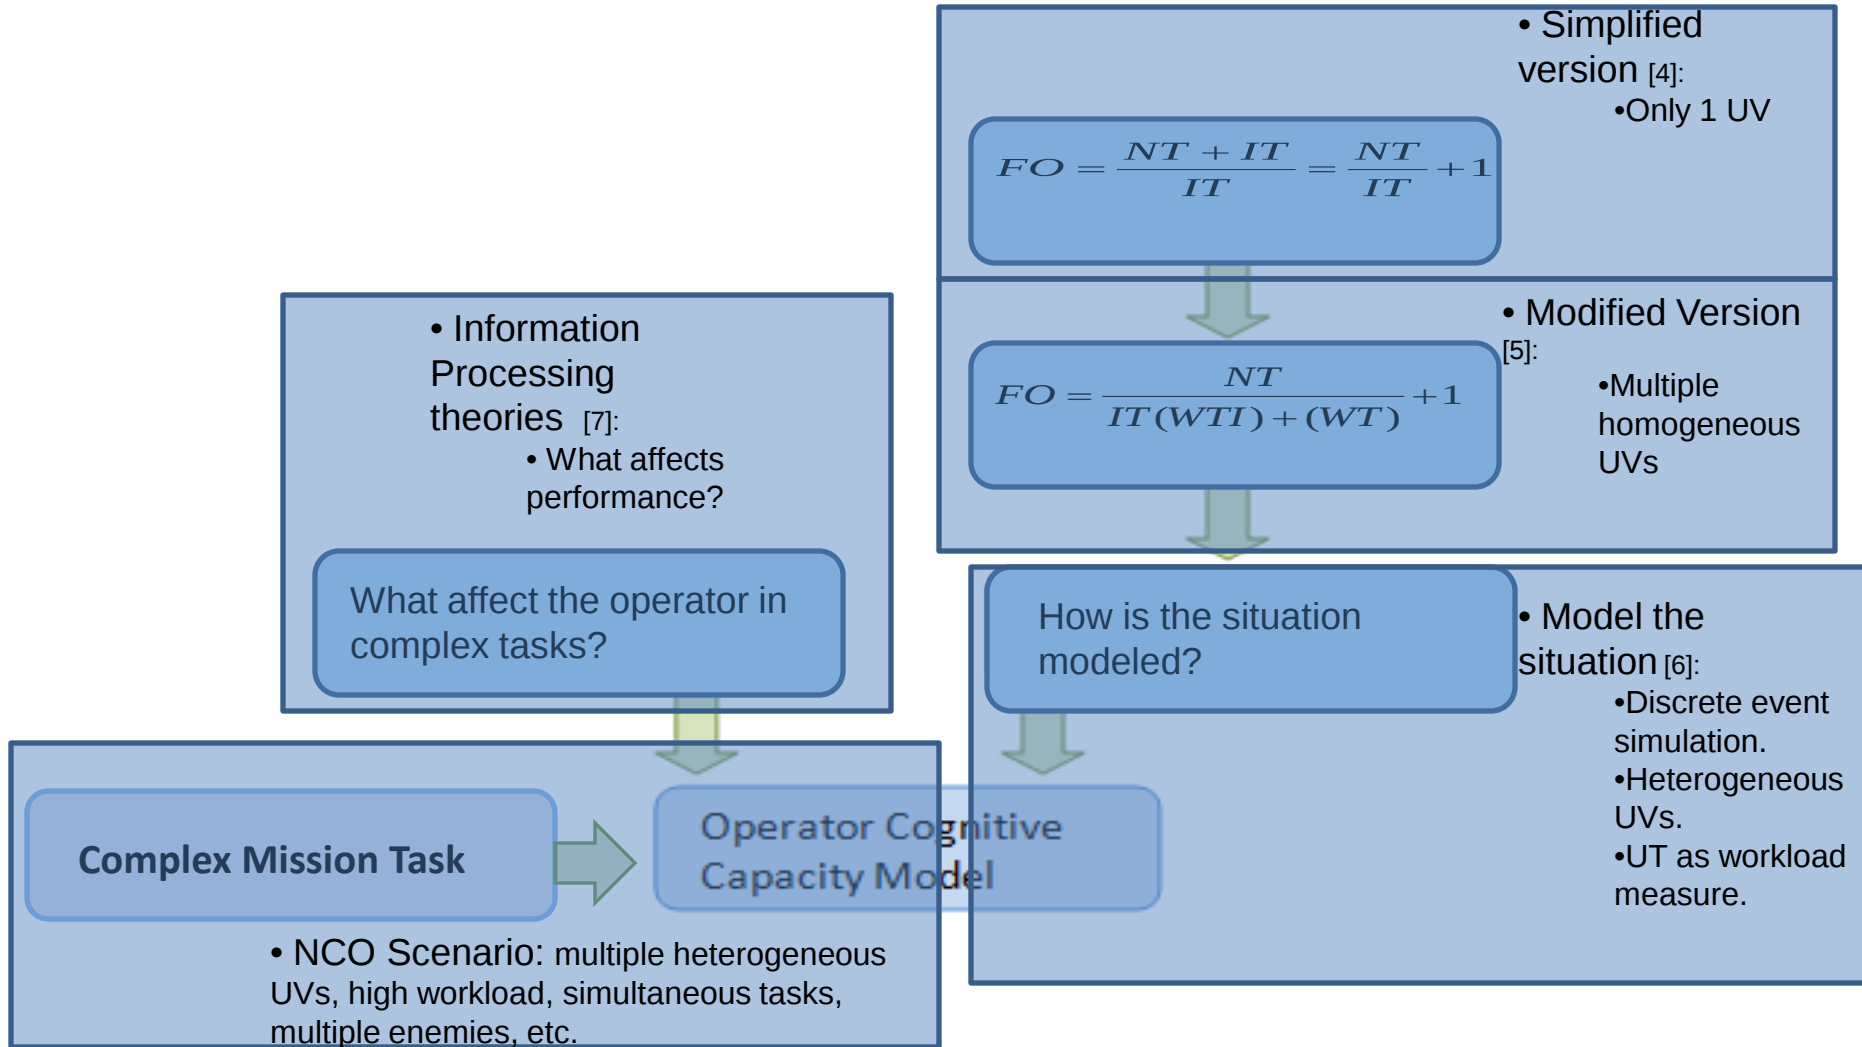


Model Details


Sequence of DM Process

Input: Observable Measures

Output: Unobservable

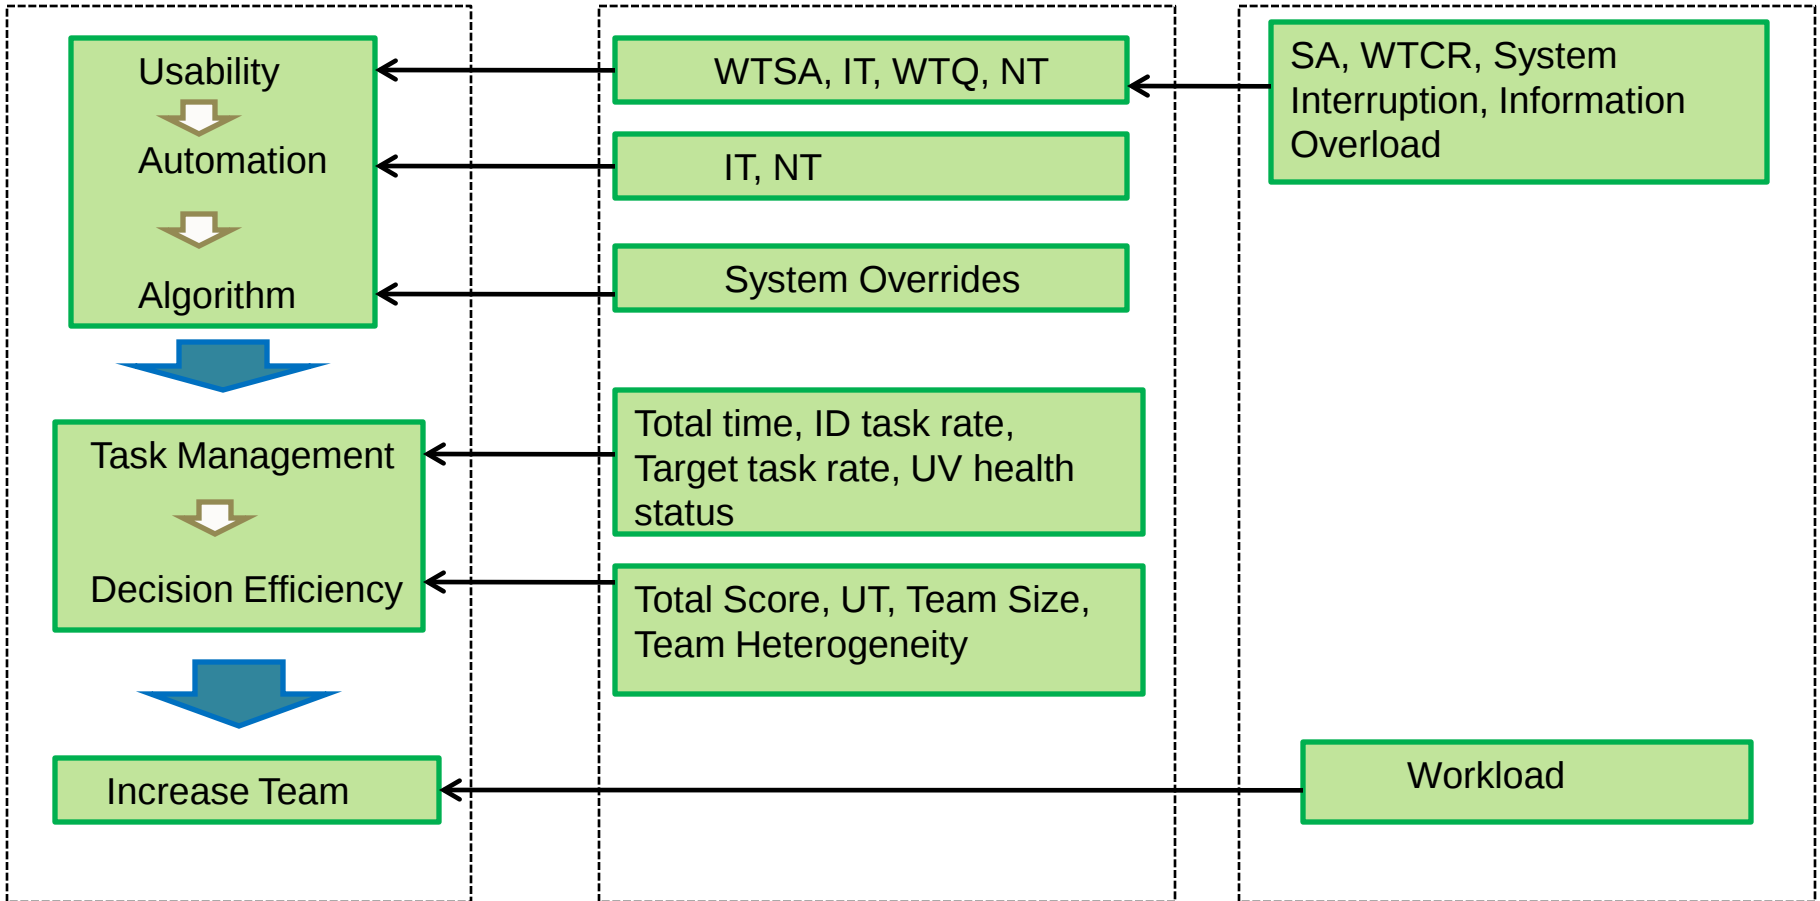

Experimental Methodology

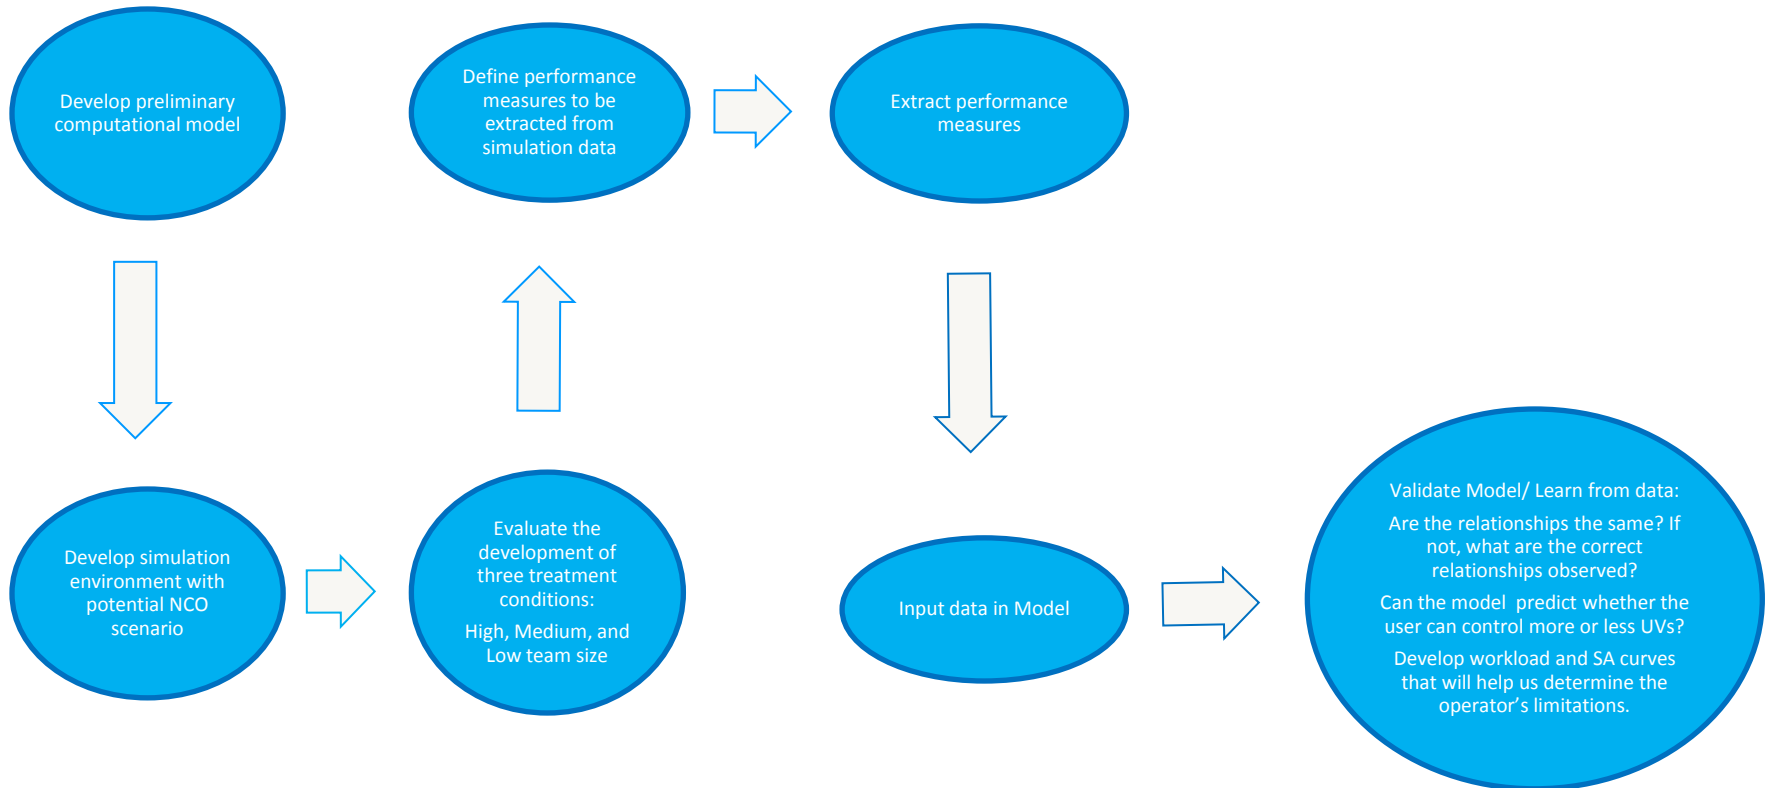

Experimental Trials

- ❖ Experimental trials are currently being conducted online at Naval Postgraduate School (NPS).
 - ✓ The online trial includes: a background and exit survey, a tutorial, a trial game, and one of a set of possible experimental conditions.
- ❖ The study design will be a between subjects with three conditions:
 - ✓ High team size (9 UVs), medium team size (7 UVs), and low team size (5 UVs).

Research Implications

- ❖ Better understanding of operator cognitive capacity in complex UV mission scenarios.
- ❖ Development of specific C2 design requirements for complex UV environments.
- ❖ Definition of the performance measures for this type of complex mission scenario.

Future Research

- ❖ Model Validation Phase 2:
 - ✓ Validate the model with a different NCO technology.
 - ✓ Incorporate workload and SA curves into the model to strength prediction.
 - ✓ Start working on a decision tool package that will include model and program to extract input from any simulation.
- ❖ Investigate the development of a warning tool based on our decision net.

Questions?



References

- [1] Department of Defense, “Network Centric Warfare: Department of Defense Report to Congress,” Office of the Secretary of Defense, Washington, DC, 2001.
- [2] Shanker, T. & Richtel, M. (2011). In New Military, Data Overload Can be Deadly. The New York Times. Retrieved from <http://www.nytimes.com/2011/01/17/technology/17brain.html?pagewanted=1&r=1&emc=eta1>.
- [3] Jason. The Mitre Corporation (2008). Data Challenges. JSR-08-142. Retrieved from <http://www.fas.org/irp/agency/dod/jason/data.pdf>.
- [4] Olsen, D.R. & Goodrich, M.A. (2003). Metric for Evaluating Human Robot Interactions. In Proc. NIST Performance Metrics for Intelligent Systems Workshop.
- [5] Crandall, J.W. & Cummings, M.L. (2007). Developing Performance Metrics for the Supervisory Control of Multiple Robots. Human Robot Interaction Conference, Arlington, VA..
- [6] Nehme, C.E. (2009). Modeling Human Supervisory Control in Heterogeneous Unmanned Vehicle Systems. Ph. D. Thesis, MIT Dept. of Aeronautics and Astronautics, Cambridge, MA. Retrieved on February 4, 2010 from MIT website at http://web.mit.edu/aeroastro/labs/halab/papers/Carl_Nehme_Thesis.pdf
- [7] Speier, C., Valacich, J.S. & Vessey, I. (1999). The Influence of Task Interruptions on Individual Decision Making: An Information Overload Perspective. Decision Sciences, 30(2): 337-360.