

**2011 NDIA GROUND VEHICLE SYSTEMS ENGINEERING AND TECHNOLOGY
SYMPOSIUM
MODELING & SIMULATION, TESTING AND VALIDATION (MSTV) MINI-SYMPOSIUM
AUGUST 9-11 DEARBORN, MICHIGAN**

UNCLASSIFIED, DISTRIBUTION A. APPROVED FOR PUBLIC RELEASE

Modeling and Simulation of High Power Battery Cells – Ensuring Safe, Reliable Power for the Warfighter in Various Applications

**David Carmen
Michael Marcel PhD
Les Alexander**
Government Solutions Group
A123 Systems Inc.
Livonia, MI

ABSTRACT

Building battery packs for various, significantly different applications, is often complex and risky. Detailed cell and pack modeling and simulation tools, along with existing and predicted power and energy profiles significantly reduce the risk of designing and integrating a new pack for new applications on the battlefield. This paper will discuss a number of modeling and simulation techniques, using case studies as examples, that ensure a battery pack, when integrated to the application, will meet the predicted performance goals and specifications. Actual data will also be shown to validate these techniques that significantly reduce development time and risk when providing power to the Warfighter.

INTRODUCTION

The systems operating on today's battlefield are becoming significantly more complex and power hungry. These include high power radios and force trackers, high energy weapons, IED defeat systems as well as unmanned ground and air systems. These systems typically not only require a significant amount of energy to ensure long operating times, but also require the battery to provide short duration, high power. Often, their usage profiles are complex, but predictable. Because these systems are becoming more prevalent on the battlefield, increased modeling and simulation capabilities must be leveraged to ensure a safe, reliable product will be delivered to the Warfighter with a quick development time.

A123 Systems has developed several high power battery configurations built around its Nanophosphate™ cell chemistry. Cells using this chemistry show excellent power density and improved abuse tolerance. A123 has multiple variants of this technology in various cell formats to include cylindrical and prismatic. These devices are the building blocks of bigger systems and due to multitude of applications in which they operate, a significant amount of performance data exists and allows for prediction of performance in future systems.

Prior to and during a battery pack build, there are a number of ways modeling and simulation can be utilized to reduce the design risks to reduce reworks and redesigns which are

often costly and time consuming. The techniques that will be discussed in this paper that are commonly used are solid modeling, drive cycle modeling and Thermal modeling. These are key performance drivers for typical battery packs and integrating these techniques will result in a better end product.

WHY MODELING AND SIMULATION

Increased computer processing power and more sophisticated modeling and simulation tools have allowed engineers to predict the behavior and performance of systems well before they are built. This provides a number of significant advantages to the engineering design process because it reduces the risk of integrating large, complex systems. Without modeling and simulation, a piece of a complex system, when integrated, may not perform as anticipated which will require rework to the piece, as well as rework to portions of the system. If this is done with multiple sub-systems, this can make the engineering process extremely costly and time consuming.

Often, when building a system, there is a significant amount of time placed on the preliminary design. This would include a requirements analysis and preliminary analysis to determine that the system meets the requirements. As the system progresses to Detailed or Critical design, a number of the subsystems details are finalized and the subsystems are built. Often, this build

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 10 AUG 2011		2. REPORT TYPE Journal Article		3. DATES COVERED 11-08-2011 to 11-08-2011	
4. TITLE AND SUBTITLE MODELING AND SIMULATION OF HIGH POWER BATTERY CELLS - ENSURING SAFE, RELIABLE POWER FOR THE WARFIGHTER IN VARIOUS APPLICATIONS				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Elise Libby; David Carmen; Michael Marcel; Les Alexander				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Government Solutions Group,A123 Systems Inc. ,Livonia ,MI,48152				8. PERFORMING ORGANIZATION REPORT NUMBER #22032	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army TARDEC, 6501 E.11 Mile Rd, Warren, MI, 48397-5000				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) #22032	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT NA					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 6	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

process takes some time, which allows, as time permits, a significant amount of modeling and simulation to be performed that can be integrated into the design, should potential problems areas be identified.

Modeling and simulation techniques can be used throughout the design process. During preliminary design, Modeling and Simulation can be used at a very high level to validate some of the analysis that is being done to the system. Examples of this may include the sizing of a DC/DC converter, used in conjunction with a battery, to tightly regulate a voltage. A top-level simulation can be performed to validate such things as proposed switching frequencies, inductor values (which often drive the physical size of these types of designs), and PWM duty cycles.

During detailed design, the modeling and simulation techniques can be taken a step further to include actual parts (often you can enter the device parameters or obtain a model from the manufacturer), the control loop (with parameters such as PID values, etc.) and other details. This model will allow you to validate any hand calculations/analysis that predicts how tightly a voltage is regulated and how it performs under load.

After detailed design and during the build of the DC/DC converter, the M&S techniques can be used to validate the hand calculated tuning parameters of the system. A detailed thermal model can also be integrated to predict any potential hot spots in the design that may not have been considered during the top level analysis. Further, “destructive” performance can be performed, using the simulation to predict safety prior to the system being built. Using M&S techniques to predict performance during a failure allows for reduced risk to life and hardware when tested on the real system. This may include a short circuit test, over-current or ground fault. Performing these tests in simulation during the pack build will not only give confidence and predicted performance when the system is actually tested, but may reduce the amount of hardware that could potentially be damaged during the test, which often results in costly reworks and time to repair systems instead of testing them.

MODELING AND SIMULATION TECHNIQUES USED FOR HIGH ENERGY/HIGH POWER PACKS

Top Level Analysis

Modeling and simulation techniques are extremely powerful, but to be used effectively, need to be performed hand in hand with a detailed analysis. Performing M&S without a method to validate the results (at various levels) is often only minimally effective. For instance, if a battery pack is being designed, M&S of a cell or Module would be an effective tool for predicting performance of a pack. The first step of the process would be to model the cell or module properties, then validate this model by actually testing the cell or the module and comparing it to the

simulated data. A close correlation between the simulated data and simulated data would be extremely effective in modeling and simulating the pack.

There are a number of ways of modeling and simulating battery packs to effectively predict their performance. The techniques that are often common to battery packs include mechanical drafting/solid modeling (to predict how the pack will mechanically integrate to the system), Cycle Simulation testing (to predict performance of the system under a “realistic” use cycle) and Prediction of thermal heating (to identify “hot spots” or potential thermal issues for the battery and associated electronics). These M&S techniques will be discussed in further detail below.

Mechanical Drafting/Solid Modeling

In most applications, the user has a fixed space or area in which to include the battery system. Often, the user has a drawing or “space claim” for the system which is often not just a square or rectangular box. Sometimes this is for “replacement” batteries, often this is for a “new design” where there is a space allocation (sometimes given with dimensions, sometimes given with volume). Usually, the first (and most important) question is “How much power and/or energy can you fit in this given space”. In these applications, a Wh/kg or Wh/L number (which is known for various products) can predict from a very high level what can accommodate the space.

Often Mechanical Drafting/Solid Modeling would be included in the preliminary design of a battery pack, or as a method of determining the feasibility of a solution “fitting” in a certain application. A123 has a detailed library of its common and non-common cell structures, modules and core electronics devices (Battery Monitoring Hardware, Contactors, Current sensors, interlocks, connectors). Often, an engineer can pull from this library quickly and “concept” a pack based on the electrical analysis of numbers of cells, modules, etc.

After analyzing the electrical requirements, the amount and type of hardware can be identified and packaging concepts can be made. This needs to include connectors (and clearance for mates), cooling interface (including clearance for connecting to it), access to interlocks, Cells/modules, integration clearance (how much “wiggle room” is available for integrating the pack), mounting features and Electronics. Given a good solid model of the application (for instance the space claim in the vehicle), a detailed solid model of the pack can be built (that includes all of the hardware) and determined if there are any potential integration issues when combining the solid model of the pack with the solid model of the system. This often facilitates coordination between the integration teams before and during the process so that these issues are not identified when trying to integrate the fabricated pack. Making

modifications to a pack after it is made is significantly more time consuming and costly than the solid modeling/integration.

This M&S technique is extremely useful and is common practice in industry. A few things that are often overlooked during this process include wiring and wire routing (to include bend radius, etc.), backshells/connector details and mounting features. Depending on the level of complexity of the solution, these factors may or may not be significant.

Battery Performance using cycle information

Most applications that require batteries understand how and under what conditions that battery is going to be used. For instance, in a vehicle start battery application, the battery may serve a couple of purposes. If it is merely used for SLI (Starting, lighting and ignition), the ability to provide short bursts of power (for starting) may be the main purpose of the battery. In this application, depth of discharge (DOD) cycles may not be as important as the ability to store energy for long periods and provide significant power when needed. If the battery is used for a significant amount of silent watch, then the requirements of the battery significantly change. Not only does it need to provide the power and energy, now the ability to provide lots of cycles is important. Often this usage can be generalized (using worst case conditions) by creating a “usage cycle” that includes starting events and cycling events. Simulation tools such as VPSET can allow the user to build vehicle models and subject the model to real world applications using data that has been already validated by TARDEC.

Once a “usage cycle” is determined, it is often agreed upon by the manufacturer and user. This usage cycle can be run in simulation (using validated cell and module data) to predict cycle life and performance. Performance parameters may include Voltage limits, current limits, how well the pack performs over time, cell temperatures, pack temperatures and amount of cooling required. This usage cycle can be run in short simulations (to predict performance during starting) or run repeatedly (to determine pack capacity, predicted run times and life).

The simulated data can identify potential weaknesses of the pack prior to build and as a way to reduce risk in the way of performance and safety. In most applications, the usage cycles that were simulated can be incorporated into a battery cycler (such as an ABC-150) that can subject the pack to the same cycle as was simulated to validate this pack and future packs with similar characteristics.

Prediction of Thermal heating

Thermal management is a significant parameter for battery packs from a performance and safety standpoint. At higher temperatures, the battery cycle life typically degrades, and at low temperatures, the performance typically suffers. From a

safety standpoint, over-charging, over-discharging or fault conditions (short circuit, etc.) are typically more catastrophic at higher ambient temperatures.

Most packs include some form of thermal management system. This could include conduction cooling, convection cooling or active cooling methods such as forced air or circulating coolant in a cold plate. These devices not only regulate the temperature of the cooling interface, but are an extremely important asset to ensure the proper ambient temperature is maintained.

There are a number of simulation packages that can be used to model thermal performance. The software not only can identify “hot spots” in the pack, but can also predict the ambient temperatures and the effectiveness of the cooling. Because battery performance and safety is very significant, it is essential predict the temperatures in which the cells are going to operate. Like the other simulation techniques, it is often very costly and time consuming to try to integrate more or less cooling ability after the pack is built. By thoroughly performing M&S of the thermal system during PDR, CDR and pack build, it significantly reduces the risk upon integration.

CASE STUDIES FOR MODELING AND SIMULATION OF HIGH ENERGY/HIGH POWER BATTERY PACKS

UAV Application

Figure 1 shows a concept of an Unmanned Aerial vehicle pack drawn using PRO-E [1] CAD Package. This application had a specific space claim (and weight) that were critical to the UAV application. During the initial stages of the design process, it was important to determine whether enough power and energy can be stored given the stringent volume and weight requirements of the application.

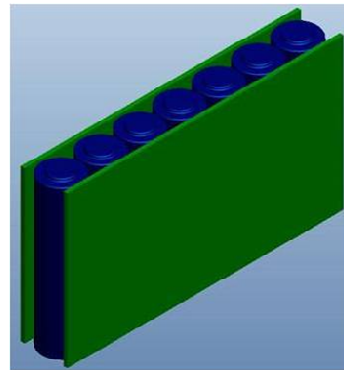


Figure 1. A123 Potential Unmanned Aerial Vehicle Pack.

This example shows that a “crude” solid model can be extremely beneficial when trying to determine whether or not a solution can meet identified needs of the system. This model only includes cells and two “squares” that represent

High Power Pack

Top Level Analysis/Requirements

The next case study involved a high power pack. For high power battery packs, the thermal management system is crucial to ensure the pack is operated within its safe operating area. This analysis started with the determination of which cell to use given the user's requirements. The cell selected for this pack was A123 Systems' AHR18700 Ultra cell. The cell, with an 18 mm diameter, and 70 mm length, is capable of providing up to 200 amps of current. The cell boasts an extremely high specific power, and is capable of operation at 100°C. Figure 4 shows the power capability of this cell.

Upon selection of the cell, a solid model was built to ensure it met the volume and weight requirements from the customer. The solid model is shown in Figure 5. The pack is capable of storage at -60° F (-51° C) to +160°F (+71° C) and operation at -37°C to 60°C (-35°F to 140°F). The detailed pack requirements are shown in Table 1.

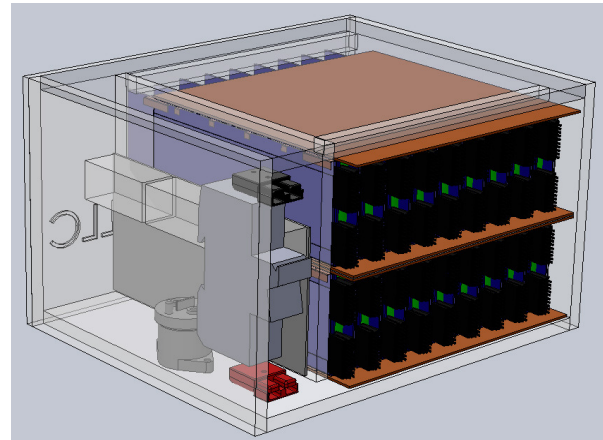


Figure 5. A123 High Power Pack for Directed Energy Applications.

Table 1. High Power pack requirements.

Nominal Voltage	600 V
Nominal Capacity	0.7 Ah
Module Dimensions (W x L x H)	12 x 10 x 7.1
Module Weight	15 kg
Operating Temperature	0 to +60°C
Storage Temperature	-30 to +60°C

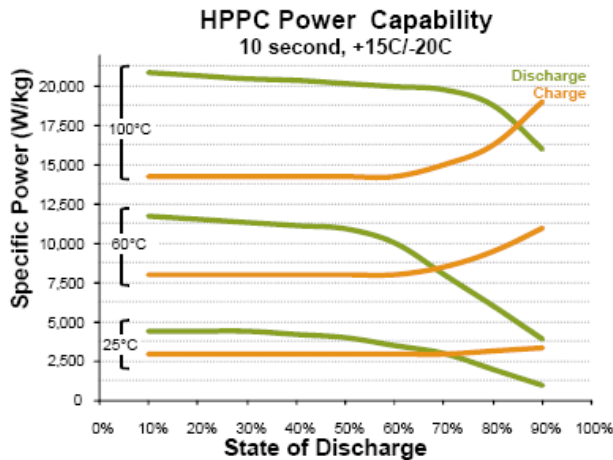


Figure 4. Specific Capacity Capability of the 18700 Cell

Load Profile/Performance Modeling

The high power pack was designed to provide up to 40 kW of power with a nominal voltage of 600 Vdc. The pack will be subjected to an aggressive load profile that helped the team determine the pack parameters. The load profile is shown in Figure 6. In this case, a thorough analysis was performed on the pack to determine how well it would perform given the load profile. Mathematical M&S techniques were used to ensure the pack would perform well electrically and thermally upon realization of the pack. Often, the mathematically validated cell performance can be used with a simple spreadsheet or mathematical modeling package (such as MATLAB [3]) to predict performance of a pack that contains a number of these cells.

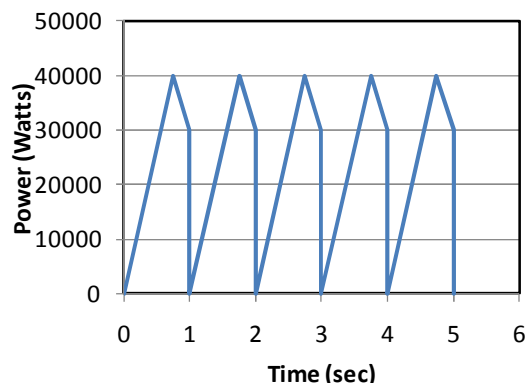


Figure 6. High Power Pack Pulse Load Requirements

Modeling/Test Data

The first step in the modeling of this pack was to test the cells to determine their capability to meet the load profile specified. This data was compared to the already existing mathematical performance models of a single cell that have been lab validated. Using the single cell data, a mathematical model can be developed for multiple cell configurations to predict performance prior to fabrication of the pack.

The load profile was appropriately scaled for testing on a single cell. Figure 7 shows the results of the testing, including the temperature rise of the cell measured in two locations, the positive lead and at mid cell. The cell level testing led to a refinement of the pack design, providing information to determine the required number of cells in the pack, and providing insight into the temperature rise that could be expected during the application of the pulse load.

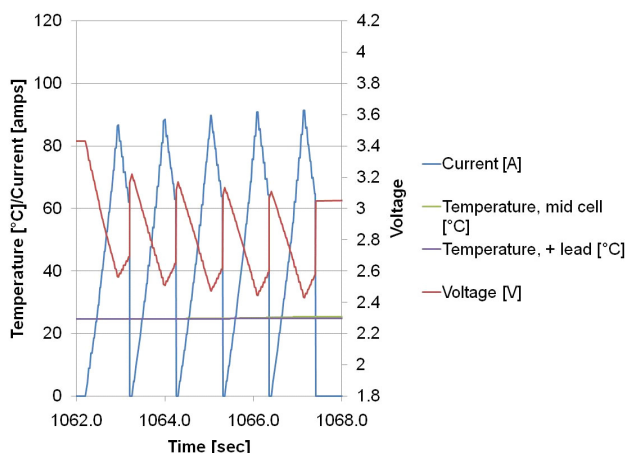


Figure 7. High Power Pack Predicted Performance.

The simple analysis/M&S techniques used in this design helped the team predict how the system could be packaged (and if it would fit in the given space claim, and how well it

would perform given the aggressive duty cycle that was provided by the customer. If M&S was not used, it would have introduced a significant amount of risk from a performance and safety standpoint upon integration to the larger system.

CONCLUSION

M&S techniques are gaining momentum in the industry as designers realize that these powerful tools significantly reduce build time and cost. For battery systems, key M&S techniques include up-front mathematical modeling of small systems to predict behavior of larger systems, solid modeling, and performance of batteries using M&S of a given duty cycle and detailed thermal modeling. These M&S techniques, when used hand in hand with strong analysis will serve as an interim design validation that can be performed prior to pack integration into a system.

In all three of the case studies that are included in this paper, M&S reduced the risk of the program and mitigated significant redesign that would have resulted without M&S. The UAV solid model helped the designers determine if existing cells could meet the power and energy requirements given an existing volume on the vehicle. The thermal modeling for the XM1124 pack predicted the thermal management strategy and reduced risk to the program by validating the strategy used. For the high power pack, validated mathematical modeling of a single cell ensured that the fabricated system would meet the peak power needs without the addition of additional cells. In all of these cases, if M&S techniques were not used, potential problems would not have been identified and extensive re-engineering or experimental testing would have been necessary.

ACKNOWLEDGEMENTS

A123 would like to acknowledge and thank TARDEC and their support staff who have participated in the case study programs and were a key contributor to their success.

REFERENCES

- [1] <http://www.ptc.com/products/creo/parametric>
- [2] <http://www.3ds.com/products/catia>
- [3] <http://www.mathworks.com/products/matlab/>
- [4] Marcel, M.J., Knakal, A., Stifflemire, T., et. Al, "Integration of Nanophosphate™ prismatic cells into the XM1124 Hybrid Electric HMMWV." Joint Services Power Presentation, May 4, 2011.

****Disclaimer:** Reference herein to any specific commercial company, product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the Department of the Army (DoA). The opinions of the authors expressed herein do not necessarily state or reflect those of the United States Government or the DoA, and shall not be used for advertising or product endorsement purposes.**