



NAVAL POSTGRADUATE SCHOOL

MONTEREY, CALIFORNIA

THESIS

**DESIGN AND EVALUATION OF A SINGLE-INLET PULSE
DETONATION COMBUSTOR**

by

Danny Soria

June 2011

Thesis Advisor:
Second Reader:

Christopher M. Brophy
Garth V. Hobson

Approved for public release; distribution is unlimited

THIS PAGE INTENTIONALLY LEFT BLANK

REPORT DOCUMENTATION PAGE			<i>Form Approved OMB No. 0704-0188</i>	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instruction, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188) Washington DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE June 2011	3. REPORT TYPE AND DATES COVERED Master's Thesis	
4. TITLE AND SUBTITLE Design and Evaluation of a Single-Inlet Pulse Detonation Combustor			5. FUNDING NUMBERS	
6. AUTHOR(S) Danny Soria				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Postgraduate School Monterey, CA 93943-5000			8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING /MONITORING AGENCY NAME(S) AND ADDRESS(ES) N/A			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES The views expressed in this thesis are those of the author and do not reflect the official policy or position of the Department of Defense or the U.S. Government. I.R.B. Protocol number ___N.A.____				
12a. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release; distribution is unlimited			12b. DISTRIBUTION CODE A	
13. ABSTRACT (maximum 200 words) Pulse detonation combustion offers thermodynamic advantages to the next generation of combustion systems. The thermodynamic efficiency is substantially improved over constant-pressure combustion systems by utilizing detonation-based combustion that occurs typically between 40 and 60 pulses per second. An existing four-inlet combustor was modified to a single-inlet arm design for integration with a rotary-valve concept. This paper discusses the design process of the single-inlet combustor so that it provides the same operation and reliability characteristics as its four-inlet predecessor. The design was derived from analysis through Computational Fluid Dynamics (CFD), which compared a variety of single-inlet arm designs to the four-inlet model. Cold flow analysis was achieved with ANSYS CFX software to map the flow field through the combustor. The combustion features inside the engine, were predicted with ANSYS FLUENT software. The inlet dump angle and ignition-shroud were selected from the results in order to support the optimal environment for flame kernel growth and subsequent deflagration to detonation transitions. After completion of computer modeling and analysis, the successful design was manufactured and assembled for testing.				
14. SUBJECT TERMS Transient Plasma Ignition, Pulse Detonation Engine, Flame Kernel Growth, Single Inlet			15. NUMBER OF PAGES 89	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT UU	

NSN 7540-01-280-5500

Standard Form 298 (Rev. 2-89)
Prescribed by ANSI Std. Z39-18

THIS PAGE INTENTIONALLY LEFT BLANK

Approved for public release; distribution is unlimited

**DESIGN AND EVALUATION OF A SINGLE-INLET PULSE DETONATION
COMBUSTOR**

Danny Soria
Lieutenant, United States Navy
B.S., United States Naval Academy, 2004

Submitted in partial fulfillment of the
requirements for the degree of

MASTER OF SCIENCE IN ASTRONAUTICAL ENGINEERING

from the

**NAVAL POSTGRADUATE SCHOOL
JUNE 2011**

Author: Danny Soria

Approved by: Christopher M. Brophy
Thesis Advisor

Garth V. Hobson
Second Reader

Knox T. Millsaps
Chair, Department of Mechanical & Astronautical Engineering

THIS PAGE INTENTIONALLY LEFT BLANK

ABSTRACT

Pulse detonation combustion offers thermodynamic advantages to the next generation of combustion systems. The thermodynamic efficiency is substantially improved over constant-pressure combustion systems by utilizing detonation-based combustion that occurs typically between 40 and 60 pulses per second. An existing four-inlet combustor was modified to a single-inlet arm design for integration with a rotary-valve concept. This paper discusses the design process of the single-inlet combustor so that it provides the same operation and reliability characteristics as its four-inlet predecessor. The design was derived from analysis through Computational Fluid Dynamics (CFD), which compared a variety of single-inlet arm designs to the four-inlet model. Cold flow analysis was achieved with ANSYS CFX software to map the flow field through the combustor. The combustion features inside the engine, were predicted with ANSYS FLUENT software. The inlet dump angle and ignition-shroud were selected from the results in order to support the optimal environment for flame kernel growth and subsequent deflagration to detonation transitions. After completion of computer modeling and analysis, the successful design was manufactured and assembled for testing.

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE OF CONTENTS

I.	INTRODUCTION.....	1
A.	PULSE DETONATION COMBUSTION CYCLE.....	1
B.	COMBUSTION CHARACTERISTICS.....	2
C.	APPLICATIONS OF PULSE DETONATION SYSTEMS.....	3
II.	BACKGROUND	5
A.	BASELINE DESIGN.....	5
B.	DUMP ANGLE	6
C.	FLAME DEVELOPMENT.....	8
D.	SINGLE-INLET APPROACH.....	8
III.	COMPUTATIONAL FLUID DYNAMICS.....	9
A.	COMPUTER MODELING.....	9
B.	ANSYS CFX	9
1.	Boundary Conditions.....	9
2.	Design Approaches.....	13
3.	Design Assessment	15
a.	<i>The 5.08 cm Inlet Arm Into 7.62 cm Combustion Chamber</i>	<i>15</i>
b.	<i>The 5.08 cm Inlet Arm Into 10.16 cm Combustion Chamber</i>	<i>16</i>
c.	<i>The 3.81 cm Inlet Arm Into 7.62 cm Combustion Chamber</i>	<i>17</i>
d.	<i>The 7.62 cm Inlet Arm Into 7.62 cm Combustion Chamber</i>	<i>20</i>
C.	ANSYS FLUENT	23
1.	Reacting-Flow Computational.....	23
2.	Boundary Conditions.....	24
3.	Four-Inlet Arm System.....	25
4.	Single-Inlet Arm Design	27
IV.	FINAL DESIGN DECISION.....	31
A.	SOLIDWORKS DESIGN	31
B.	FABRICATED HARDWARE	33
VI.	SUMMARY AND CONCLUSION	35
	LIST OF REFERENCES.....	37
	APPENDIX A. MESHING AND CFX SETUP	39
A.	THE 5.08 CM INLET ARM INTO 7.62 CM COMBUSTOR	39
B.	THE 5.08 CM INLET ARM INTO 10.16 CM COMBUSTOR	40
C.	THE 3.81 CM INLET ARM INTO 7.62 CM COMBUSTOR	41
D.	THE 7.62 CM INLET ARM INTO 7.62 CM COMBUSTOR	42
	APPENDIX B. FLUENT SETUP FOR SINGLE ARM INLET.....	43

APPENDIX C. FINAL DESIGN PLANS	45
A. ENCASING OF INLET	45
B. CENTER INSERT	50
C. SHROUD BASE	52
D. SHROUD	54
E. INSULATOR.....	55
F. CAP	56
G. INLET WATER JACKET.....	57
H. FUEL INJECTION TUBE.....	60
I. FLANGE FOR FUEL INJECTION TUBE.....	63
J. RIG ADAPTOR	65
K. RIG MOUNT.....	67
INITIAL DISTRIBUTION LIST	71

LIST OF FIGURES

Figure 1.	Pulse Detonation Engine Cycle (From Warwick, 2008)	2
Figure 2.	Design of Four-Inlet Arm System.....	6
Figure 3.	Head End Geometry for Four-Inlet Arm System (From Zittere, 2009).....	7
Figure 4.	Flame Spreading Pattern for Single-Inlet Arm Design (From Hawkes, 2009)	8
Figure 5.	Design for Four-Inlet Arm System and Shroud.....	10
Figure 6.	Fluid Flow With Velocity for Four-Inlet Arm System	12
Figure 7.	Comparison of Proposed Design Alterations.....	14
Figure 8.	Comparison of Shroud Design With 360° Holes and 180° Holes.....	14
Figure 9.	Fluid Flow With Velocity for a 5.08 cm Inlet Arm Into 7.62 cm Combustion Chamber	16
Figure 10.	Fluid Flow With Velocity for a 5.08 cm Inlet Arm Into 10.16 cm Combustion Chamber	17
Figure 11.	Fluid Flow With Velocity for a 3.81 cm Inlet Arm Into 7.62 cm Combustion Chamber, Off-Center View	18
Figure 12.	Fluid Flow With Velocity for a 3.81 cm Inlet Arm Into 7.62 cm Combustion Chamber, Standard View	19
Figure 13.	Fluid Flow With Velocity for a 3.81 cm Inlet Arm Into 7.62 cm Combustion Chamber, Lowered Shroud Alternation	20
Figure 14.	Fluid Flow With Velocity for a 7.62 cm Inlet Arm Into 7.62 cm Combustion Chamber	21
Figure 15.	Fluid Flow With Velocity for a 7.62 cm Inlet Arm Into 7.62 cm Combustion Chamber, 37.5 % Fewer Holes.....	22
Figure 16.	Fluid Flow With Velocity for Four-Inlet Arm System	24
Figure 17.	Four-Inlet System Filled With Ethylene	26
Figure 18.	Four-Inlet System With Spark	26
Figure 19.	Four-Inlet System Containing No H ₂ O.....	27
Figure 20.	Fluid Flow With Velocity for Single-Inlet Arm System	27
Figure 21.	Single-Inlet Arm Design Filled With Ethylene	28
Figure 22.	Single-Inlet Arm Design With H ₂ O Exiting Shroud.....	28
Figure 23.	Single-Inlet Arm Design With H ₂ O Traversing the Chamber	29
Figure 24.	Single-Inlet Arm Design With H ₂ O Exiting Chamber	29
Figure 25.	Single-Inlet Arm Design Temperature Displacement.....	30
Figure 26.	Exploded View of the Single-Inlet Arm Design Assembly	32
Figure 27.	Cutaway Illustration of the Single-Inlet Arm Design	32
Figure 28.	Adapter and Fuel-Mixing Inlet Arm	33
Figure 29.	The 45° Outer Casing.....	33
Figure 30.	Cap and 45° Insert.....	34
Figure 31.	Shroud and Teflon Tube	34
Figure 32.	Completed Machined Hardware	34

THIS PAGE INTENTIONALLY LEFT BLANK

LIST OF TABLES

Table 1.	Preliminary Boundary Conditions for Four-Inlet System Cold Flow Analysis.....	11
Table 2.	Summary of Desired Cold Flow Conditions for Four-Inlet Arm System.....	13
Table 3.	Four-Inlet Versus Single-Inlet Cold Flow Characteristics.....	22
Table 4.	Preliminary Boundary Conditions for Four-Inlet System Combustion Simulation.....	25

THIS PAGE INTENTIONALLY LEFT BLANK

LIST OF ACRONYMS AND ABBREVIATIONS

C ₂ H ₄	Ethylene
CAD	Computer Assisted Drawing
CFD	Computational Fluid Dynamics
cm	Centimeters
DDT	Deflagration-to-Detonation Transition
K	Kelvin
kg	Kilograms
kg/s	Kilogram/second
m/s	Meters/ second
N	Nitrogen
NPS	Naval Postgraduate School
O	Oxygen
PDC	Pulse Detonation Combustion
PDE	Pulse Detonation Engine
s	Second
TPI	Transient Plasma Ignition

THIS PAGE INTENTIONALLY LEFT BLANK

ACKNOWLEDGMENTS

A warm thank you goes to Dr. Brophy for continuing to push me to always accomplish more. His detailed understanding and passion made this thesis possible as well as an exciting adventure. As I leave the laboratory, the amount of computer stations available has quadrupled.

The ability to utilize multiple computer stations would not have been possible without the patience and assistance on Dave Dausen and Bobby Wright. I will forever be humbled by their vast amount of knowledge and friendship.

George Hageman has engraved himself in my mind with his entertaining jokes and his mechanical ability to fix every problem the laboratory could dish out. Thank you for always making the lab a comfortable environment.

A very special thank you to my wife, Shira. Many late nights in front of the computer monitors have been spent together for the past three years. You have been my best friend since we were four years old, and will always be.

Lastly, I would like to thank My, Lynn, and Pete of the Trident Room. I will cherish their ability to help me welcome the weekend after a long week of studies.

THIS PAGE INTENTIONALLY LEFT BLANK

I. INTRODUCTION

A. PULSE DETONATION COMBUSTION CYCLE

Detonation combustion inherently has a high thermodynamic efficiency due to a lower entropy increase of the working fluid for a given amount of heat release. Competitive systems that rely on the Brayton cycle, utilize deflagration combustion, which occurs under near constant pressure conditions. The effective release of energy by a detonation wave versus a deflagration wave allows a Humphrey cycle to produce more work than the Brayton cycle for the same energy release. Along with the increased performance, a Pulse Detonation Combustion (PDC) consists of relatively simplistic fabrication when compared to gas turbine engines (Nichols, 2010). Practical development of detonation-based systems therefore require repeated detonation of reactants hence the name PDC.

The PDC cycle occurs in six distinct stages as illustrated in Figure 1. Inaccurate timing of these stages may lead to non-detonation combustion, and could dramatically lower the efficiency of the combustion chamber cycle and system.

The PDC cycle begins by filling the combustion chamber completely with the predetermined mixture of oxidizer and fuel (Warwick, 2008). Ignition starts the deflagration event, which can come from a variety of sources. The deflagration wave then transitions to a detonation wave that travels down the length of the combustion chamber. As a result, expansion of remaining combustion products creates a blow down of the system that reduces the combustion chamber pressure to the refresh level. Finally, the chamber is purged with new air (Zittere, 2009).

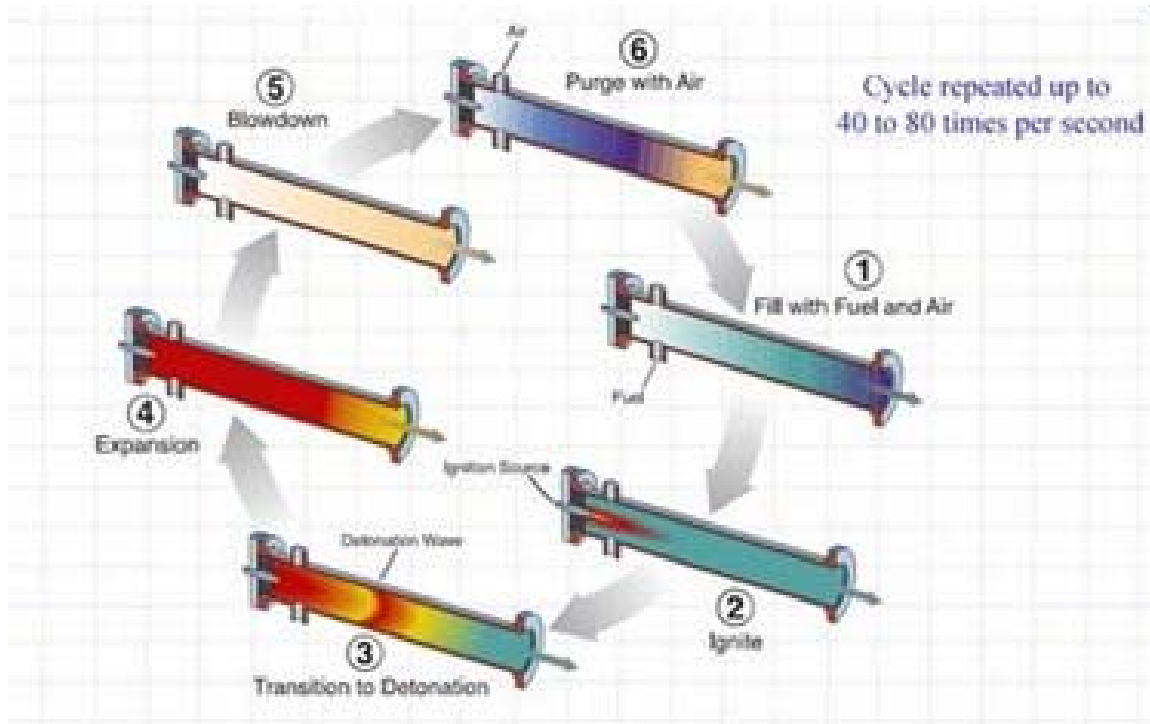


Figure 1. Pulse Detonation Engine Cycle (From Warwick, 2008)

B. COMBUSTION CHARACTERISTICS

The fundamental characteristic of a PDC is the ability to combust fuel through a detonation wave. Lee (2008) states that detonation requires that reactants remain ahead of the supersonic wave and an increase in density across the combustion wave. Without sufficient energy release to support a detonation wave, the combustion wave remains subsonic with respect to the reactants ahead of it; this is known as deflagration (Lee, 2008). The deflagration flame speed can be influenced by different mechanisms such as fuel distribution, variations, turbulence, mixture properties, and confinement (geometry). The design of a combustor can direct the subsonic wave as its disturbances move downstream and upstream propagation (Lee, 2008).

The design of the system will dictate how the transformation of deflagration-to-detonation transition (DDT) will occur. The design's intention will be to accelerate deflagration to a high supersonic velocity where the shock wave will abruptly modify to a detonation wave. This can be accomplished by methods such as the SWACER (Shock

Wave Amplification by Coherent Energy Release) mechanism in which chemical energy release is synchronized with shock pulses amplifying the energy release (Lee, 2008).

C. APPLICATIONS OF PULSE DETONATION SYSTEMS

A few applications typically are considered when discussing the efficiency improvements of a PDC-based system. One such application is a supersonic air-breathing missile system that provides benefits including creating an ability to transport weapon payloads over longer distances for a given amount of fuel, increasing payload mass, or boosting block speed.

Power generation systems for shipboard use is another application being explored. Similar to diesel engines, PDCs have a high thermodynamic efficiency, but substantially larger power density due to the higher mass flow rates. The increased fuel efficiency could allow the surface Navy to reduce the fuel cost of generating shipboard power.

THIS PAGE INTENTIONALLY LEFT BLANK

II. BACKGROUND

A. BASELINE DESIGN

The existing PDC design is the result of development over nearly six years from a variety of graduate students at the Naval Postgraduate School. It consists of four-inlet arms that mix liquid or gas fuel with air prior to discharging into a single combustion chamber with a single ignition source. The most recent modification is the introduction of cooling to the combustion chamber using segments that are individually cooled by water. Their addition has allowed the PDE to run for 20 seconds at a time without having destructive heating issues. This design has proven to be effective in producing the conditions required to support detonations in the chamber.

Using air and ethylene as reactants, either a Transient Plasma Ignition (TPI) or a gas turbine plug is capable of igniting the mixture within the PDC. The current design utilizes four-inlets, converging with the center chamber that houses the ignition source and exit toward the left, as shown in Figure 2. The flow of air starts from the left and is mixed with ethylene at the gas injectors. There are also liquid injectors for JP-10, which allows for a modification to operate on practical liquid fuels. Restrictor plates are inserted into the four arms to isolate the upstream flow from the chamber pressure fluctuations (Dvorak, 2010).

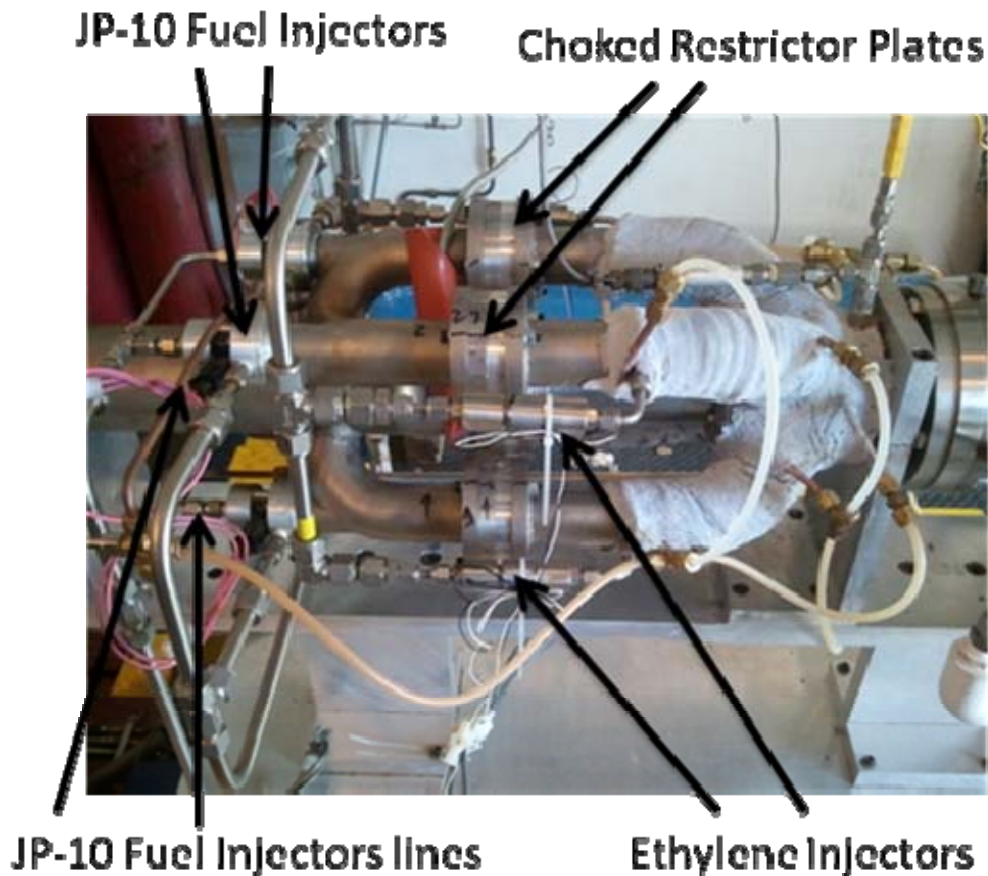


Figure 2. Design of Four-Inlet Arm System

While this rig is functional, it is impractical for future designs. For example, use of thrust vectoring for control would require three PDE chambers, which would require 12 inlets under this current design. Redesigning the system into a single-inlet therefore increases practicality. This research effort seeks the optimal design of a single-inlet PDE.

B. DUMP ANGLE

Converting the current four-arm inlet arm system into a single-arm inlet design required determining the optimal angle for inlet intersection with the combustion chamber. In order to create reliable combustion, the angle needs to produce recirculation zones that can support proper flame development. Using Computational Fluid Dynamics (CFD), Zittere (2009) evaluated three inlet dump angles of 30° , 45° , and 60° to determine which would produce the most desirable recirculation zones. While all angles provided

some recirculation zones, Zittere (2009) indicates that flame development is best facilitated when in conjunction with the position of the TPI/shroud in a head-end section design. The head end shape displayed in Figure 3 describes the analyzed sections.

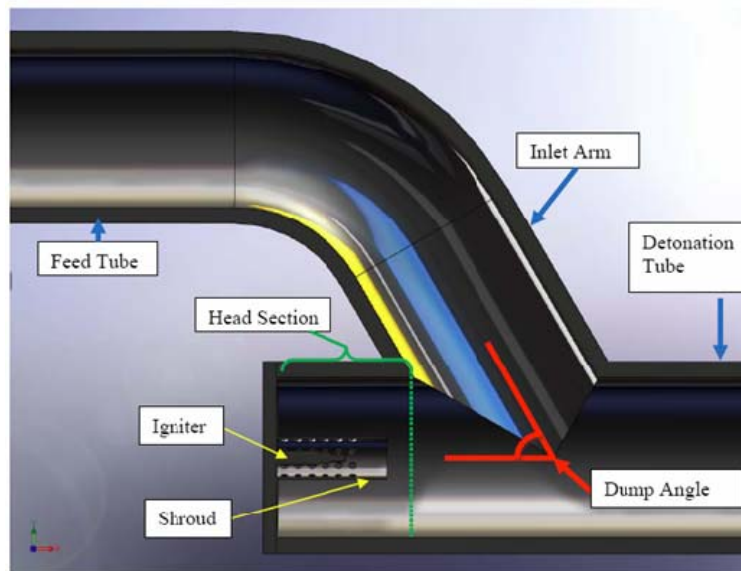


Figure 3. Head End Geometry for Four-Inlet Arm System (From Zittere, 2009)

Hawkes' (2009) physical experimentation validated the CFD analysis. However, due to manufacturing constraints, only angles of 45° , 60° , and 90° were used. Testing examined the three different configurations at a variety of equivalency ratios (1, 1.2, and 1.5). Hawkes (2009) determined that a 90° angle inlet caused the flame to become unstable and sometimes quench. Further experimentation showed that the 60° angle inlet was best if the design required a large range of operational equivalence ratios. Ultimately, Hawkes (2009) concluded that a 45° angle inlet provided the fastest ignition, and was successful at developing the growth of a flame.

C. FLAME DEVELOPMENT

The previous inlet angle evaluations helped to identify effective methods to create recirculation zones that facilitated healthy flame growth. This is promoted by protecting the spark created from the TPI from the use of a porous shroud developed and used on multiple NPS PDE designs; Hawkes' (2009) design is no different. Employing a high-speed camera facilitated observations of flame characteristics. Hawkes (2009) indicated a 45° single-inlet permitted reactants to flow through the shroud and successfully ignite. While there, it becomes turbulent and rapidly spreads until exiting through small holes of the shroud on the opposite side of the inlet (Hawkes, 2009). This process is demonstrated in Figure 4.

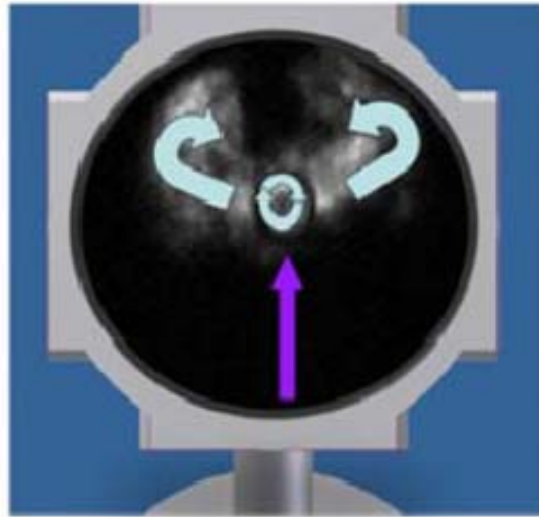


Figure 4. Flame Spreading Pattern for Single-Inlet Arm Design (From Hawkes, 2009)

D. SINGLE-INLET APPROACH

Based on results from previous work, a 45° angle single-inlet arm design using 37.5% fewer perforated shroud to surround the TPI was developed. Along with the physical design characteristics, the next evolution in the PDE system was to determine the inlet geometry as it entered the combustion tube. A design that promotes uniform fuel and air mixture and similar rapid flame development as the four-inlet arm system is required.

III. COMPUTATIONAL FLUID DYNAMICS

A. COMPUTER MODELING

Computational Fluid Dynamics (CFD) has been advanced by the need to model problems involving fluid mechanics and thermodynamics. While primary implementation of CFD focused on gas dynamics, its applications have expanded into areas including environmental engineering, chemistry, and medicine (Tu, Yeoh, & Liu, 2008). CFD offers multiple benefits and is frequently used as an economical tool to evaluate engineering options prior to committing significant investments of resources.

Two different flow solvers were employed in this study. ANSYS 13.0 is a software program suite consisting of computational modals for solving complex algorithms associated with fluid flow and structural analysis. The two programs within ANSYS that were heavily utilized in this study were ANSYS CFX and ANSYS FLUENT. Solidworks 2010, a third program, provided the ability to create the virtual 3-D geometries from which simulations and parts were generated.

B. ANSYS CFX

CFX, a general fluid dynamic modeling application of ANSYS 13.0, provided fluid flow analysis for a variety of geometries (ANSYS CFX, 2010). Understanding the desired results for the single-inlet arm system required development of a solid model representation of the current four-inlet arm design. The CFX finite volume evaluation program used the geometry and solved for the velocity field throughout the inlet arms and combustion chamber. Since the four-inlet arm design consistently creates detonations, it became the datum for follow-on analyses.

1. Boundary Conditions

The Computer Assisted Drawing (CAD) program Solidworks was used to develop the geometries later imported into the ANSYS CFX. Due to the nature of the ANSYS CFX software, the geometric figure had to represent the fluid volume within the anticipated structural design. The diameter of the four-inlet arm design's combustion

chamber is 7.62 cm and the diameter of each inlet is 3.81 cm, all entering at 45° angles. Figure 5 shows the four-inlet arm design with a short combustion chamber, the porous shroud surrounding the TPI, and a close up of the meshed TPI region.

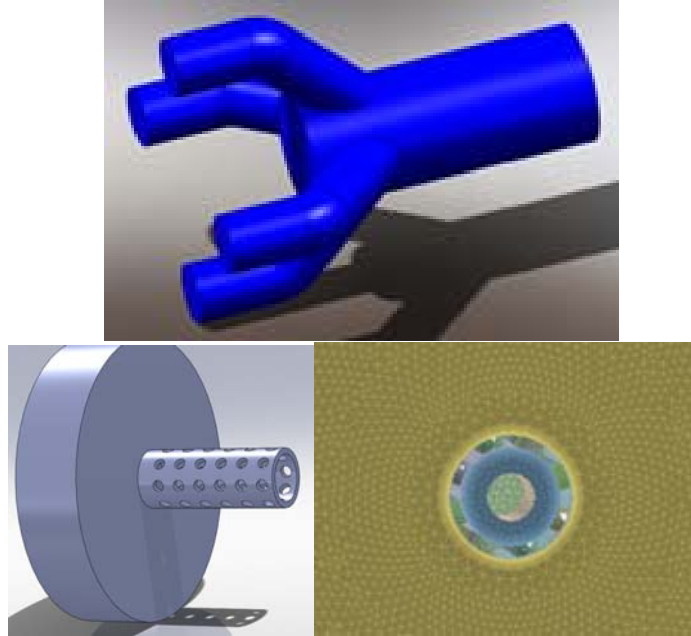


Figure 5. Design for Four-Inlet Arm System and Shroud

Descriptions of the settings used during the computational mesh development, as well as setup of initial conditions, are included in Table 1. The mesh details and resolutions of the inlet model were maintained for the single-inlet arm system. Element size was ascertained using a balance of both accuracy and length of time required to solve multimillion element solutions. The number of elements, 8 to 10 million, was determined to provide the needed accuracy without requiring each solution to utilize more than 16 processors on a Linux cluster for more than 4 to 5 hours.

Meshing Conditions			
Max Body Spacing	0.0011 mm	Angular Resolution	30°
Min Edge Length	0.00011 mm	Max Edge Length	0.0011 mm
Inflation Layers	20	Expansion Factor	1.1
Min Internal Angle	5°	TPI Inflation Max Thick	0.003 mm
Max External Angle	15°	Nodes	1806324
Pyramids	3881	Prisms	205741
Tetrahedra	9637410	Total Elements	9847032
Boundary Conditions			
INLET		Mass Flow Rate	0.3125 kg/s
Flow Regime	Subsonic	Static Temperature	480 K
OUTLET		Mass Flow Rate	0.3125 kg/s
WALL		Wall Roughness	Smooth Wall
Mass and Momentum	No Slip Wall	Heat Transfer	Adiabatic
TPI Wall		Wall Roughness	Smooth Wall
Mass and Momentum	No Slip Wall	Heat Transfer	Adiabatic
INITIALIZATION		Pressure	1 atm
Material	Air Ideal Gas	Heat Transfer	Total Energy
Turbulence	k-Epsilon	Velocity u/v/w	0/0/60 m/s
Temperature	400 K	Intensity	Medium

Table 1. Preliminary Boundary Conditions for Four-Inlet System Cold Flow Analysis

Results of the CFX analysis, shown in Figure 6 show the fluid flow through the four-inlet arm system as black streamlines and the velocity magnitude as colored axial planes. The two streamline zones located at the head end of the combustion chamber reveal the desired recirculation zones for flame development. While the single-inlet arm design also produces recirculation zones, they can become too large. This results in long residence times for the combustion products and insufficient clearing of the chamber during the purge process, thereby causing auto ignition of the subsequent cycle.

In order to maintain similar residence timescales, the velocity distributions must remain near the same levels in the single-inlet arm designs. The cold flow enters the combustion chamber with an initial mass flow rate of 0.325 kg/s and resulting velocity inside the inlet arm reaches about 96 m/s, increasing roughly to 103 m/s prior to reaching the shroud located inside the chamber. As Figure 6 illustrates, the velocity inside the shroud ranges from 12 m/s near the inlets to 37 m/s in the center of the chamber. This can stifle flame development and, for this reason, the shroud needs to protect the flame.

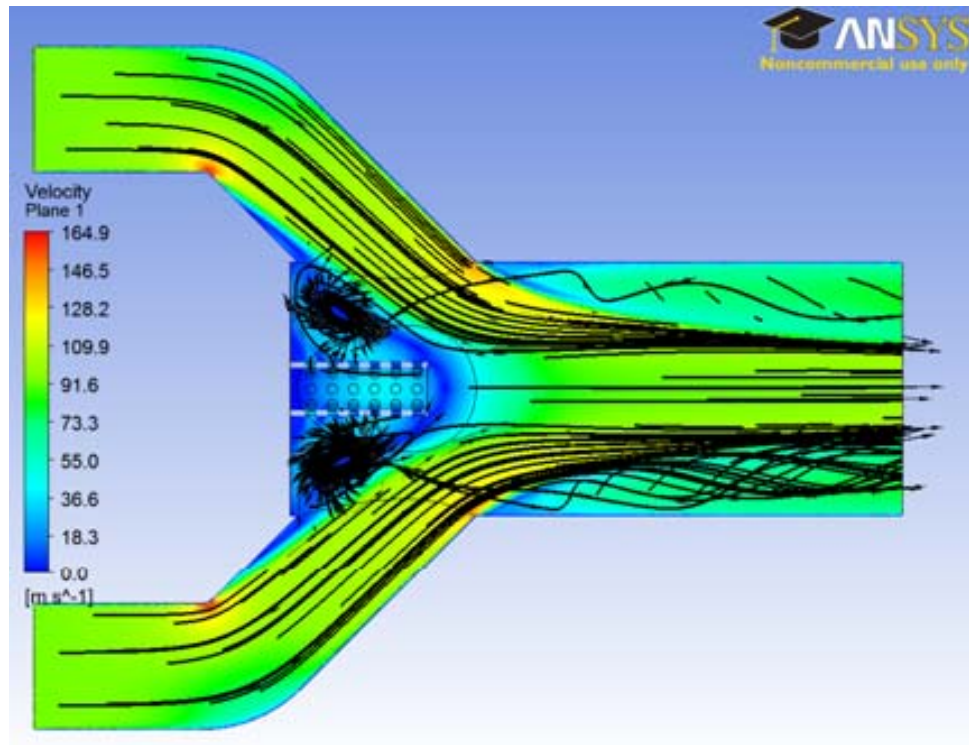


Figure 6. Fluid Flow With Velocity for Four-Inlet Arm System

The four-inlet results discussed previously provide characteristics that guide the proposed single-inlet design. Conditions for the single-inlet arm design are summarized in Table 2.

Inlet Velocity	~ 95 m/s
Velocity entering combustion chamber	~ 105 m/s
Velocity at bottom of shroud	~ 13 m/s
Velocity at center of shroud	~ 36 m/s
Recirculation zones (4)	~ 19-35 m/s

Table 2. Summary of Desired Cold Flow Conditions for Four-Inlet Arm System

2. Design Approaches

Zittere (2009) and Hawkes (2009) investigated three inlet dump angles, 45°, 60°, 90°. The preferred inlet dump angle of 45° and therefore this research aims to determine the optimal geometry. CFX analyzed the feasibility of several proposed alterations to the four-inlet arm system with respect to a single-inlet arm design: a centered two-inch inlet, a centered 7.62 cm inlet, a centered 2.54 cm inlet to 10.16 cm combustor, and a 3.81 cm inlet positioned offset from the middle. Three of the proposed inlet arm designs preserve combustion chamber entrance diameters of 7.62 cm for design uniformity of the previous PDC. Illustrations in Figure 7 compare these proposed designs. Additionally, this view includes placement of the TPI shroud in the center of the inlet. This creates recirculation zones that occur near and in the shroud and allow for flame kernel growth. Included shrouds retain a 360° porosity around the can, also similar to the originally design in Figure 5.

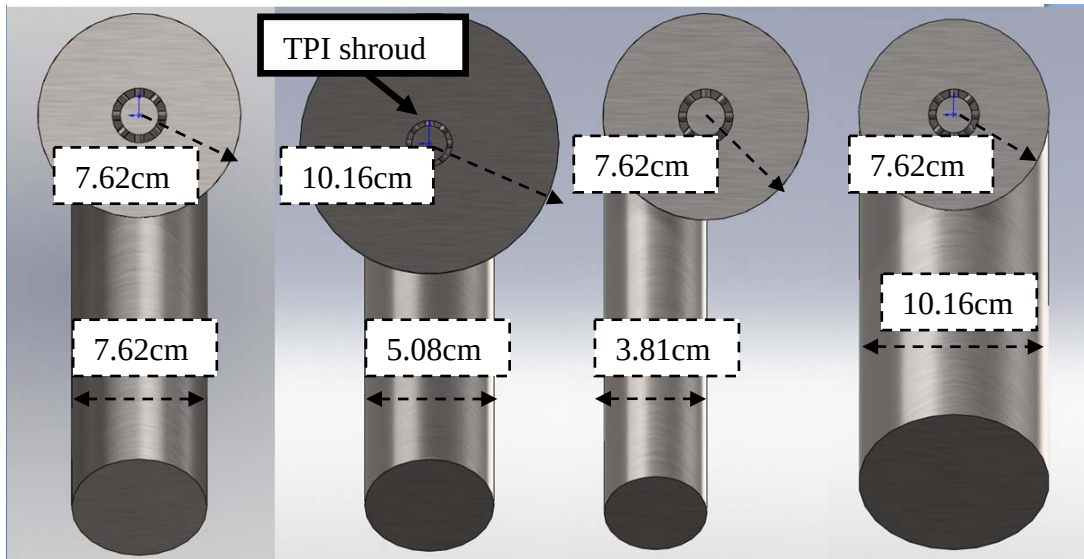


Figure 7. Comparison of Proposed Design Alterations

Initial analysis suggested reducing the number of holes in the shroud due to the high velocity introduced to the TPI, prompting the design of a less porous concept. A rendering of the two designs is included in Figure 8. Both images display a segmented area of the shroud and the blackened areas draw attention to the differences between the modifications. The cutout on the left in Figure 8 retains holes that surround the shroud a full 360° while the cutout on the right demonstrates the modifications that only place holes in the top 180°.



Figure 8. Comparison of Shroud Design With 360° Holes and 180° Holes

3. Design Assessment

The computational analysis investigated the reactant's velocity in each of the proposed designs. Special focus was placed on the reactant's velocity passing through the shroud in order to provide an environment conducive for ignition kernel development and subsequent flame growth.

a. The 5.08 cm Inlet Arm Into 7.62 cm Combustion Chamber

The illustration in Figure 9 shows the flow field for a 5.08 cm inlet arm entering a 7.62 cm combustion chamber. This proposed design revealed the existence of recirculation zones, however this design was abandoned due to its expected inability to allow proper flame development due to extensive velocities. Even though the location of the recirculation zone at the top of the head end portion of the combustion chamber is adequate for flame growth, the internal shroud velocities indicated in the results is unlikely to allow that the flame would develop enough to leave the shroud and enter the recirculation zone. As the flow enters the combustion chamber, the velocity of the reactants reaches values close to 209 m/s as they transit the inlet arm. This negatively affects flame development because it enters the shroud where the velocity ranges from 8 m/s to 103 m/s inside the shroud. While the lower values of this range are acceptable, the upper values would be too fast and likely cause flame blow out. Additionally, the velocity in excess of 150 m/s inside the chamber could also prevent the proper flame development. Ultimately, this design was abandoned and an alternate configuration was considered that possesses lower shroud velocities.

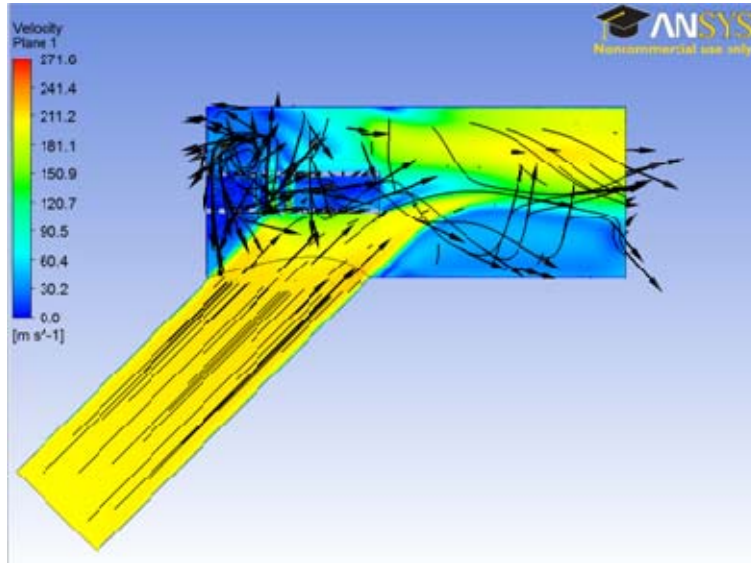


Figure 9. Fluid Flow With Velocity for a 5.08 cm Inlet Arm Into 7.62 cm Combustion Chamber

b. The 5.08 cm Inlet Arm Into 10.16 cm Combustion Chamber

The proposed design of a 5.08 cm inlet arm entering a 10.16 cm combustor chamber was also found to be unsuitable. This design provides for an additional recirculation zone to that of the previous proposed design, but the zone located at the head end of the chamber indicated a velocity between four and seven m/s, which was predicted to be too low and possess poor purge properties. This design also provided for a second zone closer to the opposing region, as demonstrated in Figure 10, with velocity more acceptable for flame development of nearly 25 m/s. However, its location was not conducive to this research since it did not work with the preferred location of the ignition source at the head end of the combustion chamber.

The velocity generated in this design is also unlikely to support healthy flame development. Although this geometry allowed the reactants to enter the combustor at nearly 176 m/s, the overall velocity inside the chamber remains in excess of 150 m/s. The decreased inlet arm velocity improved the velocity inside the shroud to a range of 12 to 42 m/s. Unfortunately, the recirculation zones contribute to areas of drastic differences in velocities to effectively create a sheer layer that the flame would likely be unable to

penetrate. This secondary consideration regarding inhibited flame development throughout the chamber led to this design also being abandoned.

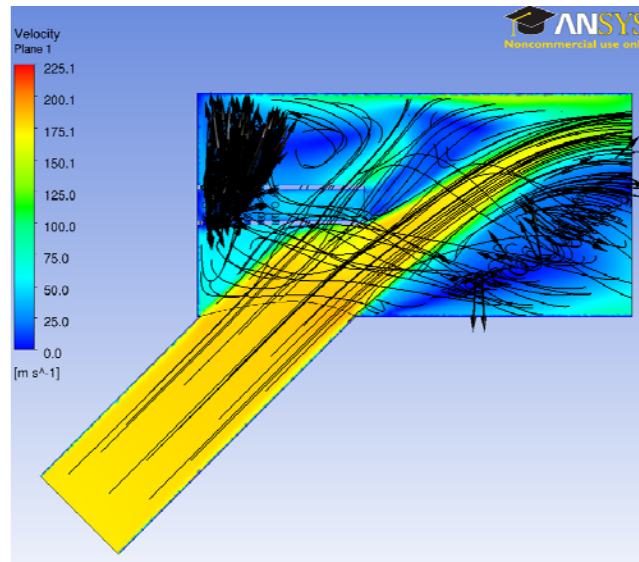


Figure 10. Fluid Flow With Velocity for a 5.08 cm Inlet Arm Into 10.16 cm Combustion Chamber

c. The 3.81 cm Inlet Arm Into 7.62 cm Combustion Chamber

The proposed design of a 3.81 cm inlet arm entering a 7.62 cm combustion chamber was investigated to explore the creation of effective recirculation zones. Placing the inlet arm off-center, as demonstrated by Figure 11, circulated the fuel and air upon the entrance of reactants into the combustion chamber in an effort to create an initial flow direction and encourage the existence of recirculation zones. This was achieved by reducing the diameter of the inlet arm in order to direct reactant velocity, and successfully created a vortex throughout the combustion chamber.

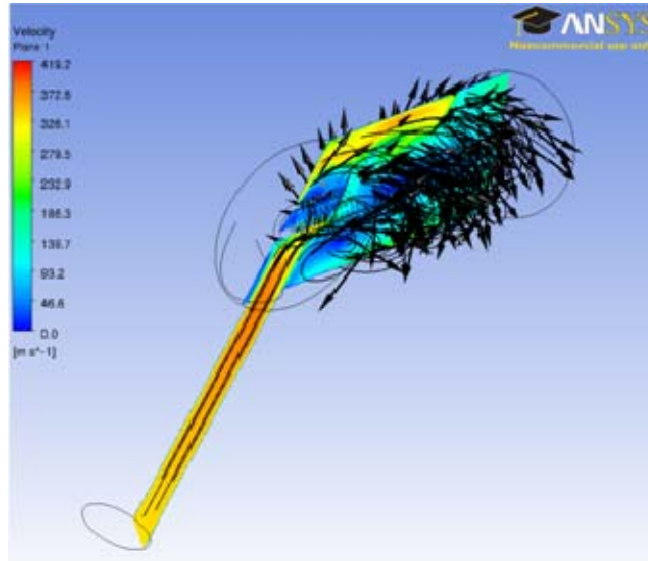


Figure 11. Fluid Flow With Velocity for a 3.81 cm Inlet Arm Into 7.62 cm Combustion Chamber, Off-Center View

The standard view of this design is provided in Figure 12 and illustrates where possible recirculation zones may exist. This design creates recirculation zones to support flame development, but simultaneously, the reduced diameter results in an increased velocity of the reactants to nearly 380 m/s, which was deemed to be too high. The protective shroud could restrict some of the velocity and result in lowered values between 25 and 42 m/s, but these continue to exceed the desired velocity offered by the four-inlet system. Regardless of the observed flow field rotation and locally lower combustor velocities, the near sonic inflow to the combustor makes this design unfavorable.

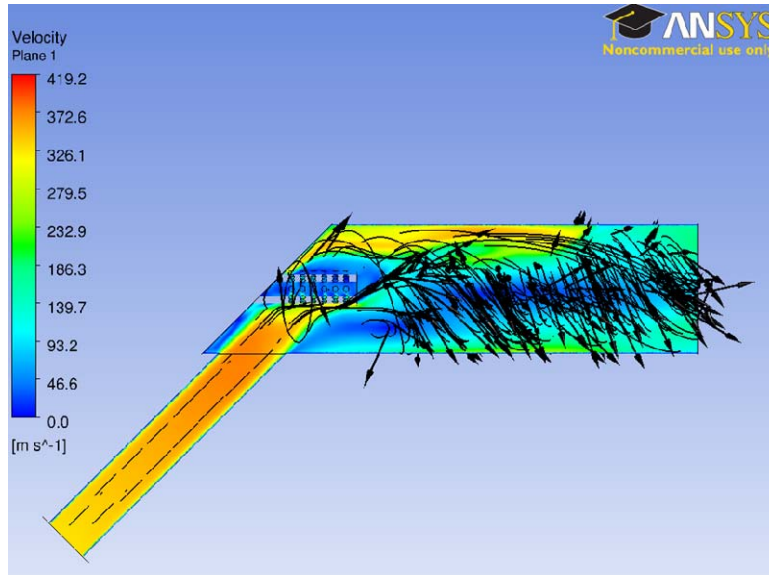


Figure 12. Fluid Flow With Velocity for a 3.81 cm Inlet Arm Into 7.62 cm Combustion Chamber, Standard View

The overall flow field structure within the combustor of this proposed design is desirable, but increased inlet arm velocity of 373 m/s also makes this design unfavorable. A modification explored altered the shroud's placement towards the position where the inlet arm intersects the combustor chamber, as illustrated in Figure 13. It was expected to remove the shroud's ability to affect the flow and interrupt the velocity of the reactants entering the combustion chamber, therefore circumventing the shroud vice traveling through the shroud. While these modifications preserved the flow circulation inside the combustion chamber, this design minimized the amount of recirculation zones due to the increased velocity throughout the combustion chamber. Moreover, the new placement did not positively affect flame development. Instead, this modification increased the velocity inside the shroud to nearly 400 m/s. It was determined that the shroud would require further protection in order to facilitate flame cultivation as well as the ability to grow in order to engulf the combustion chamber. Due to multiple reasons, this design was also abandoned.

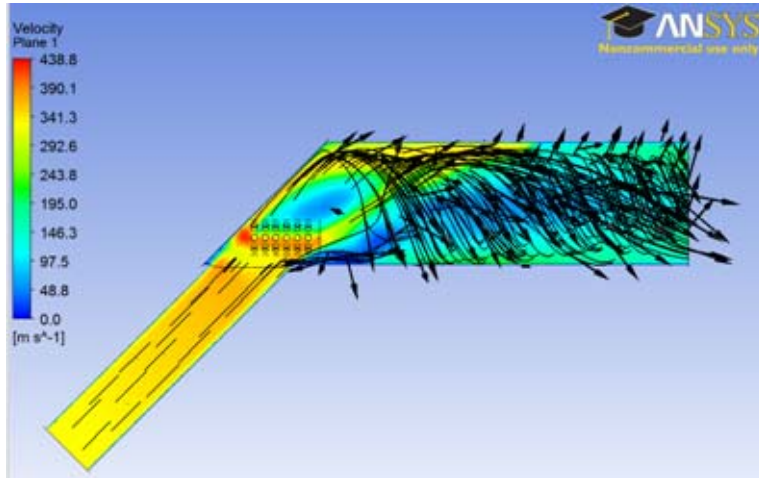


Figure 13. Fluid Flow With Velocity for a 3.81 cm Inlet Arm Into 7.62 cm Combustion Chamber, Lowered Shroud Alternation

d. The 7.62 cm Inlet Arm Into 7.62 cm Combustion Chamber

Results from the previous designs proposed demonstrated the importance of providing a manageable inlet velocity in order to support healthy flame development. Since the mass flow will remain at 0.3125 kg/s, the proposed design for a 7.62 cm inlet arm entering a 7.62 cm combustion chamber further decelerated the velocity of the reactants as they transited the inlet arm and entered the combustion chamber. CFX results in Figure 14 show reduced velocity in the inlet arm measuring 93 m/s, which then decreases further within the shroud to a velocity between 25 and 40 m/s. These lower velocities are conducive to the desired flame growth within the shroud and can be supported by the neighboring recirculation zone prior to exiting the combustion chamber. However, within the shroud, velocities were still in excess of those for the four-inlet arm design, and therefore a minor modification to the shroud porosity was required.

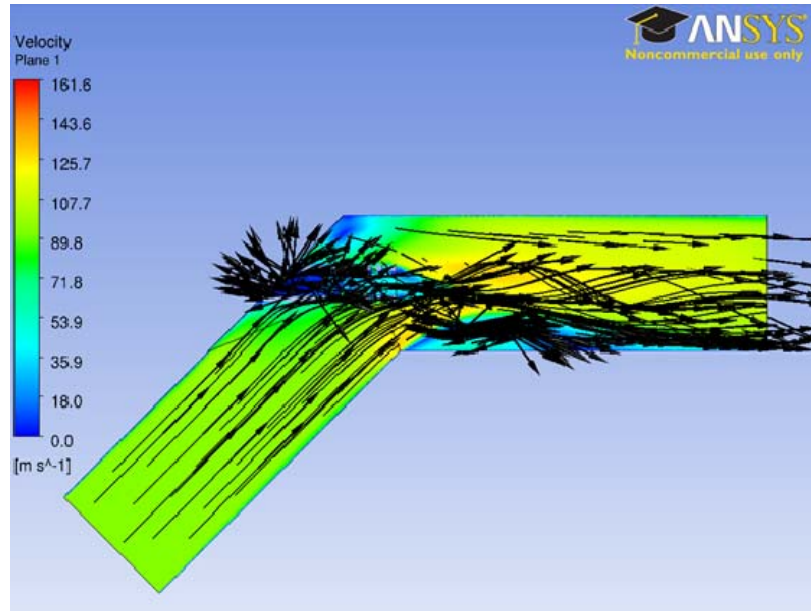


Figure 14. Fluid Flow With Velocity for a 7.62 cm Inlet Arm Into 7.62 cm Combustion Chamber

The initial design of the shroud included a geometry with 100% porosity, but the modification resulted in a 37.5 % fewer porous design, as depicted earlier in Figure 8. This decreased the velocities within the shroud to between 13 and 34 m/s, therefore producing an environment for initial flame ignition similar to the four-inlet arm design. CFX results for this modified design, in Figure 15, illustrate that the fluid flow velocity also decreased to between 15 and 35 m/s. An additional benefit was that the recirculation zones increased velocity to 18–35 m/s. Since the desired inlet arm velocities were observed in the simulations it establishes promise for this design.

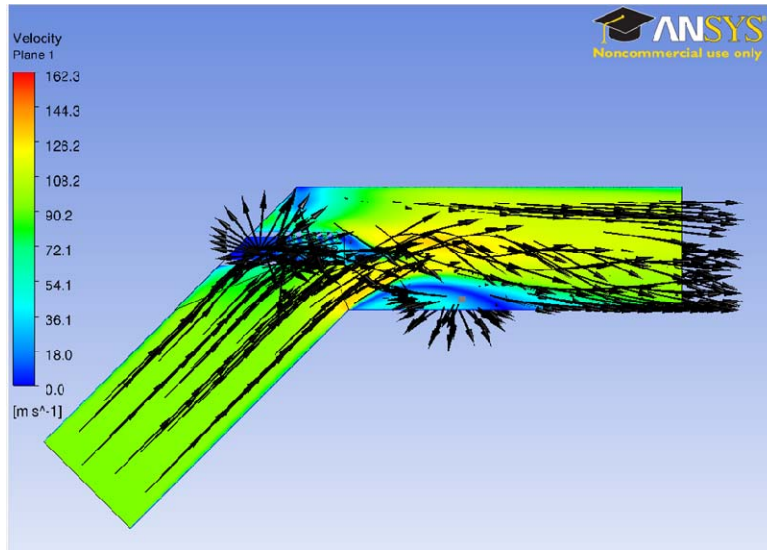


Figure 15. Fluid Flow With Velocity for a 7.62 cm Inlet Arm Into 7.62 cm Combustion Chamber, 37.5 % Fewer Holes

The design of a 7.62 cm inlet arm entering a 7.62 cm combustion chamber with a modified shroud sufficiently imitates the desired results of the four-inlet arm system. This is the analytical evidence that a successful deflagration would likely occur when using this design. A comparison of the desired results for the four-inlet arm design and this proposed single-inlet arm design is shown in Table 3.

Conditions	Four-Inlet	Single-Inlet
Inlet Velocity	~95 m/s	~93 m/s
Velocity entering combustion chamber	~105 m/s	~114 m/s
Velocity at bottom of shroud	~13 m/s	~ 14 m/s
Velocity at center of shroud	~36 m/s	~ 33 m/s
Recirculation zones	4 zones ~19–35 m/s	3 zones ~18–32 m/s

Table 3. Four-Inlet Versus Single-Inlet Cold Flow Characteristics

C. ANSYS FLUENT

FLUENT is a software package contained within ANSYS dedicated to modeling flow, turbulence, heat transfer, and chemical reactions for applications such as fluid flow over an aircraft wing, blood flow through a body, and modeling chemical reactions of mixed species (ANSYS Fluent, 2010). It was utilized for this research to map the combustion behavior of an ethylene-air mixture through both the previous four-inlet arm system and the newly designed single inlet-arm design.

1. Reacting-Flow Computational

The capability to conduct reacting-flow chemical mixture simulations for the various combustor scenarios was the primary reason for using FLUENT. However, initial use of FLUENT was limited as familiarity favored CFX. Therefore, simulations were conducted in both programs for comparison and to allow increased modeling versatility.

The first simulation conducted examined air flow through the four-inlet system. Results from CFX simulations were then compared to those of FLUENT in order to validate the initial conditions and confirm that the resulting flow fields matched, allowing for a second simulation, which included chemical reactions. Figure 16 shows the image developed in FLUENT demonstrating similar flow field characteristics as the four-inlet system in Figure 6 computed with CFX. A slight modification to elongate the combustion chamber in FLUENT was required to address a slight flow reversal error at the exit plane, but this affected neither the results of velocity nor the environment for flame development.

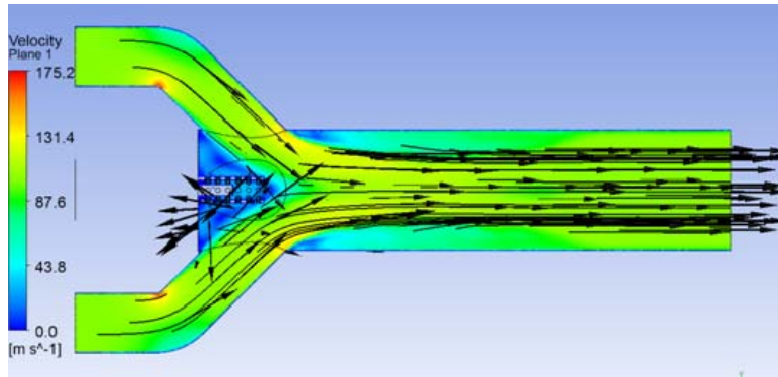


Figure 16. Fluid Flow With Velocity for Four-Inlet Arm System

2. Boundary Conditions

The computational mesh used in CFX was also utilized in the FLUENT software. The simulation setup in FLUENT represented a transient flow problem, delayed spark, and a chemical mixture suitable for combustion. The four-inlet arm design boundary conditions and computational settings are shown in Table 4.

GENERAL		Time	Transient
MODELS		Viscous	k-epsilon
k-epsilon model	Realizable	Species	Species Transport
Mixture Material	Ethylene-air	Reactions	Volumetric
SPARK		Ignition Model	Fixed Spark Size
Energy	1 J	Start time	.005 s
Shape	Cylinder	Duration	.001 s
INLET		Velocity	100 m/s
C2H4	0.065	O2	0.22
OUTLET		Gauge Pressure	0
WALL		Wall Roughness	Smooth Wall
TPI Wall		Wall Roughness	Smooth Wall
SOLUTION SETUP		Step Size	1E-6
Number of Time Steps	60000	Export File Step	5
Ma Iterations/Time Step	150	Reporting Interval	5

Table 4. Preliminary Boundary Conditions for Four-Inlet System Combustion Simulation

3. Four-Inlet Arm System

The reacting flow model failed to demonstrate successful ignition as indicated by the presence of a sufficient amount of fuel-air mixture in the combustion chamber and inside the shroud after the ignition discharge. As Figure 17 illustrates at time 0.004892s, the combustion chamber is filling with the ethylene immediately prior to initiation of the spark.

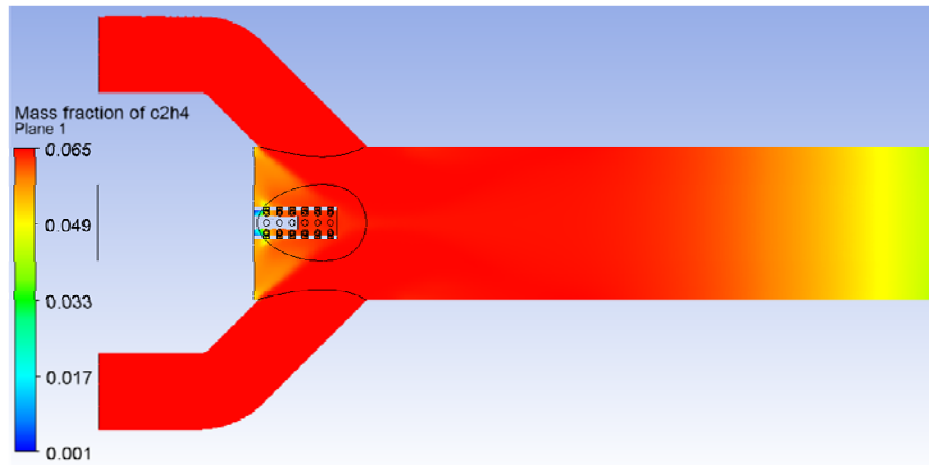


Figure 17. Four-Inlet System Filled With Ethylene

While within the combustion chamber an environment to promote flame development existed, there was no evidence of combustion. An increase in temperature at the base of ignition source demonstrates that a spark was generated, as shown in Figure 18. However, it appears that the spark was too small to ignite the mixture and may require better defining in the computational setup.

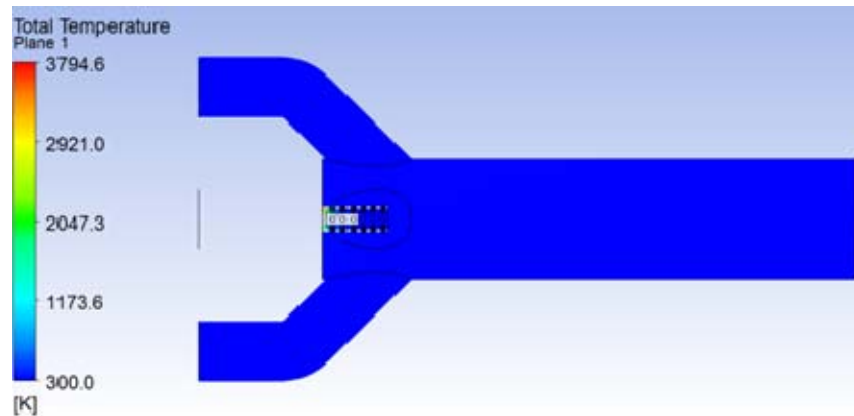


Figure 18. Four-Inlet System With Spark

At time 0.005527s, Figure 19 illustrates there was a lack of H_2O , a product of combustion, and therefore it fails to confirm that combustion occurred.

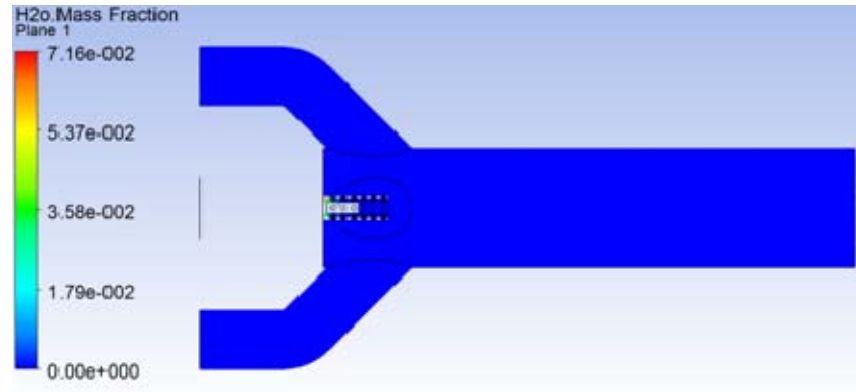


Figure 19. Four-Inlet System Containing No H₂O

Since the physical model in the four-inlet system has had successful combustion, it is assumed that boundary conditions for the computational setup are incorrect. Modeling of the spark is based on a given energy, which may have been spread out too far over a volume in the igniter.

4. Single-Inlet Arm Design

Due to the length of time needed for computation, simulations for the preferred single-inlet design were performed simultaneously with those of the four-inlet arm system. The initial boundary conditions for these simulations are located in Appendix B. Just like the geometry of the four-inlet arm system, it was necessary to develop the flow fields to verify FLUENT results. These flows are displayed in Figure 20.

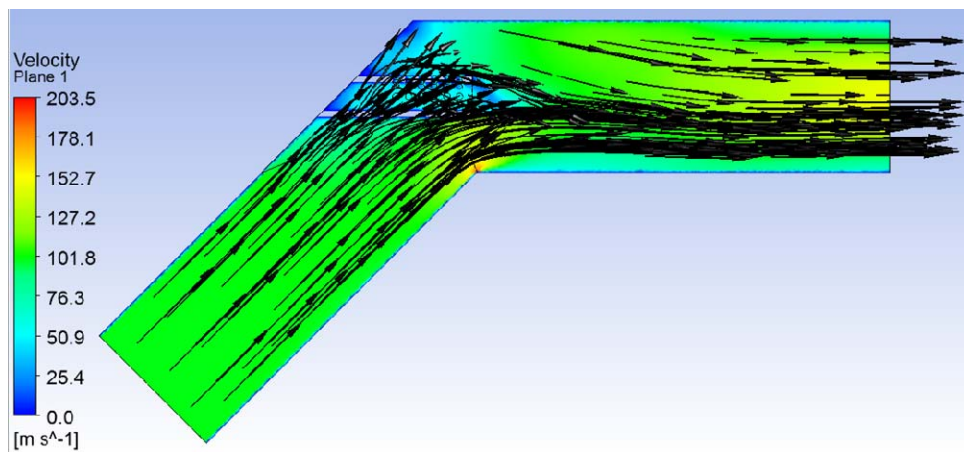


Figure 20. Fluid Flow With Velocity for Single-Inlet Arm System

The single-inlet arm design filled with ethylene at time 0.003987s is displayed in Figure 21. Once the chamber was filled, the spark was initiated and the development of products is supposed to occur.

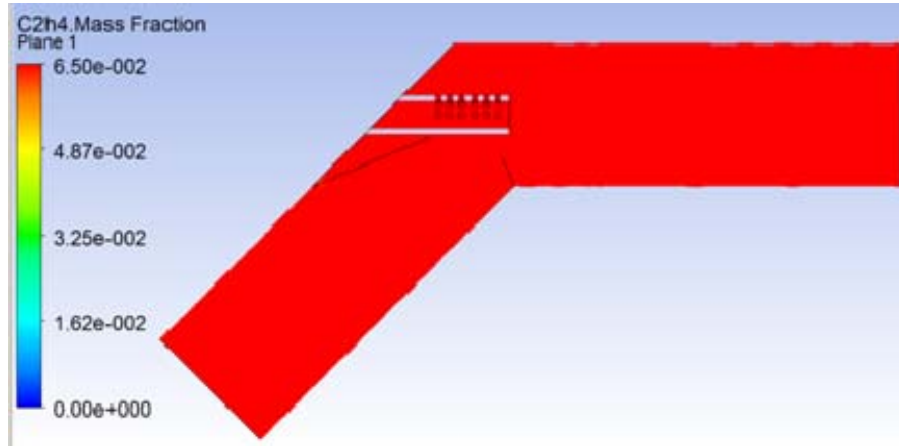


Figure 21. Single-Inlet Arm Design Filled With Ethylene

At time 0.004391s in Figure 22, shortly after the spark, there is a small amount of H_2O produced. This would normally indicate that combustion occurred, but the low magnitude of the mass fraction ($6.25e-4$) does not support that combustion and likely represents the small amount of water generated by the energy discharge (igniter) event.

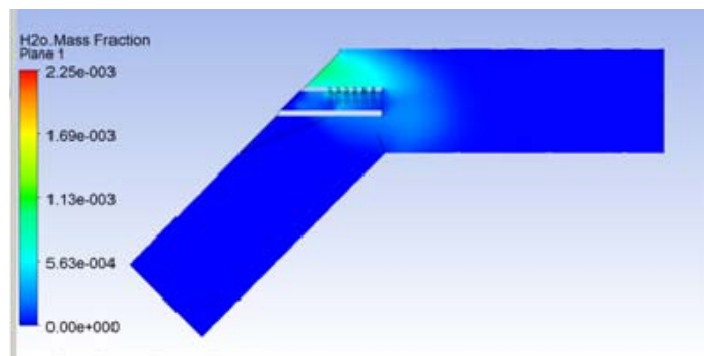


Figure 22. Single-Inlet Arm Design With H_2O Exiting Shroud

The small amount of H_2O does not reside very long above the shroud where it was expected to gain energy in the recirculation zones prior to going down the chamber. The movement of H_2O down the combustor can be seen at time step 0.005021s in Figure 23.

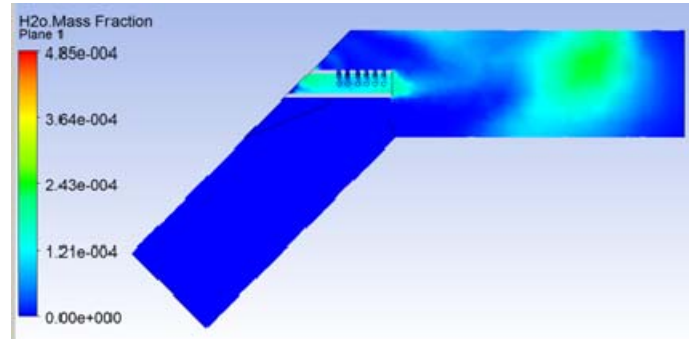


Figure 23. Single-Inlet Arm Design With H_2O Traversing the Chamber

The final time step for the simulation is at 0.006596s where the small amount of H_2O produced is exiting the combustion chamber shown in Figure 24.

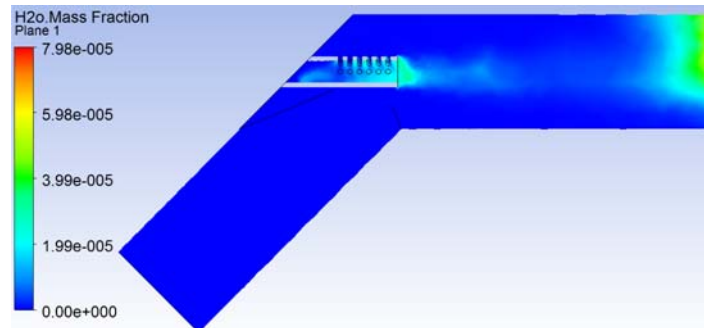


Figure 24. Single-Inlet Arm Design With H_2O Exiting Chamber

While the previous figures displayed the production of H_2O , the small amount does not support the observation that combustion really occurred. The temperature distribution in Figure 25 shows that temperature only increased roughly 250°F . Had the mixture fully combusted, the temperatures should have increased to values over 2000°F .

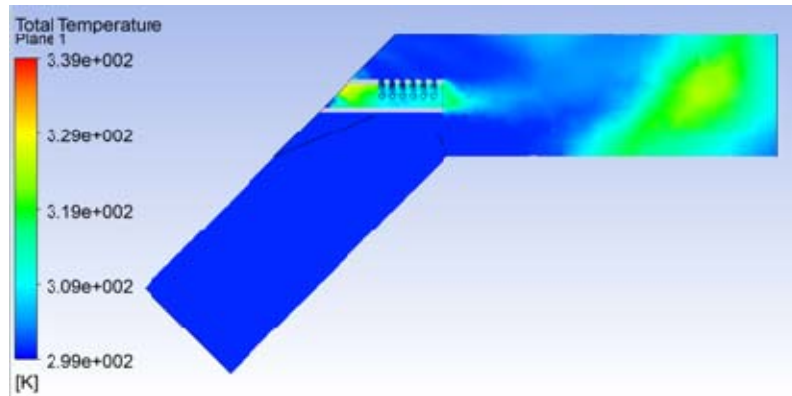


Figure 25. Single-Inlet Arm Design Temperature Displacement

The development and dispersion of H_2O shows that there was some reaction occurring in the single-inlet system; however, this could be an artifact of the ignition conditions. Since the results for the four-inlet arm are not adequate, it is not possible to determine if combustion failed due to computational setup or design. What can be gained from this simulation is the observation that there is insufficient purging of flow through the flame shroud. As the mixture burns, there is no fresh fuel-air entering the shroud, which may require further investigation of shroud design.

IV. FINAL DESIGN DECISION

Models evaluated using CFX and FLUENT revealed that the 7.62 cm single inlet arm into 7.62 cm combustion chamber design would likely produce adequate velocities and flame development. Based on this analysis, physical pieces were commissioned, according to compatibility measurements, and placed on the test platform.

A. SOLIDWORKS DESIGN

Building the single-inlet design involved two considerations: consistency with simulations and modularity. Retaining the geometries used during CFD and FLUENT simulations maintain consistency. Establishing modularity allows minor alterations during system testing, simultaneously providing opportunities for improving the single-inlet arm design.

The first concern was the proper insulation of the TPI cathode, which required a Teflon sleeve to isolate the cable and plug. The 45° casing contained channels to provide a cooling ability for the system during long duration runs. Modularity was also taken into account when building the 45° insert that maintained position of the shroud and igniter. If further testing desired a different location for the shroud or igniter, the insert could be replaced. An exploded view of the single-inlet arm design assembly is depicted in Figure 26.

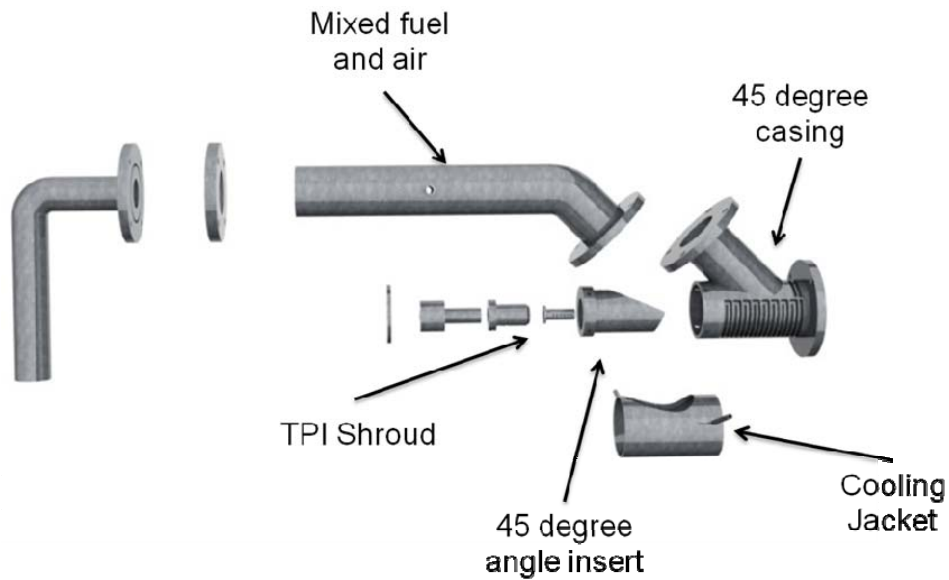


Figure 26. Exploded View of the Single-Inlet Arm Design Assembly

Detailed drawings provided to the machinist for fabrication are located in Appendix C. Many of the pieces fit inside of each other, requiring tolerances within a thousand of an inch to be assigned to the majority of the pieces. A cutaway illustration in Figure 27 shows the assembled unit and justification for such tight tolerances.

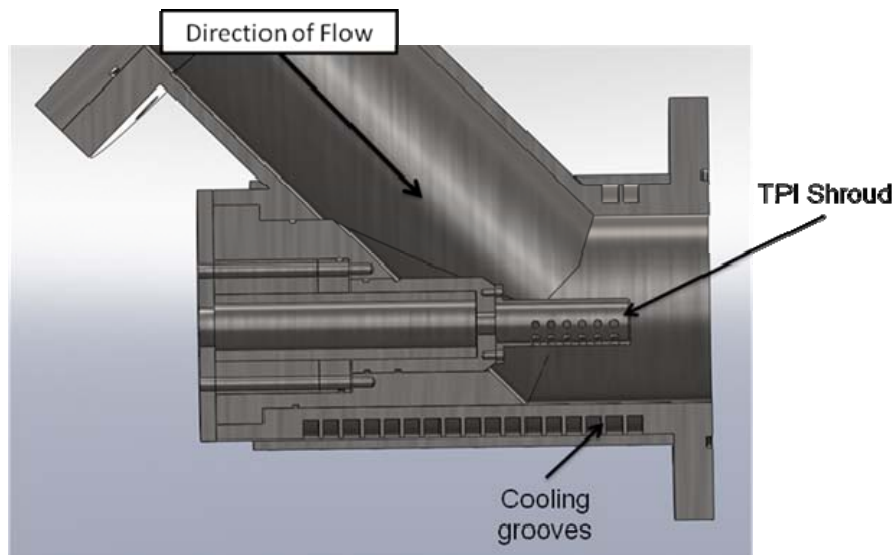


Figure 27. Cutaway Illustration of the Single-Inlet Arm Design

B. FABRICATED HARDWARE

Selections of the fabricated combustor components are pictured in Figure 28. This completed adapter piece and fuel-mixing inlet tube attach to the primary combustor.



Figure 28. Adapter and Fuel-Mixing Inlet Arm

The hardware depicted in Figure 29 shows the outer casing before and after the water jacket casing is applied as well as the 45° section. The channeled grooves will utilize cooling water for the combustor.



Figure 29. The 45° Outer Casing

The plate used to hold the pieces in place and the 45° insert are in Figure 30 without the angle cut.



Figure 30. Cap and 45° Insert

The shroud and TPI/Gas Turbine plug incasing are shown in Figure 31. However, the holes have not been cut into the shroud. The Teflon tube is for insulating the plug and cable.



Figure 31. Shroud and Teflon Tube

The completed system from the machines is shown in Figure 32. They are to be assembled, incorporated to the PDE, and tested at a variety of frequencies, pressures, and fuel mixtures.



Figure 32. Completed Machined Hardware

VI. SUMMARY AND CONCLUSION

The four-inlet combustor design successfully created combustion for the PDC. However, streamlining this system was needed to allow practical applicability by reducing the number of inlet arms. The single-inlet combustor design was determined using previous research and modeling programs to reproduce favorable flow field characteristics of the four-inlet combustor system.

CFD simulation programs, such as CFX and FLUENT, examined the flow fields and resulting velocities inside the combustion chamber for four proposed designs. The FLUENT software package also attempted to investigate the ignition and combustion behavior as well. Although combustion was not observed, it was not determined if that was due to failure to define proper computational boundary conditions or the design itself. The use of FLUENT is still an acceptable method of modeling combustion, but will require more work in understanding the software modeling program with larger geometries.

It was determined from the results that were available that a geometry with a single-inlet arm design utilizing a 7.62 cm inlet entering a 7.62 cm combustion chamber at a 45° dump angle should produce an acceptable flow field. Hardware was fabricated for testing at the Rocket Propulsion Laboratory at the Naval Postgraduate School.

Upon arrival and assembly of the fabricated hardware, experimental testing of the preferred design will establish a path for future research. The follow-on research will explore the operational limits of this single-inlet arm PDC through manipulation of boundary conditions such as different pressures, fuels, frequencies, TPI positions, and shroud usage. Moreover, this design's modularity invites future improvements and applicability to contribute to the evolution of PDCs.

THIS PAGE INTENTIONALLY LEFT BLANK

LIST OF REFERENCES

- Ansys CFX. (2010). *Powerful computational fluid dynamics software for process and product design optimization* (Release 13.0). [Brochure].
- Ansys Fluent. (2010). *Powerful computational fluid dynamics software for optimization of product development and processes* (Release 13.0). [Brochure].
- Dvorak, W. T. (2010). *Performance characterization of swept ramp obstacle fields in pulsedetonation applications*. Master's thesis, Naval Postgraduate School, Monterey, CA.
- Hawkes, N. C. (2009). *Characterization of transient plasma ignition flame kernel growth for varying inlet conditions*. Master's thesis, Naval Postgraduate School, Monterey, CA.
- Lee, J. H. (2008). *The detonation phenomenon*. Cambridge: Cambridge University Press.
- Nichols, A. D. (2010). *Swept-ramp detonation initiation performance in high-pressure pulse detonation combustor*. Master's thesis, Naval Postgraduate School, Monterey, CA.
- Tu, J., Heng, G., & Liu, C. (2008). *Computational fluid dynamics: A practical approach*. Butterworth Heinemann.
- Warwick, G. (2008, June 20). *Darpa lifts the covers on vulcan engine*. Retrieved on January 5, 2011 from <http://www.aviationweek.com>
- Zittere, B. (2009). *Flowpath design of three-tube valve-less pulse detonation combustor*. Master's thesis, Naval Postgraduate School, Monterey, CA.

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX A. MESHING AND CFX SETUP

A. THE 5.08 CM INLET ARM INTO 7.62 CM COMBUSTOR

Meshing Conditions			
Max Body Spacing	0.001 mm	Angular Resolution	30°
Min Edge Length	0.0001 mm	Max Edge Length	0.001 mm
Inflation Layers	20	Expansion Factor	1.2
Min Internal Angle	5°	TPI Inflation Max Thick	0.003 mm
Max External Angle	15°	Nodes	1858688
Pyramids	2689	Prisms	885897
Tetrahedra	10324274	Total Elements	10415560
Boundary Conditions			
INLET		Mass Flow Rate	0.3125 kg/s
Flow Regime	Subsonic	Static Temperature	480 K
OUTLET		Mass Flow Rate	0.3125 kg/s
WALL		Wall Roughness	Smooth Wall
Mass and Momentum	No Slip Wall	Heat Transfer	Adiabatic
TPI Wall		Wall Roughness	Smooth Wall
Mass and Momentum	No Slip Wall	Heat Transfer	Adiabatic
INITIALIZATION		Pressure	1 atm
Material	Air Ideal Gas	Heat Transfer	Total Energy
Turbulence	k-Epsilon	Velocity u/v/w	0/0/60 m/s
Temperature	400 K	Intensity	Medium

B. THE 5.08 CM INLET ARM INTO 10.16 CM COMBUSTOR

Meshing Conditions			
Max Body Spacing	0.0015 mm	Angular Resolution	30°
Min Edge Length	0.0001 mm	Max Edge Length	0.0015 mm
Inflation Layers	5	Expansion Factor	1.2
Min Internal Angle	2.5°	TPI Inflation Max Thick	0.003 mm
Max External Angle	10°	Nodes	911279
Pyramids	2540	Prisms	59651
Tetrahedra	4495877	Total Elements	5058068
Boundary Conditions			
INLET		Mass Flow Rate	0.3125 kg/s
Flow Regime	Subsonic	Static Temperature	480 K
OUTLET		Mass Flow Rate	0.3125 kg/s
WALL		Wall Roughness	Smooth Wall
Mass and Momentum	No Slip Wall	Heat Transfer	Adiabatic
TPI Wall		Wall Roughness	Smooth Wall
Mass and Momentum	No Slip Wall	Heat Transfer	Adiabatic
INITIALIZATION		Pressure	1 atm
Material	Air Ideal Gas	Heat Transfer	Total Energy
Turbulence	k-Epsilon	Velocity u/v/w	0/0/60 m/s
Temperature	400 K	Intensity	Medium

C. THE 3.81 CM INLET ARM INTO 7.62 CM COMBUSTOR

Meshing Conditions			
Max Body Spacing	0.00115 mm	Angular Resolution	30°
Min Edge Length	0.000115 mm	Max Edge Length	0.00115 mm
Inflation Layers	20	Expansion Factor	1.1
Min Internal Angle	5	TPI Inflation Max Thick	0.003 mm
Max External Angle	15	Nodes	1501168
Pyramids	3325	Prisms	235096
Tetrahedra	7859408	Total Elements	8097829
Boundary Conditions			
INLET		Mass Flow Rate	0.3125 kg/s
Flow Regime	Subsonic	Static Temperature	480 K
OUTLET		Mass Flow Rate	0.3125 kg/s
WALL		Wall Roughness	Smooth Wall
Mass and Momentum	No Slip Wall	Heat Transfer	Adiabatic
TPI Wall		Wall Roughness	Smooth Wall
Mass and Momentum	No Slip Wall	Heat Transfer	Adiabatic
INITIALIZATION		Pressure	1 atm
Material	Air Ideal Gas	Heat Transfer	Total Energy
Turbulence	k-Epsilon	Velocity u/v/w	0/0/60 m/s
Temperature	400 K	Intensity	Medium

D. THE 7.62 CM INLET ARM INTO 7.62 CM COMBUSTOR

Meshing Conditions			
Max Body Spacing	0.0011 mm	Angular Resolution	30°
Min Edge Length	0.0001 mm	Max Edge Length	0.0011 mm
Inflation Layers	5	Expansion Factor	1.2
Min Internal Angle	5°	TPI Inflation Max Thick	0.003 mm
Max External Angle	15°	Nodes	1981635
Pyramids	2574	Prisms	80512
Tetrahedra	11077246	Total Elements	11160332
Boundary Conditions			
INLET		Mass Flow Rate	0.3125 kg/s
Flow Regime	Subsonic	Static Temperature	480 K
OUTLET		Mass Flow Rate	0.3125 kg/s
WALL		Wall Roughness	Smooth Wall
Mass and Momentum	No Slip Wall	Heat Transfer	Adiabatic
TPI Wall		Wall Roughness	Smooth Wall
Mass and Momentum	No Slip Wall	Heat Transfer	Adiabatic
INITIALIZATION		Pressure	1 atm
Material	Air Ideal Gas	Heat Transfer	Total Energy
Turbulence	k-Epsilon	Velocity u/v/w	0/0/60 m/s
Temperature	400 K	Intensity	Medium


APPENDIX B. FLUENT SETUP FOR SINGLE ARM INLET

Boundary Conditions			
GENERAL		Time	Transient
MODELS		Viscous	k-epsilon
k-epsilon model	Realizable	Species	Species Transport
Mixture Material	Ethylene-air	Reactions	Volumetric
SPARK		Ignition Model	Fixed Spark Size
Energy	1 J	Start time	.004 s
Shape	Cylinder	Duration	.001 s
INLET		Velocity	100 m/s
C2H4	0.065	O2	0.22
OUTLET		Gauge Pressure	0
WALL		Wall Roughness	Smooth Wall
TPI Wall		Wall Roughness	Smooth Wall
SOLUTION SETUP		Step Size	1E-6
Number of Time Steps	60000	Export File Step	5
Ma Iterations/Time Step	150	Reporting Interval	5


THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX C. FINAL DESIGN PLANS

A. ENCASING OF INLET

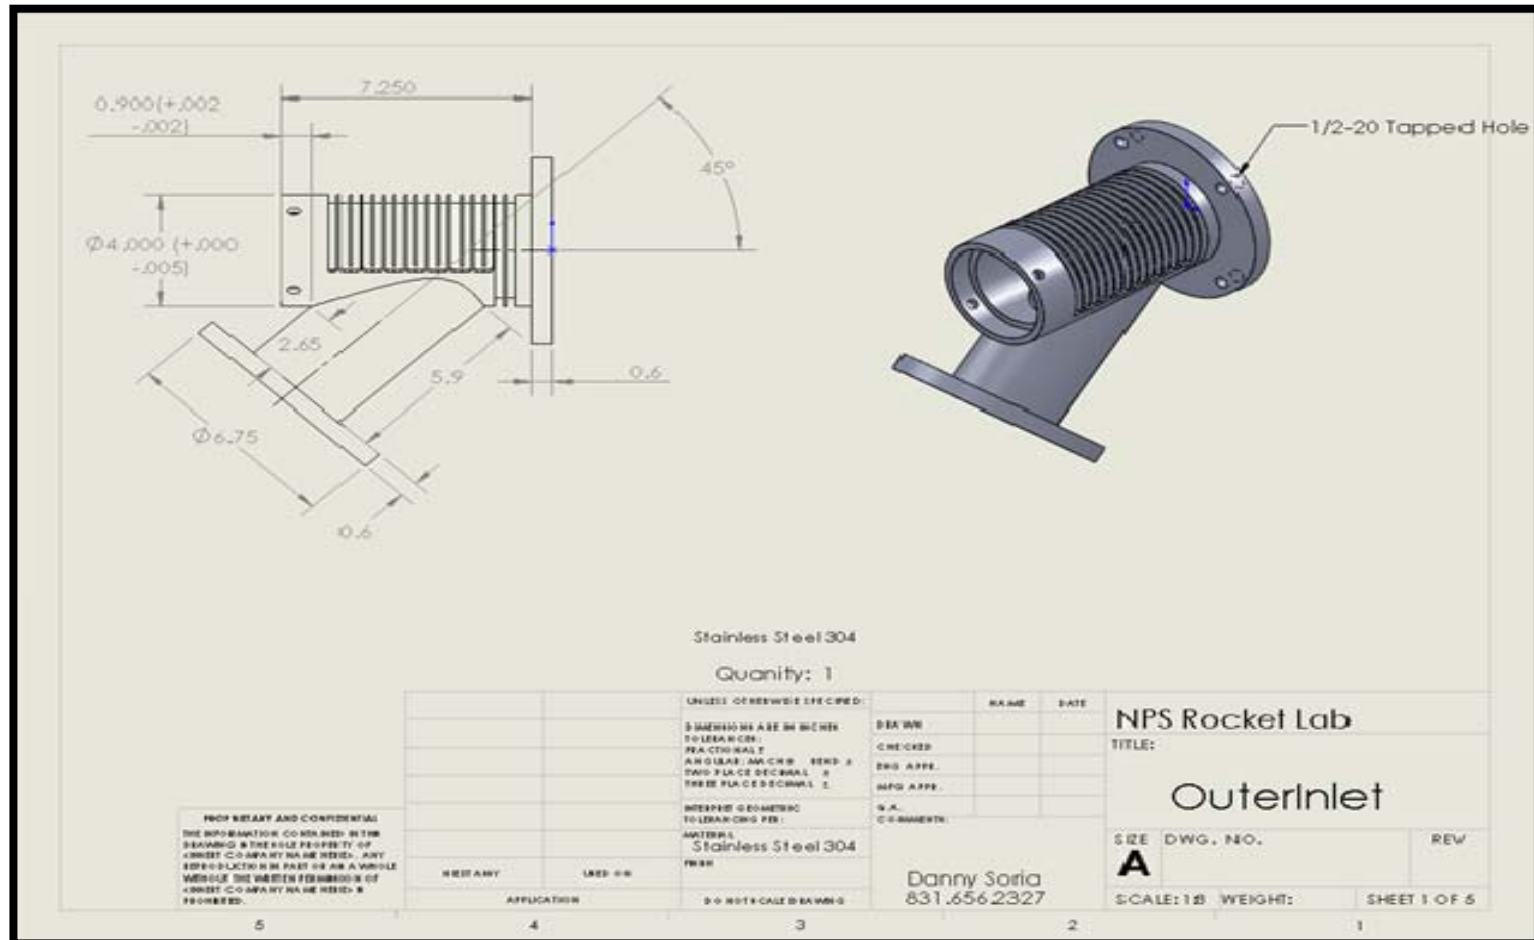

FLANGE A (Tap Holes, O-ring)
Attached to rig with holes at 45 degree from center line

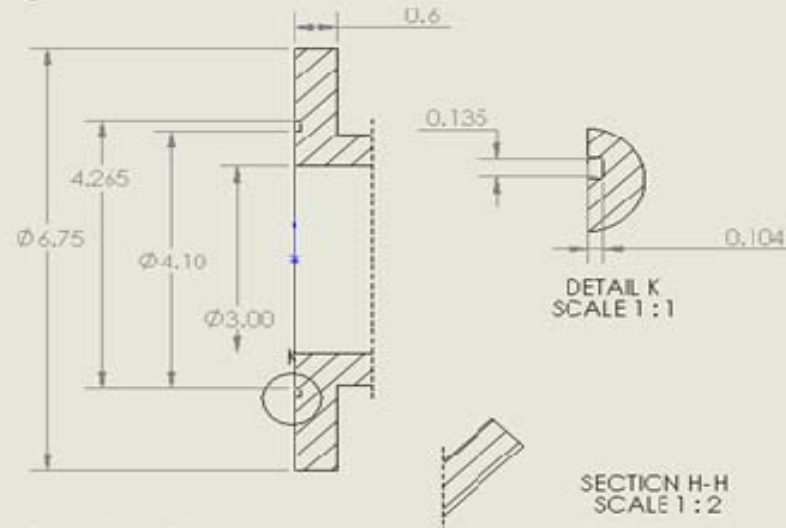


Quantity: 1


		UNLESS OTHERWISE SPECIFIED:		NAME		DATE		NPS Rocket Lab	
		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONALS ANGULAR: MAX ± .0001 TWO PLACE DECIMAL ± .005 THREE PLACE DECIMAL ± .0005		DRAWN				TITLE:	
		HIDDEN: GEOMETRIC INTERFACING REF.		CHECKED					
		MADE FROM Stainless Steel 304		ENG APPR.				OuterInlet	
		FINISH		MFG APPR				SIZE DWG. NO. REV	
NEXT AWY		USED ON		S.A. COMMENTS				A	
APPLICATION		DO NOT SCALE DRAWING		DANNY SORIA 831.656.2327				SCALE: 1:8 WEIGHT: SHEET 2 OF 3	

Rear view

Flange B (through holes, NO o-ring, NO taps)
Attached to rig with holes at 45 degree from center line

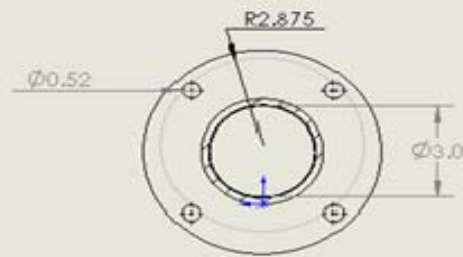

SECTION M-M
SCALE 1:4

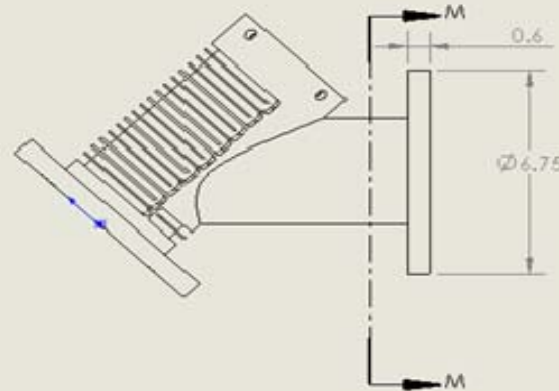

Stainless Steel 304

Quantity: 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED HEREIN IS THE SOLE PROPERTY OF
NPS ROCKET LAB. NO REPRODUCTION IN ANY FORM OR BY ANY MEANS
WITHOUT THE WRITTEN PERMISSION OF NPS ROCKET LAB IS
FORBIDDEN.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	NPS Rocket Lab	
DIMENSIONS ARE IN INCHES		DRAWN		TITLE:	
FRACTIONALS		CHECKED		OuterInlet	
ANGULAR: MAXIMUM BEND IS		ENG APPR.		SIZE DWG. NO.	
TWO PLACES OR MORE		MFG APPR.		A	
THREE PLACES OR MORE		Q.A.		REV	
NEUTRAL GEOMETRIC		COMMENTS:		SCALE: 1:8 WEIGHT: SHEET 3 OF 5	
COVERING FIBER					
MATERIAL:		Danny Soria			
Stainless Steel 304		831.656.2327			
FINISH:					
DO NOT SCALE DRAWING					
NEXT ASSY	USED ON				
APPLICATION					


5

4

3

2

1

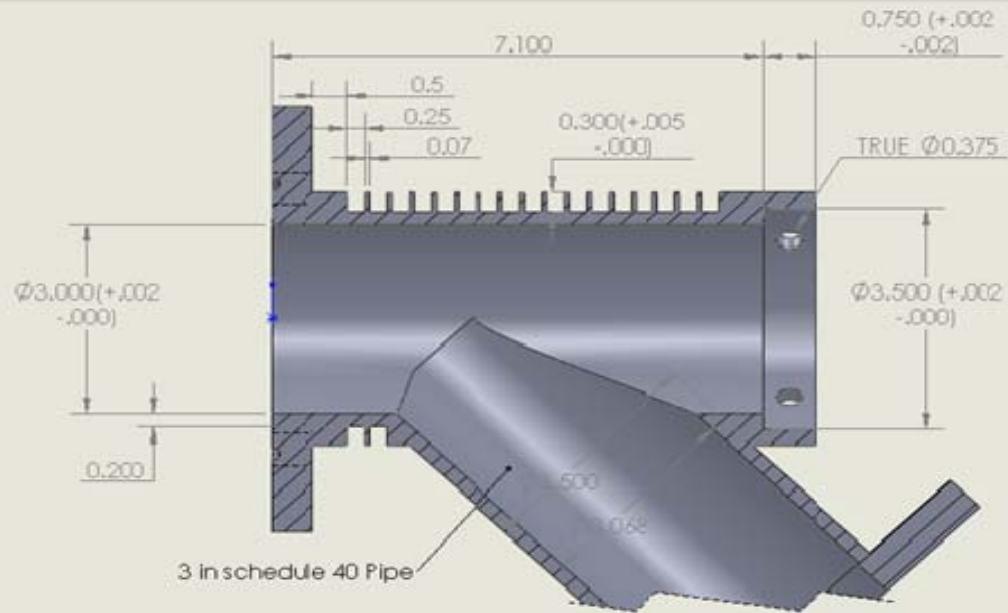

Stainless Steel 304

Quantity: 1

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	NPS Rocket Lab	
		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS ANGULAR: A/4 CH 1/2 B/2 TWO PLACE DECIMAL 1/2 THREE PLACE DECIMAL 1/2		DRAWN		TITLE:	
				CHECKED			
				ENG APPR.			
				MFG APPR.			
		MATERIAL SPECIFICATIONS MATERIAL REF:		Q.A. COMMENTS		OuterInlet	
		MATERIAL Stainless Steel 304				SIZE DWG. NO.	REV
NEXT REV		USED ON		A			
APPLICATION		FOR NOTATION DRAWING		Danny Soria 831.656.2327		SCALE: 1/8" = 1"	WEIGHT: SHEET 4 OF 5

new holes are 45 degree of center
through the part "OuterInlet"

The drawing shows a cross-section of a mechanical part with a central hole. A detail view of the hole is shown with a 45-degree chamfer. The hole has a radius of R1.750 (+.001, -.000) and a chamfer radius of R2.000 (+.000, -.0025). The chamfer is 45 degrees. The part is labeled "OuterInlet".

Stainless Steel 304

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
[INSERT COMPANY NAME HERE]. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
[INSERT COMPANY NAME HERE] IS
PROHIBITED.

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL
ANGLES: EACH ± .5 DEG
TWO PLACE DECIMAL ± .01
THREE PLACE DECIMAL ± .005

Stainless Steel 30-4

Figure 10.10

DO NOT SCALE DRAWING

© 2004 WILEY-VCH Verlag GmbH & Co. KGaA, Weinheim

CHICKED

● 2006 年 12 月 1 日起

1995-1996

REF A374

GA

Comments:

2000

Dan

831.

Danny Soria
831.656.2327

NPS Rocket Lab

TALE:

OuterInlet

SZF

DWG. NO.


RFV

A


SCALE: 1:8 WEIGHT:


SHEET 5 OF 5

B. CENTER INSERT

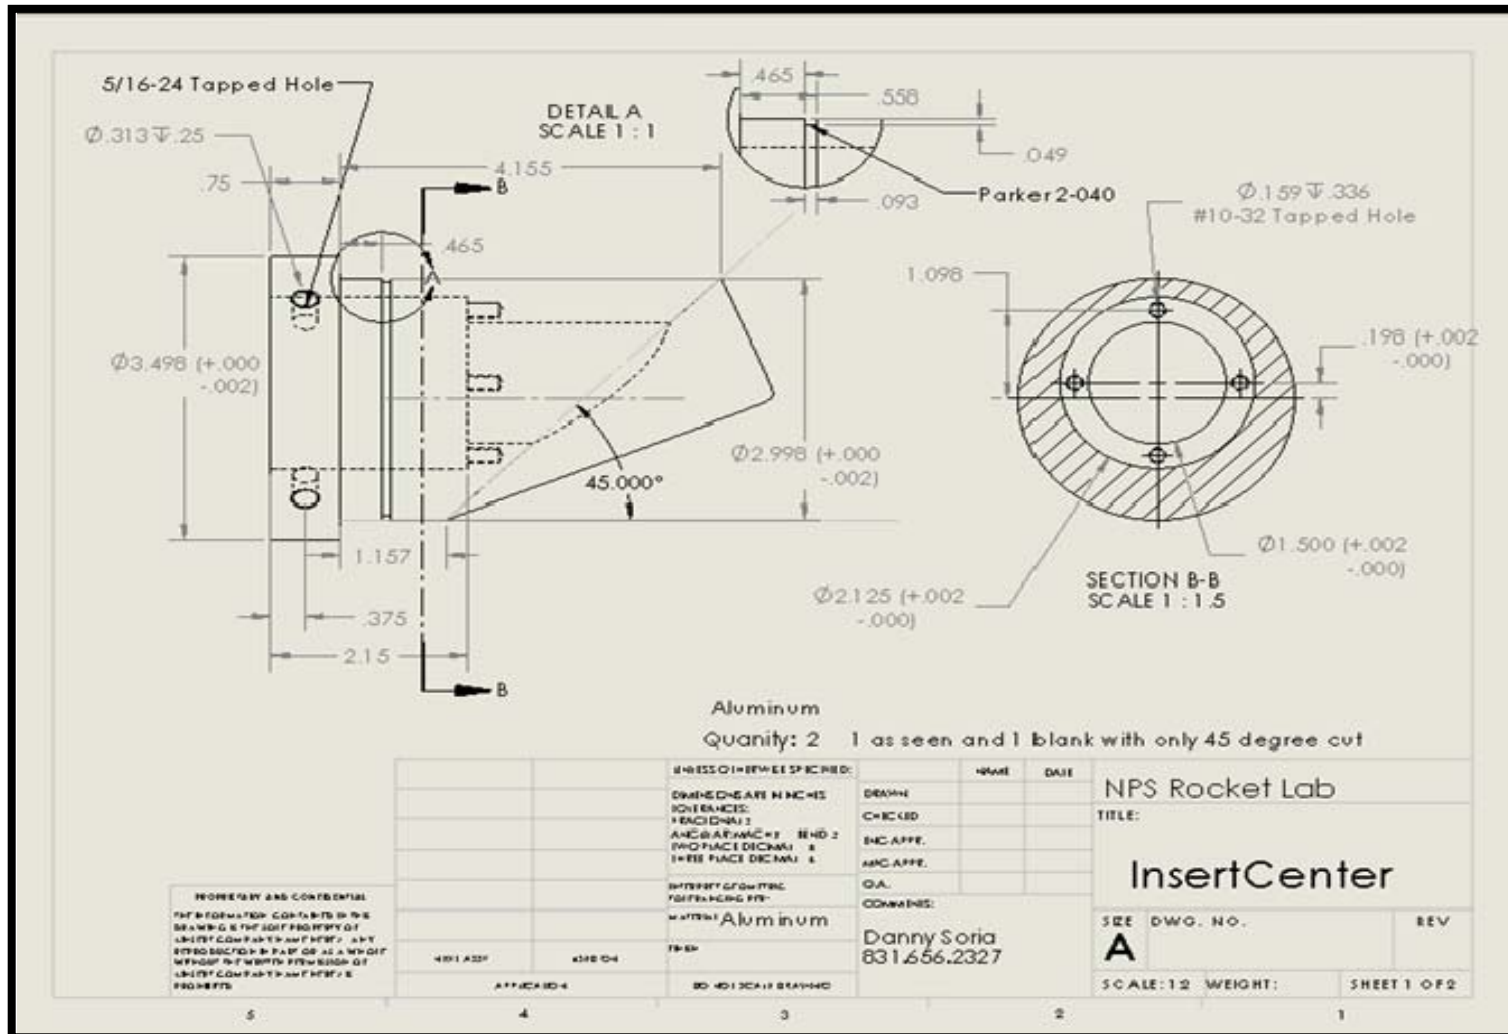


C. SHROUD BASE

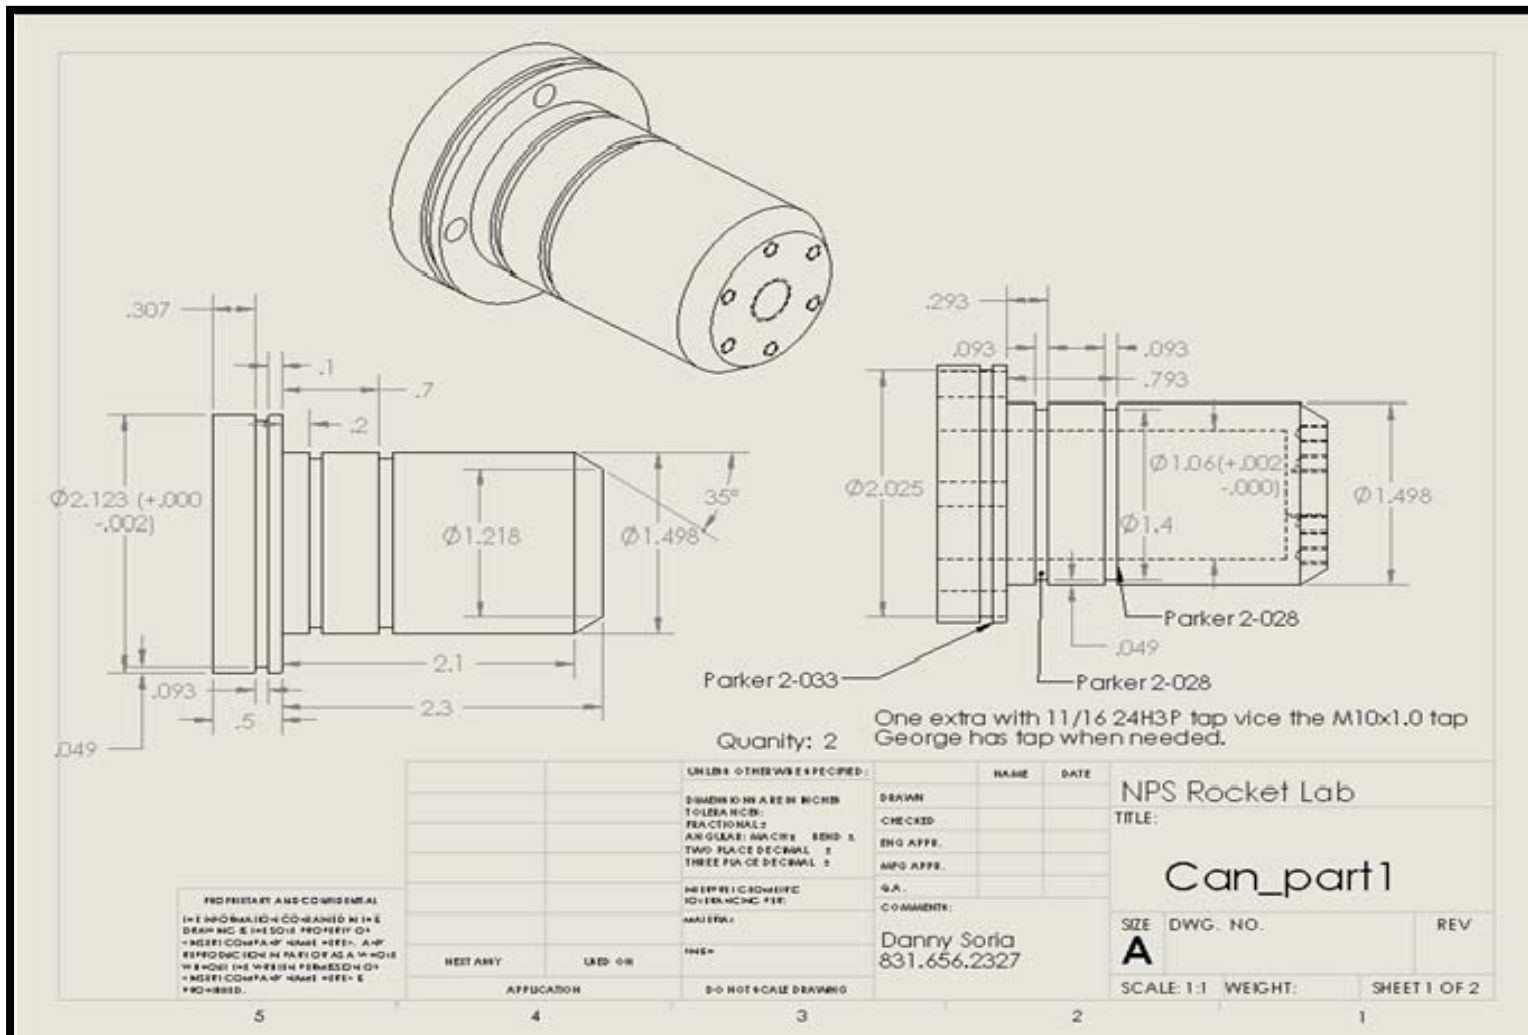


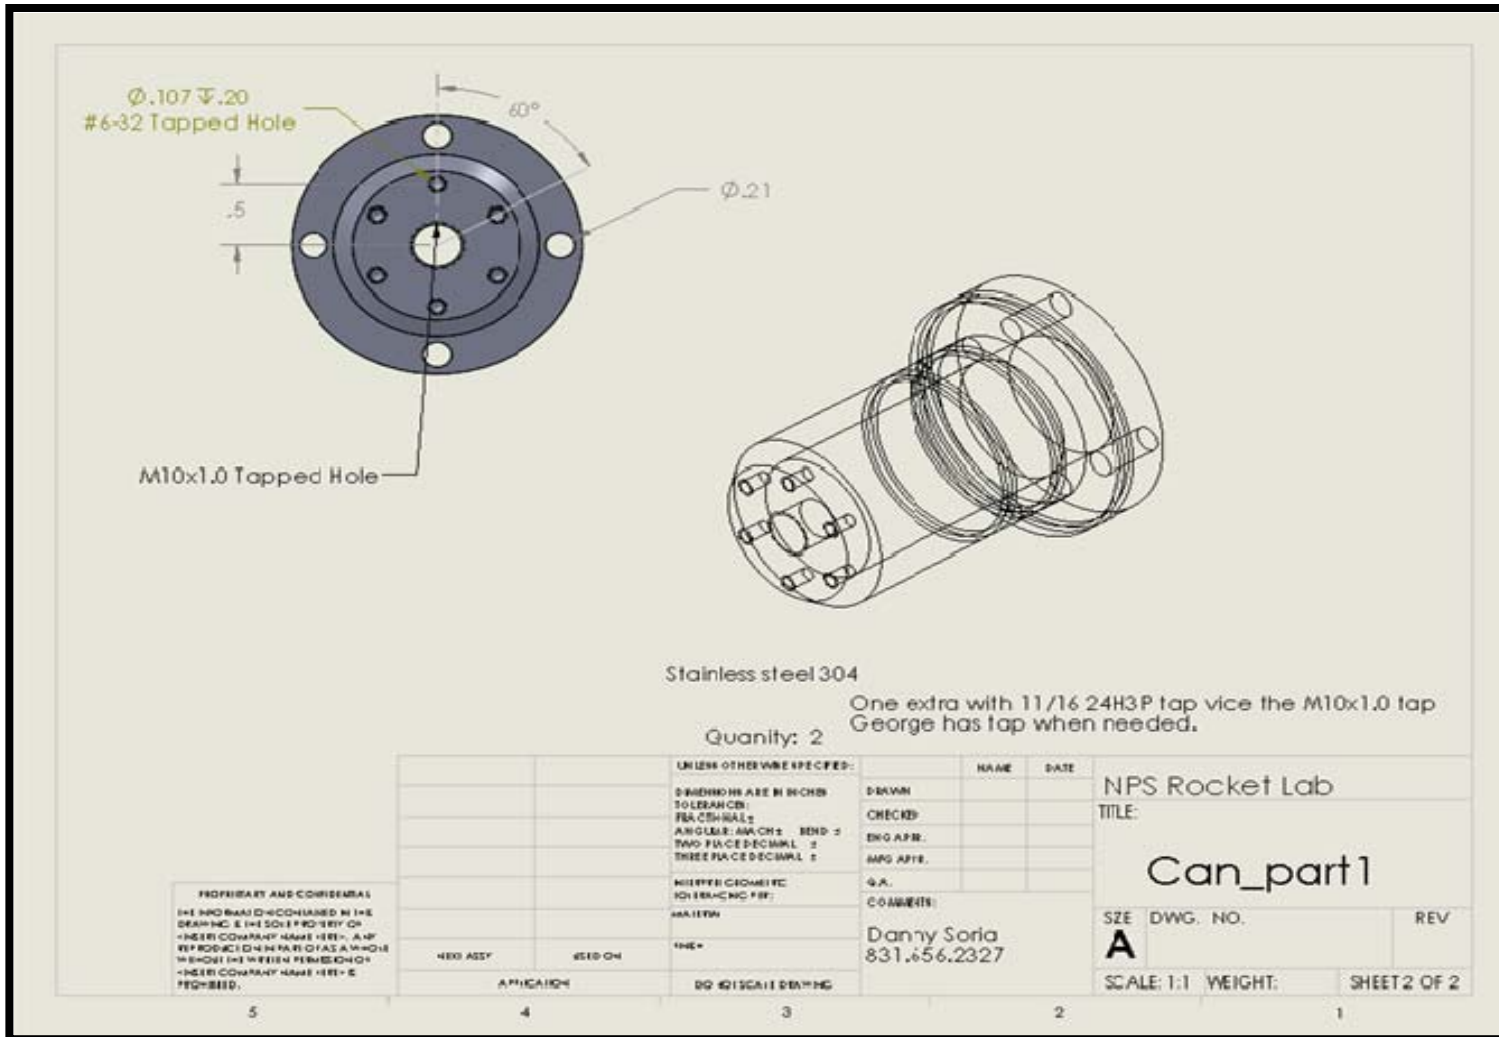


D. SHROUD

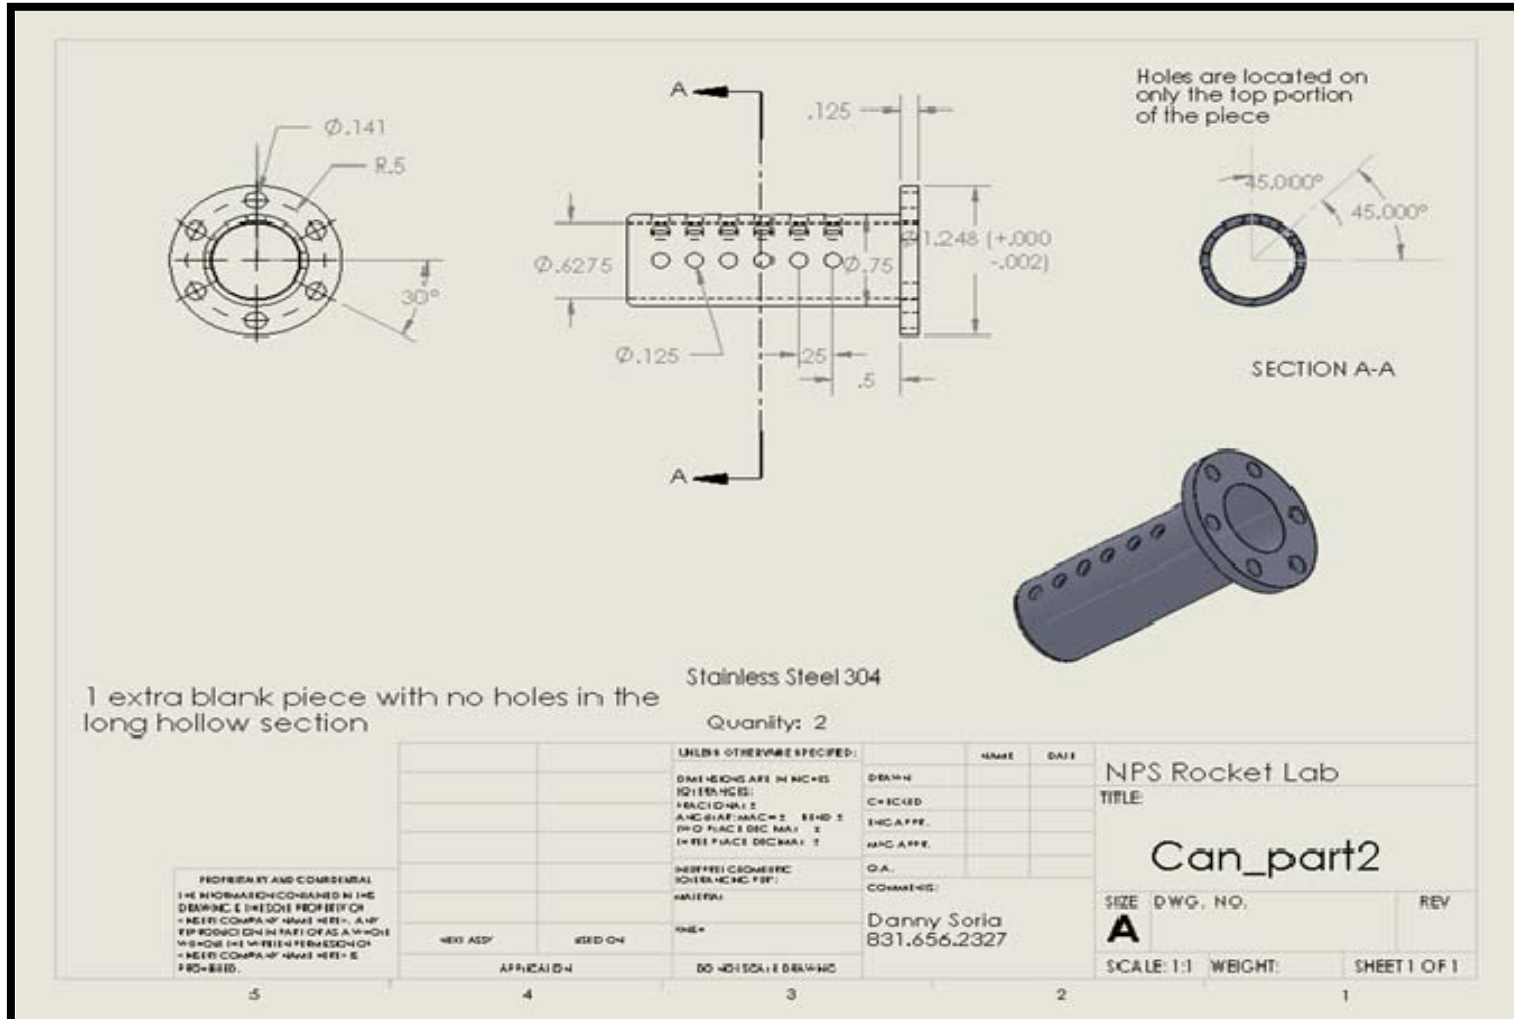


E. INSULATOR

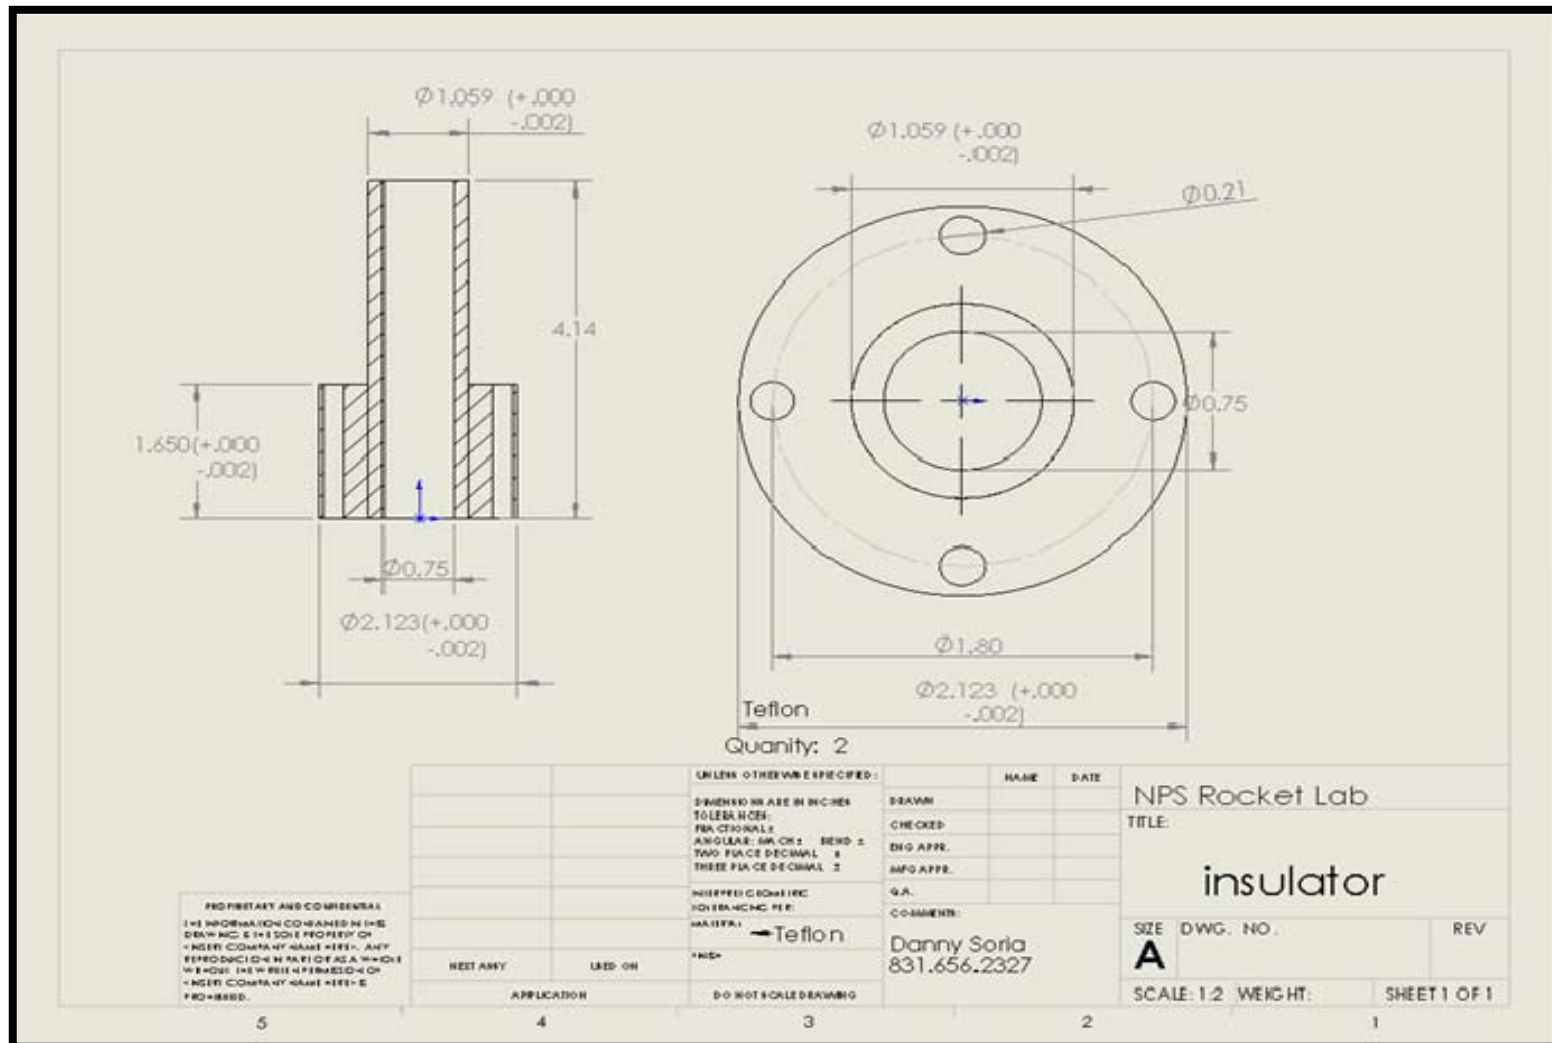




F. CAP

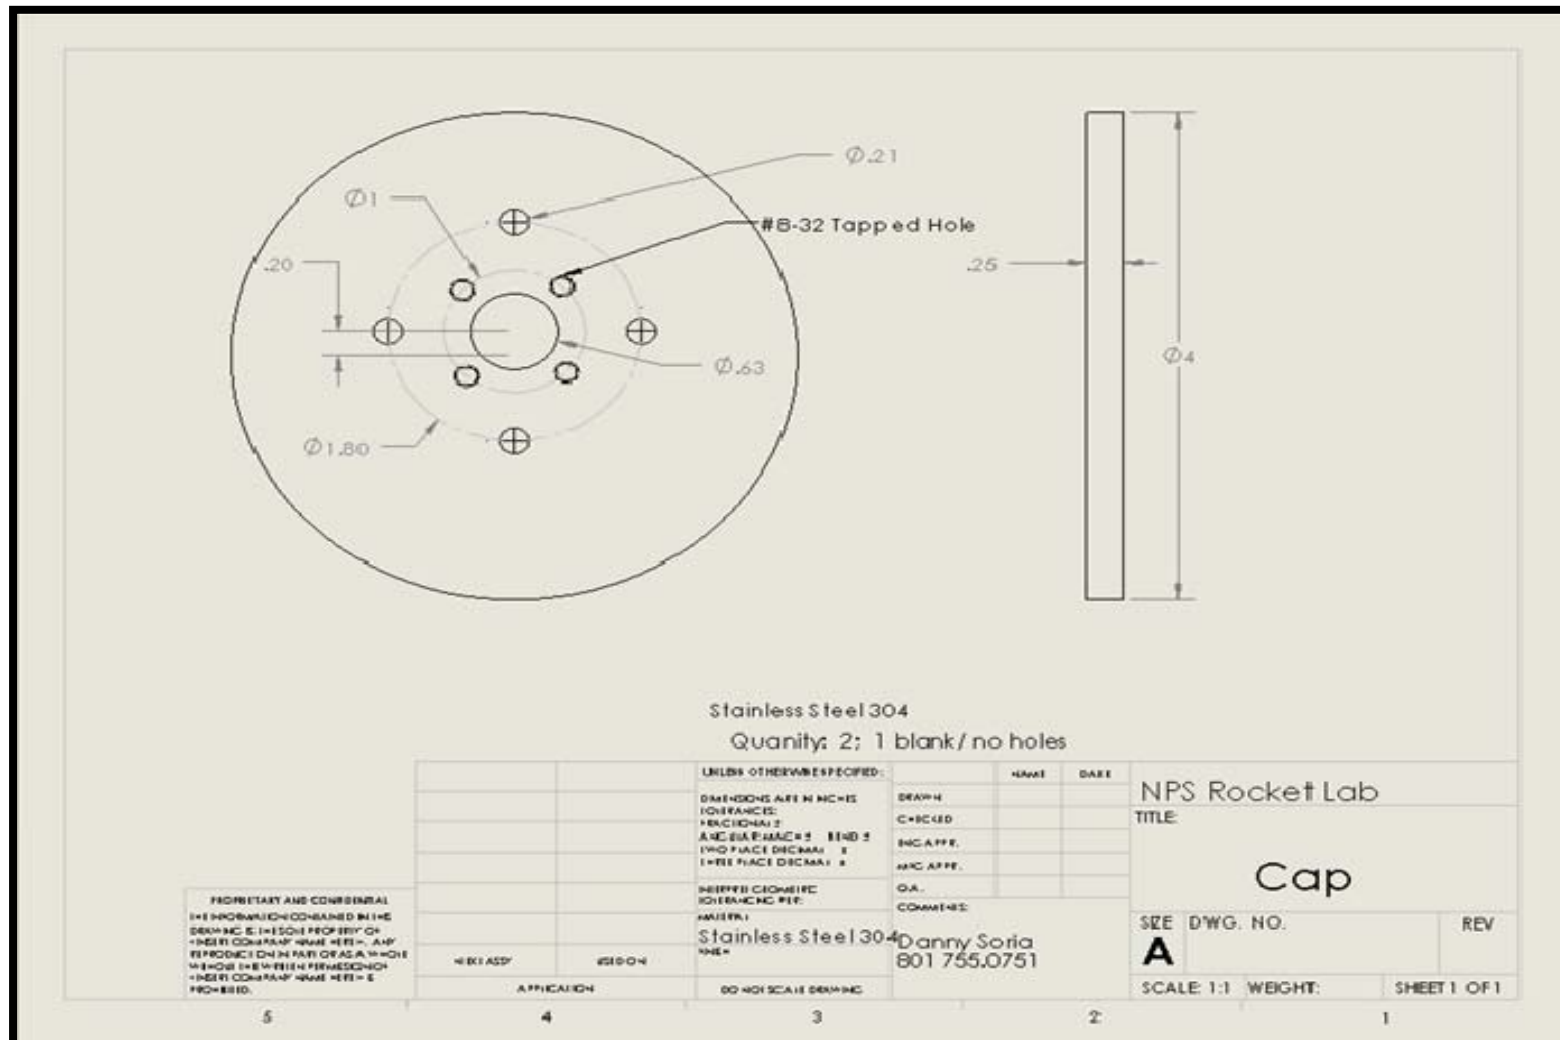

G. INLET WATER JACKET

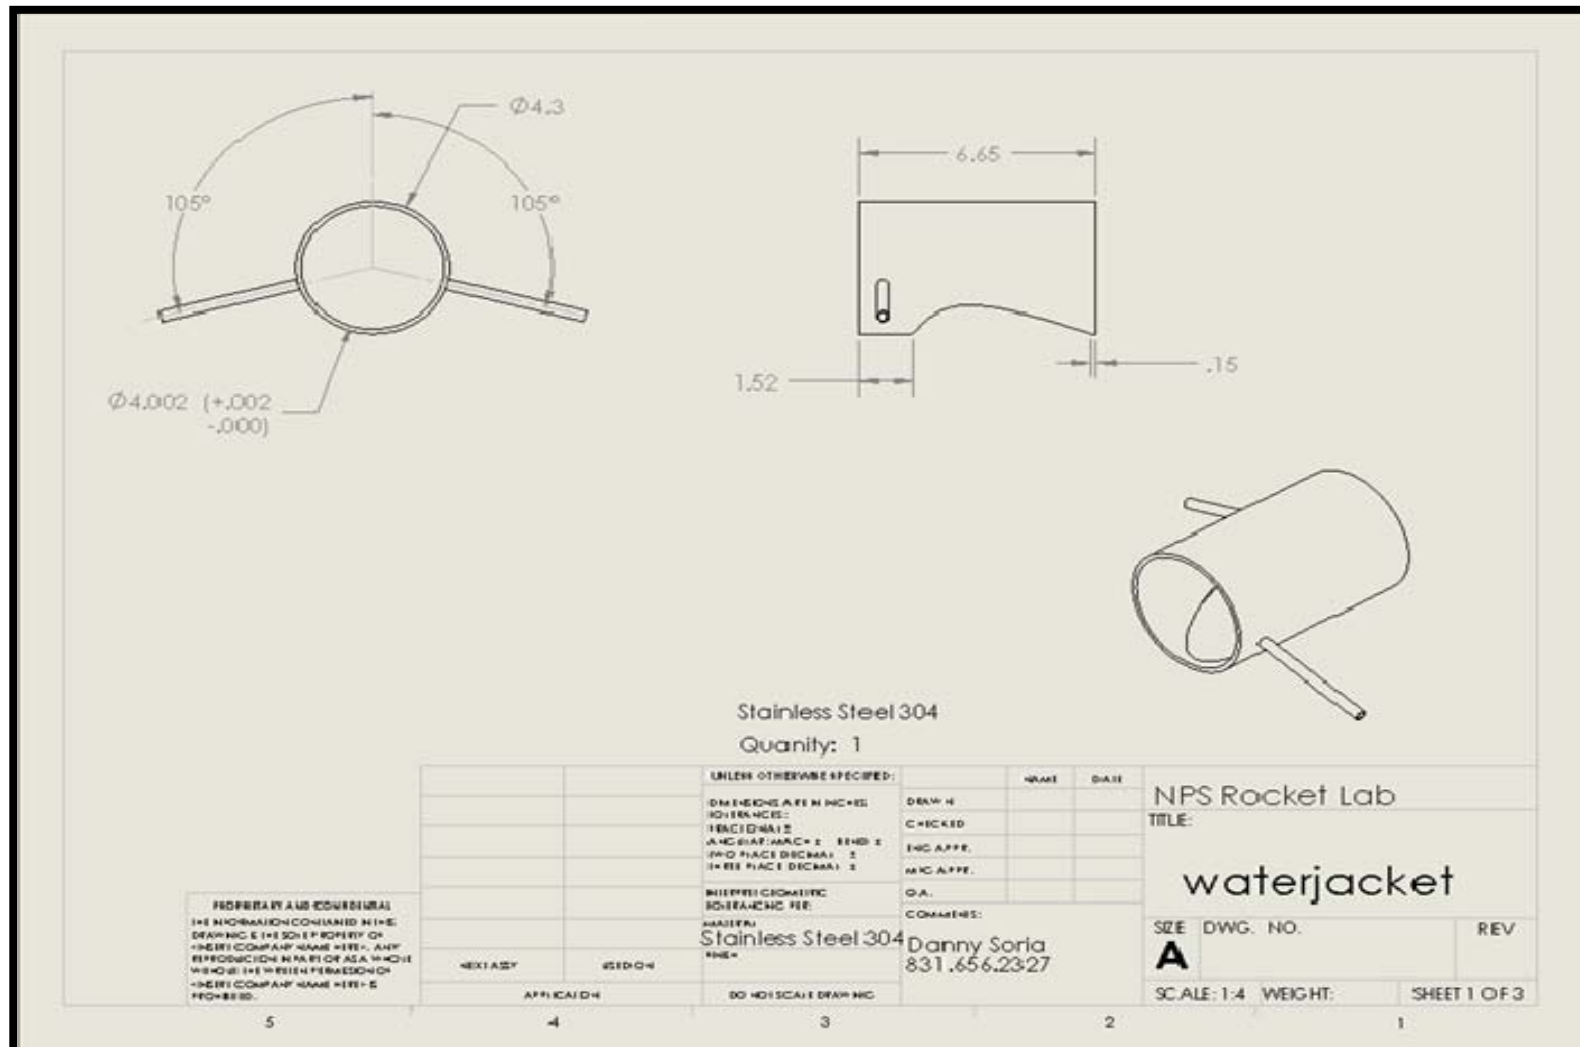

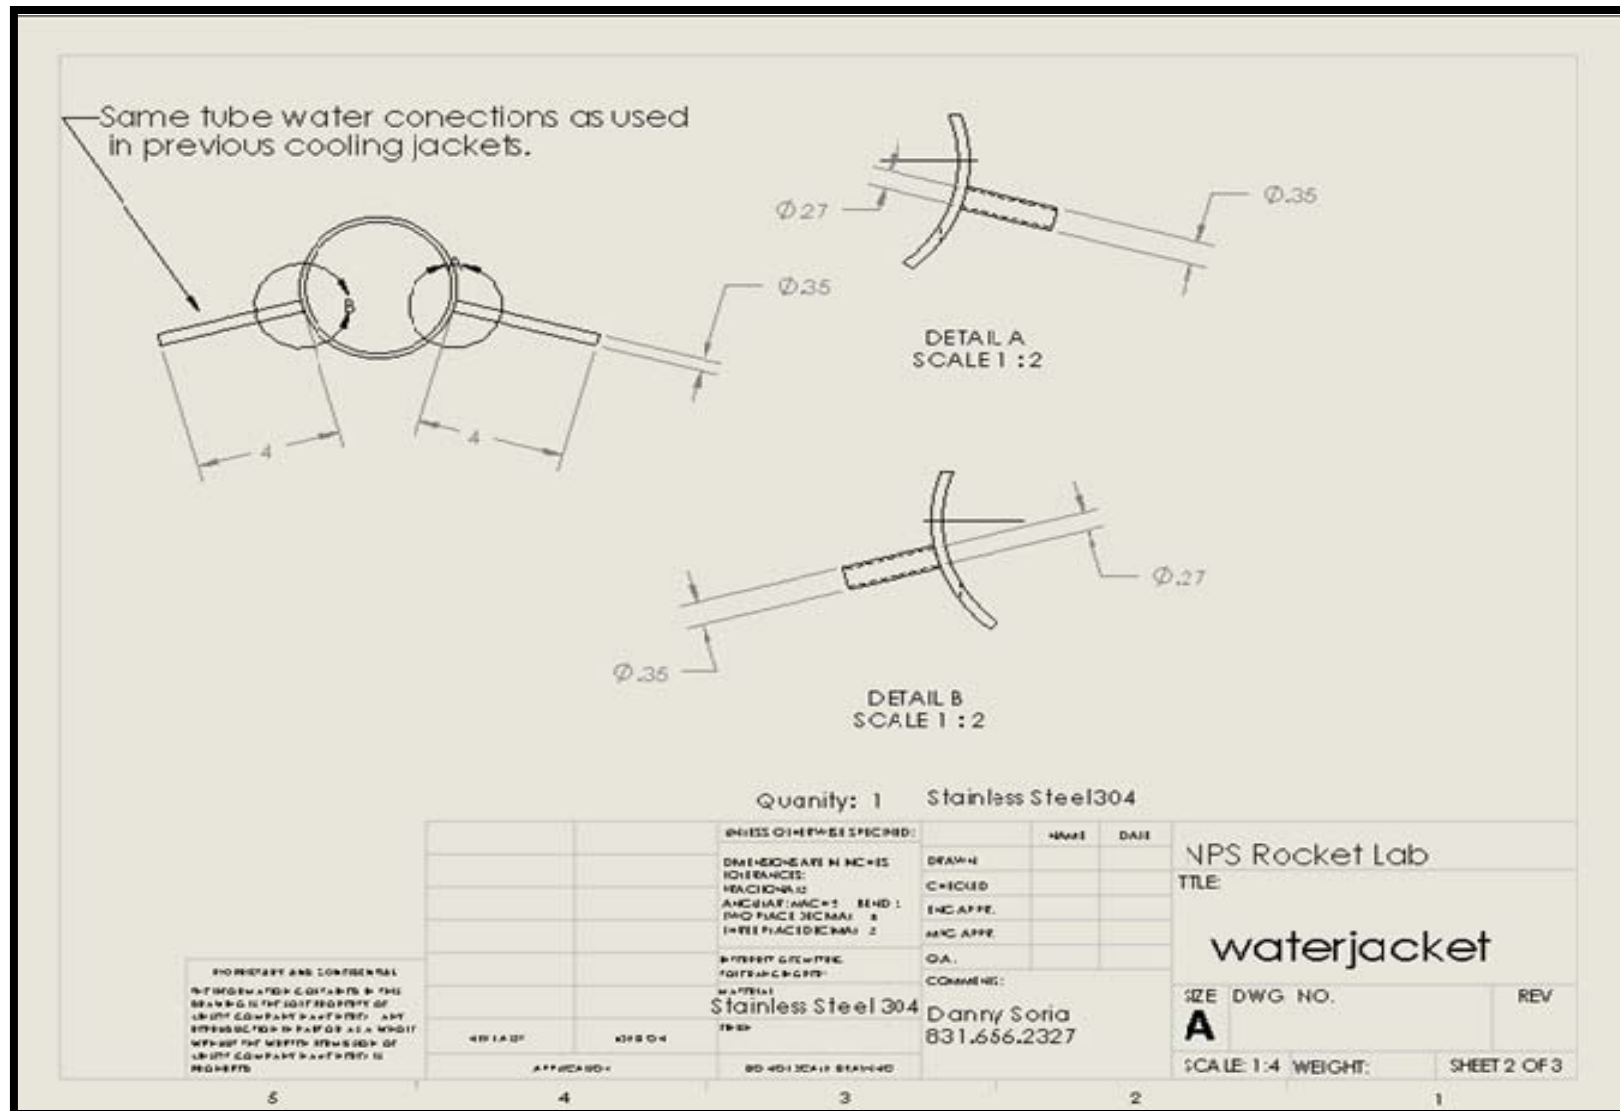

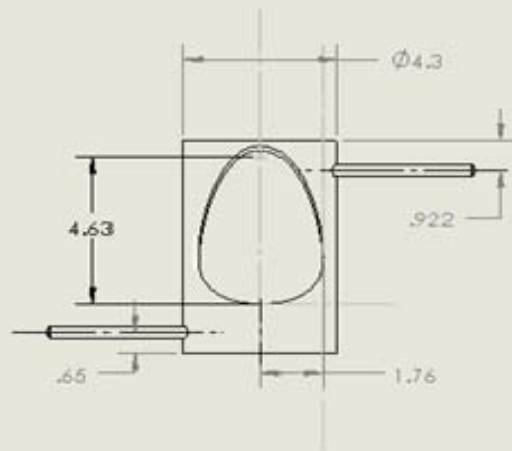

Quantity: 1 Stainless Steel 304

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED HEREIN IS THE PROPERTY OF NPS ROCKET LAB. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NPS ROCKET LAB IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES		DRAWN	
TOLERANCES:		CHECKED	
FRACTIONS: 1/8, 1/4, 3/8, 1/2, 5/8, 3/4, 7/8		ENG APPR.	
DECIMALS: .125, .25, .375, .5, .625, .75, .875, 1.0		MFG APPR.	
HOLE POSITION: .005, .010, .015, .020, .025, .030, .035, .040, .045, .050		Q.A.	
HOLE DIA: .005, .010, .015, .020, .025, .030, .035, .040, .045, .050		COMMENTS:	
MATERIAL: Stainless Steel 304		Danny Soria	
FINISH: NONE		831.656.2327	
DESIGN	APPROVAL	SIZE	DWG. NO.
		A	
SCALE: 1:4		WEIGHT:	SHEET 3 OF 3

NPS Rocket Lab
TITLE:
waterjacket
REV

5


4


3

2

1

H. FUEL INJECTION TUBE

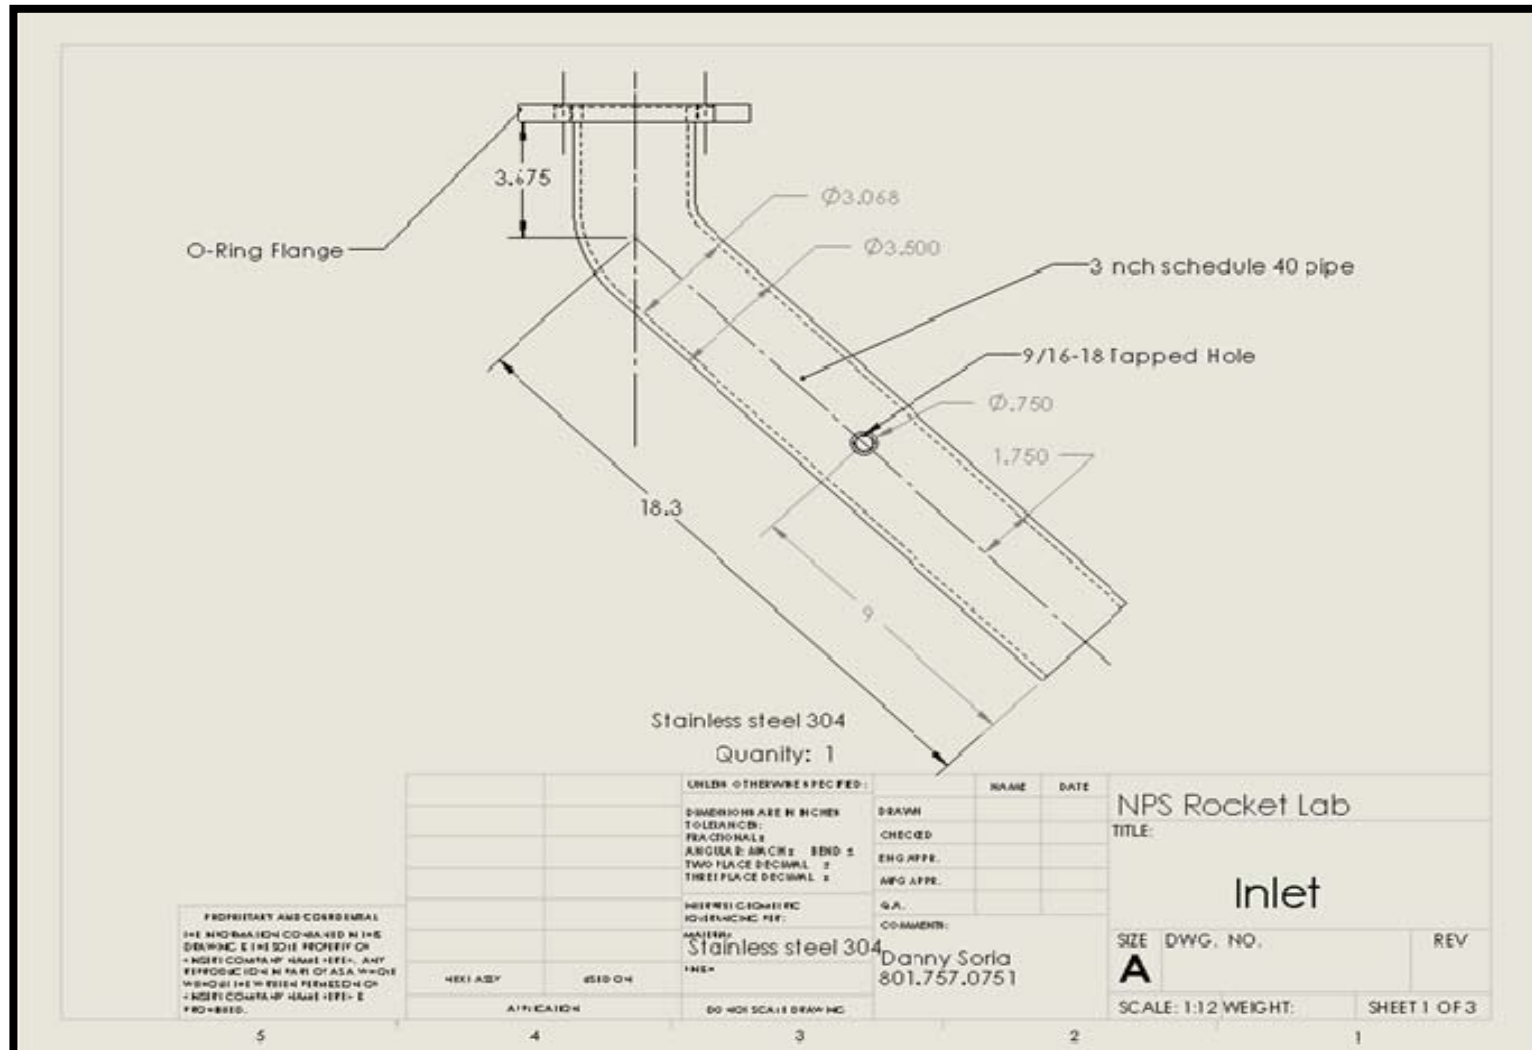

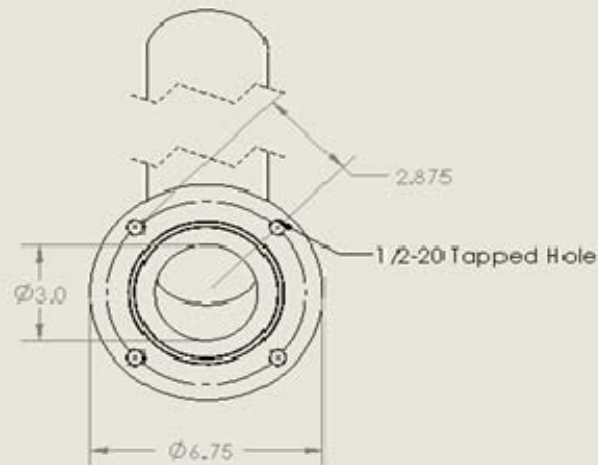

FLANGE A (Same as Outer Inlet)
Attached to rig with holes at 45 degree
from center line

Quantity: 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
NPS ROCKET LAB. ANY REPRODUCTION
OR TRANSMISSION IN ANY FORM OR BY
ANY MEANS WITHOUT THE WRITTEN
PERMISSION OF NPS ROCKET LAB IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	NPS Rocket Lab TITLE: Inlet
DIMENSIONS ARE IN INCHES FRACTIONS		DESIGNED		
ANGULAR DIMENSIONS		CHECKED		
TOLERANCES UNLESS OTHERWISE SPECIFIED		ENGINEER		
MATERIAL: 304 STAINLESS STEEL		QA		SIZE DWG. NO. REV
FINISH		COMMENTS		
DESIGNED BY	DATE	DRAWN BY		SCALE: 1:12 WEIGHT:
APPLICATION		DO NOT SCALE DRAWING		SHEET 2 OF 3

Danny Sorla
801.757.0751


5

4

3

2

1

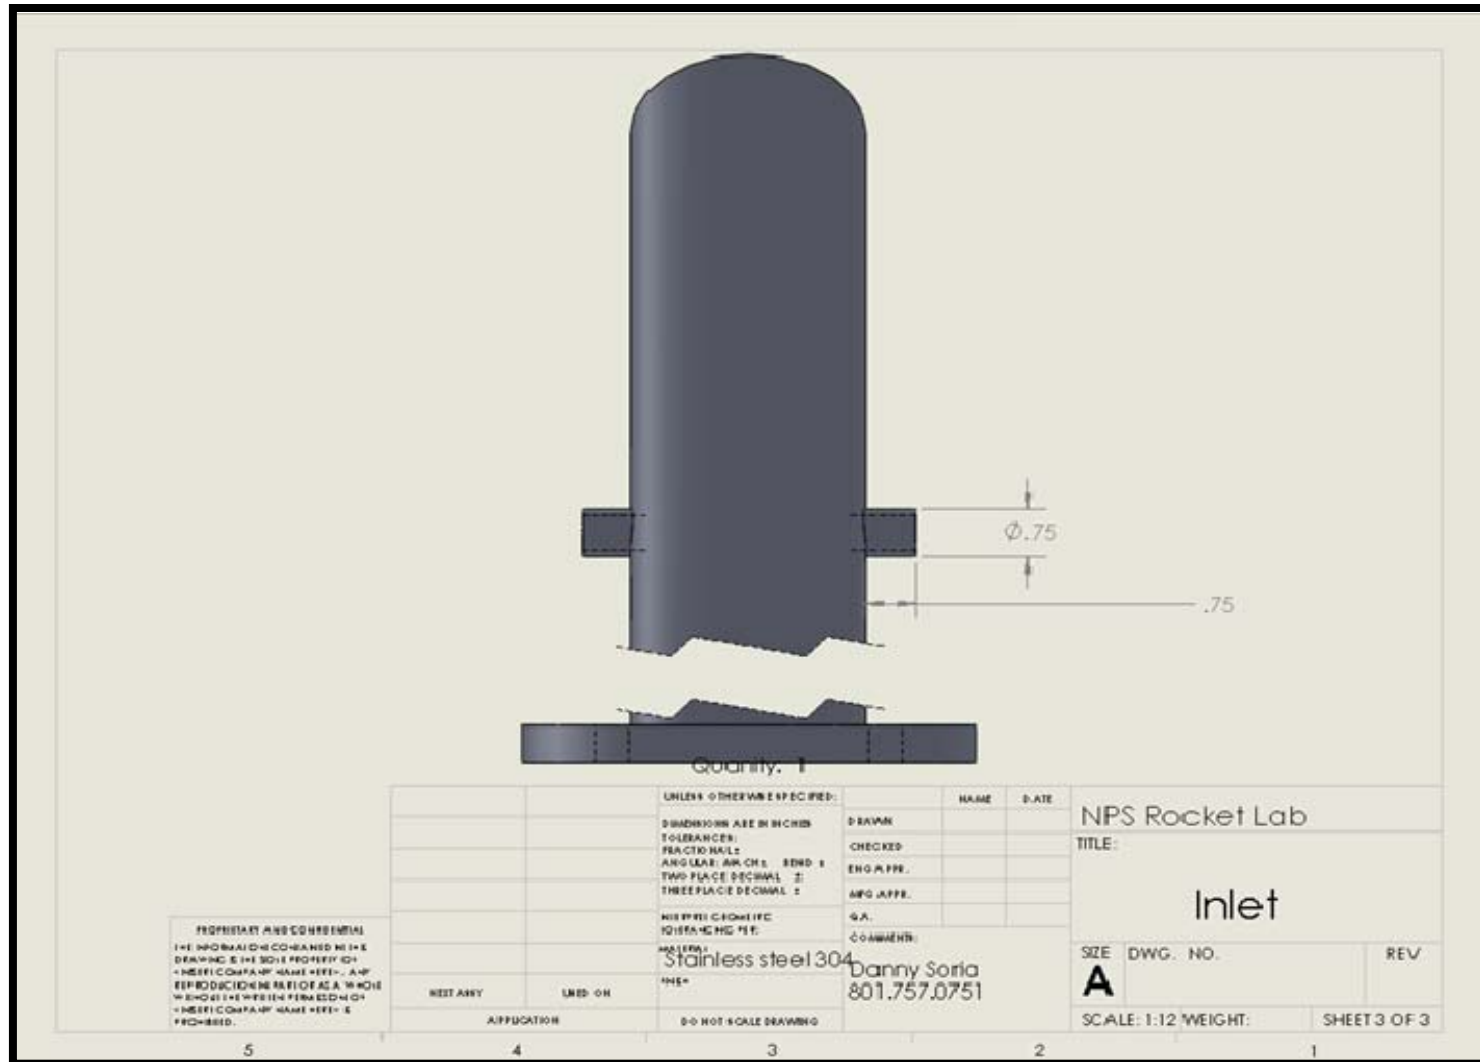


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED HEREIN IS
DRAWING IS THE SOLE PROPERTY OF
- NPS Rocket Lab - NAME HERE -
REPRODUCTION IN WHOLE OR IN PART
WITHOUT THE WRITTEN PERMISSION OF
- NPS Rocket Lab - NAME HERE - IS
PROHIBITED.


UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES	DRAWN		
TOLERANCES:	CHECKED		
FRACTIONS	ENG APPR.		
ANGULAR DIMENSIONS	ENG APPR.		
TWO PLACE DECIMALS	Q.A.		
THREE PLACE DECIMALS	COMMENTS:		
MATERIALS			
QUANTITIES			
FINISH			
NOTES			
REVISIONS			
APPROVAL			
DATE			

NPS Rocket Lab		
TITLE:		
Inlet		
SIZE	DWG. NO.	REV
A		
SCALE: 1:12		WEIGHT:
		SHEET 3 OF 3


I. FLANGE FOR FUEL INJECTION TUBE

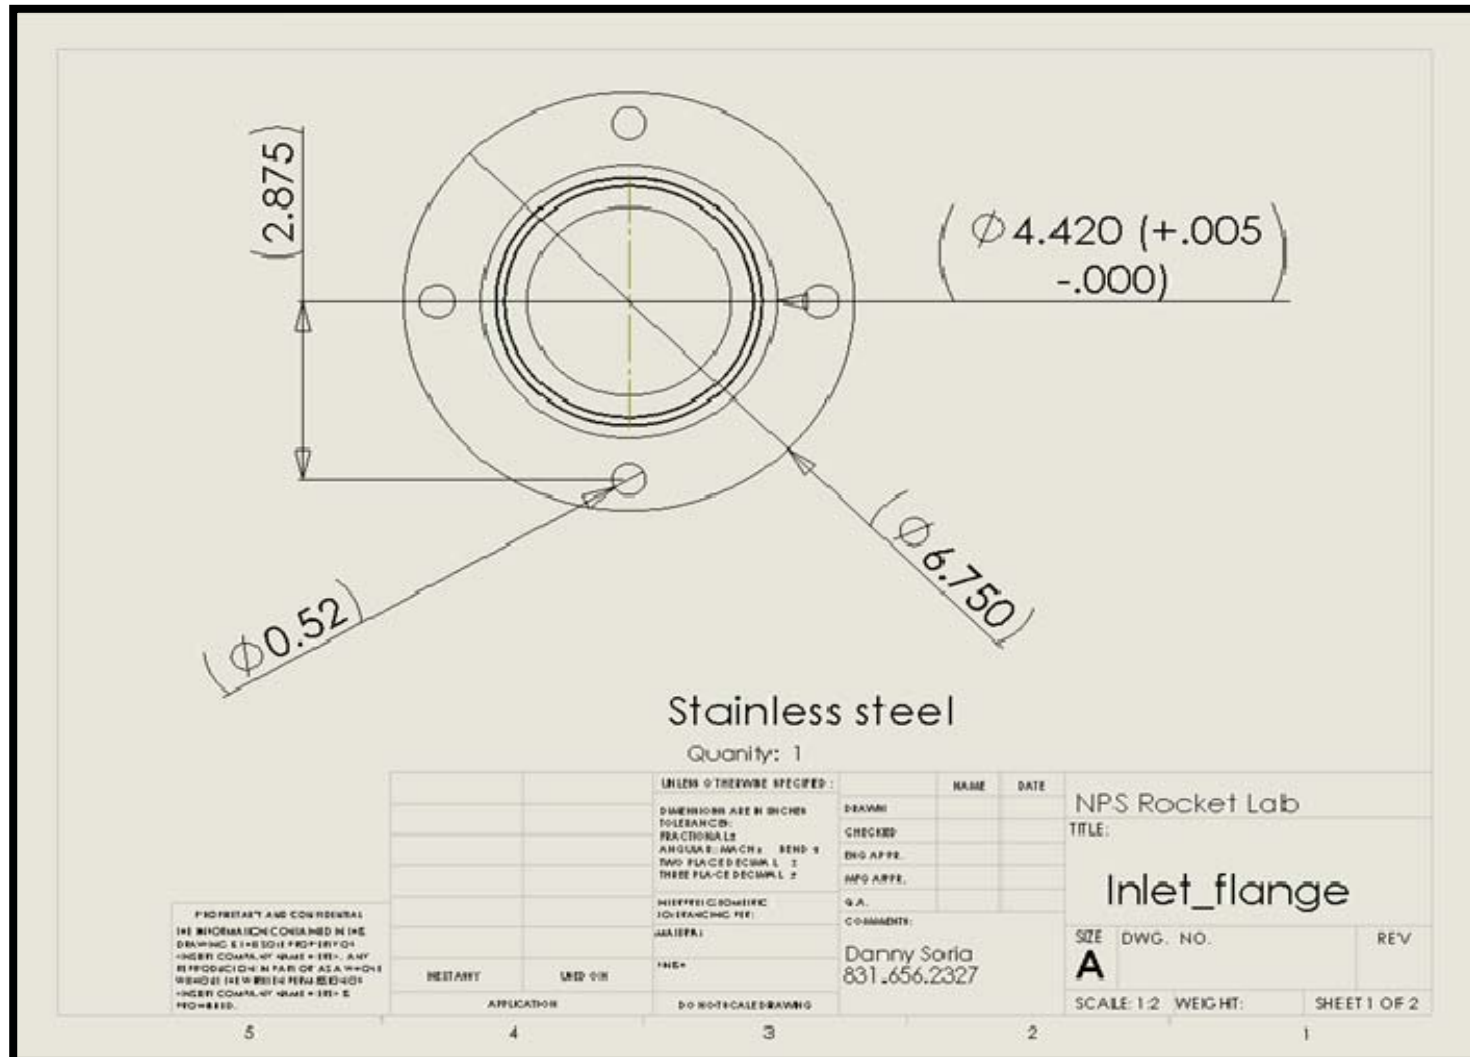

J. RIG ADAPTOR

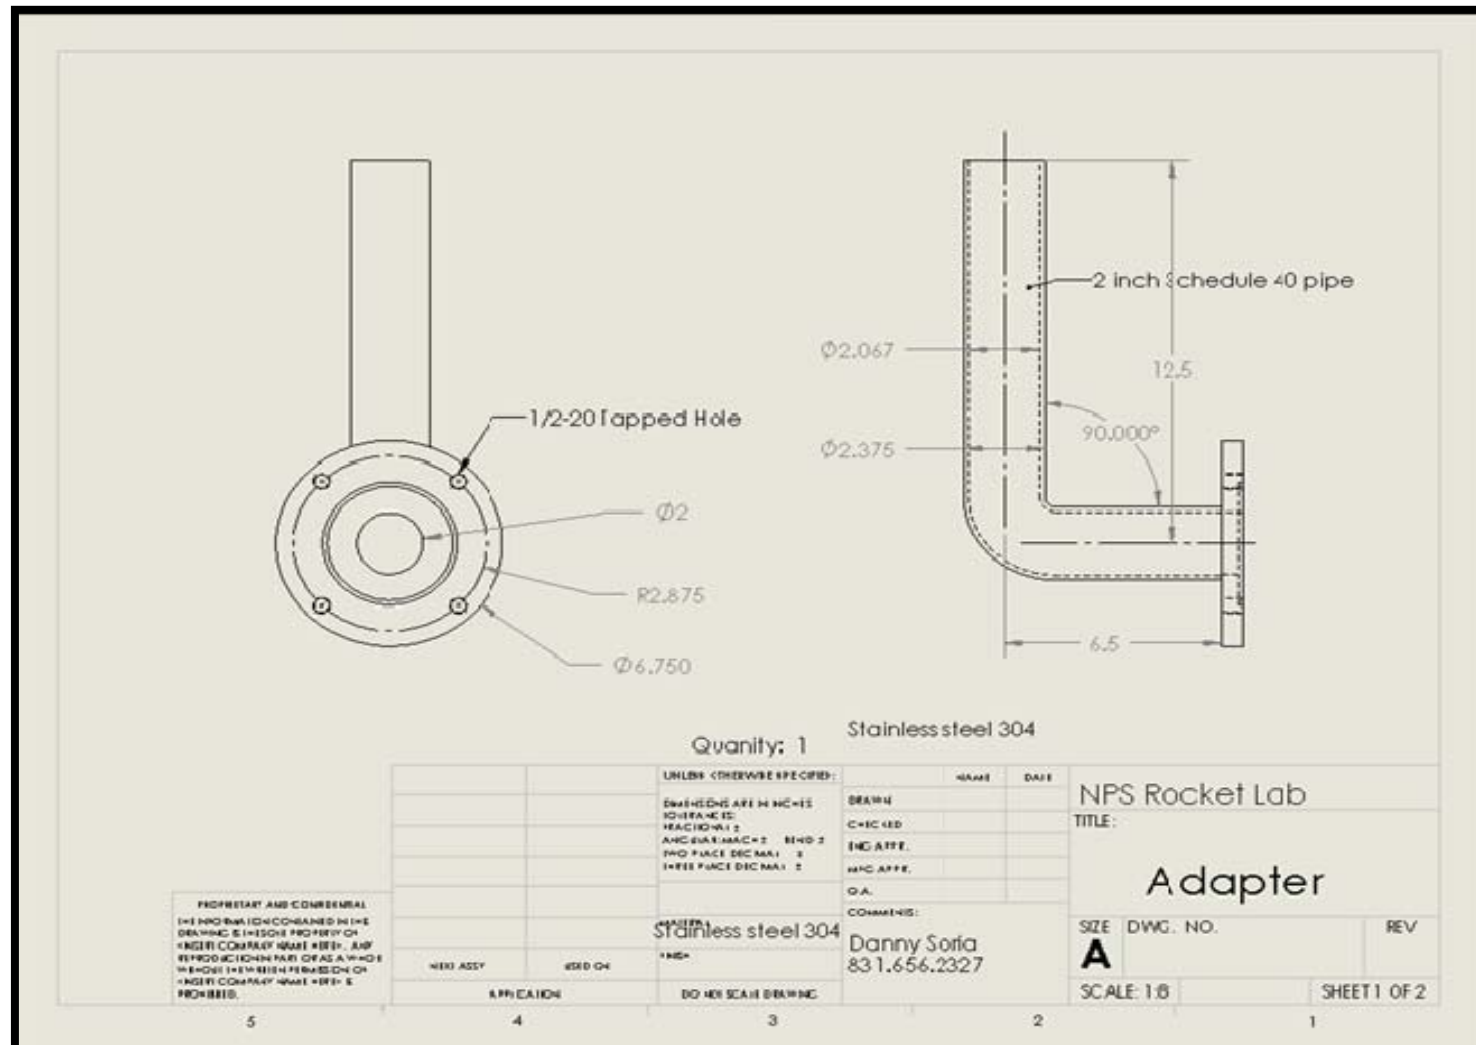

Similar Flange as FLANGE A (Has a smaller O-ring)
Attached to rig with holes at 45 degree from center line

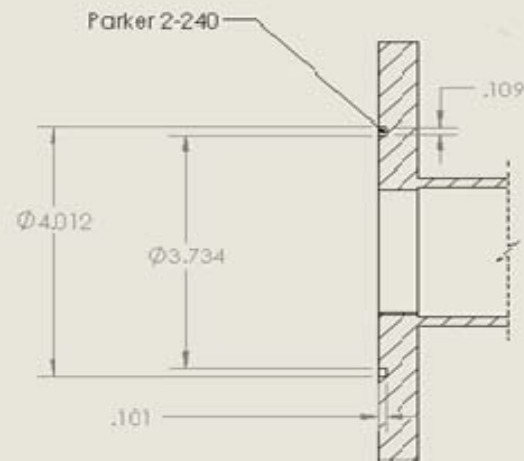



Quantity: 1 Stainless steel 304

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
NPS ROCKET LAB. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
NPS ROCKET LAB IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TO LEAST FIVE DECIMALS ANGLES: DECIMALS TWO PLACE DECIMALS THREE PLACE DECIMALS		NAME	DATE	NPS Rocket Lab TITLE: Adapter
		DRAWN		
		CHECKED		
		ENG APPR.		
		APPROV.		
MATERIAL Stainless steel 304		COMMENTS: Danny Soia 831.656.2227		SIZE A
NEXT ASSY 5	USED ON 4	APPROVAL 3	SCALE: 1:1	DWG. NO. 1
DONOT SCALE DRAWING		SHEET 2 OF 2		REV

K. RIG MOUNT

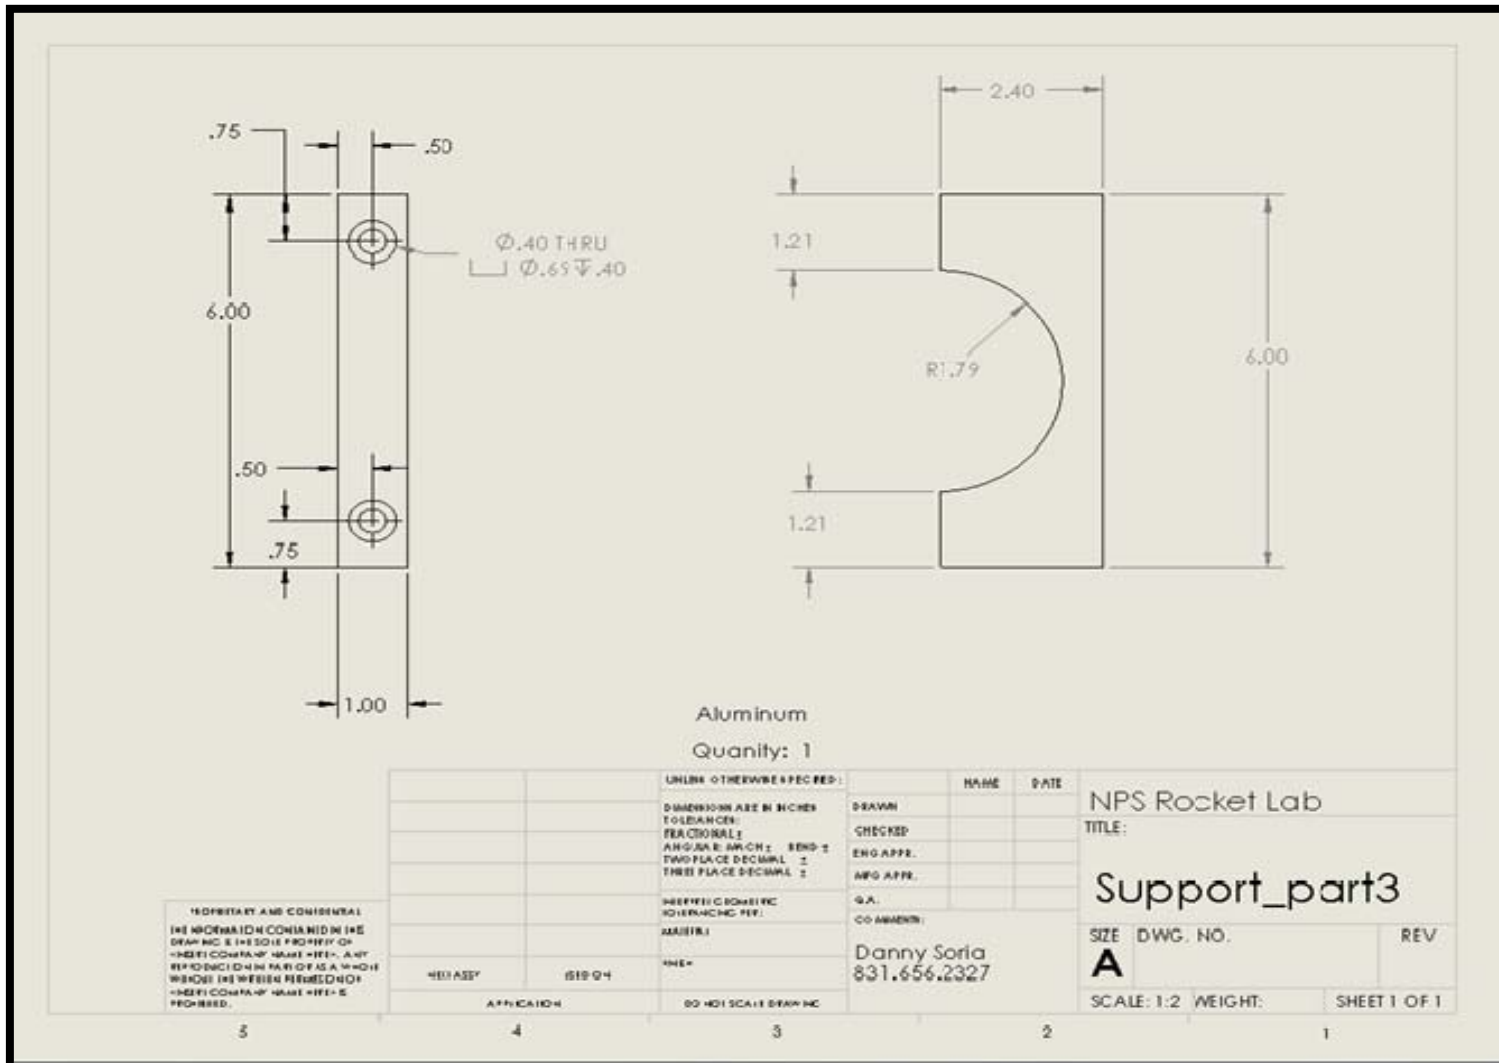

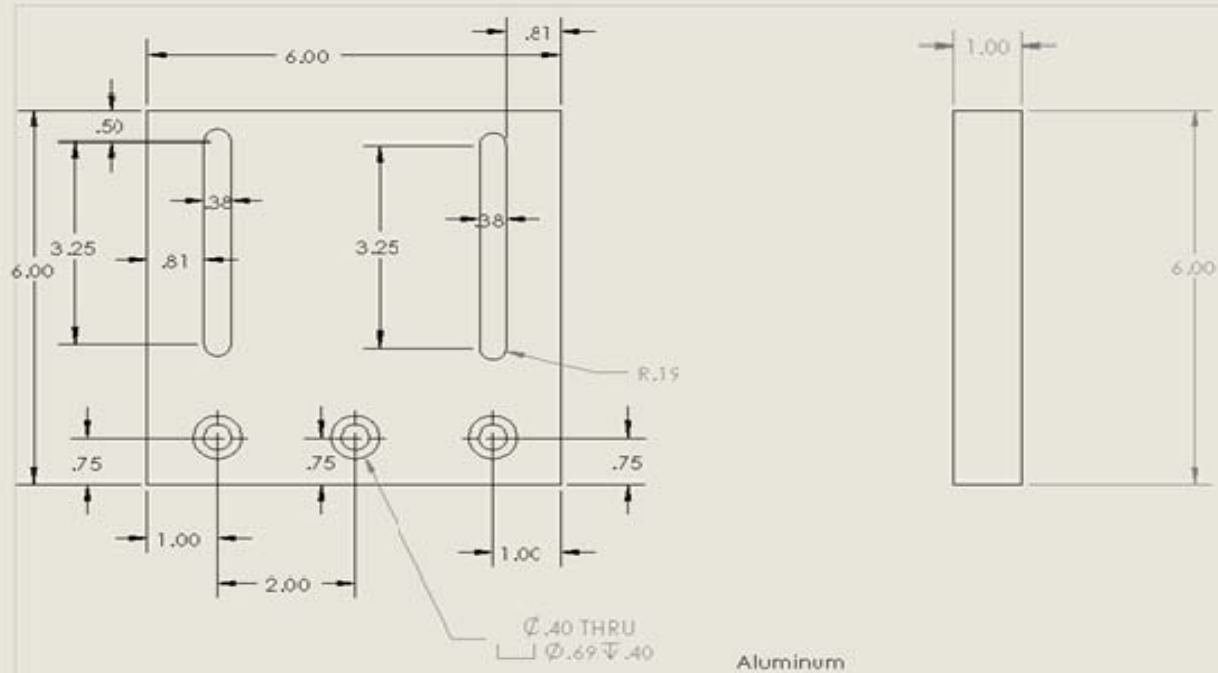

Quantity: 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE PROPERTY OF
NPS Rocket Lab. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
NPS Rocket Lab IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES		DESIGN	
TOLERANCES:		CHECKED	
FRACTIONAL 1		ENG APPR.	
ANGULAR 1/16 INCH 1/2		INFO APPR.	
TWO PLACE DECIMAL 1/2		Q.A.	
THREE PLACE DECIMAL 1/2		COMMENTS:	
BEEP FEET GEO METRIC		Danny Soria	
TOLERANCE PER:		831.656.2327	
MATERIAL			
FINISH			
WEST ASSY	MOD ON		
APPROVAL			
D-D 4011 SCALE DRAWING			

NPS Rocket Lab

TITLE:

Support_part 1

SIZE DWG. NO.

A

REV

SCALE 1:2 WEIGHT:

SHEET 1 OF 1

THIS PAGE INTENTIONALLY LEFT BLANK

INITIAL DISTRIBUTION LIST

1. Defense Technical Information Center
Ft. Belvoir, Virginia
2. Dudley Knox Library
Naval Postgraduate School
Monterey, California
3. Asst. Professor Chris Brophy
Naval Postgraduate School
Monterey, California
4. Professor Garth Hobson
Naval Postgraduate School
Monterey, California
5. LT Danny Soria
Naval Postgraduate School
Monterey, California