



AFRL-RW-EG-TP-2011-023

Benchtop Energetics Progress

**Mario E. Fajardo
Emily C. Fossum
Christopher D. Molek
William K. Lewis**

**Air Force Research Laboratory
Munitions Directorate/Ordnance Division
Energetic Materials Branch (AFRL/RWME)
Eglin AFB, FL 32542-5910**

July 2011

This paper was presented at the 17th APS Topical Conference on Shock Compression of Condensed Matter, Chicago, IL, 26 June – 1 Jul 2011. One or more of the authors is a U.S. Government employee working within the scope of their position; therefore, the U.S. Government is joint owner of the work and has the right to copy, distribute, and use the work. Any other form of use is subject to copyright restrictions.

This work has been submitted for publication in the interest of the scientific and technical exchange. Publication of this report does not constitute approval or disapproval of the ideas or findings.

Distribution A: Approved for public release; distribution unlimited. Approval Confirmation 96 ABW/PA # 96ABW-2011-0291, dated February 23, 2011

AIR FORCE RESEARCH LABORATORY, MUNITIONS DIRECTORATE

Air Force Materiel Command ■ United States Air Force ■ Eglin Air Force Base

This page intentionally left blank

NOTICE AND SIGNATURE PAGE

Using Government drawings, specifications, or other data included in this document for any purpose other than Government procurement does not in any way obligate the U.S. Government. The fact that the Government formulated or supplied the drawings, specifications, or other data does not license the holder or any other person or corporation; or convey any rights or permission to manufacture, use, or sell any patented invention that may relate to them.

Qualified requestors may obtain copies of this report from the Defense Technical Information Center (DTIC) (<http://www.dtic.mil>).

AFRL-RW-EG-TP-2011-023 HAS BEEN REVIEWED AND IS APPROVED FOR PUBLICATION IN ACCORDANCE WITH ASSIGNED DISTRIBUTION STATEMENT.


FOR THE DIRECTOR:



HOWARD G. WHITE, PhD
Technical Advisor
Ordnance Division



JENNIFER L. JORDAN, PhD
Technical Advisor
Energetic Materials Branch



MARIO E. FAJARDO, PhD
Project Manager
Energetic Materials Branch

This report is published in the interest of scientific and technical information exchange, and its publication does not constitute the Government's approval or disapproval of its ideas or findings.

This page intentionally left blank

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) 07-2011		2. REPORT TYPE Briefing Charts		3. DATES COVERED (From - To) 1 July 2003 – 1 July 2011	
4. TITLE AND SUBTITLE Benchtop Energetics Progress				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER 61	
6. AUTHOR(S) Mario E. Fajardo, Emily C. Fossum, Christopher D. Molek, William K. Lewis				5d. PROJECT NUMBER 2303	
				5e. TASK NUMBER EM	
				5f. WORK UNIT NUMBER 02	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Air Force Research Laboratory Munitions Directorate Ordnance Division Energetic Materials Branch Eglin AFB, FL 32542-5910				8. PERFORMING ORGANIZATION REPORT NUMBER AFRL-RW-EG-TP-2011-023	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) Air Force Research Laboratory, Munitions Directorate Ordnance Division Energetic Materials Branch (AFRL/RWME) Eglin AFB FL 32542-5910 Technical Advisor: Dr. Jennifer L. Jordan				10. SPONSOR/MONITOR'S ACRONYM(S) AFRL-RW-EG	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) AFRL-RW-EG-TP-2011-023	
12. DISTRIBUTION / AVAILABILITY STATEMENT Distribution A: Approved for public release; distribution unlimited. Approval Confirmation 96 ABW/PA # 96ABW-2011-0291, dated February 23, 2011					
13. SUPPLEMENTARY NOTES DISTRIBUTION STATEMENT INDICATING AUTHORIZED ACCESS IS ON THE COVER PAGE AND BLOCK 12 OF THIS FORM.					
14. ABSTRACT We have constructed an apparatus for investigating the reactive chemical dynamics of mg-scale energetic materials samples. We seek to advance the understanding of the reaction kinetics of energetic materials, and of the chemical influences on energetic materials sensitivity. We employ direct laser irradiation, and indirect laser-driven shock, techniques to initiate thin-film explosive samples contained in a high-vacuum chamber. Expansion of the reacting flow into vacuum quenches the chemistry and preserves reaction intermediates for interrogation <i>via</i> time-of-flight mass spectrometry (TOFMS). By rastering the sample coupon through the fixed laser beam focus, we generate hundreds of repetitive energetic events in a few minutes. A detonation wave passing through an organic explosive, such as pentaerythritol tetranitrate (PETN, C ₅ H ₄ N ₄ O ₁₂), is remarkably efficient in converting the solid explosive into final thermodynamically-stable gaseous products (<i>e.g.</i> N ₂ , CO ₂ , H ₂ O...). Termination of a detonation at an explosive-to-vacuum interface produces an expanding pulse of hyperthermal molecular species, with leading-edge velocities ~ 10 km/s. In contrast, deflagration (subsonic combustion) of PETN in vacuum produces mostly reaction intermediates, such as NO and NO ₂ , with much slower molecular velocities; consistent with expansion-quenched thermal decomposition of PETN. We propose to exploit these differences in product chemical identities and molecular species velocities to provide a chemically-based diagnostic for distinguishing between detonation and deflagration events. In this talk we also report recent progress towards the quantitative detection of hyperthermal neutral species produced by direct laser ablation of aluminum metal and of organic energetic materials, as a step towards demonstrating the ability to discriminate slow reaction intermediates from fast thermodynamically-stable final products.					
15. SUBJECT TERMS Detonation, deflagration, TOFMS, laser ablation					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UL	18. NUMBER OF PAGES 27	19a. NAME OF RESPONSIBLE PERSON Mario E. Fajardo
a. REPORT UNCLASSIFIED	b. ABSTRACT UNCLASSIFIED	c. THIS PAGE UNCLASSIFIED			19b. TELEPHONE NUMBER (include area code) 850-882-9067

This page intentionally left blank

Benchtop Energetics Progress



**17th Biennial International Conference
American Physical Society Topical Group
Shock Compression of Condensed Matter
27 June 2011**

**Dr. Mario E. Fajardo
Air Force Research Laboratory
Munitions Directorate
Ordnance Division
Energetic Materials Branch
Eglin AFB, FL**



Benchtop Energetics Coworkers



Dr. William K. Lewis

NRC Postdoc

University of Dayton Research Institute, Dayton, OH

1stLt Rachel M. Nep (USAF)

AFRL/RWME

George Mason University, Fairfax, VA

Dr. Emily C. Fossum

NRC Postdoc

AFRL/RVSS

Monday 12:15PM C2.00005

Benchtop Energetics:

Detection of Hyperthermal Species

Dr. Christopher D. Molek

NRC Postdoc

University of Florida REEF

AFRL/RWME





Outline



- **Introduction**
 - Shock Wave and Detonation Cartoons
 - Hyperthermal Species from Explosions *In Vacuo*
- **1st Generation Experiment**
 - Laser Driven Flyers and Time-Of-Flight Mass Spectrometry (TOFMS)
 - PETN Deflagration Quenched by Vacuum Expansion
 - No Hyperthermal Species Detected
- **2nd Generation Experiment**
 - Apparatus Modifications – Differential Pumping
 - SIMION Simulations of Ion Trajectories within TOFMS
 - Detection of Fast Aluminum Atoms from Laser Ablation
 - Nitrocellulose Laser Initiation Preliminary Results
- **Conclusions & Future Directions**



Shock Waves

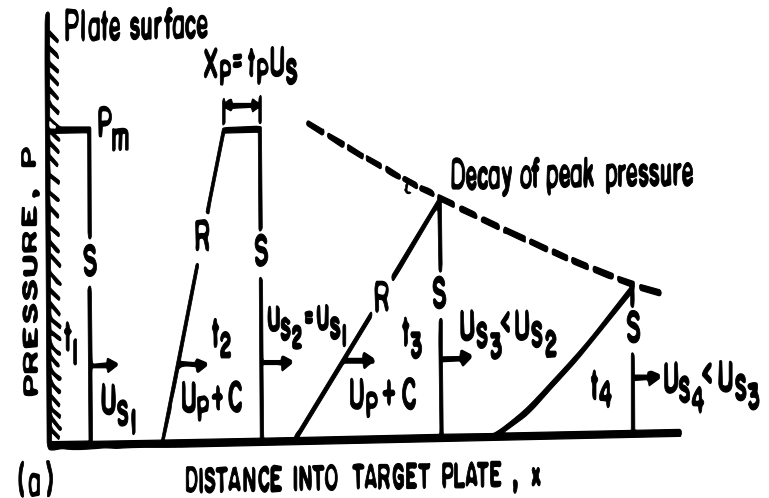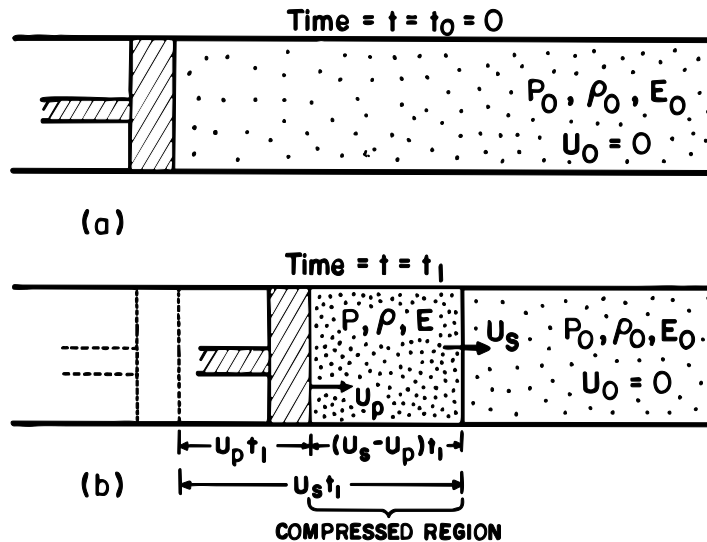


Shock Wave: a discontinuity in a material's properties (pressure, density, internal energy, etc.) propagating faster than the speed of sound in the undisturbed material.

Unsupported shock waves eventually decay into sound waves.

M.A. Meyers, Dynamic Behavior Of Materials (Wiley-Interscience, New York, 1994).




Detonation Waves

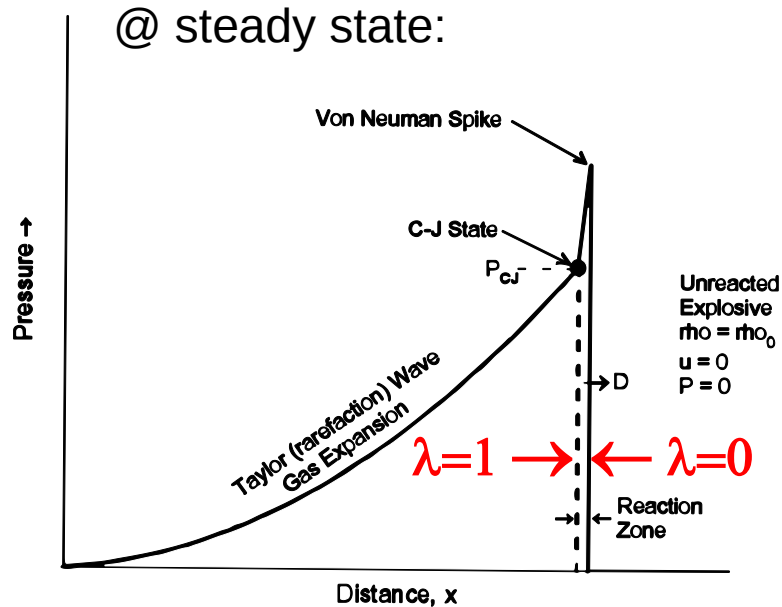

Detonation Wave: a shock wave supported by a rapid exothermic chemical reaction.

P.W. Cooper, Explosives Engineering (Wiley-VCH, New York, 1996).

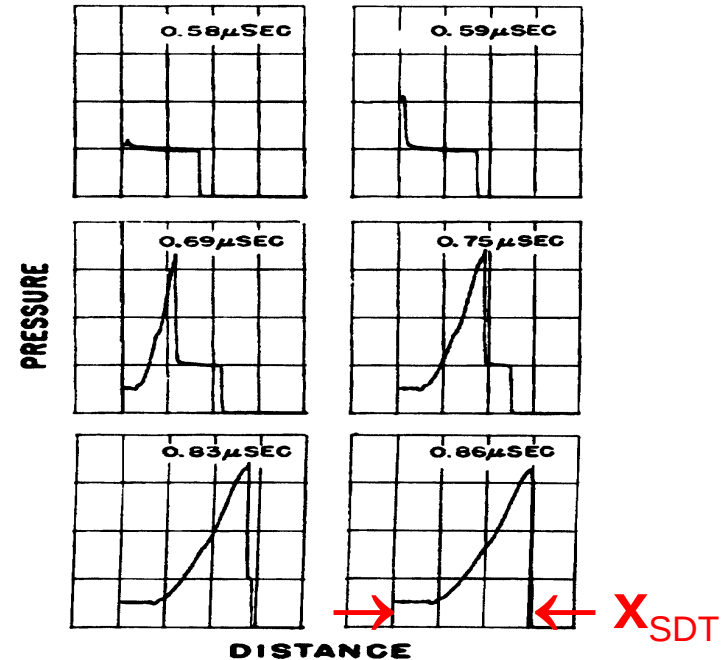

Initiation of nitromethane by 90 kbar shock (SIN simulation).

C.L. Mader, Numerical Modeling of Explosives and Propellants (CRC Press, Boca Raton, 1998).

Monday 11:30AM C2.00002, A Hydrocode Study of Explosive Shock Ignition, G. BUTLER & Y. HORIE, AFRL/RWME.



Hypervelocity Species



JOURNAL OF APPLIED PHYSICS

VOLUME 42, NUMBER 2

FEBRUARY 1971

Explosive Gas Blast: The Expansion of Detonation Products in Vacuum

THOMAS J. AHRENS

Seismological Laboratory, California Institute of Technology, Pasadena, California 91109

AND

CHARLES F. ALLEN

Stanford Research Institute, Menlo Park, California 94205

AND

ROBERT L. KOVACH

Department of Geophysics, Stanford University, Stanford, California 94305

(Received 18 May 1970; in final form 4 September 1970)

A series of 0.2- to 3-gm HNS charges were detonated in vacuums of 10^{-3} to 10^{-5} Torr. The resultant freely expanding, detonation product, gas blast achieves terminal velocities of 8 to 12 km/sec within 3 to 5 μ sec after the detonation wave arrives at the free surface. Measured pressure profiles display rise times to maximum stagnation ("reflected shock") pressure varying from $\sim 30 \mu$ sec, 20-cm away from a 2.6-gm charge, to $\sim 185 \mu$ sec, 127-cm away from 0.2-gm charge at 10^{-5} Torr. Rise times were generally shorter at 10^{-3} and 10^{-4} Torr; the 10^{-5} Torr values agree with numerical calculations. Using cube root scaling of charge mass, the observed peak reflected pressure as a function of range may be represented by


$$p = 6.5 \times 10^5 \text{ (bar)} r'^{-3.5},$$

where r' the ratio of the range to the equivalent charge radius.

Expect fast, thermodynamically stable products from detonations.



Benchmark Experiments

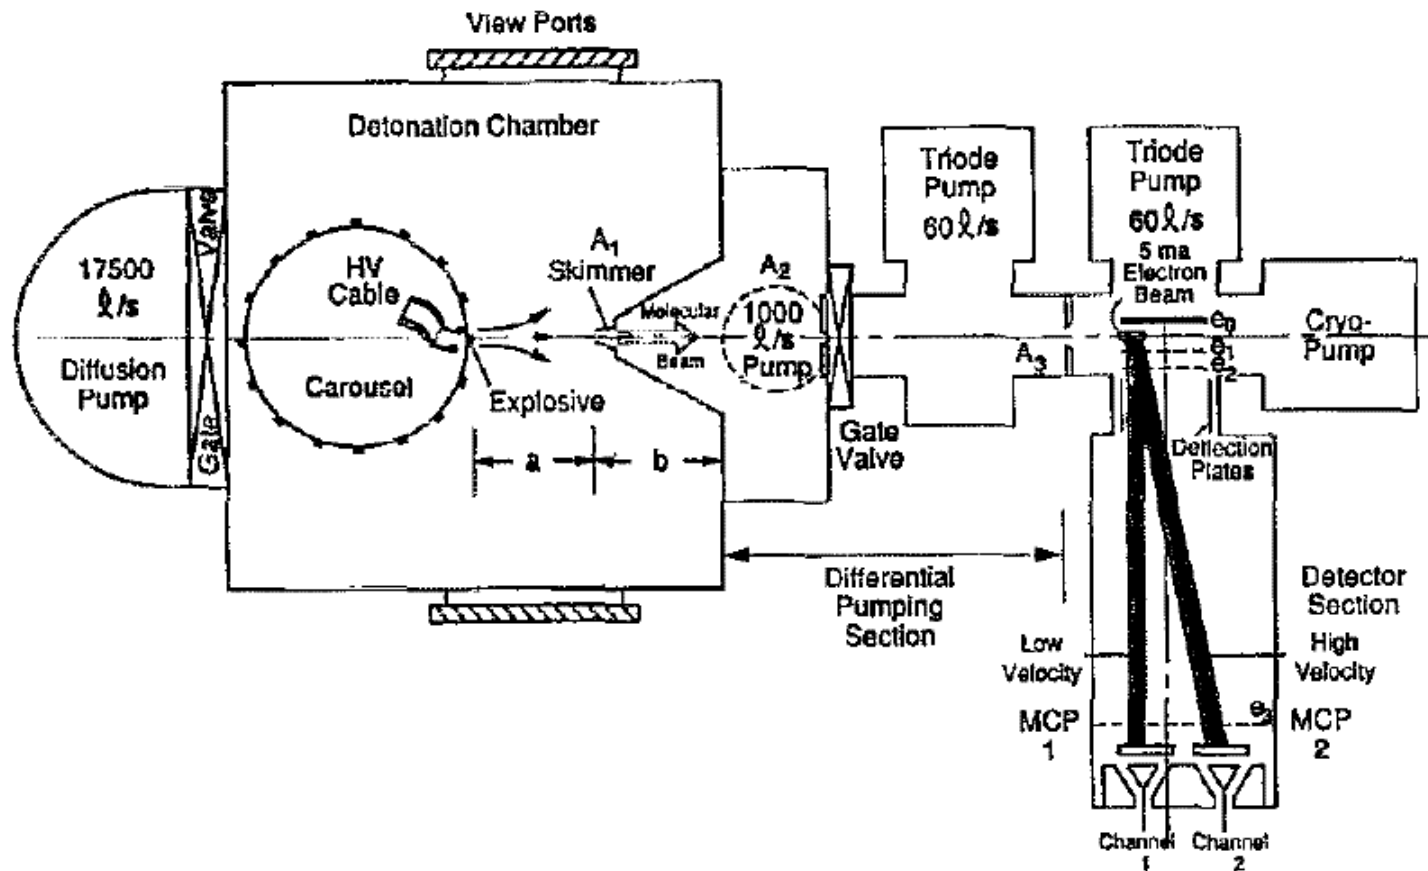

N.C. Blais, H.A. Fry, N.R. Greiner, Rev. Sci. Instrum. **64**, 174 (1993).

Observed both fast and slow species, intermediates and products.



Our Approach & Challenges



Approach:


- Laser-driven shock ignition/initiation of ~ mg samples
- Vary sample thickness over putative characteristic length scales: reaction zone, run to detonation...
- Spectroscopic and mass spectrometric diagnostics
- Statistically meaningful number of measurements

Challenges:

- Controlled, quantifiable ignition/initiation conditions
 - reproducible, plentiful laser-driven flyers
 - sample preparation & characterization
- Observation/interpretation of mass spectrometric data
 - qualitative: fragments/products, slow/fast velocities
 - quantitative species assignments





1st Generation Expt. Schematic

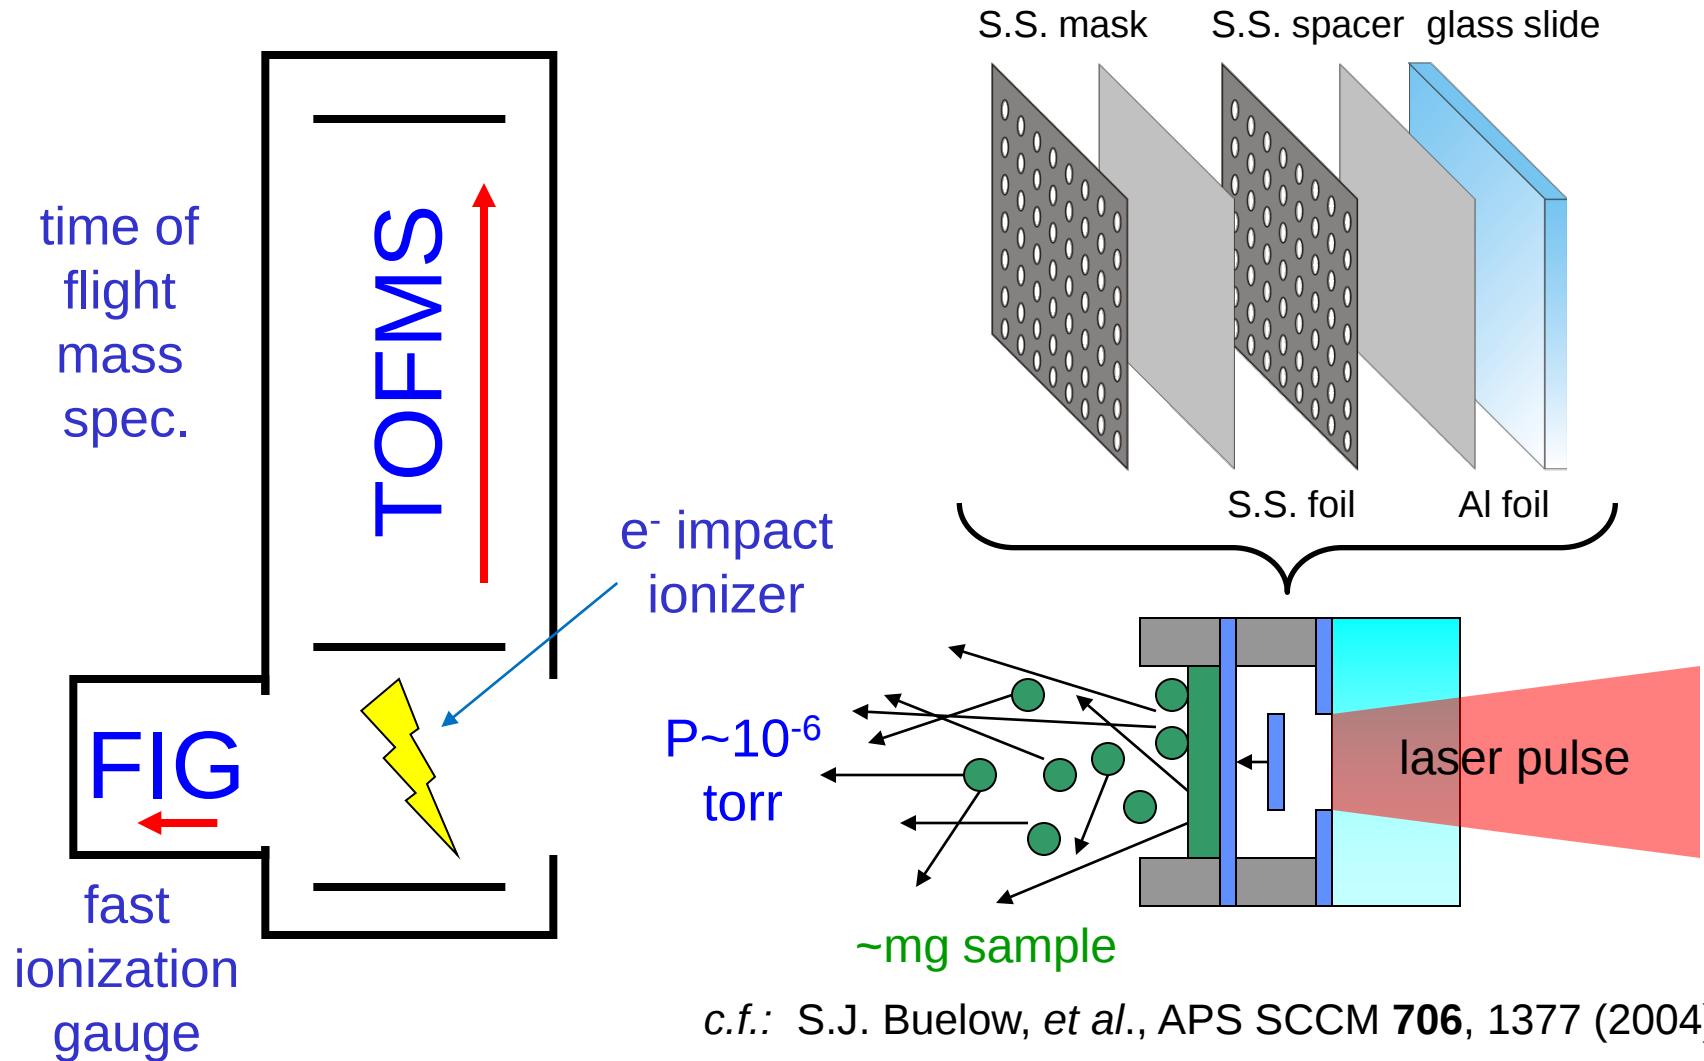

c.f.: S.J. Buelow, *et al.*, APS SCCM **706**, 1377 (2004).
I.Y.S. Lee, *et al.*, J. Appl. Phys. **75**, 4975 (1994).



Slow Gas Production by PETN

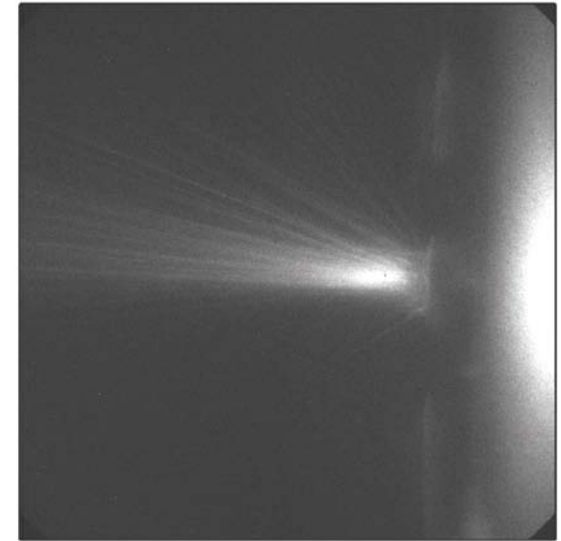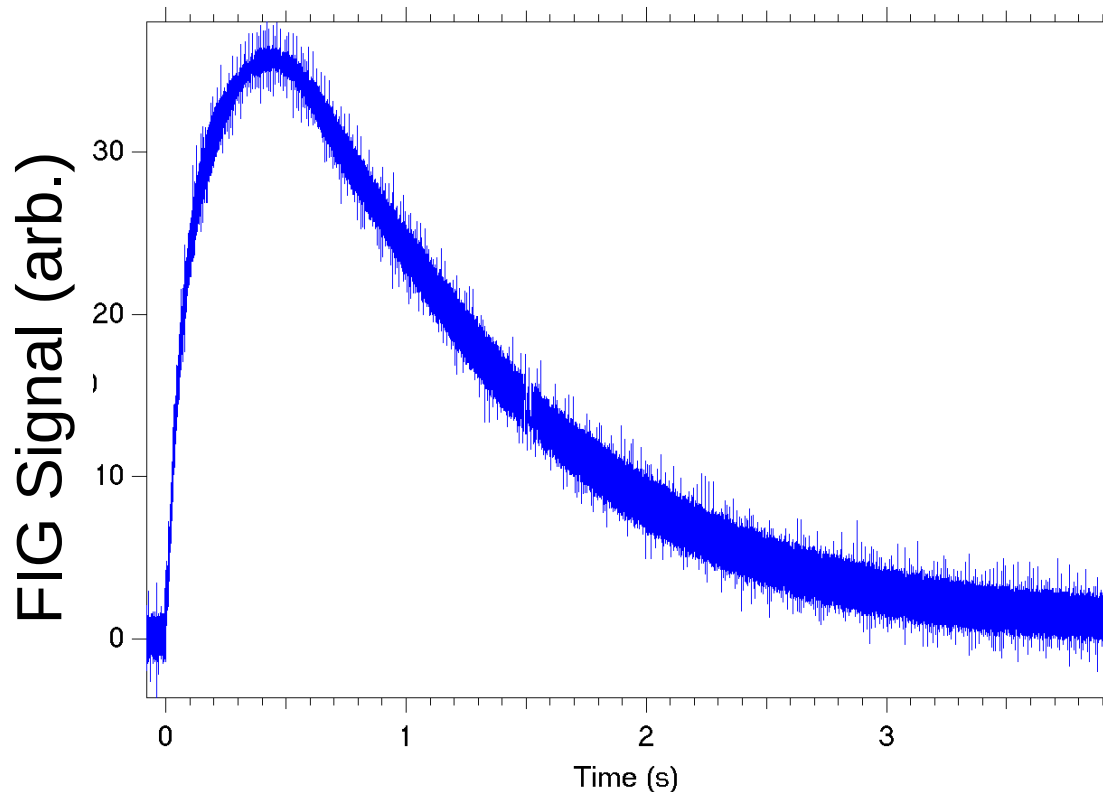


Deflagrating PETN particles; $v \sim 1$ m/s

Expected: direct observation of products traveling line-of-sight to TOFMS.
N.C. Blais, H.A. Fry, N.R. Greiner, Rev. Sci. Instrum. 64, 174 (1993).

Actual: products endure multiple collisions with vacuum chamber walls
⇒ strong detection bias towards chemically stable, volatile species.




Mass Spectrometry of PETN

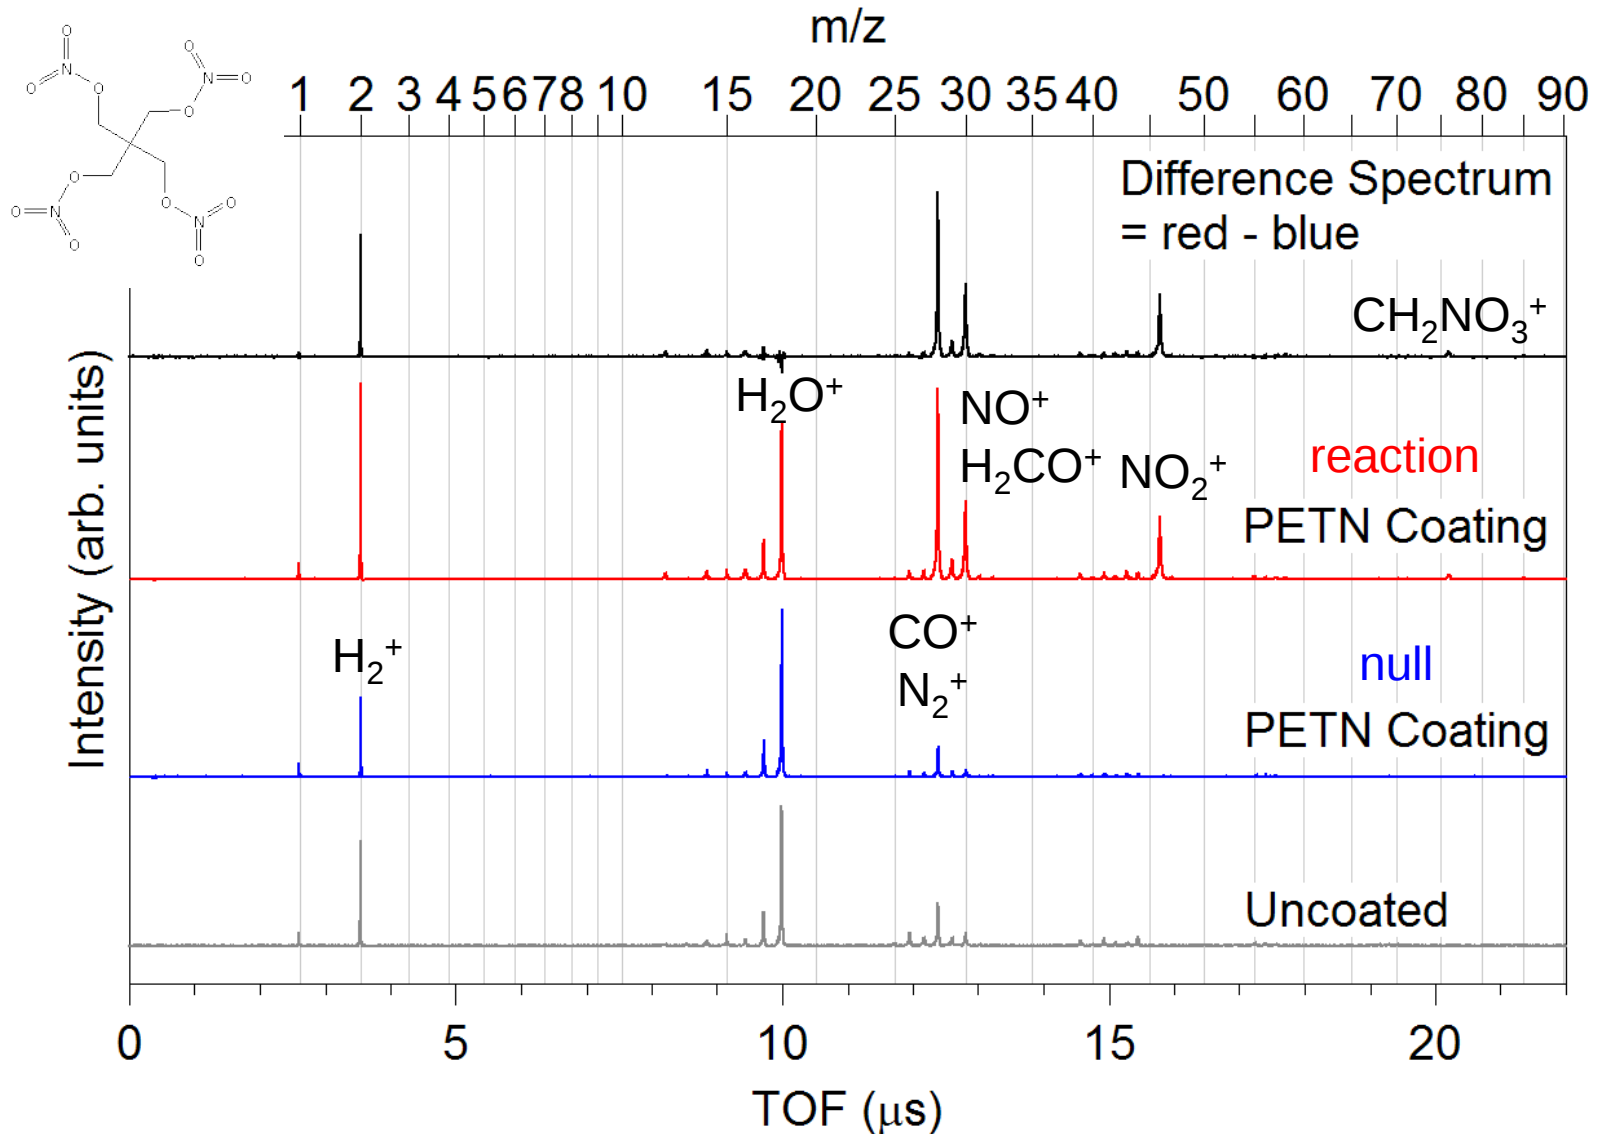




PETN Reaction Chemistry

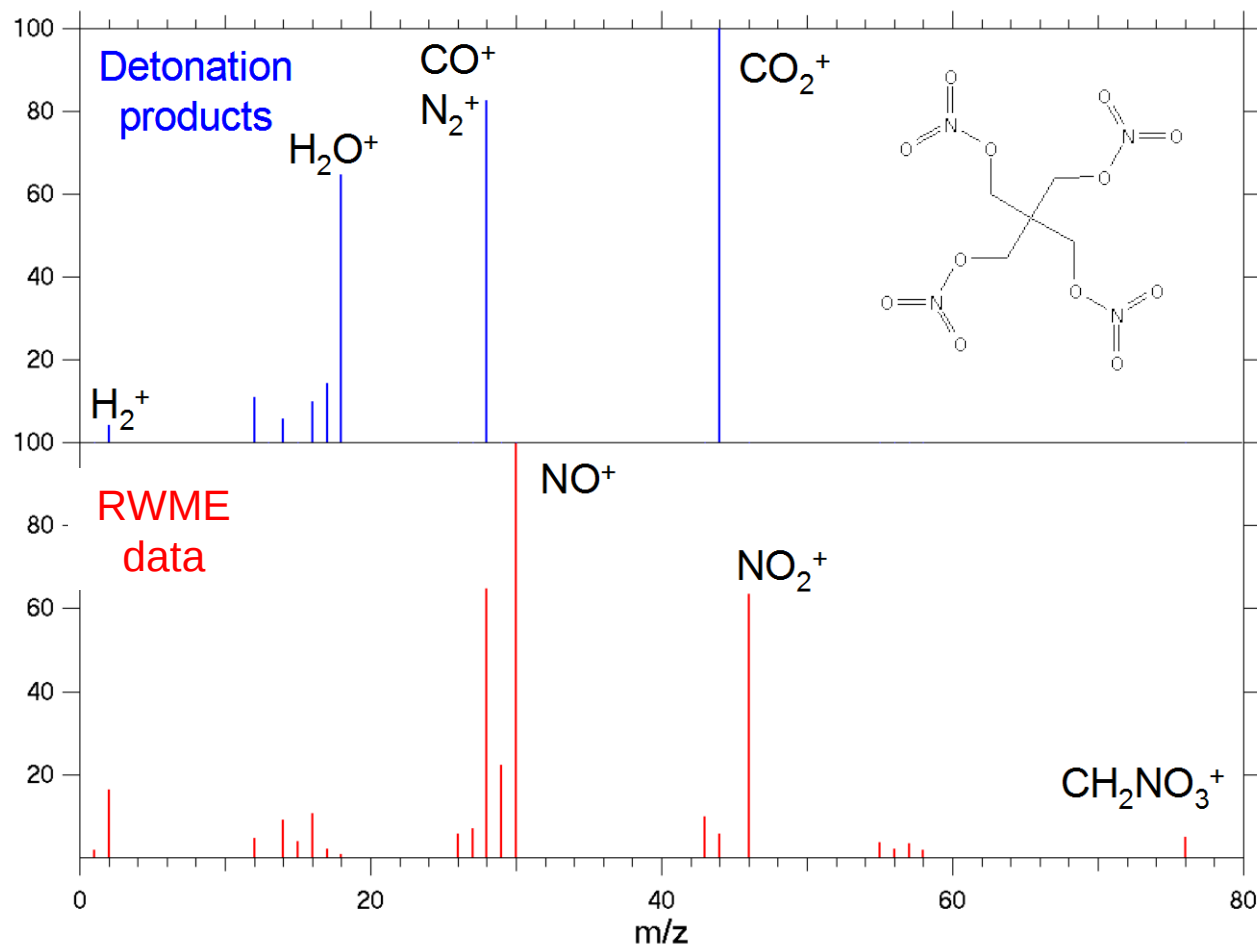

Products
(moles/mole PETN):

CO_2	3.50 ± 0.04
CO	1.56 ± 0.08
N_2	2.00 ± 0.04
H_2	0.51 ± 0.04
H_2O	3.45 ± 0.04
NH_3	< 0.0002
CH_4	< 0.0002


D. Ornellas, et al.,
Rev. Sci. Instrum.
37, 907 (1966).

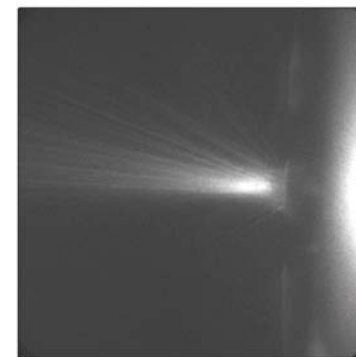

Deflagrating PETN;
thermal decomposition
quenched by expansion
into vacuum.



PETN Ignition Threshold (Almost*)

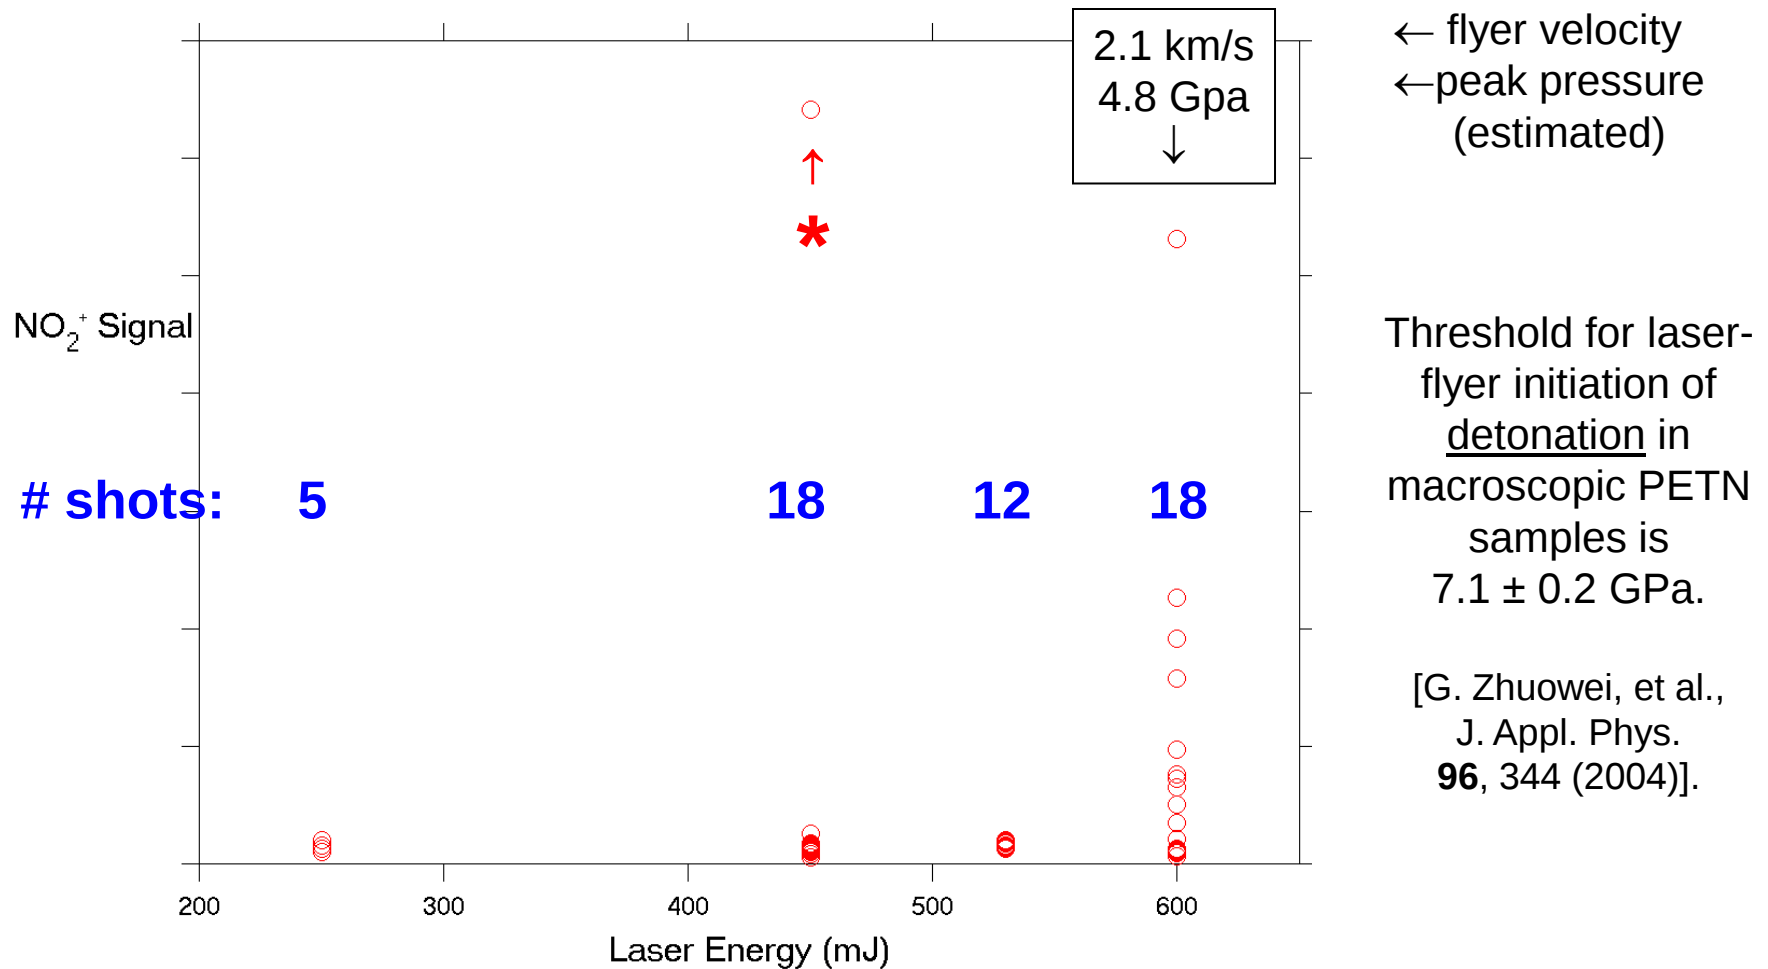





1st Generation Expt. Summary



- Demonstrated working laser-flyer initiation + mass spectrometric product characterization apparatus.
- Detected onset of chemical reactions in PETN -- at a “reasonable” threshold shock pressure.
- Observed reaction products consistent with thermal decomposition quenched by vacuum expansion.
- However, failed to detect either hyperthermal species from PETN, *OR* fast Al atoms in aluminum laser ablation experiments.



Add Differential Pumping Region

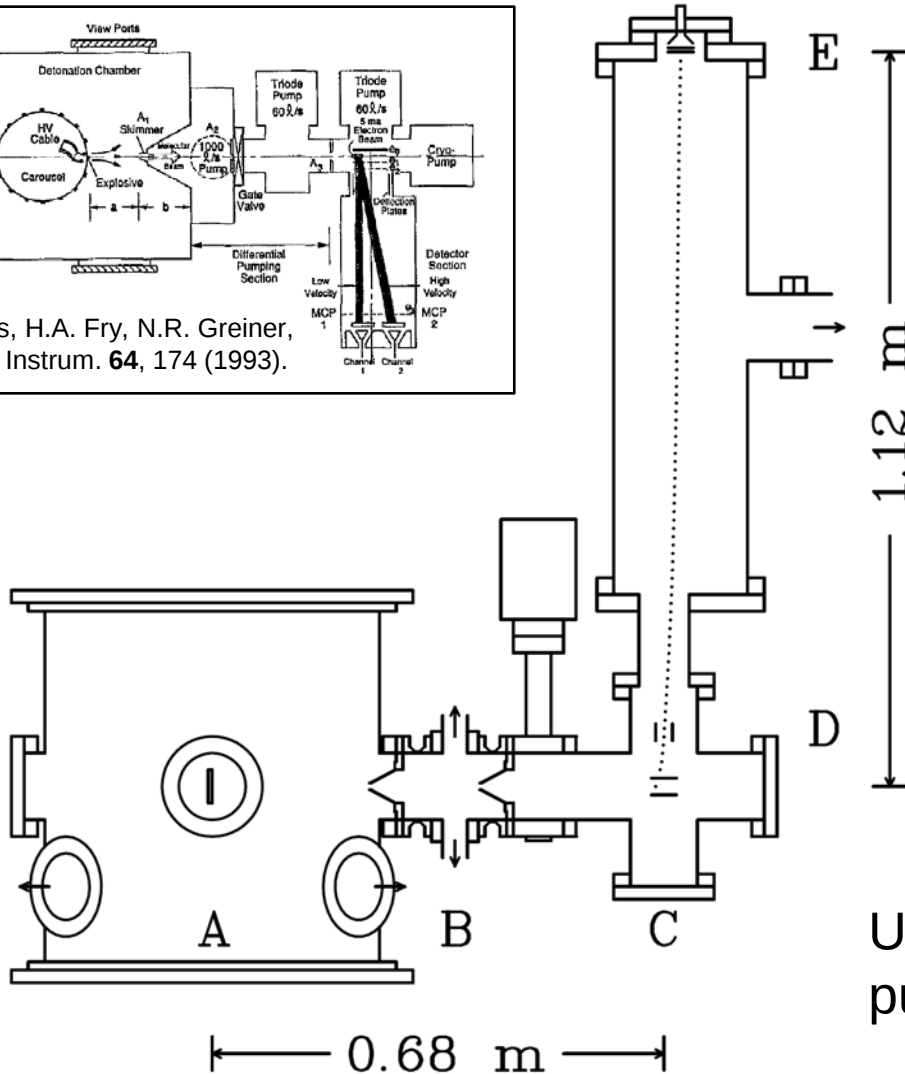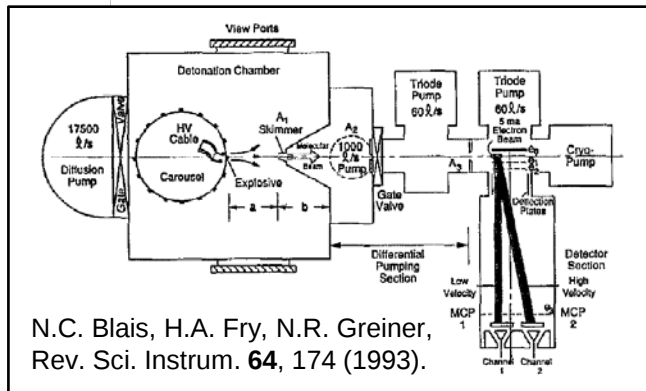


- A – Main Chamber**
- B – Differential Pumping**
- C – Ionization Region**
- D – Deflection Region**
- E – MCP Ion Detector**

Use skimmers and differential pumping to form molecular beam.



SIMION Simulations

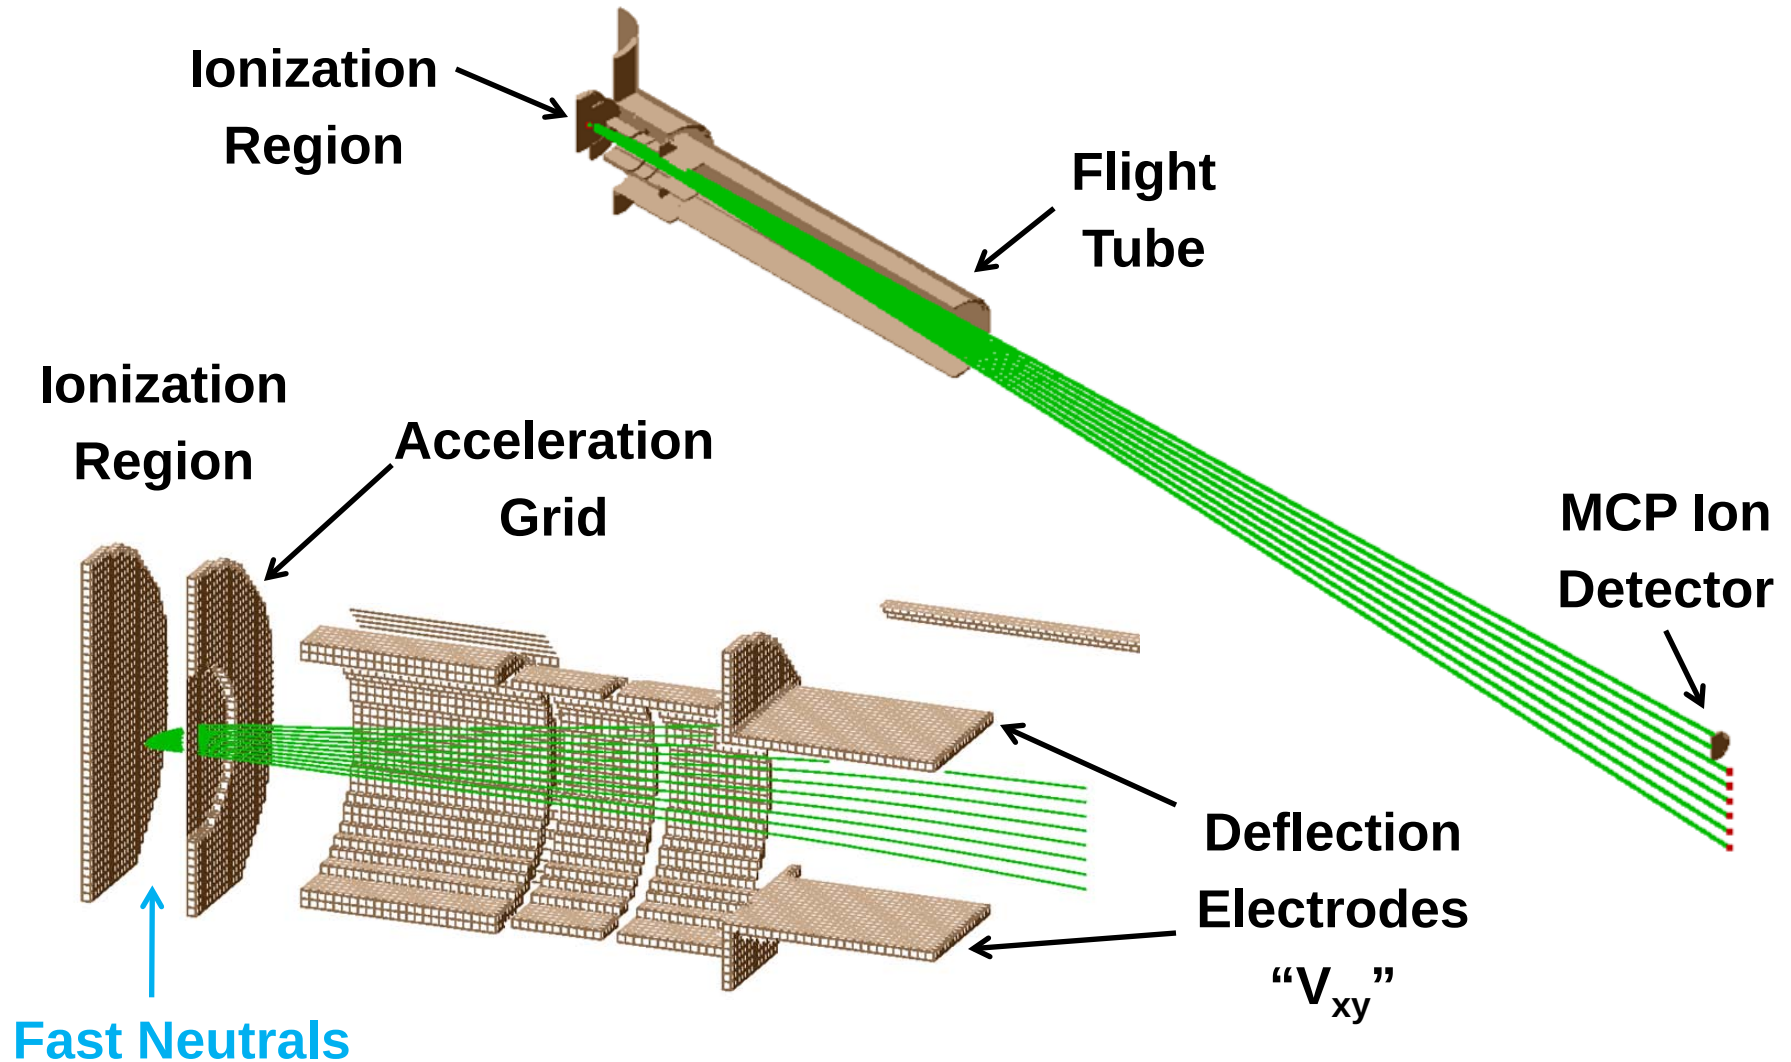





Aluminum Ablation Schematic



Use 1064 nm laser ablation of solid aluminum to produce fast ($v \sim 10$ km/s) Al atoms.


M. Macler, and M.E. Fajardo,
Appl. Phys. Lett. **65**, 159 (1994).

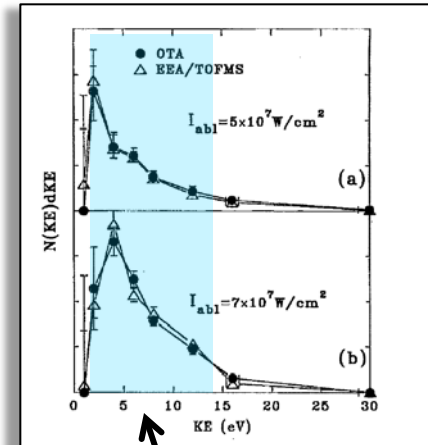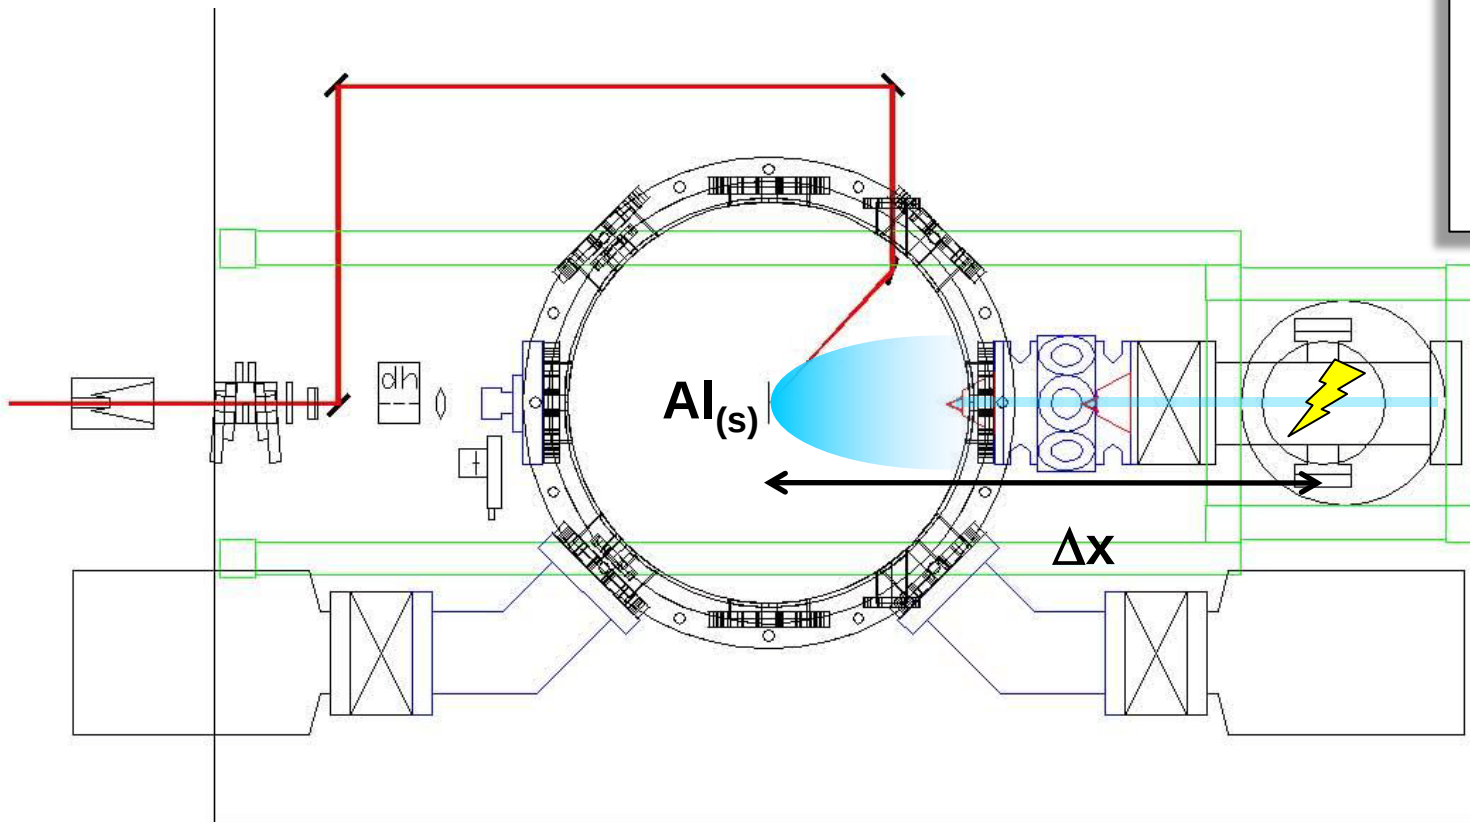

Al atom velocity
3 to 10 km/s



Aluminum Ablation Results


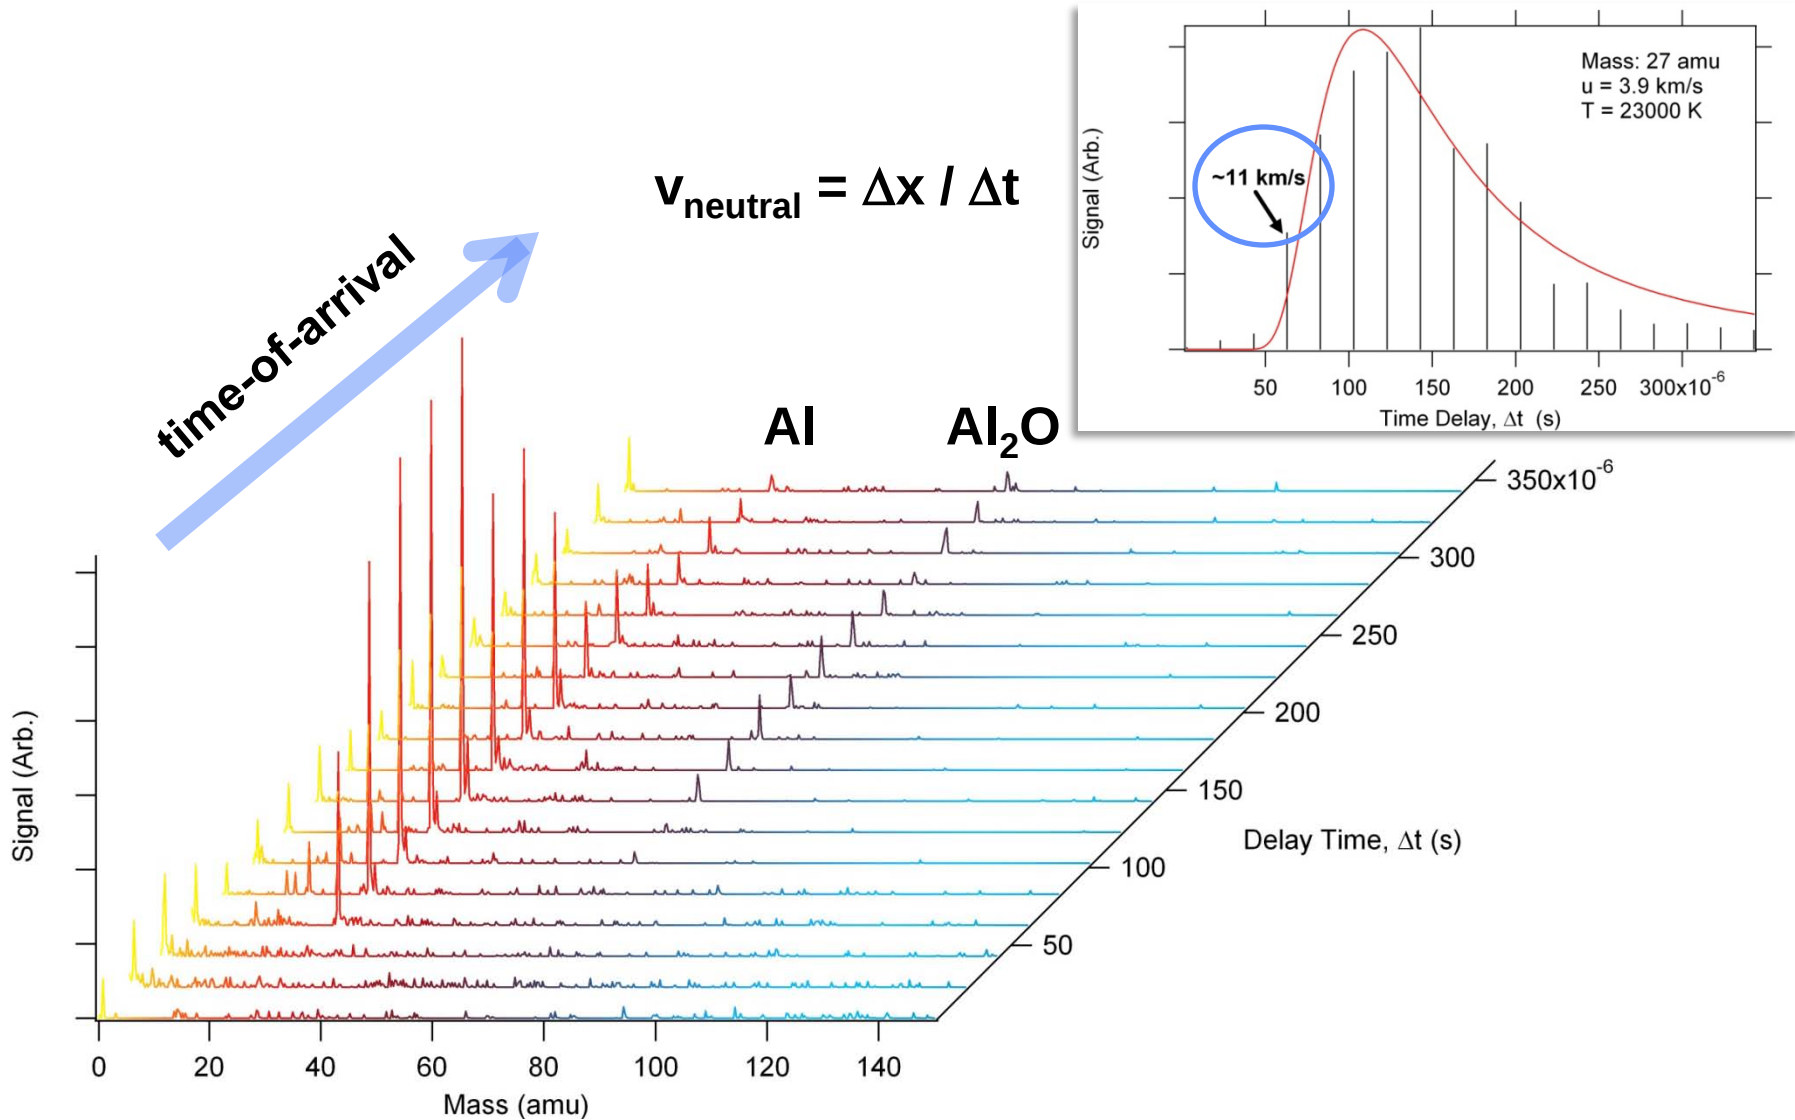




Nitrocellulose Laser Initiation



Fit m_{28} time-of-arrival data to
Maxwell-Boltzman + u_{stream}

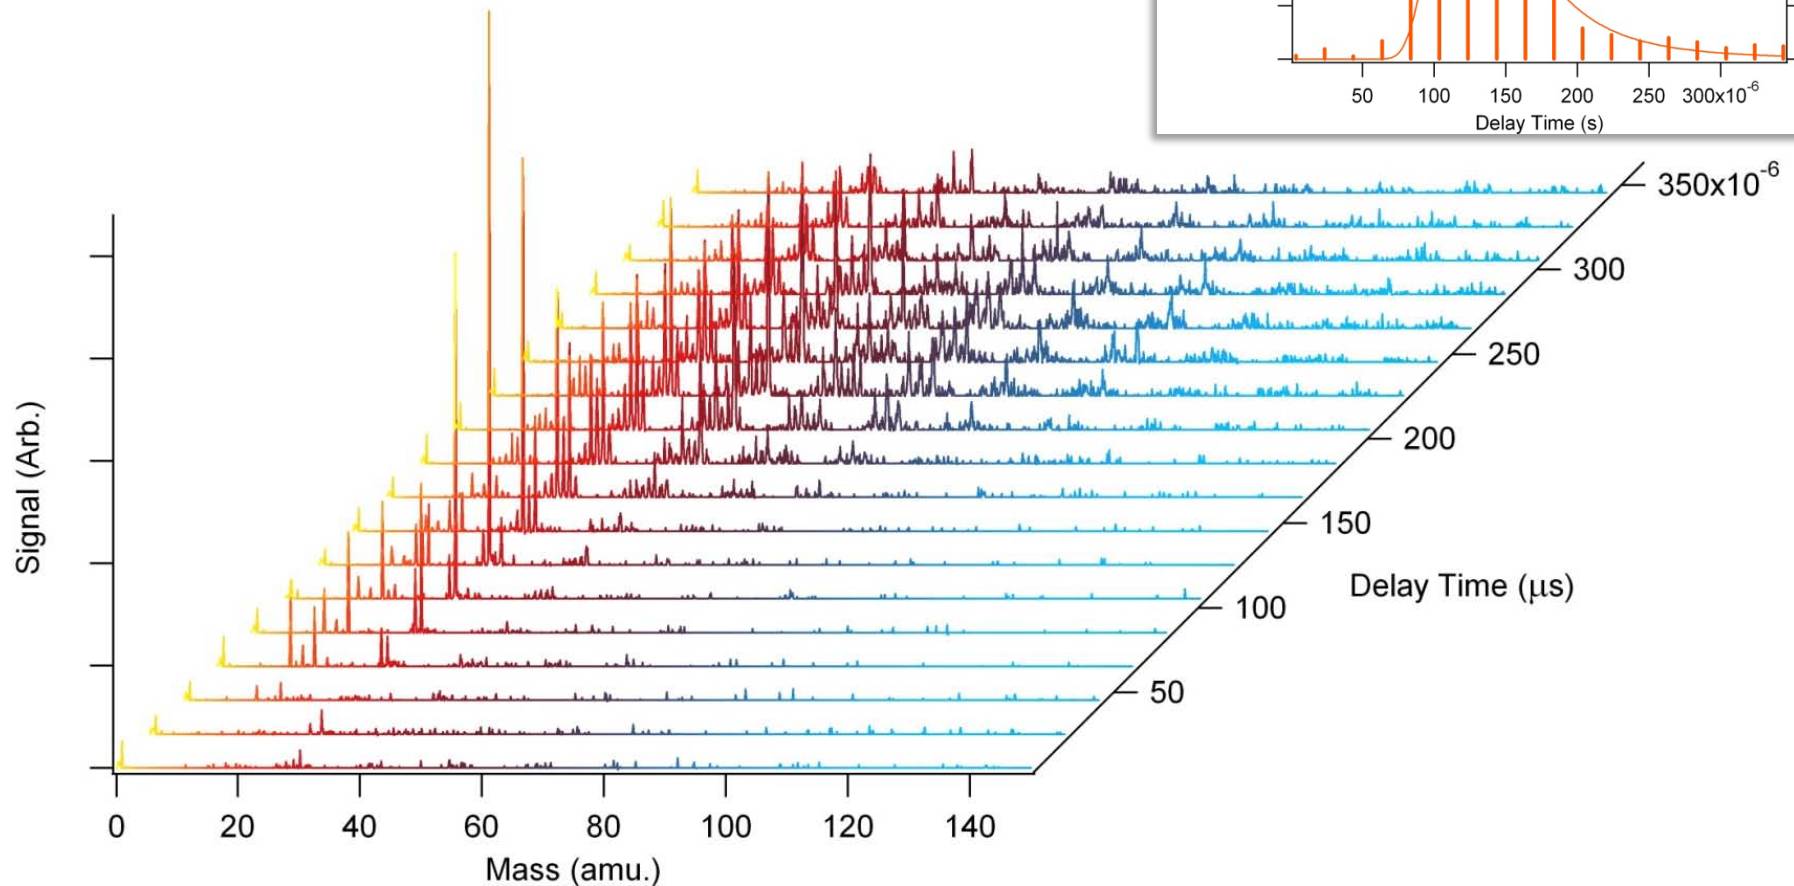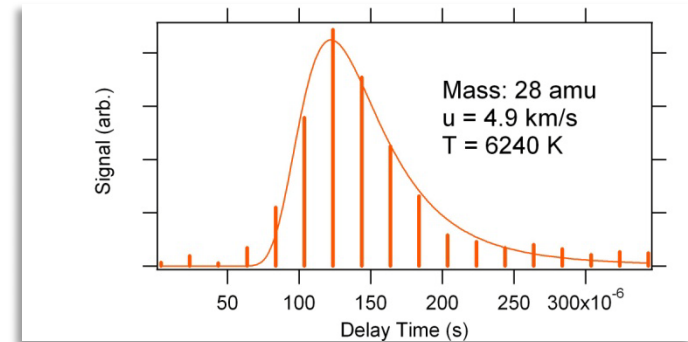



Conclusions





- Proposed a novel scheme for monitoring deflagration and “detonation-like” behaviors in small scale explosive samples-in-vacuum based on the chemical identities and velocity distributions of the gaseous products.
- Demonstrated detection of fast Al atoms ($v \sim 10$ km/s).
- Detected fast organic species from direct laser initiated nitrocellulose thin films.
- Determined semi-quantitative corrections for extracting neutral velocity distributions from measured time-of-arrival data.

Monday 12:15PM C2.00005
Benchtop Energetics:
Detection of Hyperthermal Species




Future Directions – Laser Shocks

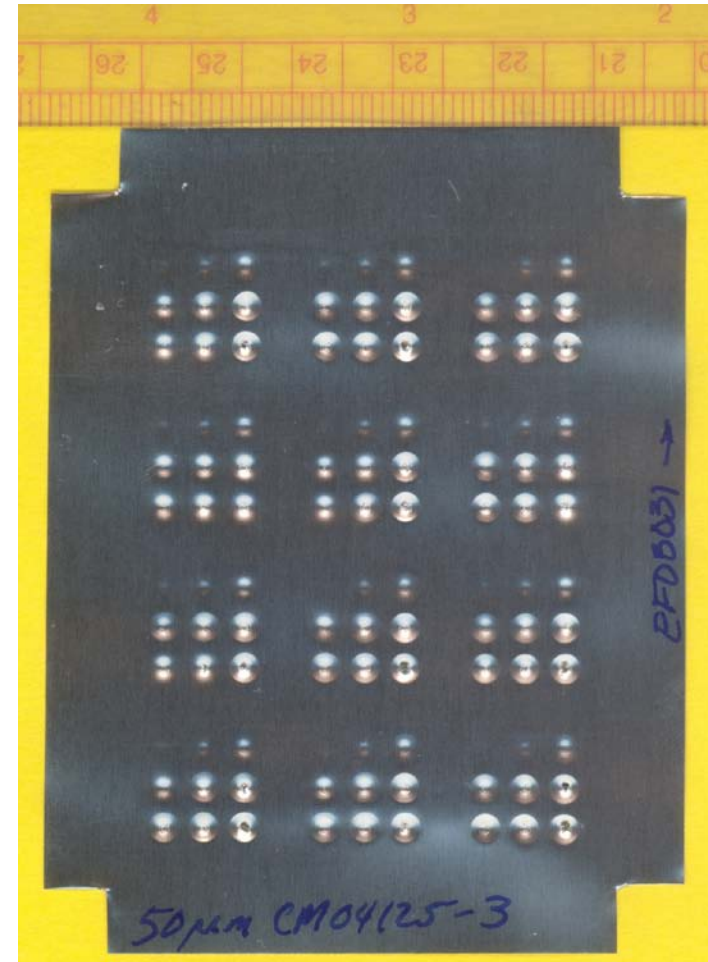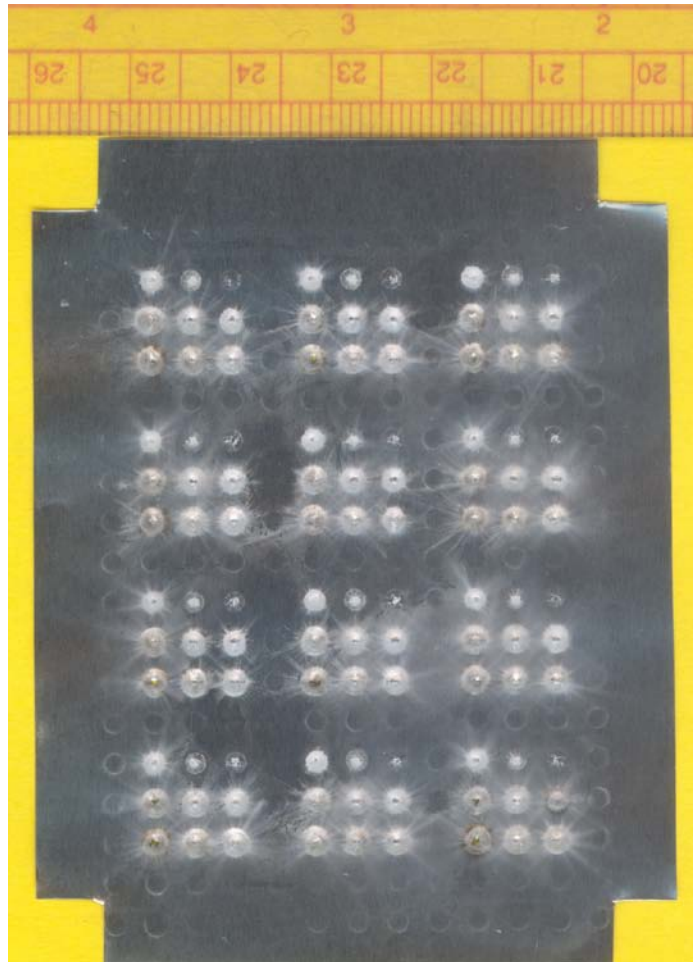


Wednesday 12:15PM M6.00006, Low-Order Modeling of Micro-Flier Impact with Thin Stationary Targets, MARK FRY & KEITH GONTHIER, Louisiana State University



Future Directions – Sample Prep.

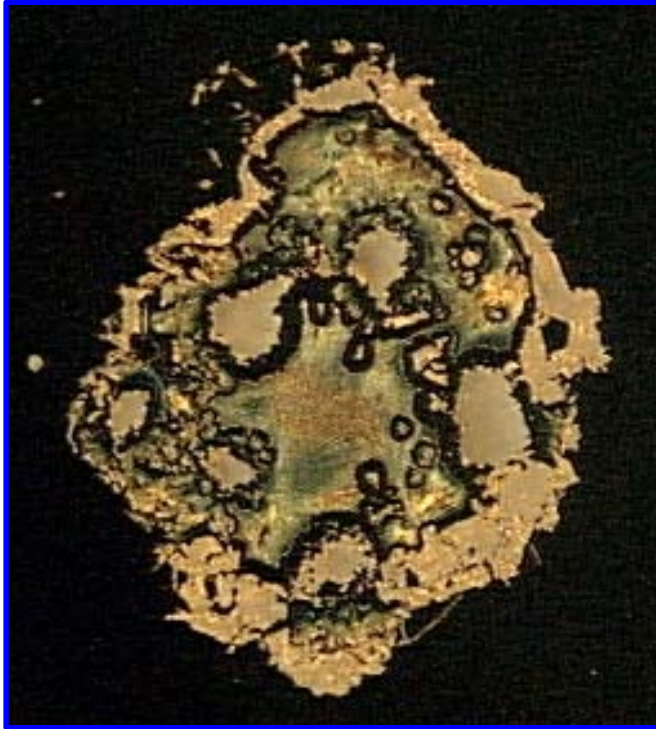

drop-wise deposited PETN

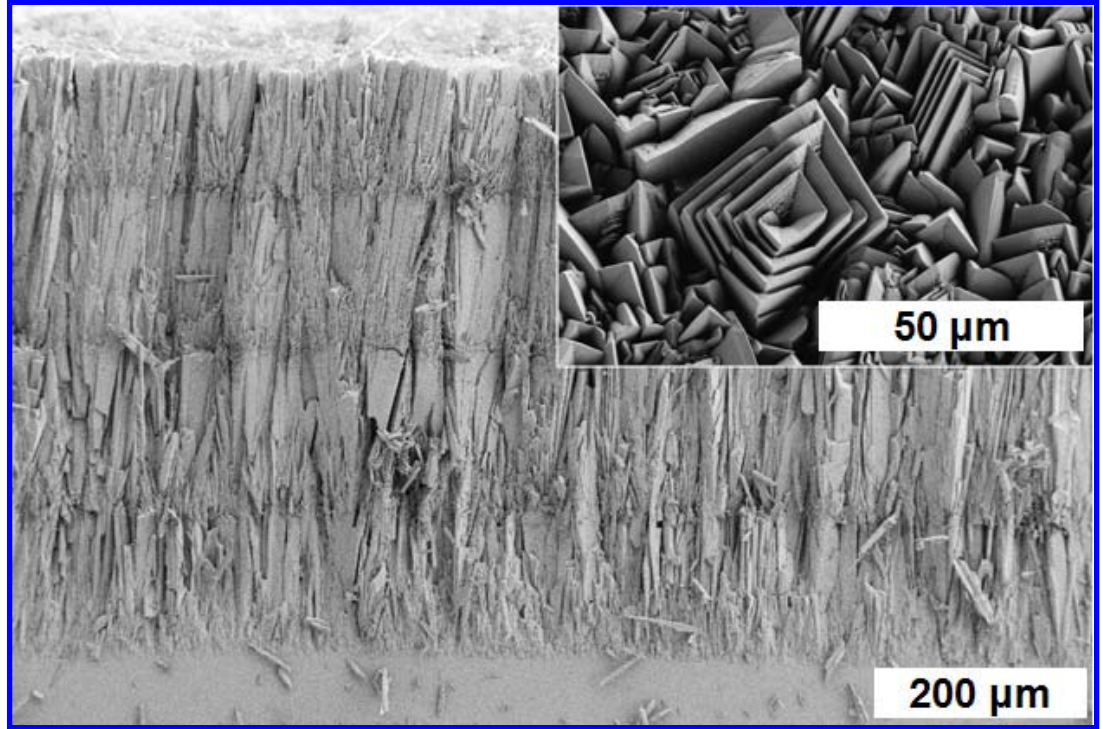

physical vapor deposited PETN (Tappan)

Friday 11:00AM Z2.00001, Critical Detonation Thickness in Vapor-Deposited Pentaerythritol Tetranitrate (PETN) Films, ALEX TAPPAN, et al. Sandia National Labs

DISTRIBUTION LIST
AFRL-RW-EG-TP-2011-023

*Defense Technical Info Center
8725 John J. Kingman Rd Ste 0944
Fort Belvoir VA 22060-6218

AFRL/RWME (6)
AFRL/RWOC-1 (STINFO Office)