



Acoustic Change Detection Using Sources of Opportunity

by Owen R. Wolfe and Geoffrey H. Goldman

ARL-TN-0454

September 2011

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

Army Research Laboratory

Adelphi, MD 20783-1197

ARL-TN-0454

September 2011

Acoustic Change Detection Using Sources of Opportunity

Owen R. Wolfe and Geoffrey H. Goldman
Sensors and Electron Devices Directorate, ARL

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188		
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) September 2011		2. REPORT TYPE Final		3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE Acoustic Change Detection Using Sources of Opportunity		5a. CONTRACT NUMBER			
		5b. GRANT NUMBER			
		5c. PROGRAM ELEMENT NUMBER			
6. AUTHOR(S) Owen R. Wolfe and Geoffrey H. Goldman		5d. PROJECT NUMBER			
		5e. TASK NUMBER			
		5f. WORK UNIT NUMBER			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: RDRL-SES-P 2800 Powder Mill Road Adelphi, MD 20783-1197		8. PERFORMING ORGANIZATION REPORT NUMBER ARL-TN-0454			
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)			
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)			
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT There is interest in developing low-cost, low-power non-line-of-sight sensors for monitoring human activity. This report describes an algorithm that can detect a physical change in a building such as a door opening or closing. The algorithm is based on cross-correlating the acoustic signal measured from two microphones. Detection occurs when a statistically significant change in normalized cross-correlation is measured at different times. The algorithm was tested with an experiment that used a simple, inexpensive, hand-held FM radio as a sound source, two microphones, and a data acquisition system. The algorithm successfully detected a change in the environment when a door was opened or closed.					
15. SUBJECT TERMS Acoustic, change detection, sources of opportunity					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 18	19a. NAME OF RESPONSIBLE PERSON Geoffrey Goldman
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (Include area code) (301) 394-0882

Contents

List of Figures	iv
Acknowledgments	v
1. Introduction	1
2. Experiment	1
3. Algorithm	2
4. Processing	4
5. Discussion	8
6. Conclusion	8
7. References	9
Distribution List	10

List of Figures

Figure 1. A schematic of the experiment.	2
Figure 2. A portion of the frequency domain data (red and green) with the desired spectrum (blue).	3
Figure 3. A block diagram of the algorithm.	3
Figure 4. Acoustic data from a trial during which the door was opened.	4
Figure 5. Acoustic data from a trial during which the door remained closed,	4
Figure 6. The cross-correlations of data from a trial during which the door was opened.	5
Figure 7. Cross-correlations of data from a trial during which the door remained closed.	5
Figure 8. The cross-correlations from the trial where the door was open at time 1 and closed at time 2.	6
Figure 9. The cross-correlation from a trial where the door remained shut at time 1 and time 2.	6
Figure 10. The difference of the cross-correlations from a trial where the door was opened has a sum of 218.	7
Figure 11. The difference of the cross-correlations from a trial during which the door remained closed has a sum of 44.	7

Acknowledgments

We would like to thank Chris Reiff and Gary Chatters for their help with the experiment.

INTENTIONALLY LEFT BLANK.

1. Introduction

There is interest in developing non-line-of-sight sensors for monitoring human activity. While individuals performing activities can intentionally or unintentionally reduce their signature to sensors such as microphones and cameras, they may generate other clues that can be exploited. Active acoustics can be used to perform change detection inside buildings. Common challenges with active acoustics systems are audible range frequencies giving away the position of the system and ultrasound frequencies quickly attenuating with range (1 dB/m) (1). In order to avoid these issues, we use an acoustic source of opportunity such as a radio, a conversation, or another similar signal. This mitigates the problem of the source being discovered and reduces the cost of the system (2, 3).

Change detection is the process of using data from sensors to measure a change in the surrounding area at different times. Change detection is accomplished by subtracting a reference image or profile of an area from a test image (4). Any changes in the scene are noticed, while things that stayed the same are cancelled. An acoustic change detection algorithm requires an image or profile of the environment. A relatively simple way of generating an acoustic profile of an area is to cross-correlate the data measured on two microphones (5). For discrete signals, cross-correlation is defined as

$$R_{xy}(m) = \sum_{n=-\infty}^{\infty} x(n)y(m+n), \quad (1)$$

where $x(n)$ is the measured signal from microphone 1 at index n and $y(m+n)$ is the measured signal from microphone 2 at time $(m+n)$. With the addition of a third microphone, acoustic imagery could be generated and allow for localization in a plane.

2. Experiment

The algorithm was tested with a simple experiment. Two microphones were placed 4 m apart. The acoustic source was an FM radio that was placed less than a 1 m away from the first microphone. The radio was set to a station that played music and talk. Data from the microphones were recorded at a sampling rate of 10 KHz with the door position either opened or closed (figure 1). The data collected during different trials were used to evaluate the algorithm.

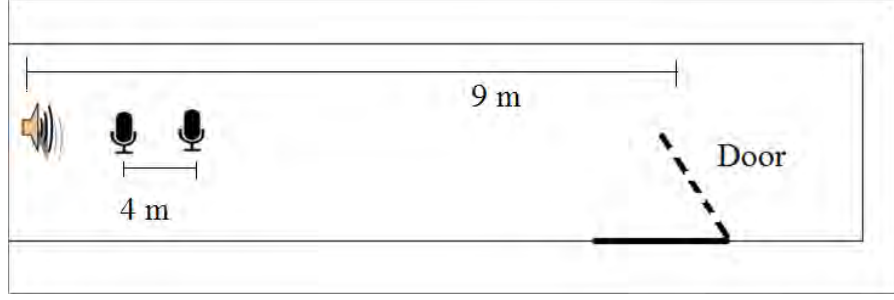


Figure 1. A schematic of the experiment.

3. Algorithm

The algorithm begins by filtering low frequency noise using a Butterworth filter. Next, the data sets from microphones 1 and 2 are split and delayed by approximately 40 s. This ensures that the data are only from periods where the door was completely open or completely closed.

The channels are equalized by first converting the data into the frequency domain (figure 2) using a fast Fourier transform (FFT). The amplitude of the two spectrums are equalized to

$$S(\omega) = \min(|X_1(\omega)|, |X_2(\omega)|), \quad (2)$$

where $X_1(\omega)$ and $X_2(\omega)$ are the discrete Fourier transforms of the data on microphones 1 and 2, ω is frequency, and $\min$ is minimum of the amplitude of the two spectrums for each frequency. To equalize the spectrums, the original spectrums are divided by their own magnitudes and then multiplied by the magnitude of the $S(\omega)$. Then, the signals are converted back to the time domain using an inverse fast Fourier transform (iFFT). These new time domain signals are now equalized. Next the data are cross-correlated. The outputs of the cross-correlations are subtracted and normalized using

$$D(n) = \frac{|R_{x_1y_1}(n) - R_{x_2y_2}(n)|}{(|R_{x_1y_1}(n)| + |R_{x_2y_2}(n)| + \sigma)_0} \left(\frac{r(n)|r(n) - r_0|}{2} + 1 \right)^{\frac{1}{4}}, \quad (3)$$

where $R_{x_1y_1}(n)$ is the first cross-correlation at index n and $R_{x_2y_2}(n)$ is the second cross-correlation at index n , and $r(n)$ corresponds approximately to the range and is given by

$$r(n) = cnT + r_1, \quad (4)$$

where n is the index, c is the speed of sound, T is one over the sampling rate, and r_1 is the distance between the source and the first microphone. This normalization partially accounts for the attenuation of the signal with range. Next, the sum is compared to a threshold based upon a Student's t -distribution.

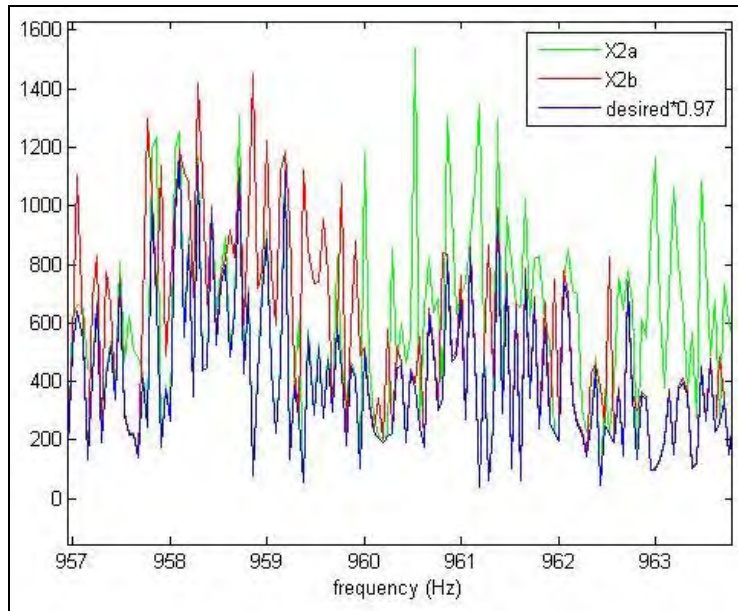


Figure 2. A portion of the frequency domain data (red and green) with the desired spectrum (blue).

Figure 3 shows a block diagram of the algorithm.

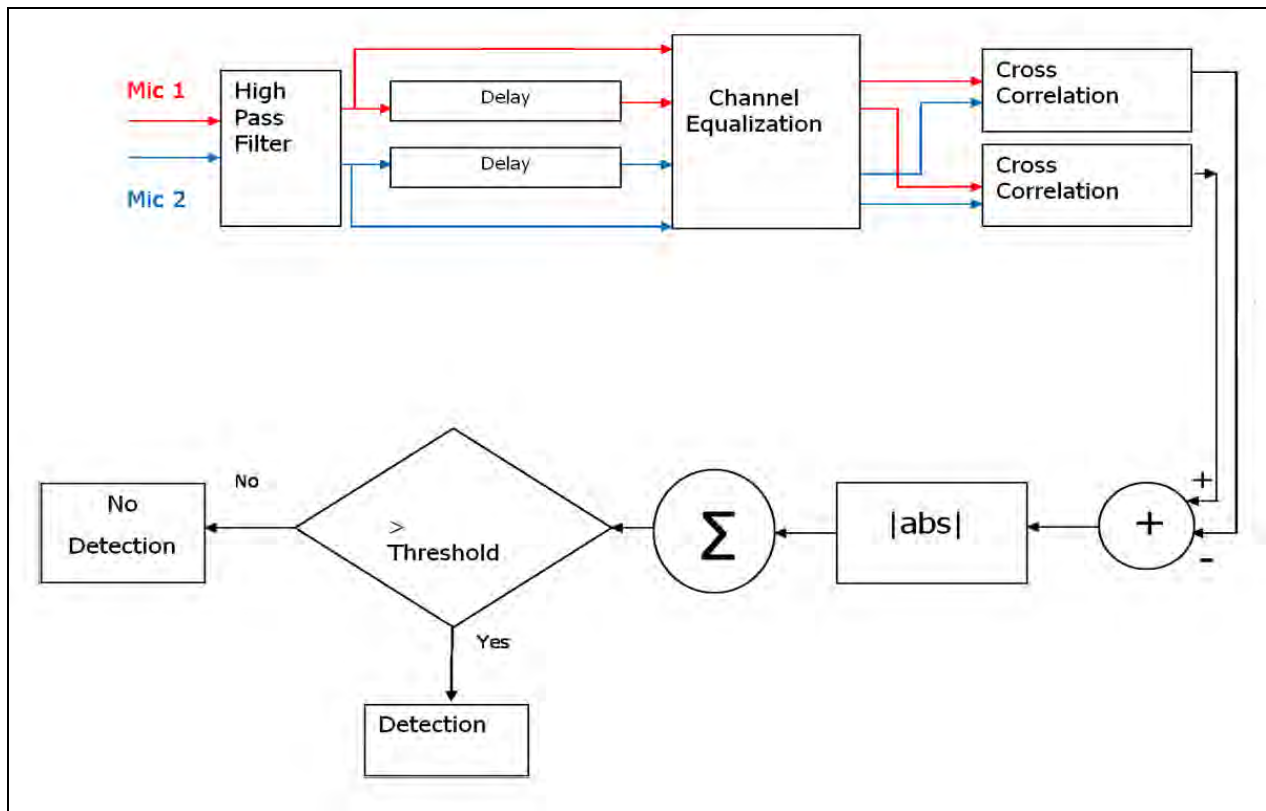


Figure 3. A block diagram of the algorithm.

4. Processing

Results are shown for data collected during two different trials. First, the data are equalized using equation 2. Figure 4 shows the waveforms in time when the door was opened and figure 5 shows the waveforms in a time when the door remained closed.

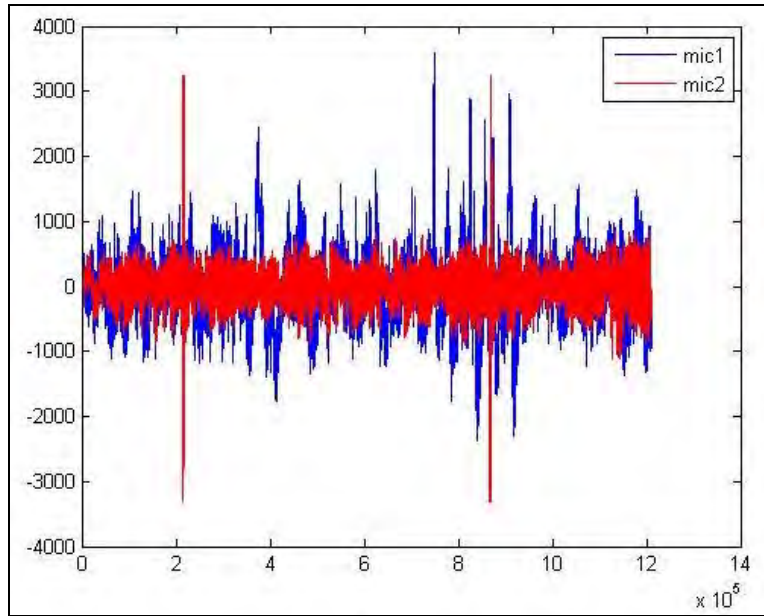


Figure 4. Acoustic data from a trial during which the door was opened.

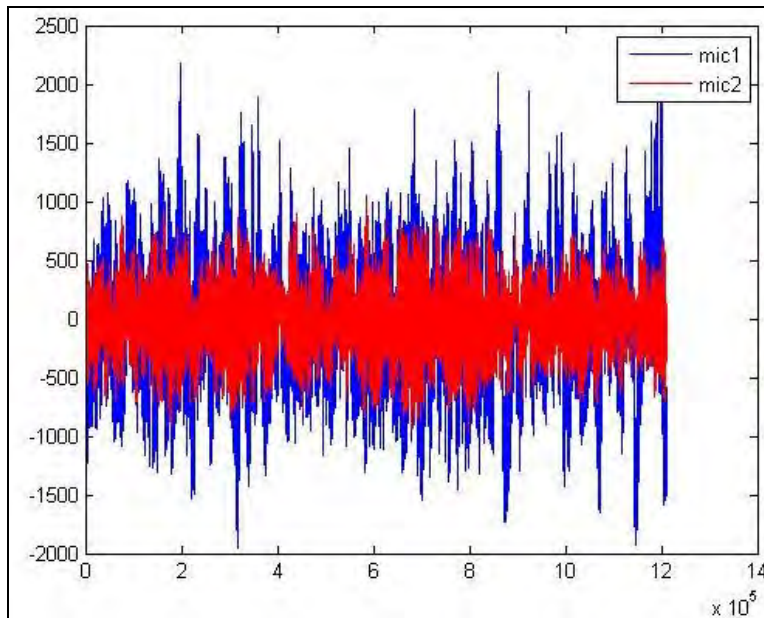


Figure 5. Acoustic data from a trial during which the door remained closed,

Next, the results from figures 4 and 5 are cross-correlated. The results are shown in figures 6–9. Figures 8–9 are zoomed-in versions of the data in figures 6–7. The x -axis has been converted to range by multiplying the time variable in the cross correlation by the speed of sound. The large peak in the figures occurs at 4.5 m, which correspond to the distance between the microphones.

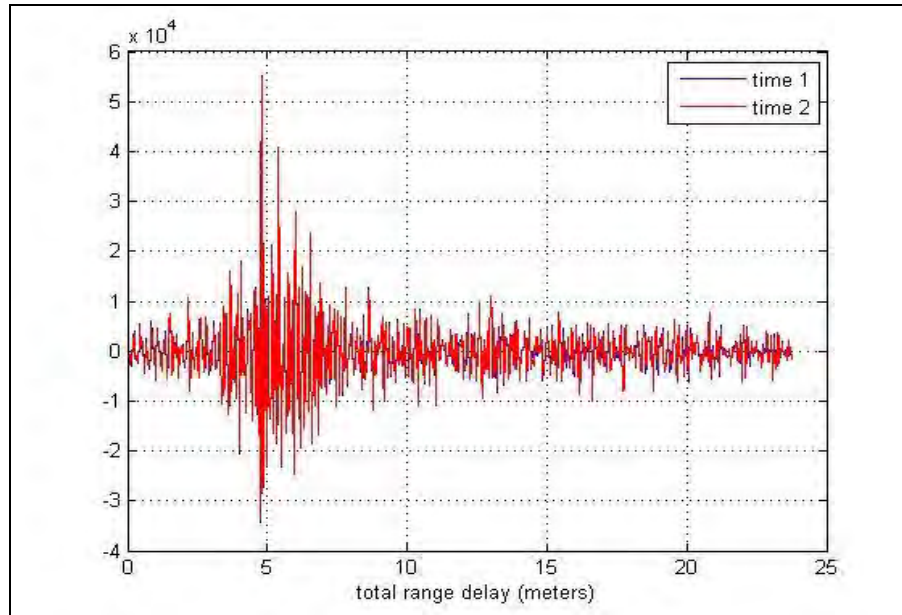


Figure 6. The cross-correlations of data from a trial during which the door was opened.

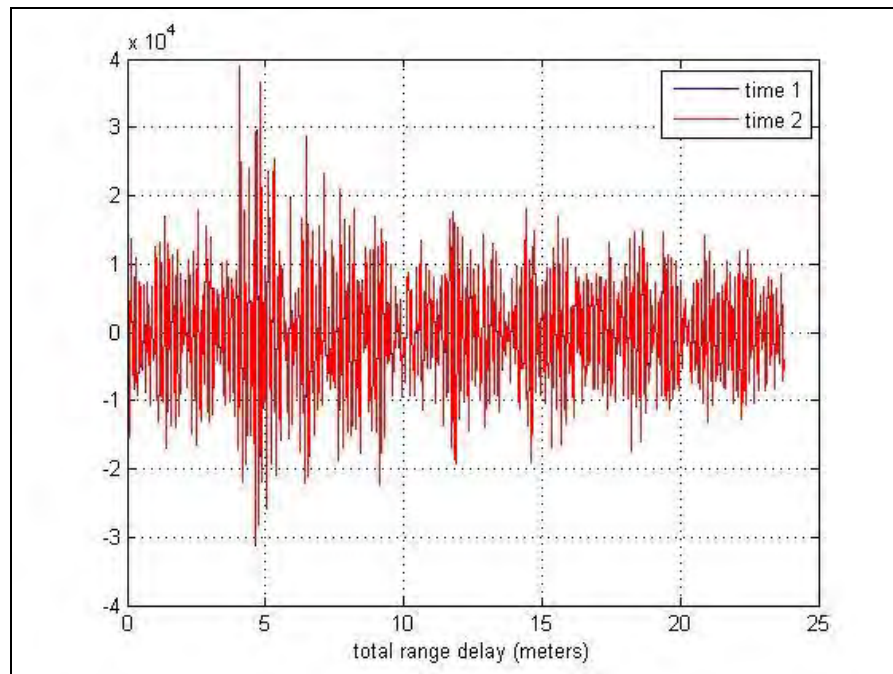


Figure 7. Cross-correlations of data from a trial during which the door remained closed.

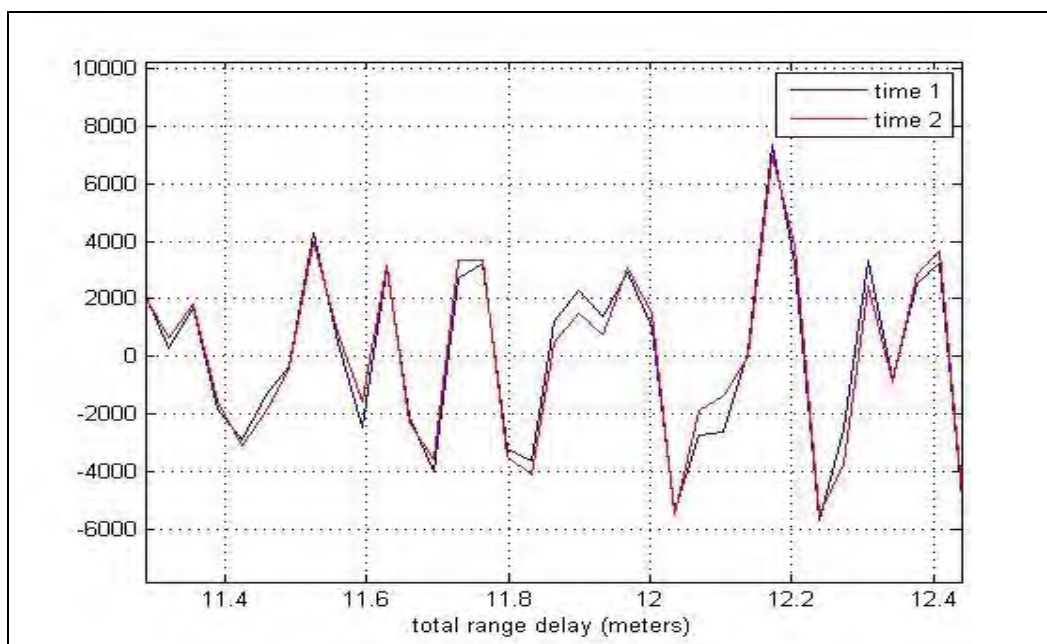


Figure 8. The cross-correlations from the trial where the door was open at time 1 and closed at time 2.

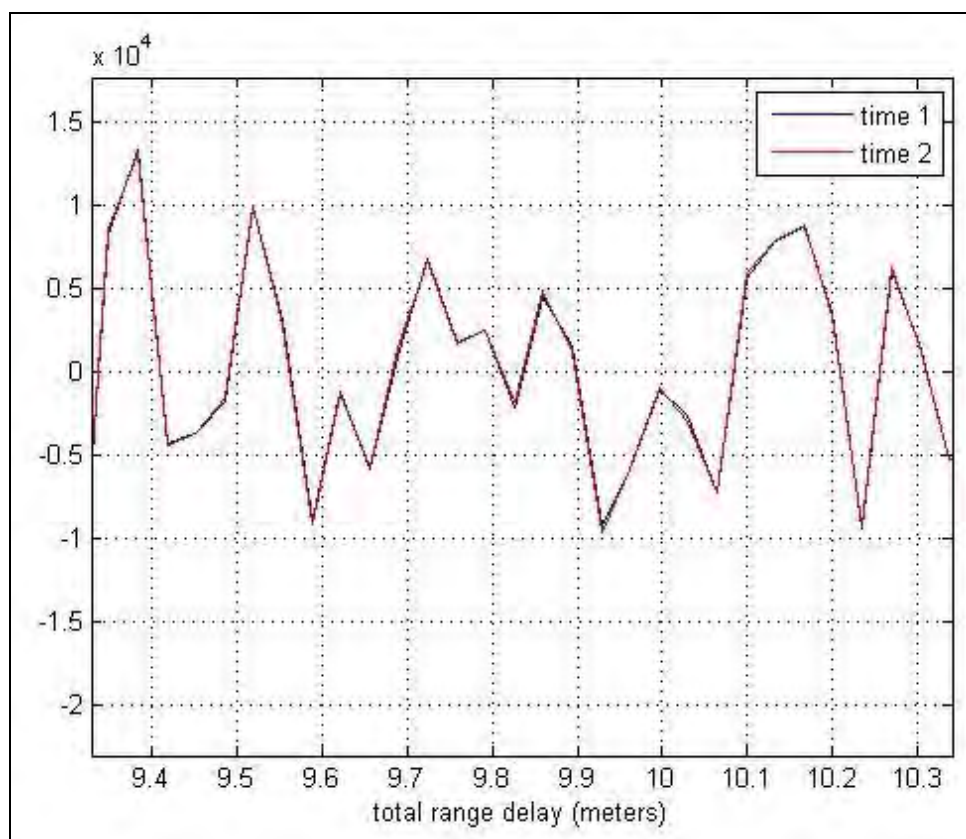


Figure 9. The cross-correlation from a trial where the door remained shut at time 1 and time 2.

Lastly, the cross-correlations are subtracted from each other, normalized, and then summed. Figure 10 shows the results for the door being opened then closed, while figure 11 shows the results for the door being shut at both times.

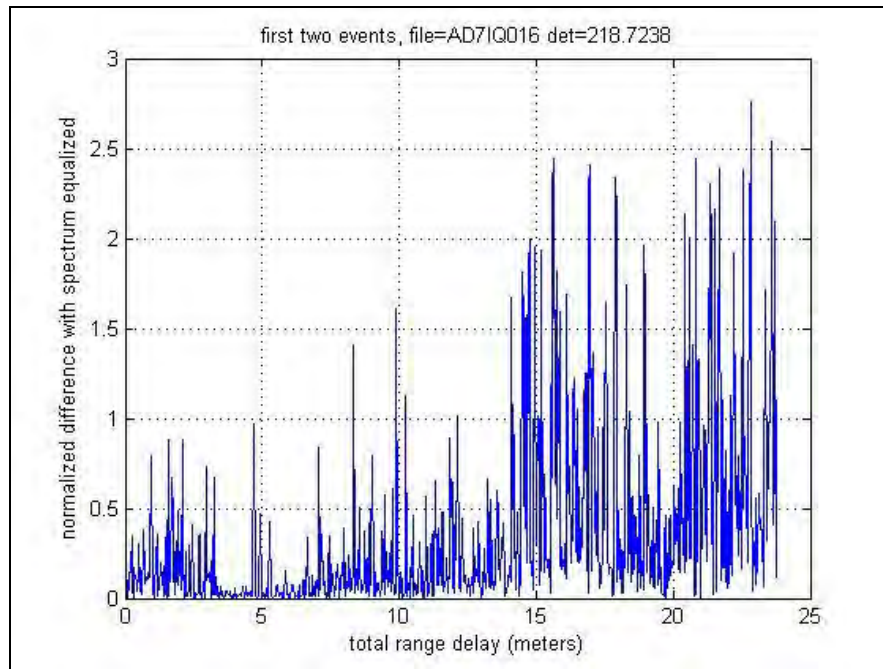


Figure 10. The difference of the cross-correlations from a trial where the door was opened has a sum of 218.

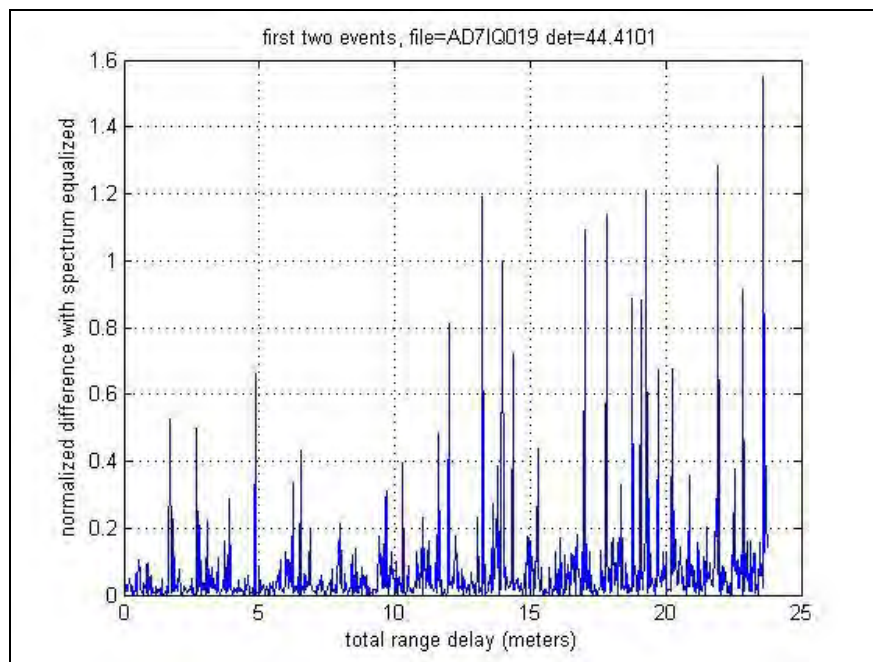


Figure 11. The difference of the cross-correlations from a trial during in which the door remained closed has a sum of 44.

5. Discussion

The results show that the sum of the differences in the amplitude of the cross-correlated signal received when the door position changed is greater than with no change. This is the result of the change in the scattering of the acoustic energy caused by the door opening. Statistics were calculated on the average normalized differences between the cross-correlation results with no change in the environment using the four data sets. The mean was 28 and the standard deviation was 38. The sum of the data when the environment was changed was 218. This is greater than four standard deviations away from the mean results when the environment remained constant. These results were evaluated using a Student's t -test, which indicated that there was greater than a 99.9% confidence that a change occurred.

6. Conclusion

These results demonstrate acoustic change detection using sources of opportunity. The simplicity of this technique means that acoustic surveillance could be conducted using inexpensive and nearly unnoticeable equipment.

Ideally, the range to the change could be determined, but this algorithm was unable to determine the range because of the noisy cross-correlation results and a complex scattering environment. A more complex algorithm is required to obtain reliable range information.

7. References

1. Silex, *Sound Attenuation*. <http://www.silex.com/pdfs/Sound%20Attenuation.pdf> (accessed 10 August 2011).
2. Tan, D.K.P. et al. Passive radar using Global System for Mobile communication signal: theory, implementation and measurements. *IEE Proceedings - Radar, Sonar and Navigation* **June-July 2005**, 152, (3), 116–123. <http://ieeexplore.ieee.org> (accessed 10 August 2011).
3. Wang, L.; Yarman, C. E.; Yazici, B. Doppler Hitchhiker: A Novel Passive Synthetic Aperture Radar using Ultra-Narrowband Sources of Opportunity. *IEEE Transactions on Geoscience and Remote Sensing* PP **June 2011**, (99), 1–17. <http://www.ieexplore.ieee.org> (accessed 10 August 2011).
4. Chapman, B. SAR Interferometry and Surface Change Detection. Basic Principles of SAR Interferometry, last modified August 9, 1995. <http://southport.jpl.nasa.gov/scienceapps/dixon/report2.html> (accessed 10 August 2011).
5. Chan, T. et al. *Combined Use of Various Passive Radar Range-Doppler Techniques*. http://www.ee.washington.edu/research/funlab/imaging/chan_report_8_18.pdf (accessed 10 August 2011).

NO. OF
COPIES ORGANIZATION

1 (PDF only)	DEFENSE TECHNICAL INFORMATION CTR DTIC OCA 8725 JOHN J KINGMAN RD STE 0944 FORT BELVOIR VA 22060-6218
1	DIRECTOR US ARMY RESEARCH LAB IMNE ALC HRR 2800 POWDER MILL RD ADELPHI MD 20783-1197
1	DIRECTOR US ARMY RESEARCH LAB RDRL CIO LL 2800 POWDER MILL RD ADELPHI MD 20783-1197
1	DIRECTOR US ARMY RESEARCH LAB RDRL CIO MT 2800 POWDER MILL RD ADELPHI MD 20783-1197
1	DIRECTOR US ARMY RESEARCH LAB ATTN RDRL SES P G GOLDMAN 2800 POWDER MILL RD ADELPHI MD 20783-1197
10 HCS 1 CD	OWEN WOLFE 2422 PONY LANE RESTON VA 20191

TOTAL: 16 (1 ELEC, 1 CD, 14 HCS)