


Interpreting and Responding to Intensified Site Characterization Results



Fred Payne
ARCADIS

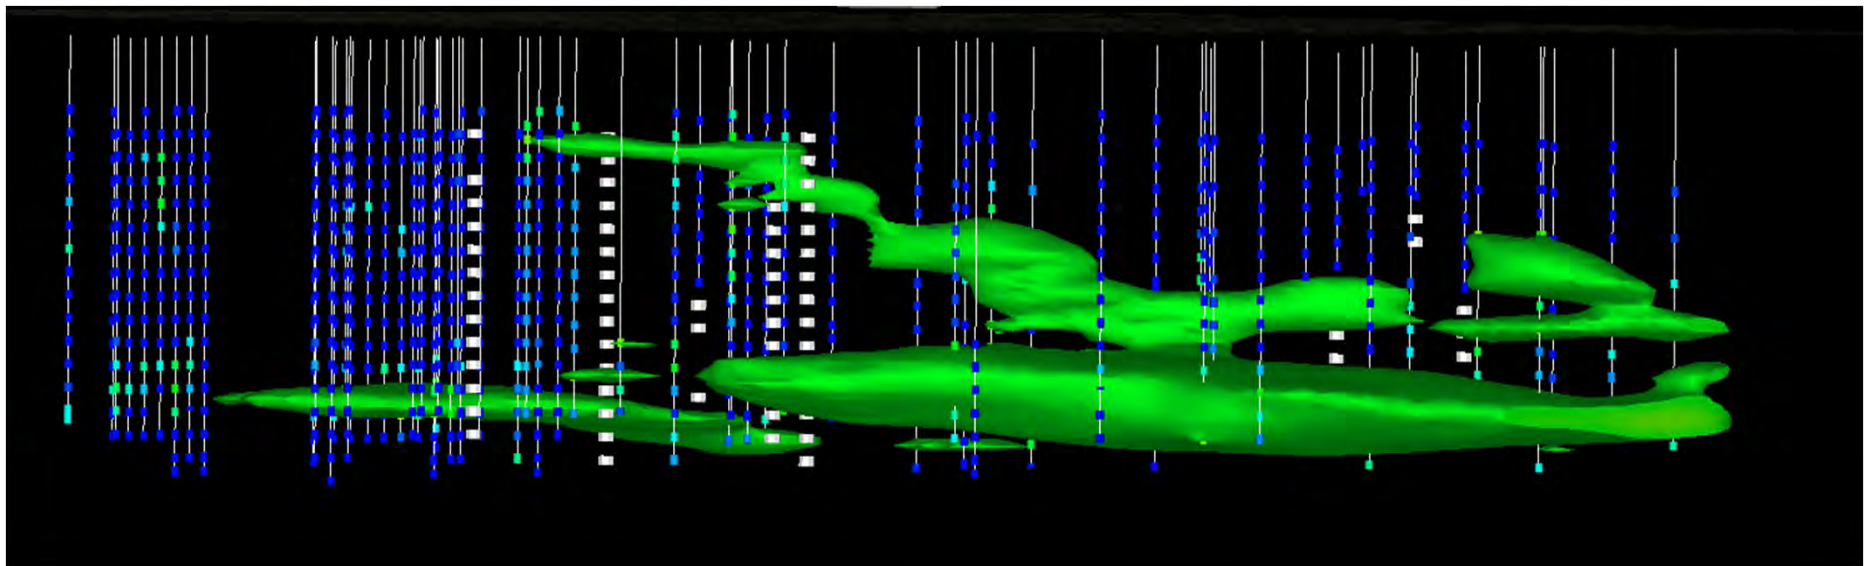

SERDP
DOD • EPA • DOE



ESTCP

Report Documentation Page		Form Approved OMB No. 0704-0188
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.		
1. REPORT DATE NOV 2011	2. REPORT TYPE	3. DATES COVERED 00-00-2011 to 00-00-2011
4. TITLE AND SUBTITLE Interpreting and Responding to Intensified Site Characterization Results		5a. CONTRACT NUMBER
		5b. GRANT NUMBER
		5c. PROGRAM ELEMENT NUMBER
6. AUTHOR(S)	5d. PROJECT NUMBER	
	5e. TASK NUMBER	
	5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) ARCADIS,375 West Santee,Charlotte,MI,48813		8. PERFORMING ORGANIZATION REPORT NUMBER
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited		
13. SUPPLEMENTARY NOTES Presented at the Partners in Environmental Technology Technical Symposium & Workshop, 29 Nov ? 1 Dec 2011, Washington, DC. Sponsored by SERDP and ESTCP. U.S. Government or Federal Rights License		
14. ABSTRACT High-resolution site characterization is being applied at an increasing number of sites especially large-plume sites with long-standing chlorinated solvent source zones. This allows us to improve remedy design and operation, but it can also add to the challenge of regulatory closure, particularly in jurisdictions that require all groundwater to reach MCLs including locations where groundwater cannot be extracted at rates that would allow use for water supply. Common patterns are emerging from these sites, including ? Heterogeneous, anisotropic aquifer matrix structure, even at sites that were expected to be relatively homogeneous ? Contaminant mass transport focused in a small fraction of the aquifer matrix crosssection (more than 90% of the mass transport is occurring in less than 10% of the aquifer matrix) ? Extremely small transverse dispersivities; and ? In locations where the aquifer matrix has been exposed to soluble contaminants over extended periods, a significant portion of the contaminant mass resides in lowerpermeability zones. In many locations, there is a large divergence between contaminant concentrations in groundwater extraction wells (or monitoring wells pumped at modest to high specific flow rates) and small-scale sample collections from lower-permeability zones. Contaminants located in the lower-permeability zones can be very difficult to treat and the challenge of meeting MCLs across all permeabilities is significant. This paper provides details of recent high-resolution sampling programs at large plume sites and examines how site hydrogeology and contaminant chemistry interacted to create the distribution patterns that are being observed. Then, the paper examines the prospects for remedial action in these zones, with data from multiple technologies in heterogeneous aquifers.		
15. SUBJECT TERMS		

16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 27	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

INTERPRETING AND RESPONDING TO INTENSIFIED SITE CHARACTERIZATION RESULTS

DR. FRED PAYNE
ARCADIS
375 West Santee
Charlotte, MI 48813
(248) 376-5129
fred.payne@arcadis-us.com

High-resolution site characterization is being applied at an increasing number of sites, especially large-plume sites with long-standing chlorinated solvent source zones. This allows us to improve remedy design and operation, but it can also add to the challenge of regulatory closure, particularly in jurisdictions that require all groundwater to reach MCLs, including locations where groundwater cannot be extracted at rates that would allow use for water supply.

Common patterns are emerging from these sites, including:

- Heterogeneous, anisotropic aquifer matrix structure, even at sites that were expected to be relatively homogeneous;
- Contaminant mass transport focused in a small fraction of the aquifer matrix cross-section (more than 90% of the mass transport is occurring in less than 10% of the aquifer matrix);
- Extremely small transverse dispersivities; and,
- In locations where the aquifer matrix has been exposed to soluble contaminants over extended periods, a significant portion of the contaminant mass resides in lower-permeability zones.

In many locations, there is a large divergence between contaminant concentrations in groundwater extraction wells (or monitoring wells pumped at modest to high specific flow rates) and small-scale sample collections from lower-permeability zones. Contaminants located in the lower-permeability zones can be very difficult to treat and the challenge of meeting MCLs across all permeabilities is significant.

This paper provides details of recent high-resolution sampling programs at large plume sites and examines how site hydrogeology and contaminant chemistry interacted to create the distribution patterns that are being observed. Then, the paper examines the prospects for remedial action in these zones, with data from multiple technologies in heterogeneous aquifers.

Outline


- Patterns Emerging from Intensified Site Characterization
 - Heterogeneous, anisotropic structure
 - Extreme low dispersivities
- Large-Plume Conceptual Model
 - Transport in transmissive zones
 - Storage in less-transmissive zones
 - Mass exchange rates are a critical factor
- New Opportunities Arise
 - Remedial strategies (e.g., directed groundwater recirculation)
 - Compliance (e.g., dynamic groundwater monitoring)
- Questions and Discussion



Beaver Island, Michigan

Impacts and Opportunities

- Contaminant mass transport is often concentrated in a small portion of the aquifer cross-section
- Remedies can be designed to take advantage of this distribution pattern

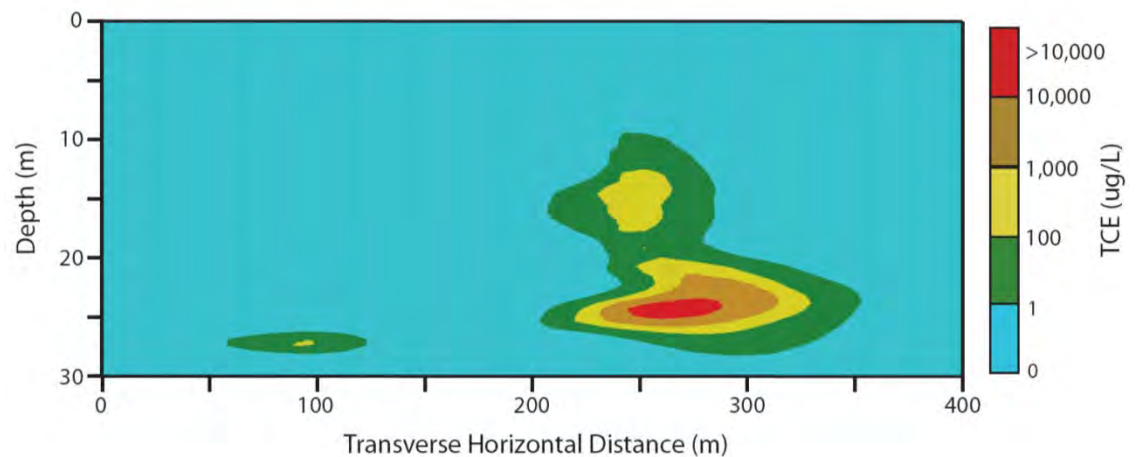


However,

- High-resolution sampling is also unmasking contaminant mass storage – High-C, Low-K zones
 - Mass transfer behavior controls remedy design and success
 - Need to rationalize application of compliance standards

transport

storage

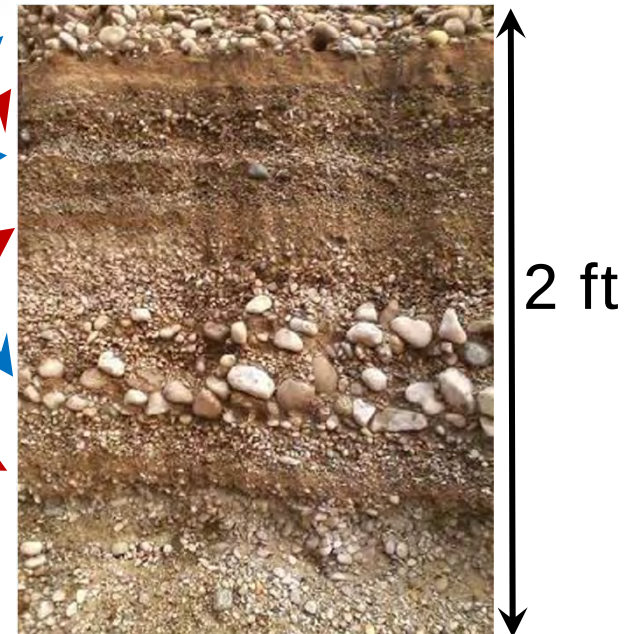


Field research repeatedly confirms that transverse dispersivity is near-zero




Borden aquifer studies – Rivett, Feenstra and Cherry


Natural aquifers show near-zero transverse dispersivity

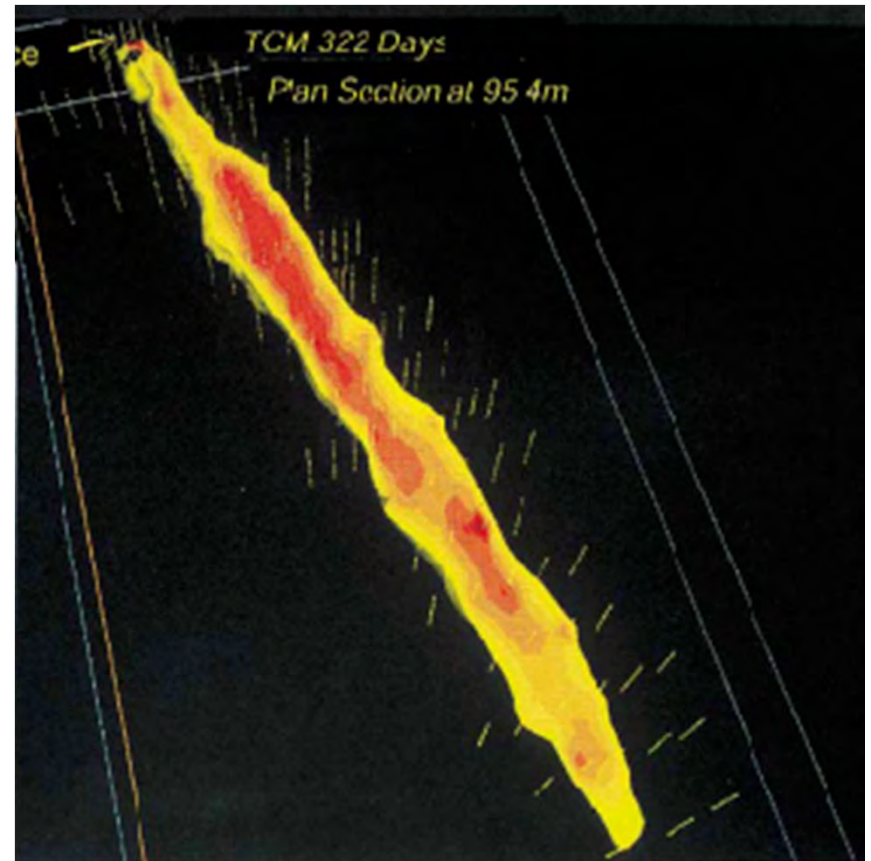


Cape Cod Tracer Studies – A broad spectrum of transport velocities

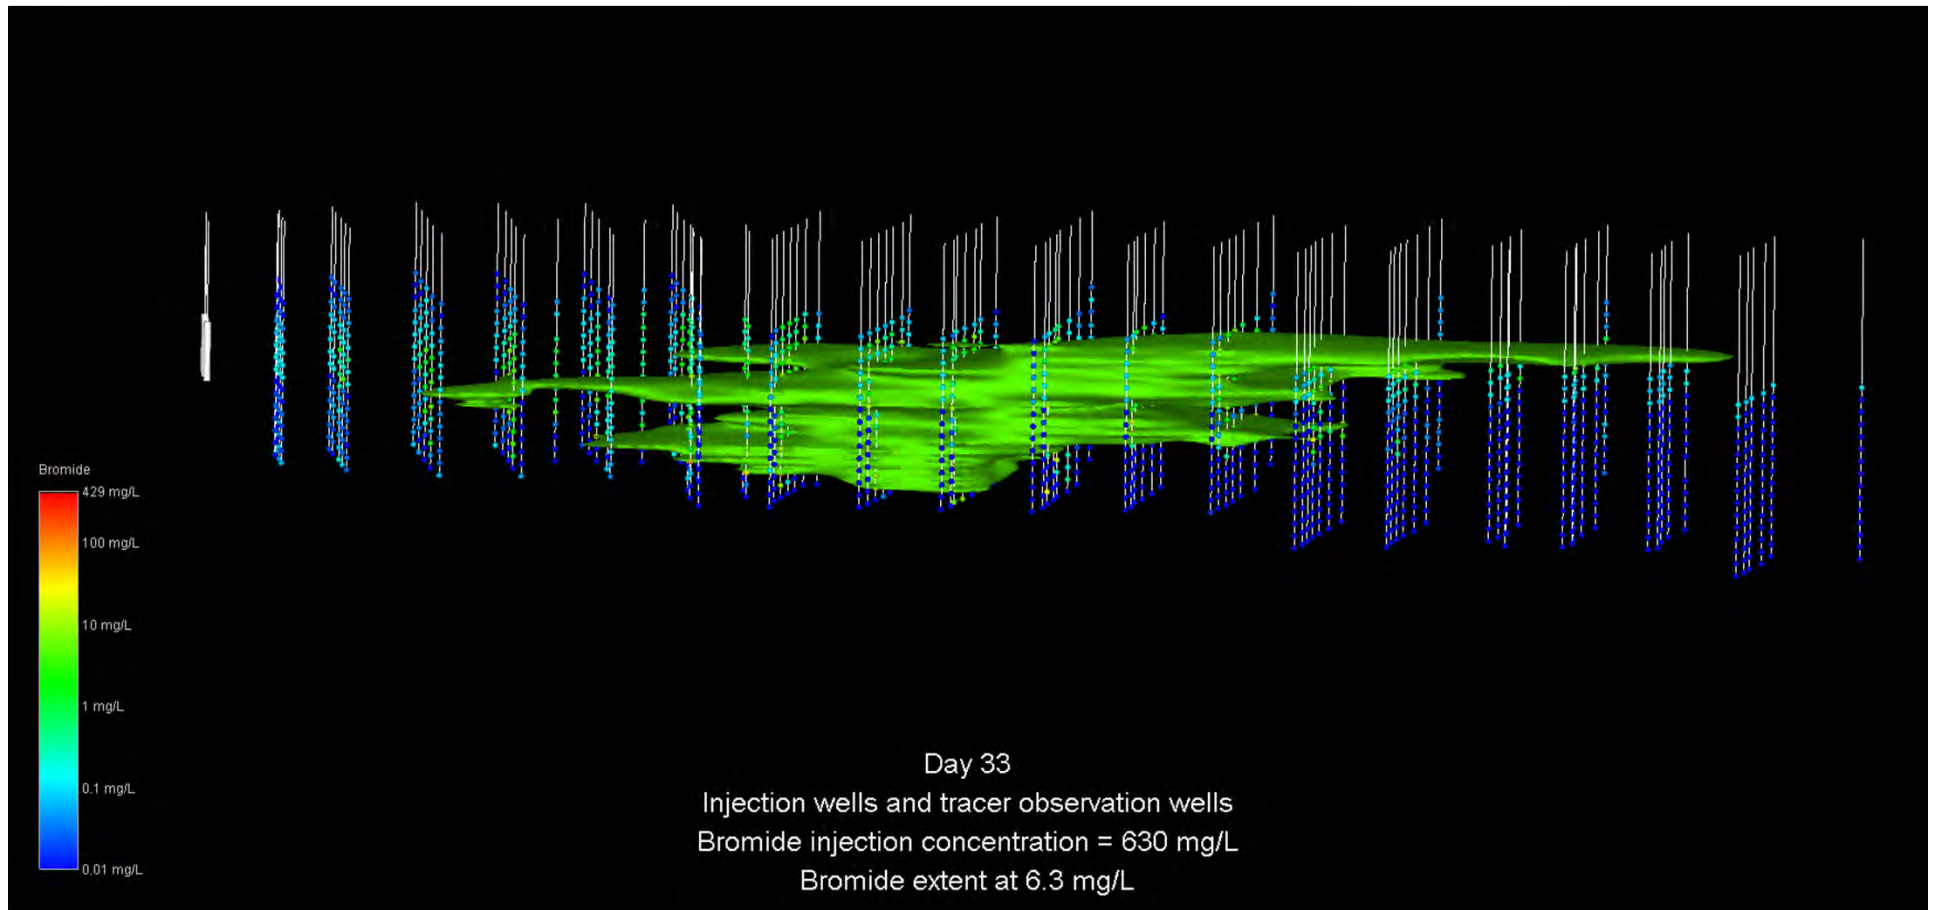

Multi-Domain Transport and Storage

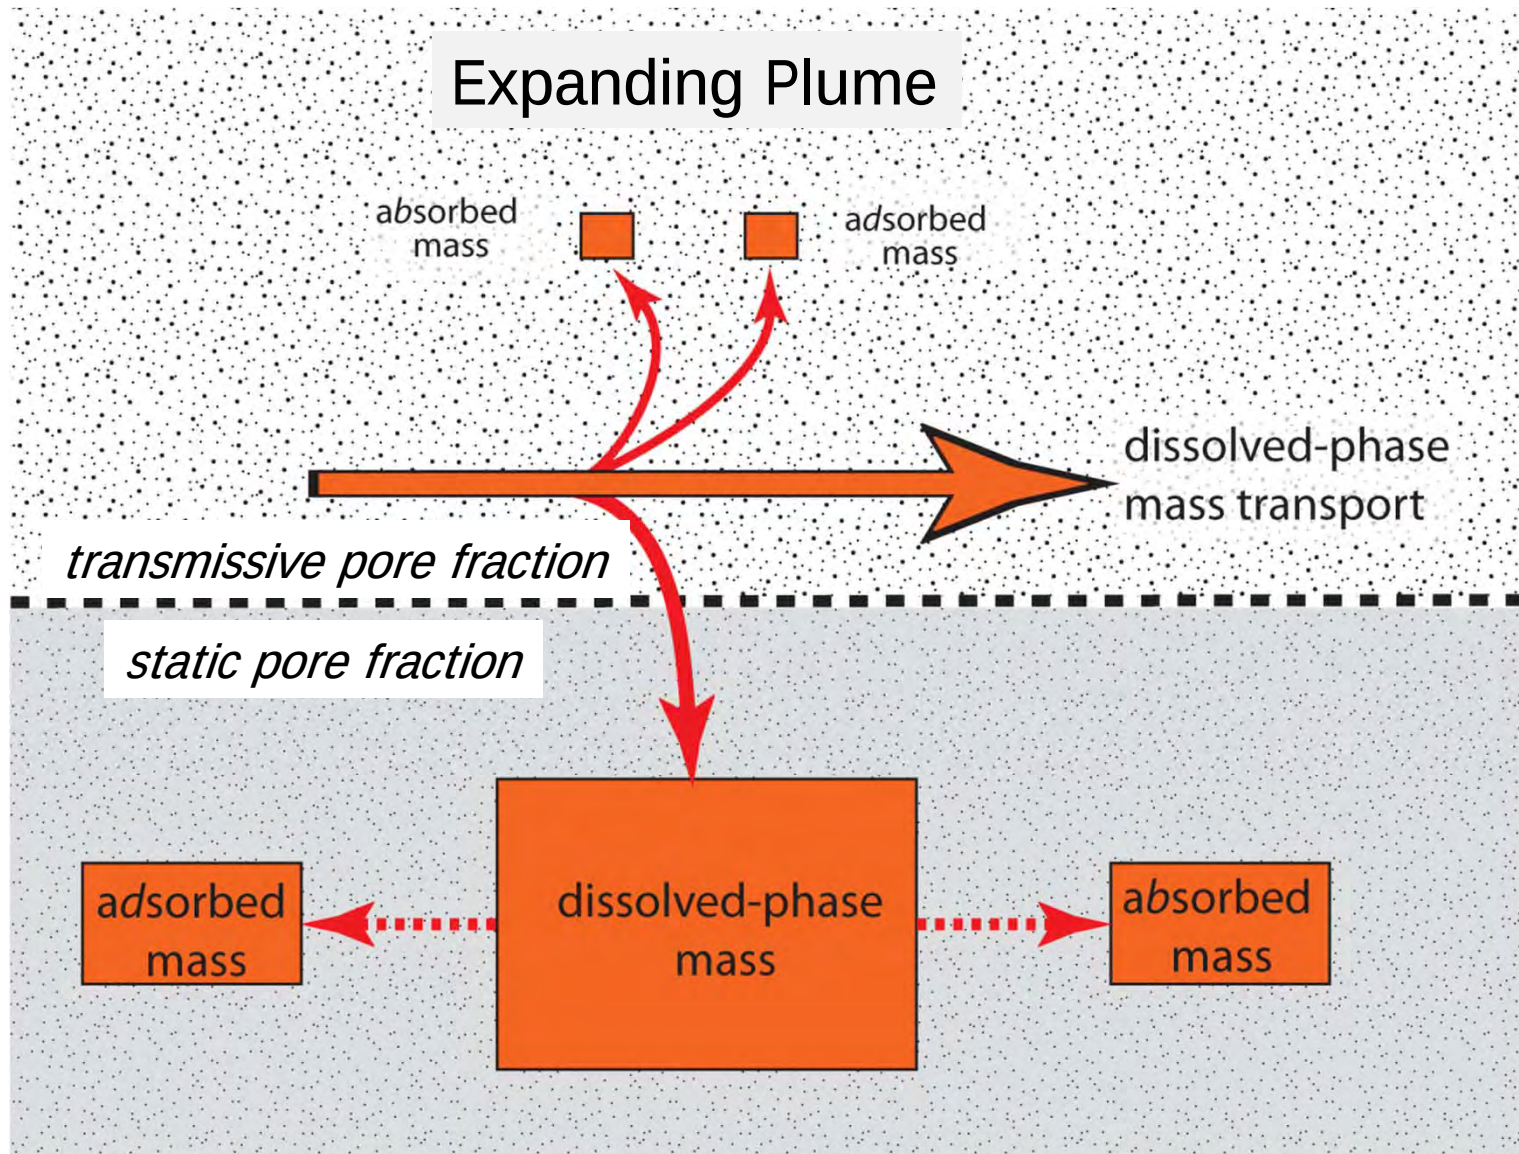


Multi-Domain Transport and Storage

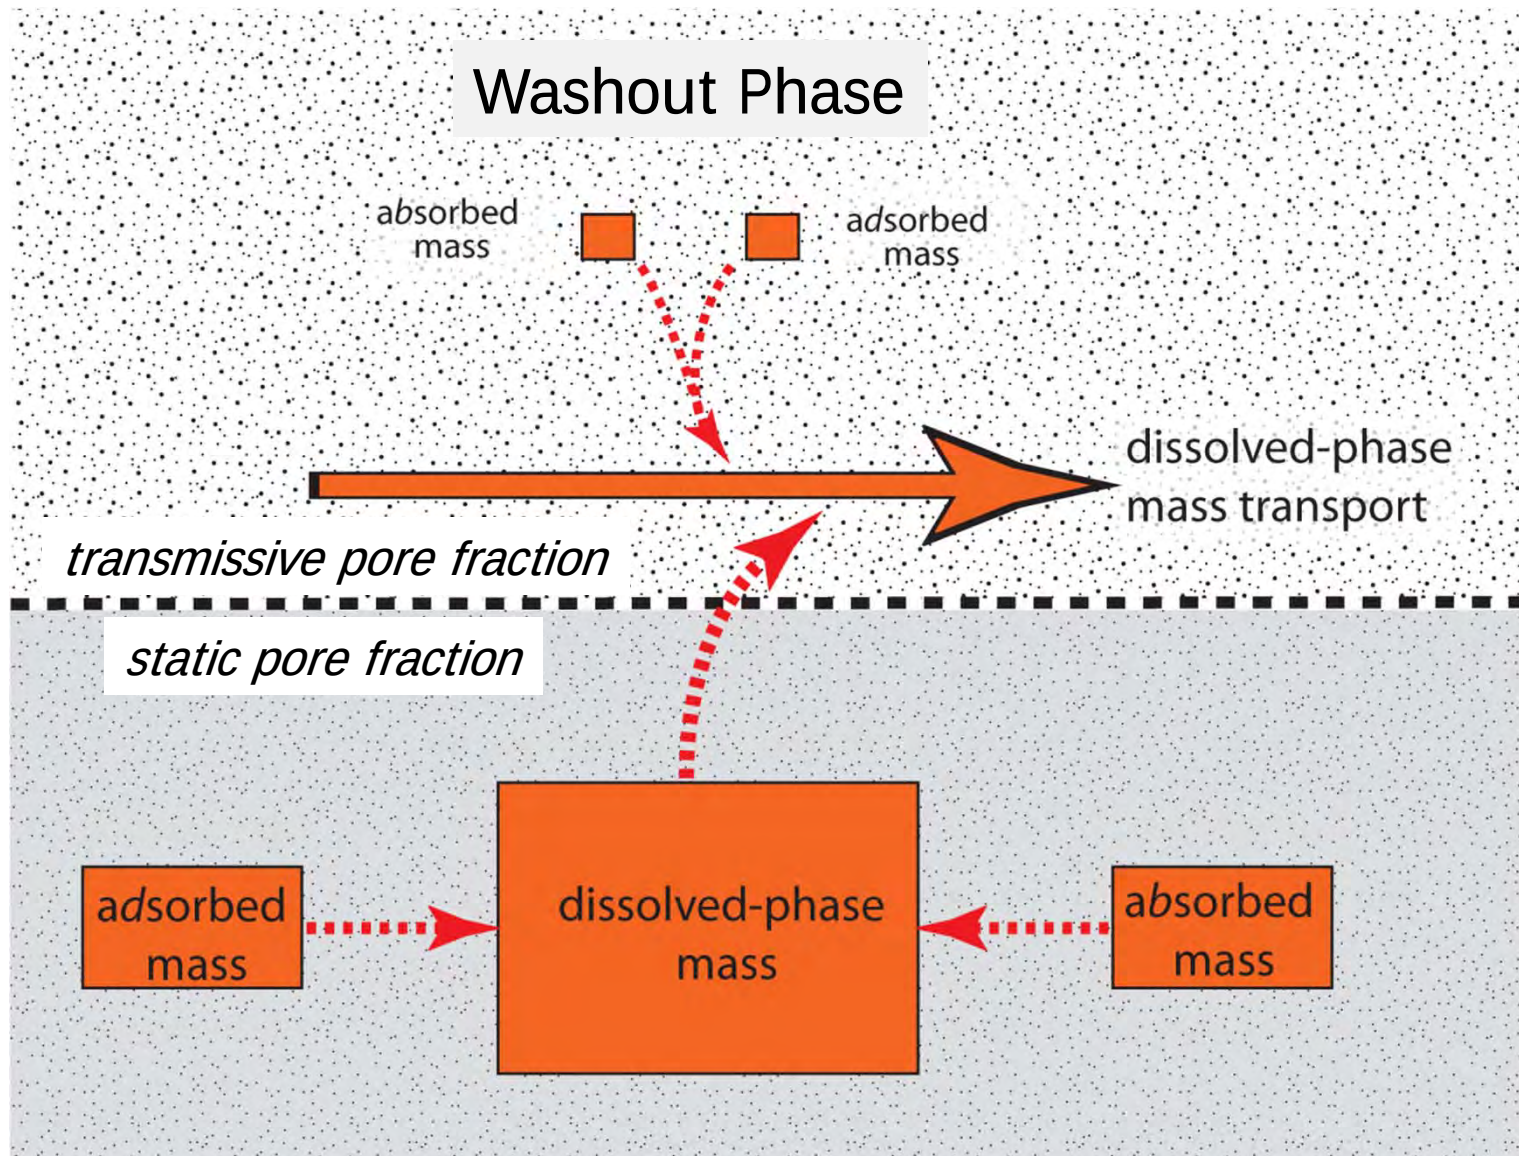


Aquifer Matrix Effects

- Two aquifer blocks with equal:
 - Average hydraulic conductivity
 - Mobile porosity
 - Groundwater transport velocity
- In the high-mass-transfer geometry, the rate of diffusive migration into the low-K zones is approximately 10-fold greater than for the low-mass-transfer case.
 - Increased exchange surface area
 - Decreased diffusion path lengths

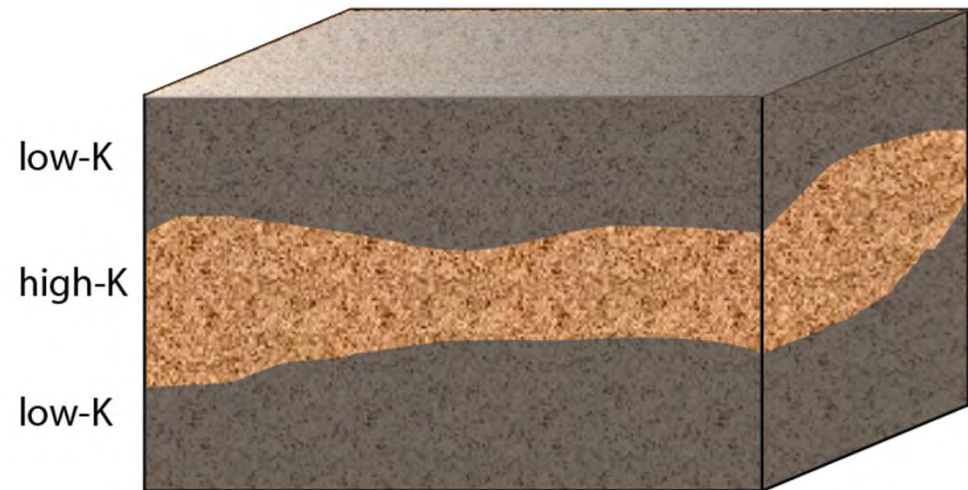


low mass transfer

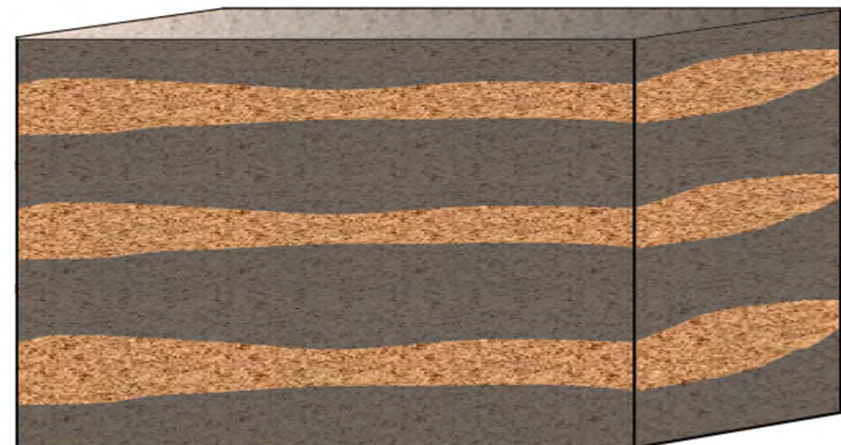

high mass transfer

Matrix Structure Controls Diffusion Impact

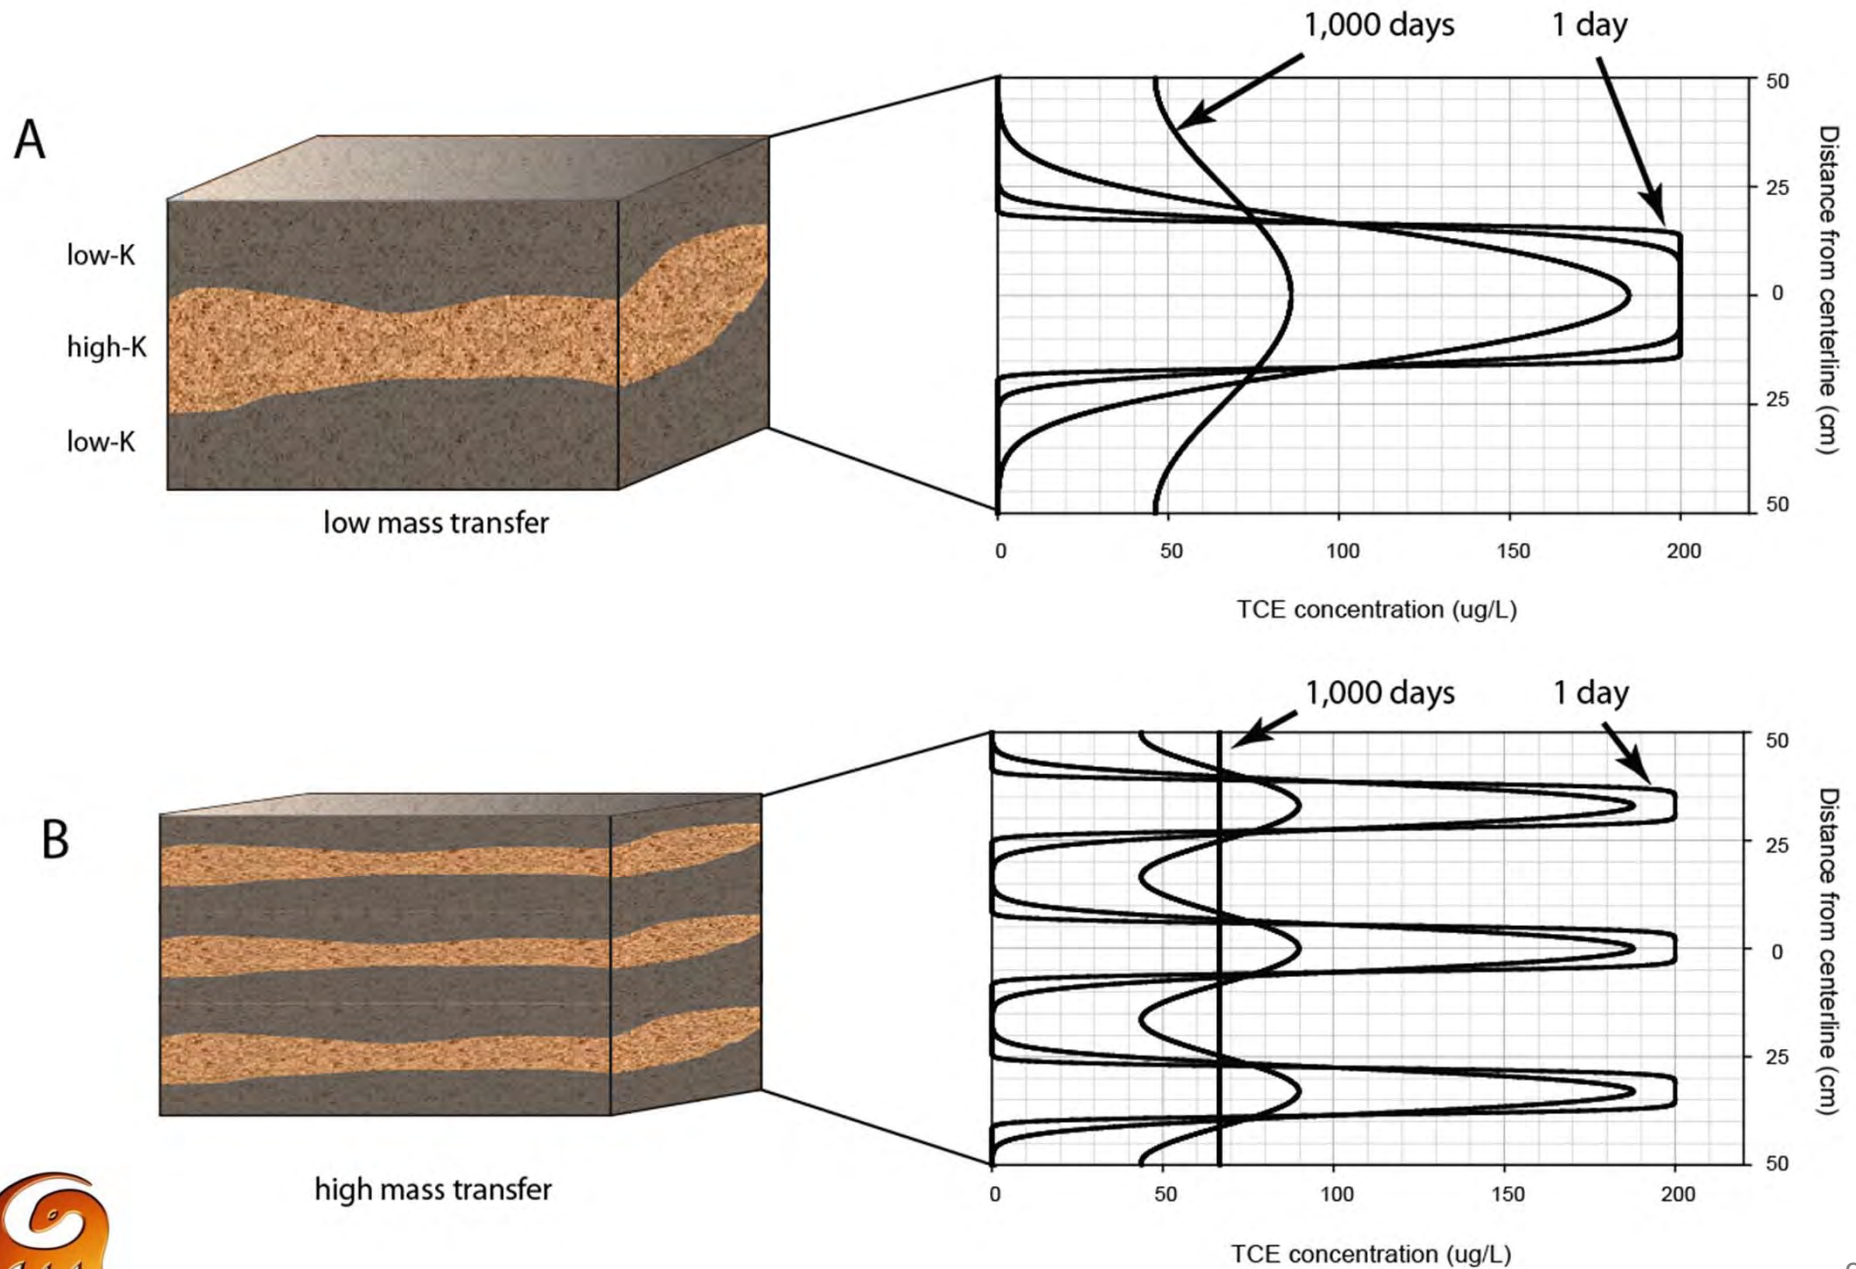


Re-Thinking Monitoring Wells



- 10-year life-cycle cost of a single monitoring well ~ \$150,000 (construct, develop, monitor and report quarterly, abandon)
- Better approach – separate site characterization from monitoring well construction – characterize then determine most effective monitoring well locations.
- Yields a significant reduction in the number of monitoring wells

Mapping at High Definition – Collaborative Demonstration with Amsted Industries Muskegon, Michigan Site

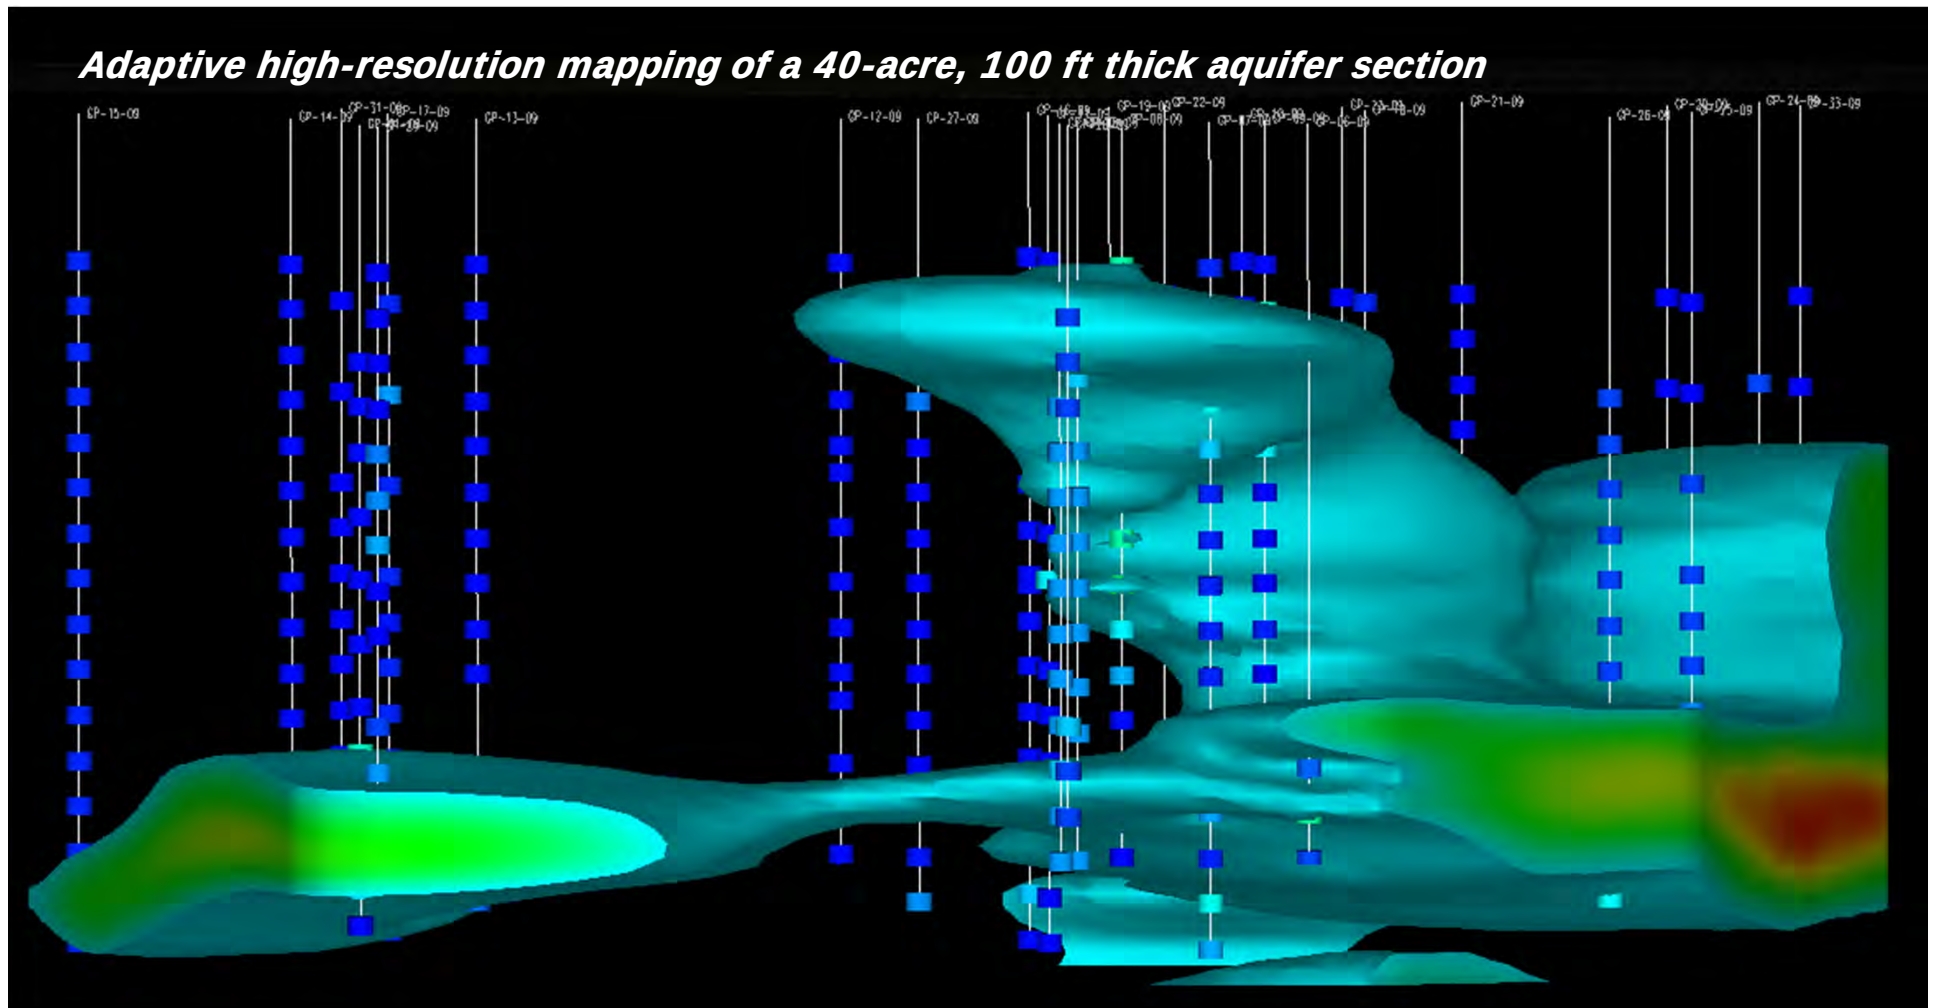


Muskegon Site - Conceptual Site Model


- High-K sandy aquifer
- 100 ft thickness
- Multiple known sources in the area
- TCE used and disposed via seepage lagoon
- Seepage lagoon excavated in 1975
- Conventional monitoring wells indicated 100 ug/L TCE in groundwater, heading off-site




Muskegon Site – 5 ug/L envelope

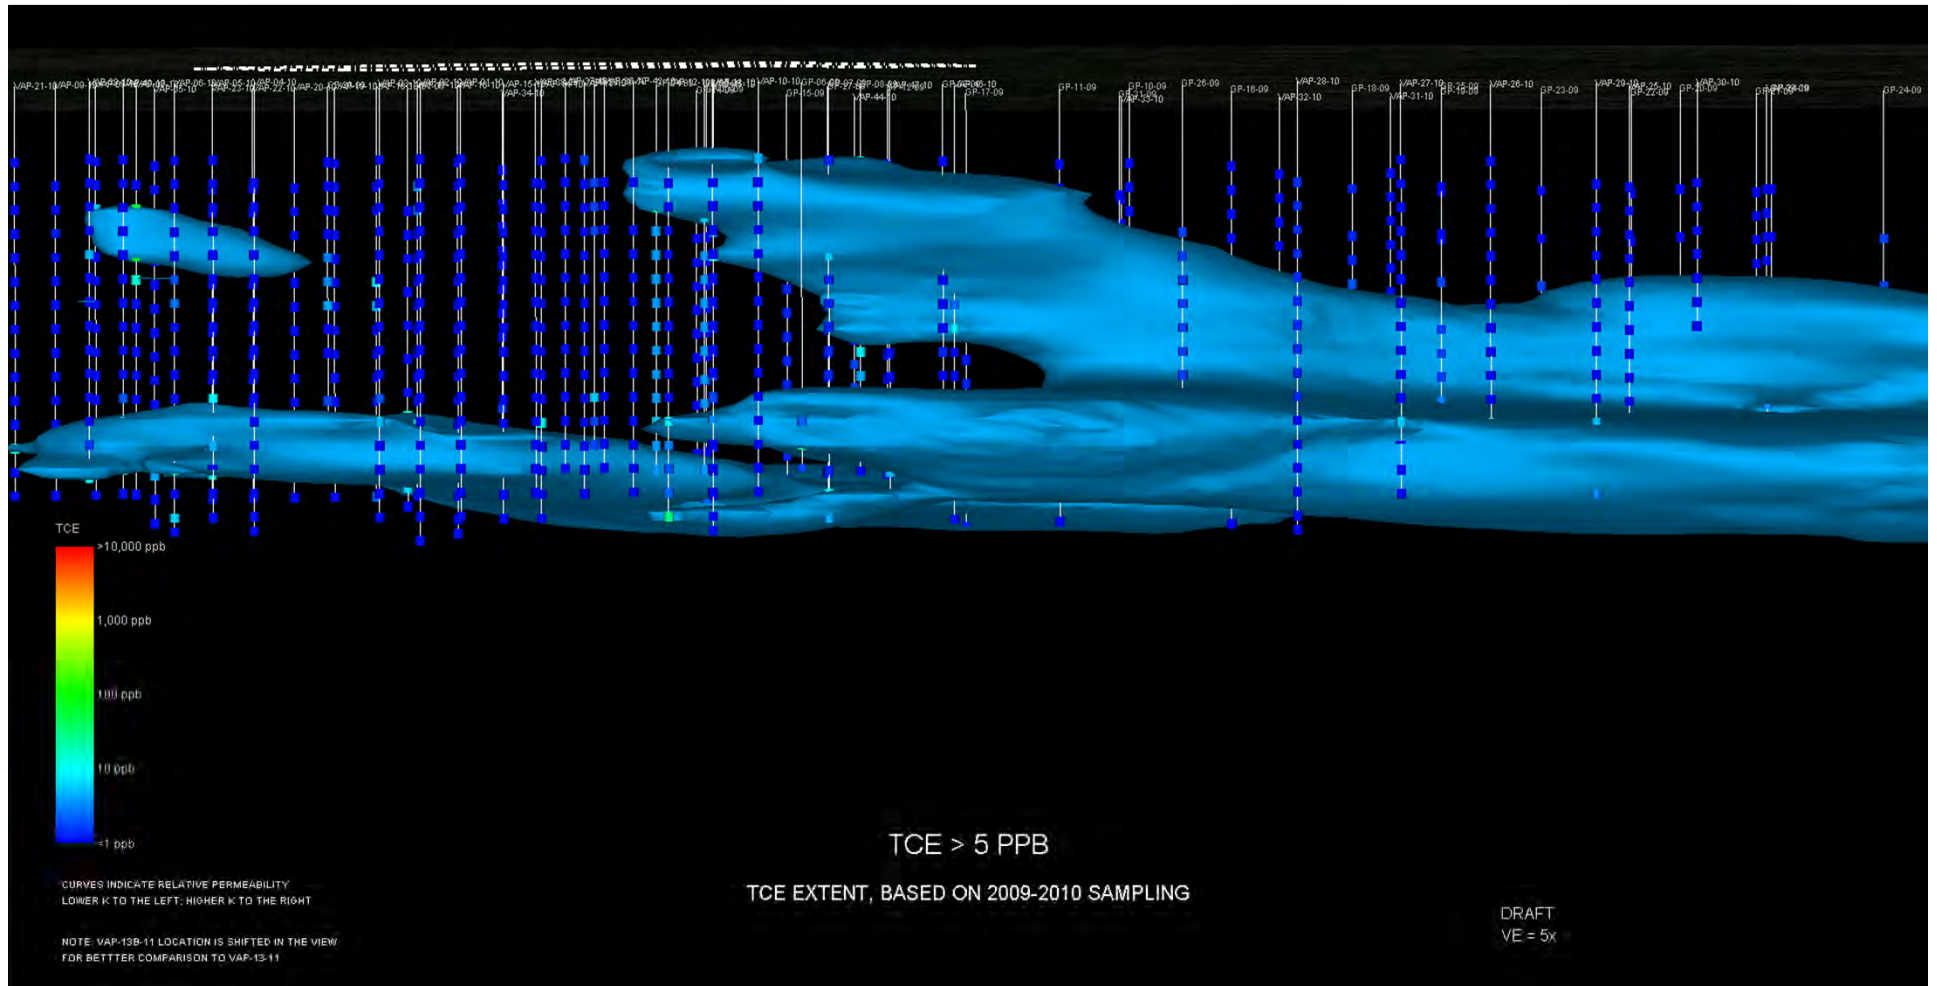

Muskegon Site – 100 ug/L envelope

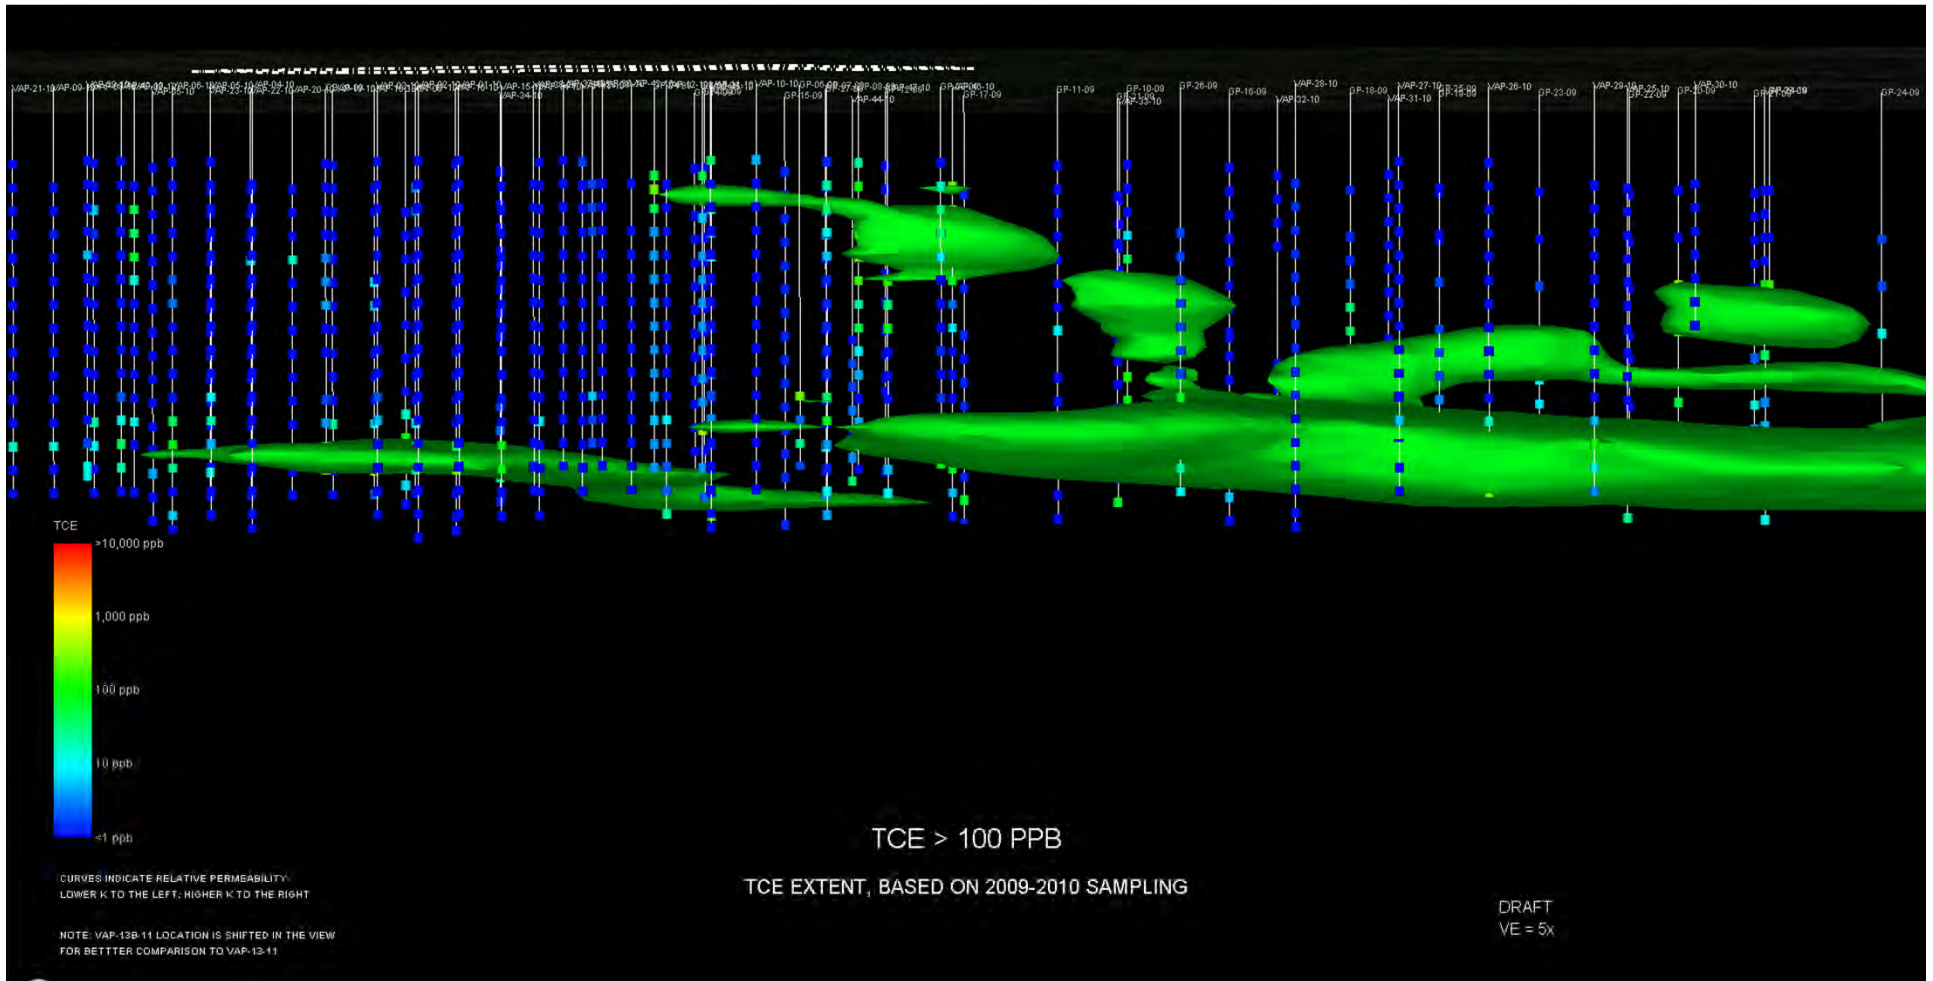



Muskegon Site – 10,000 ug/L envelope

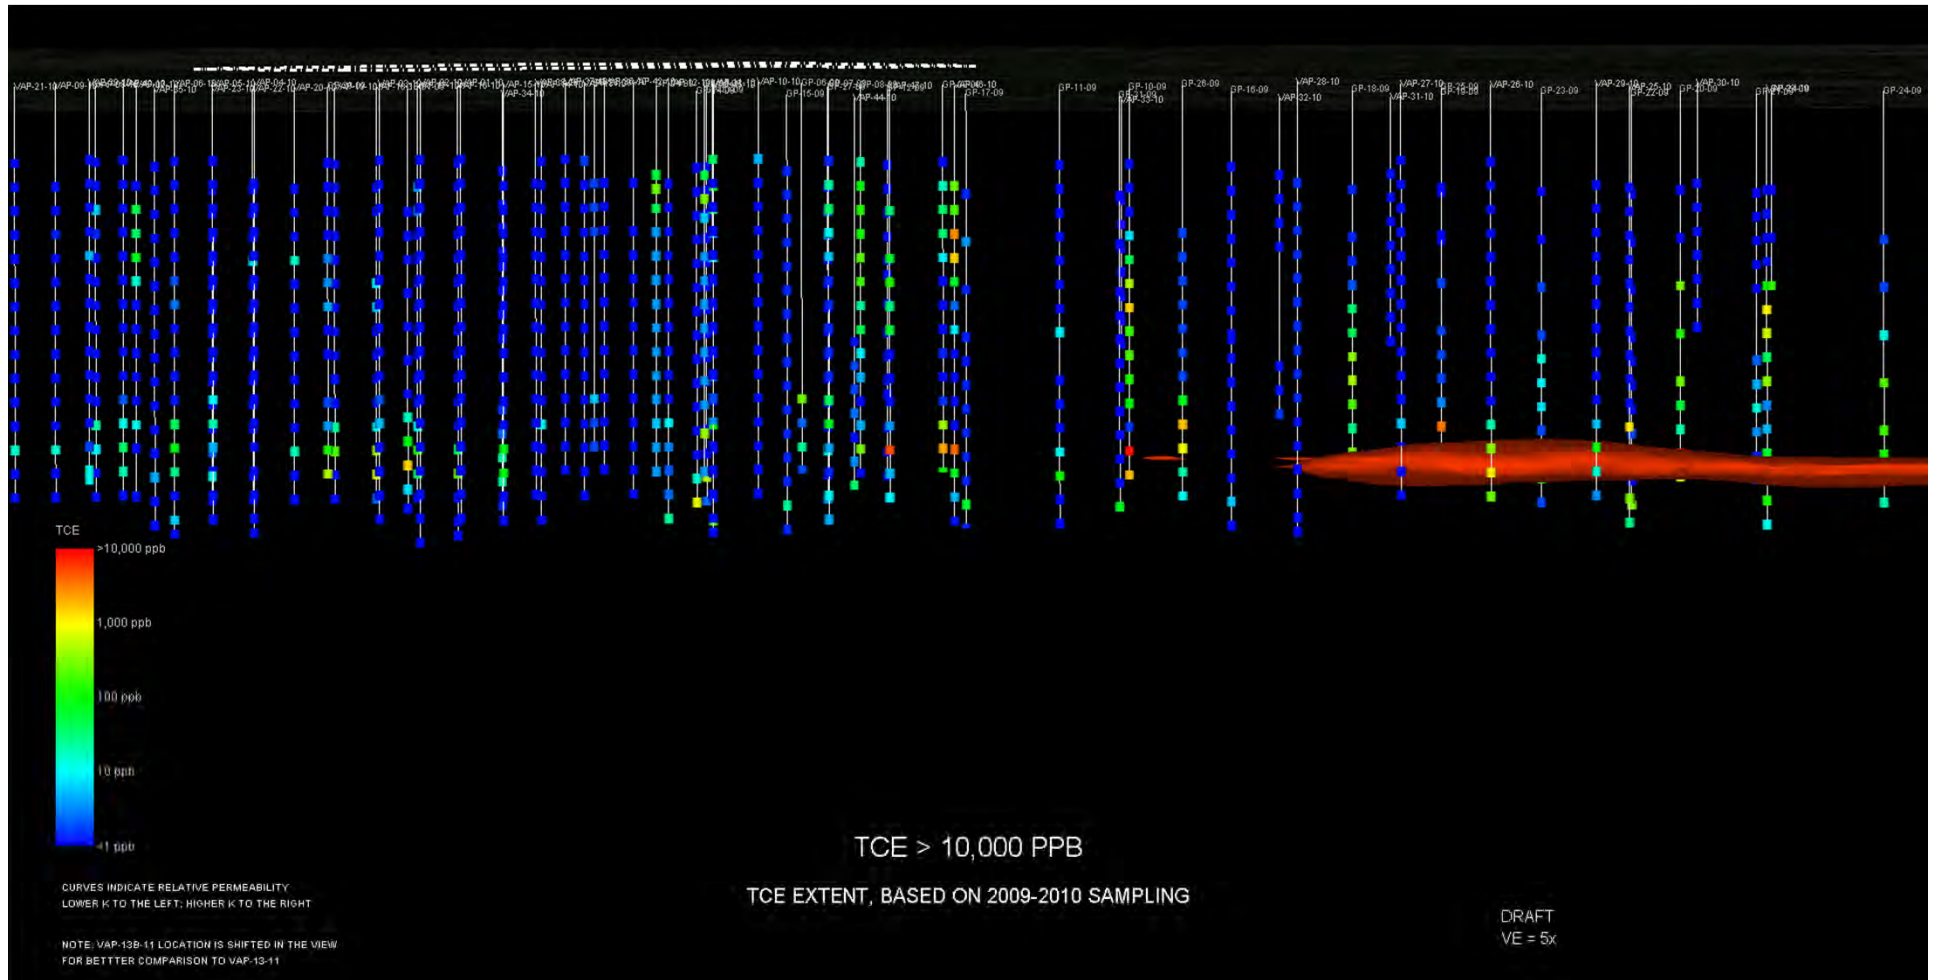



2,600 ft →

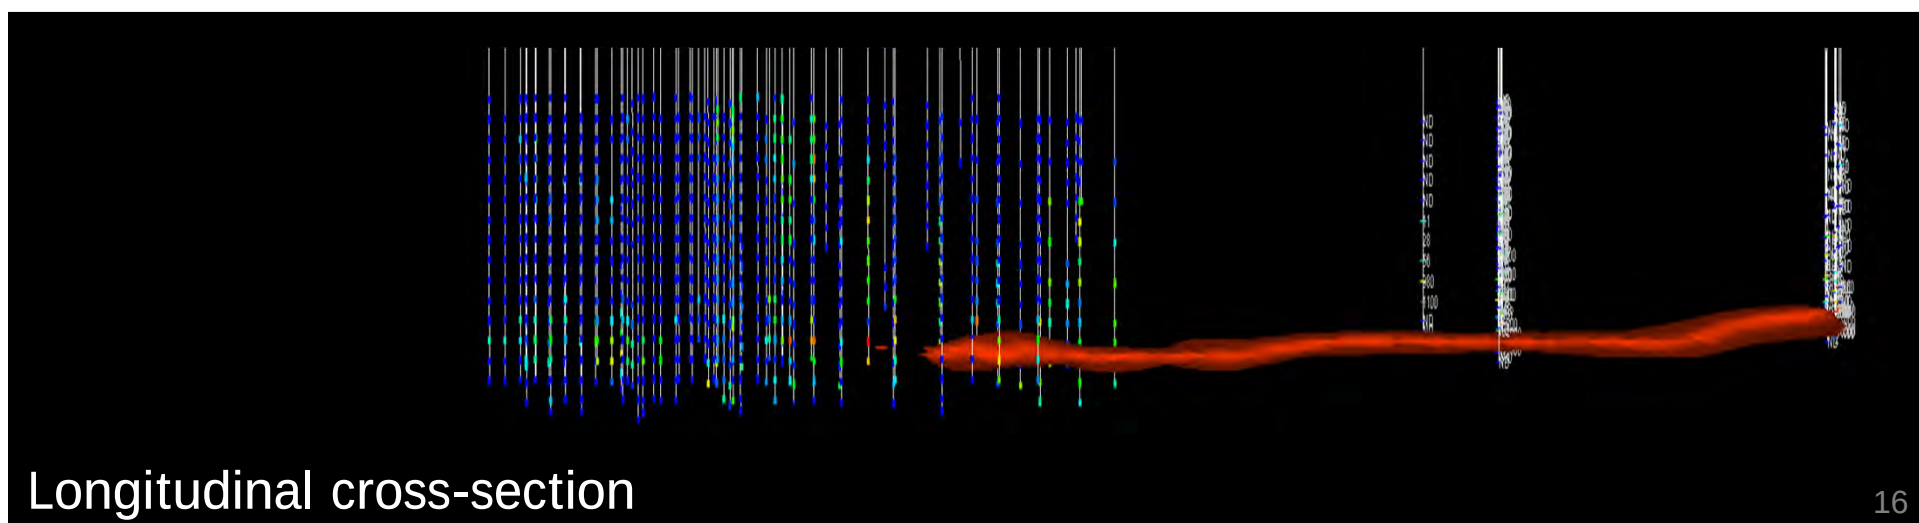

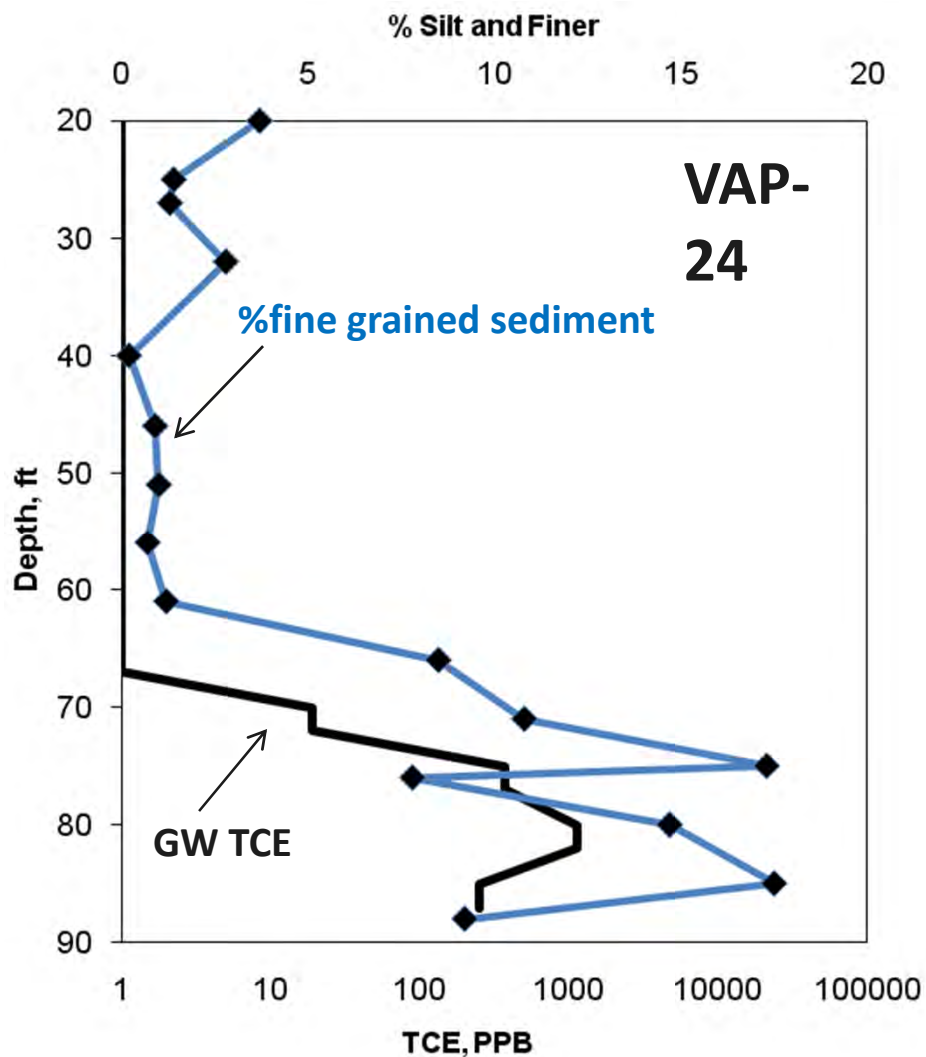


Highest TCE concentrations are in lower permeability sediments

3-5% silt and clay
95-97% sand

<1 ppb TCE


10-20% silt and clay
80-90% sand

10-10,000 ppb TCE

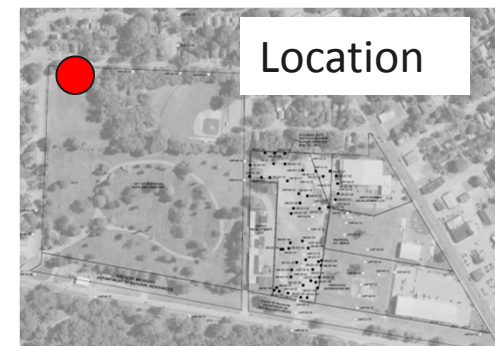


Muskegon Site – Downgradient Transects

Transect 1 – 2,600 ft downgradient from source lagoon

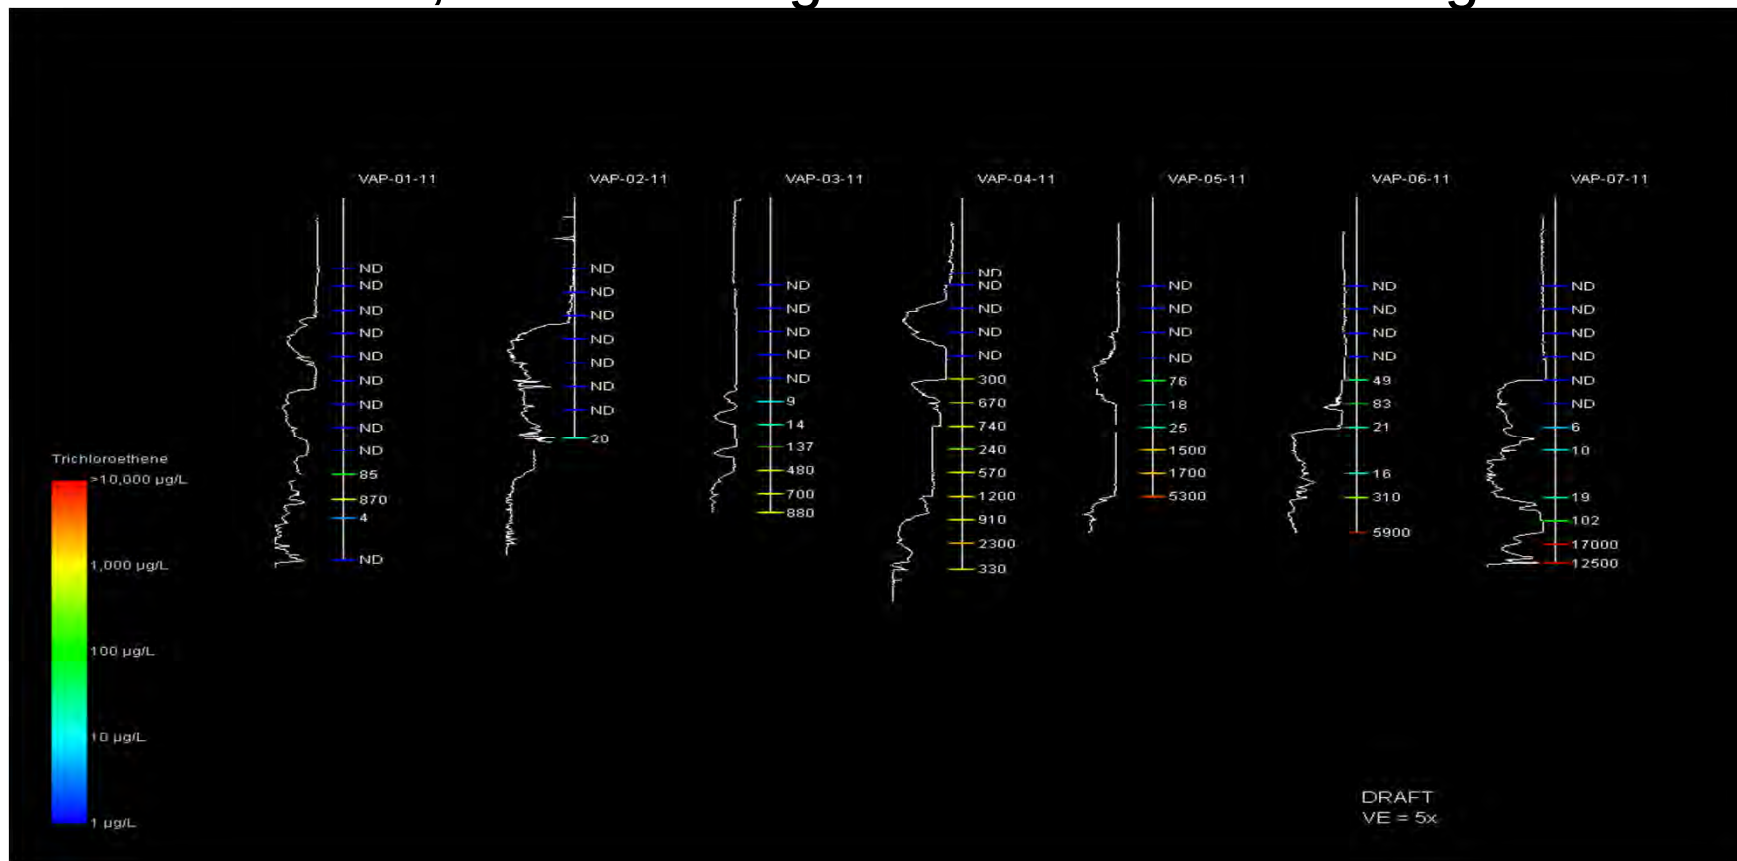


2,600 ft Downgradient

- Maximum hydraulic response on the Waterloo Profiler over a large portion of the cross-section
- More than ½-mile and 35 years from the source zone.
- TCE concentrated in lower-K zones
- A large plume passed by here

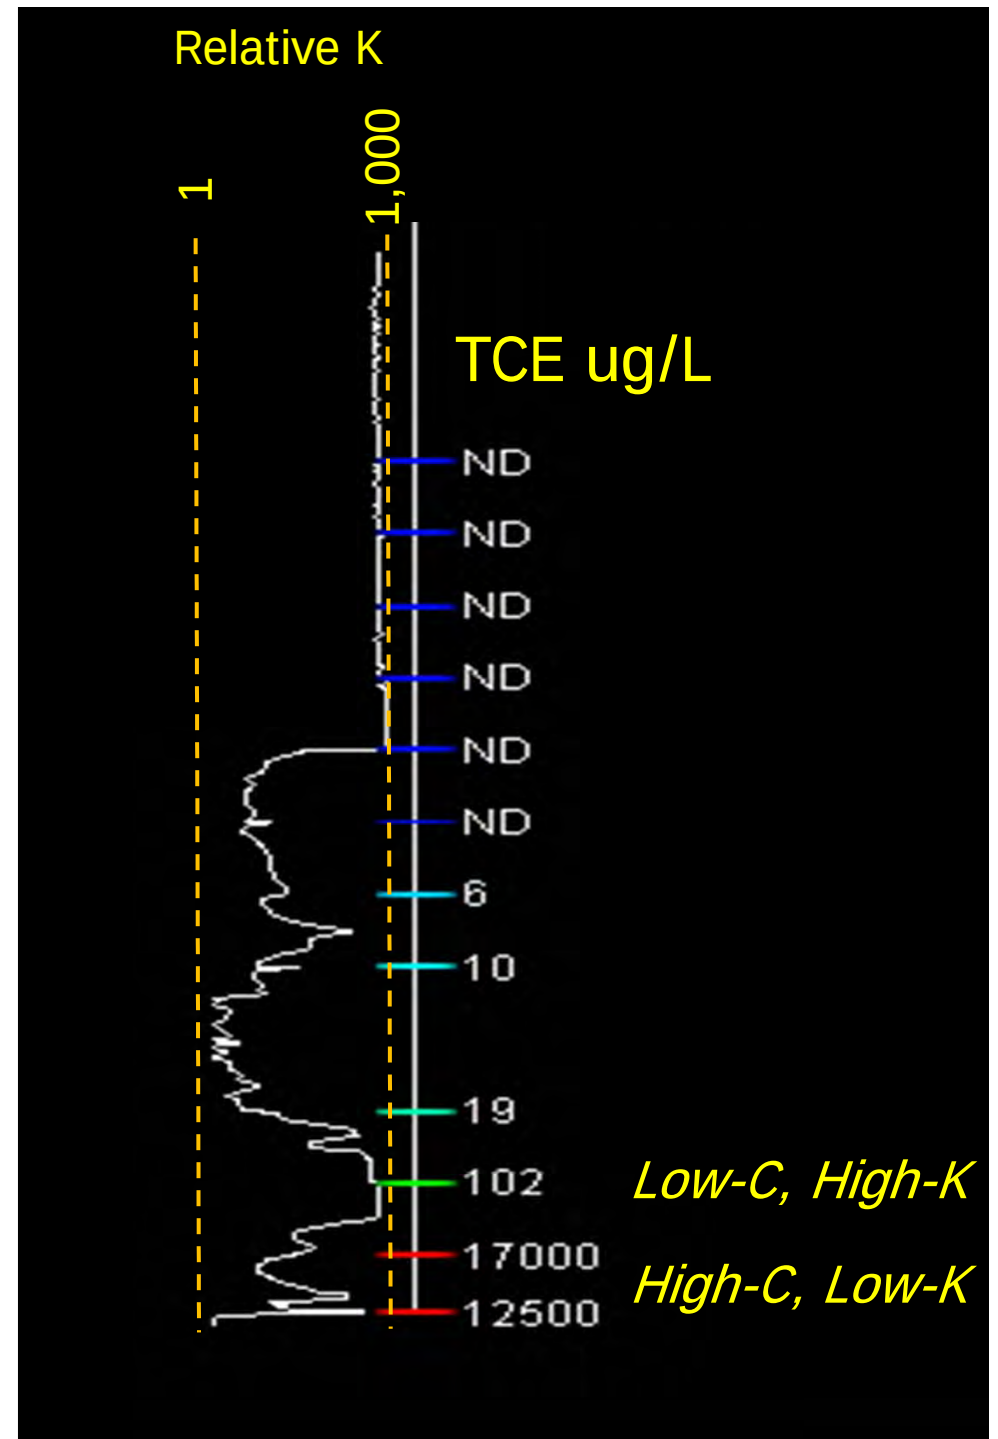


Interpreting TCE distribution – Washout Model

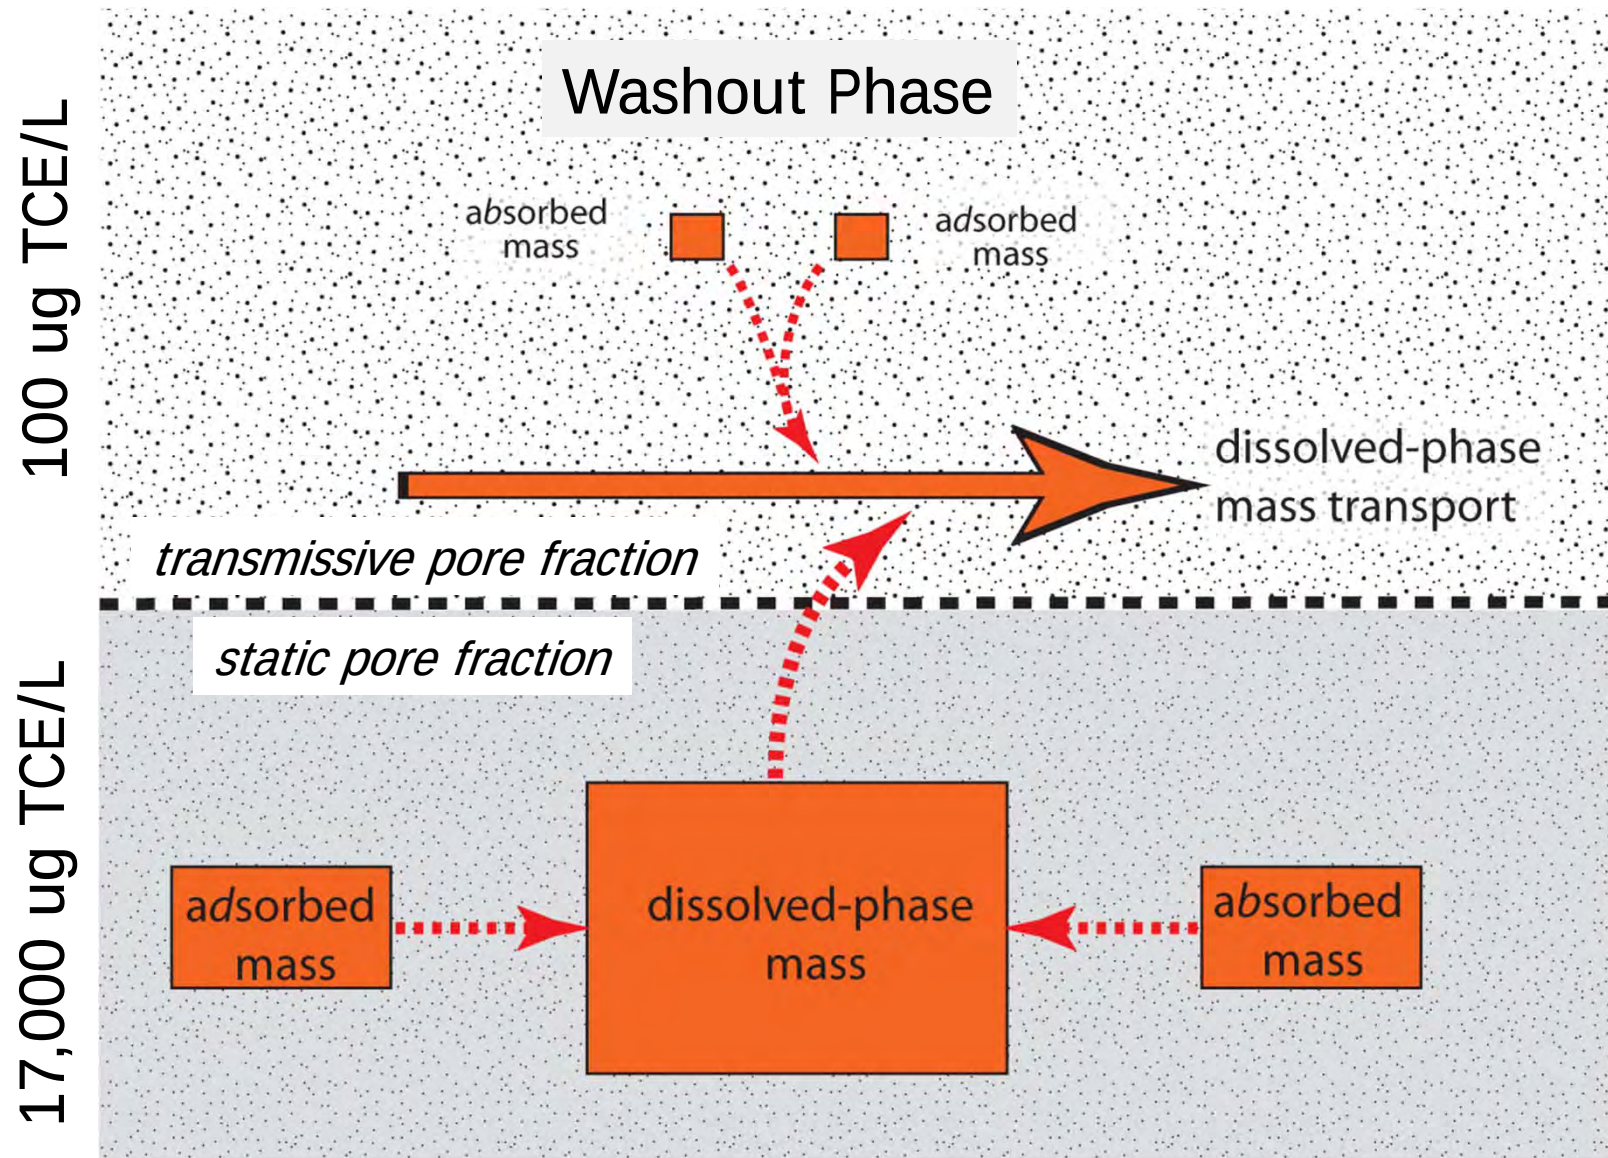

Large-Plume Site - Reese AFB, Texas

- Low-mass-transfer aquifer
- Limited zones of Low-K/High-C
- Responsive to Directed Groundwater Recirc

2005

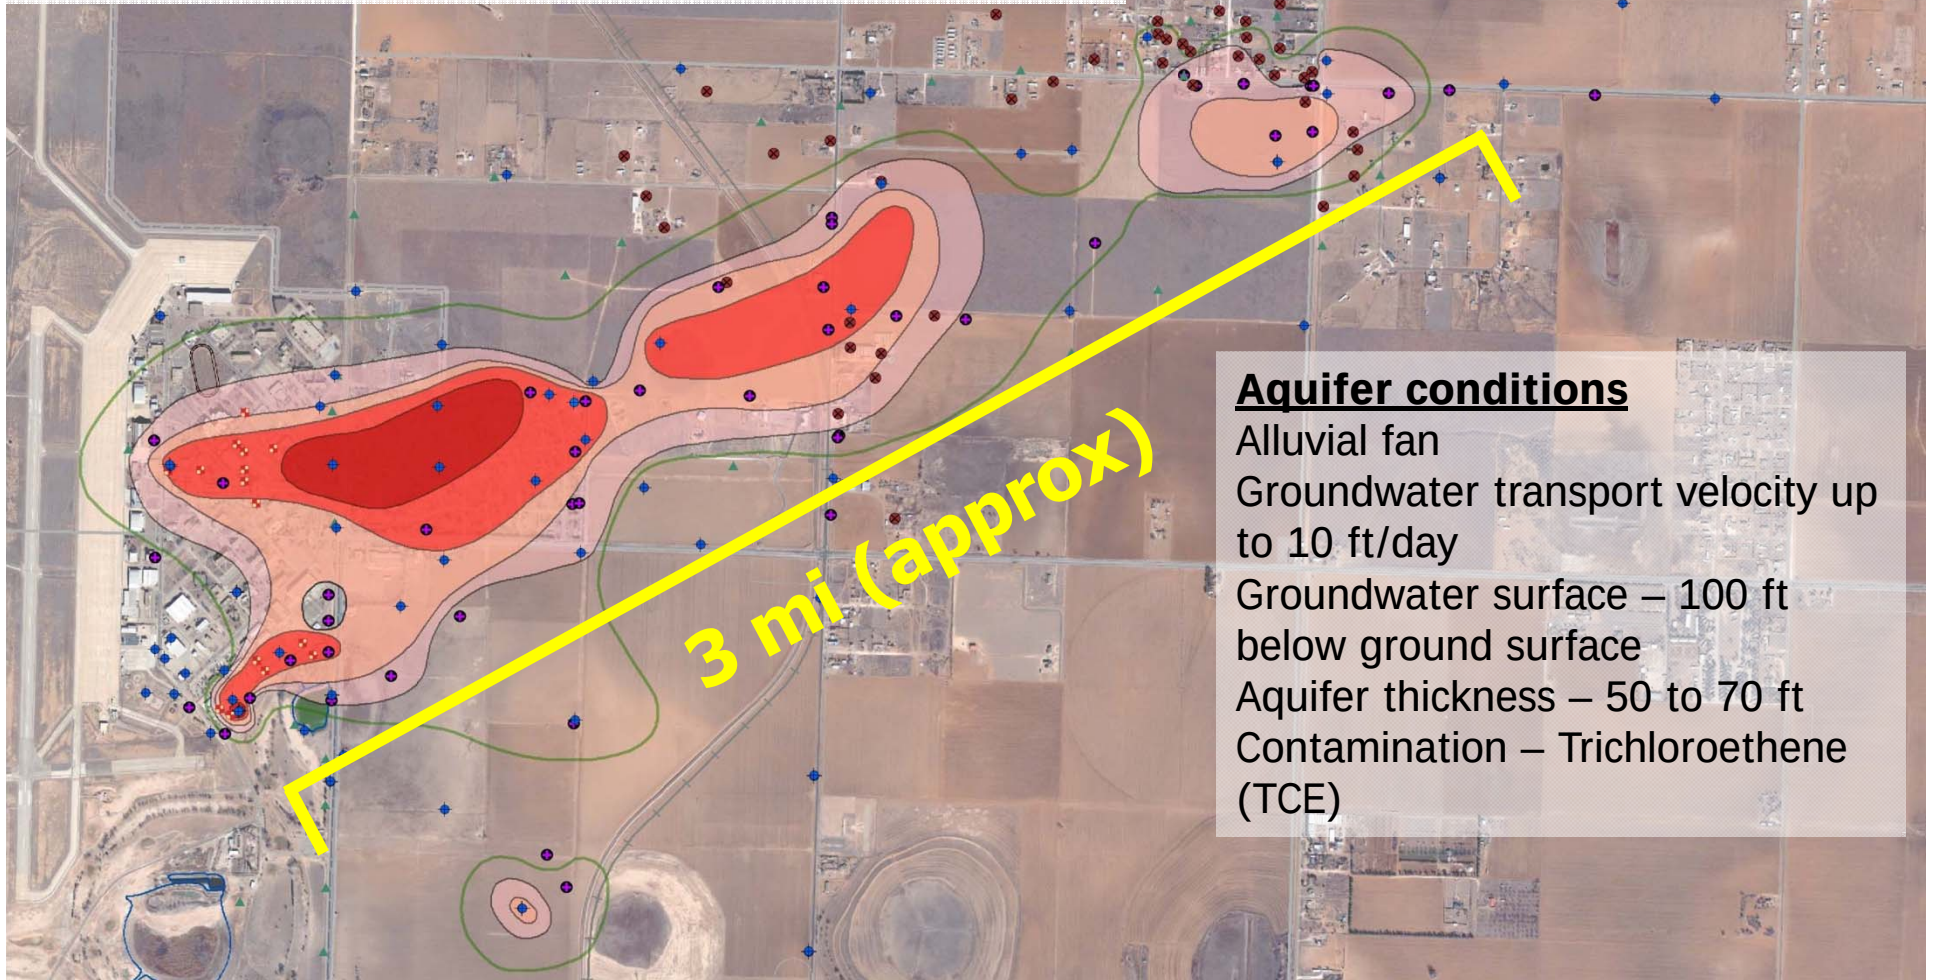

Aquifer conditions

Alluvial fan

Groundwater transport velocity up to 10 ft/day

Groundwater surface – 100 ft below ground surface

Aquifer thickness – 50 to 70 ft


Contamination – Trichloroethene (TCE)

2007

Hydrogeologic Interpretation


Secondary transport channels
Aggressive in-situ bio

Primary transport channel

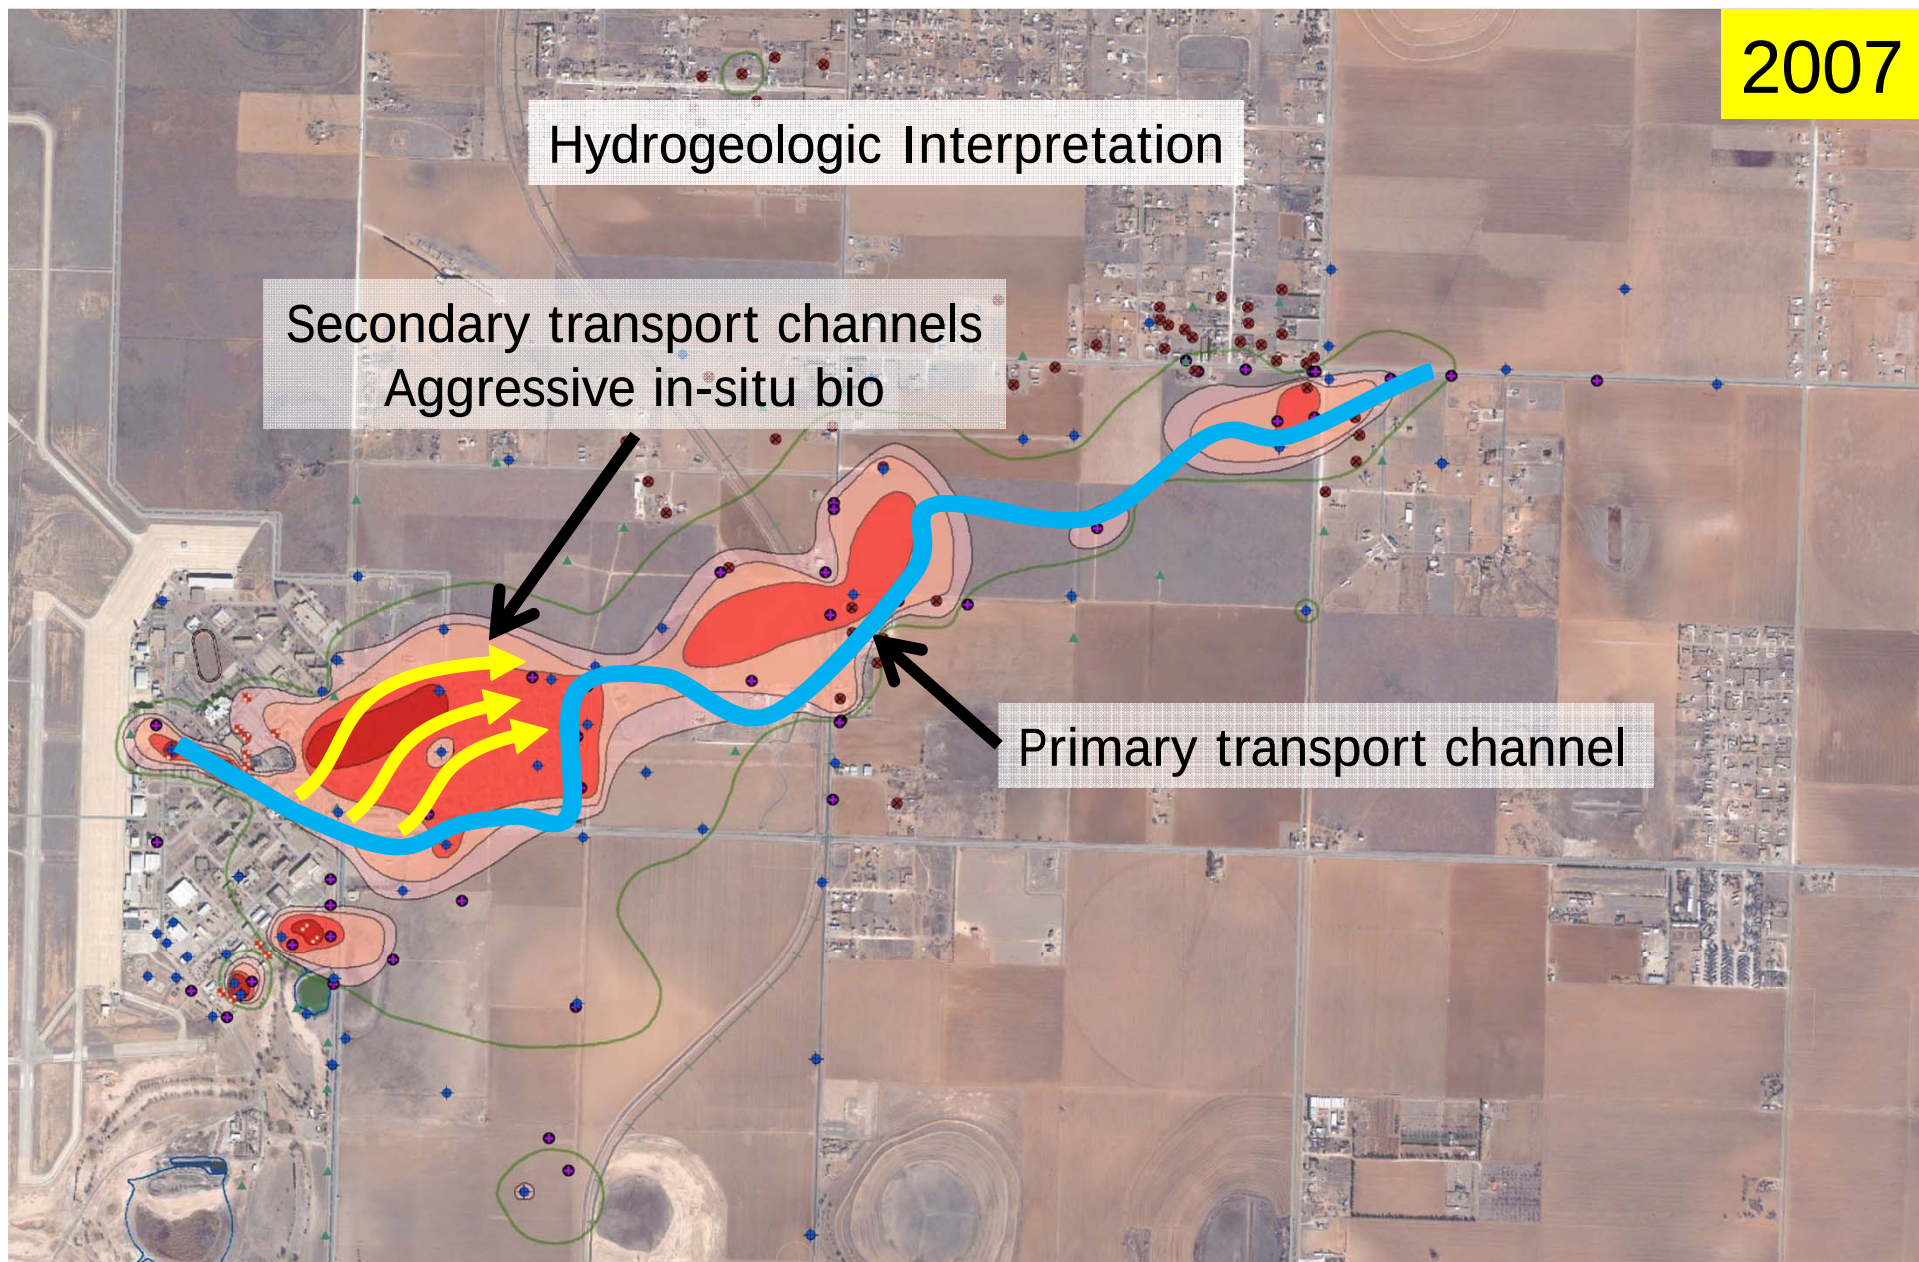


2010

Directed Groundwater Recirculation

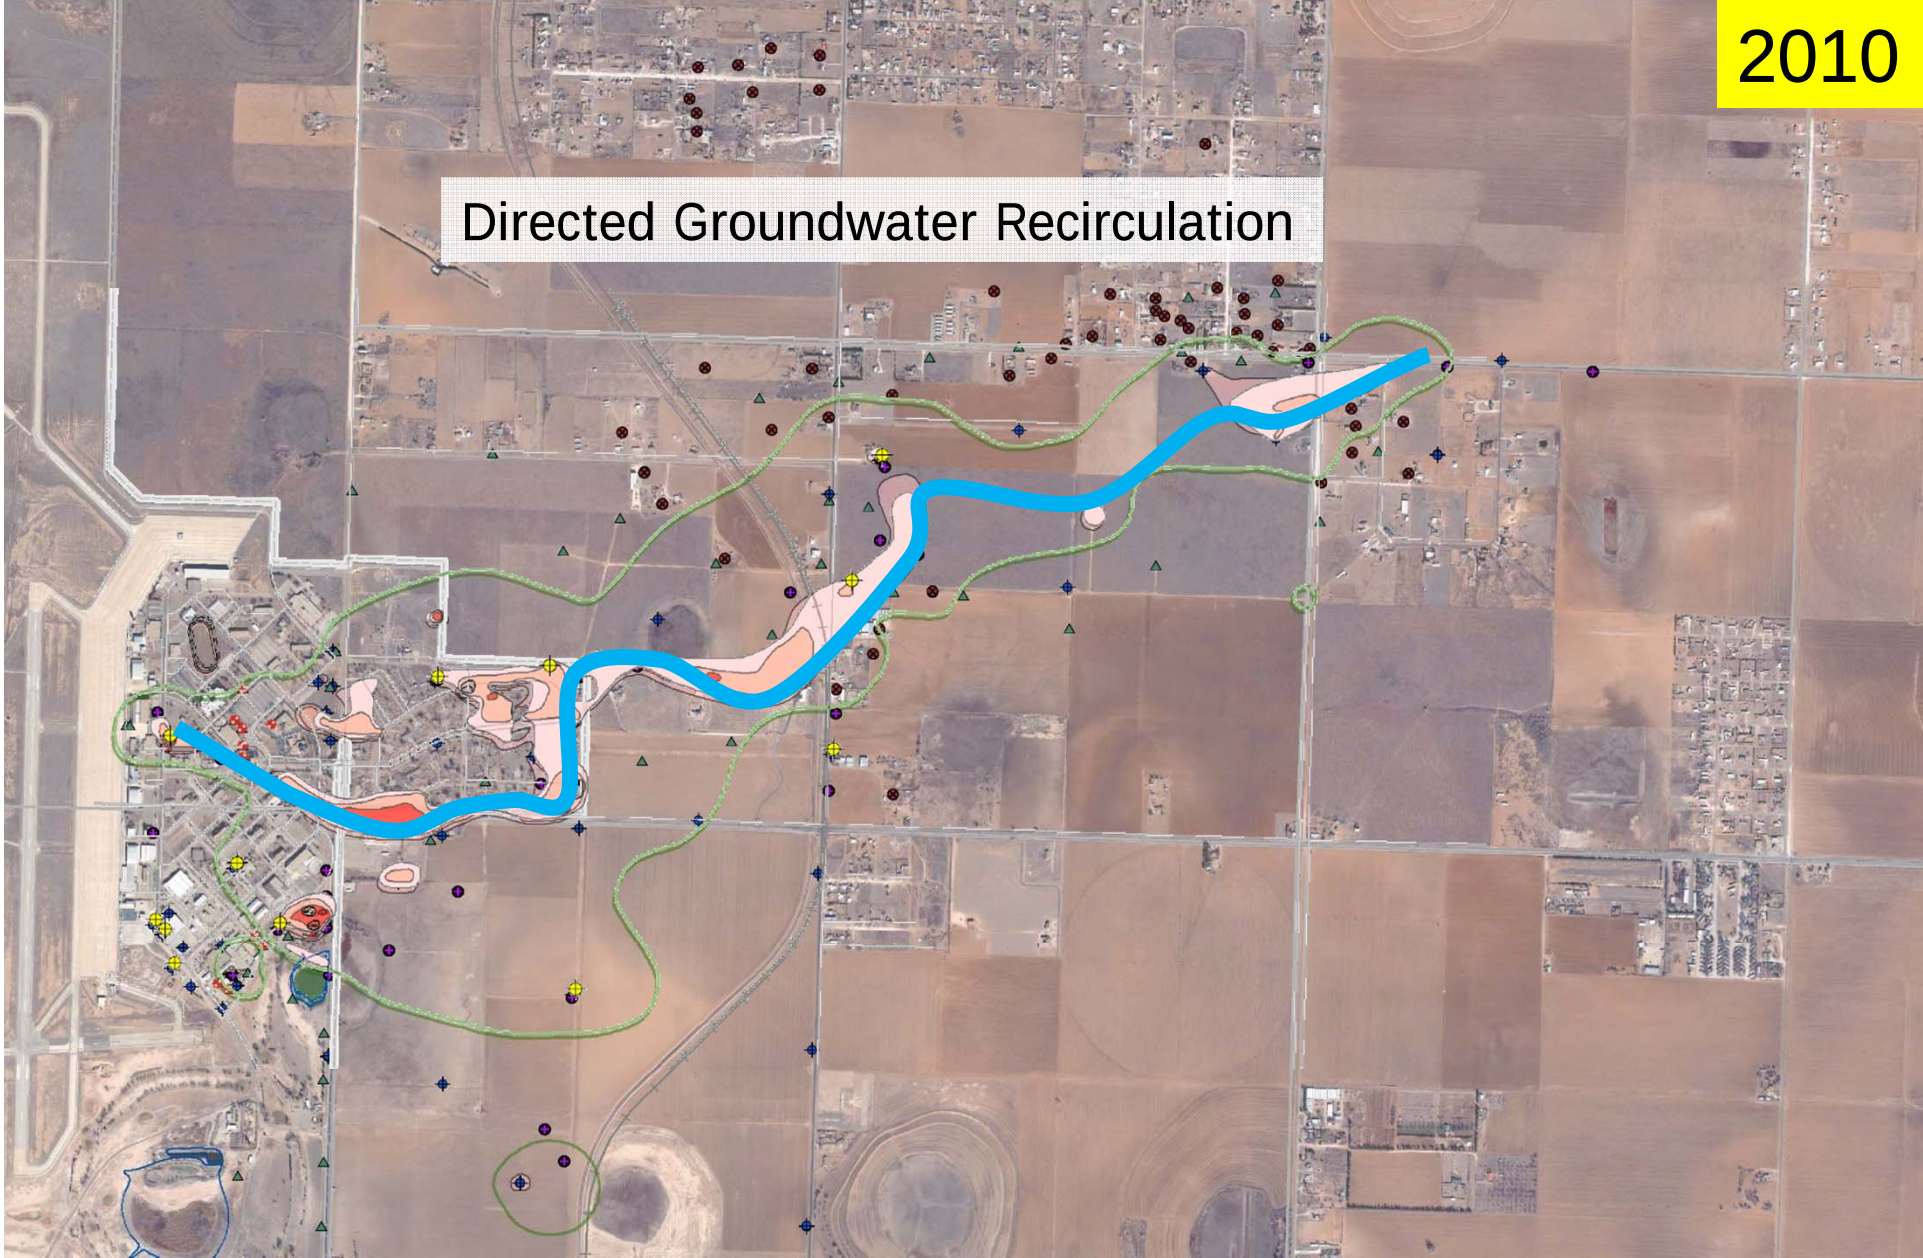

2011 (Jan)

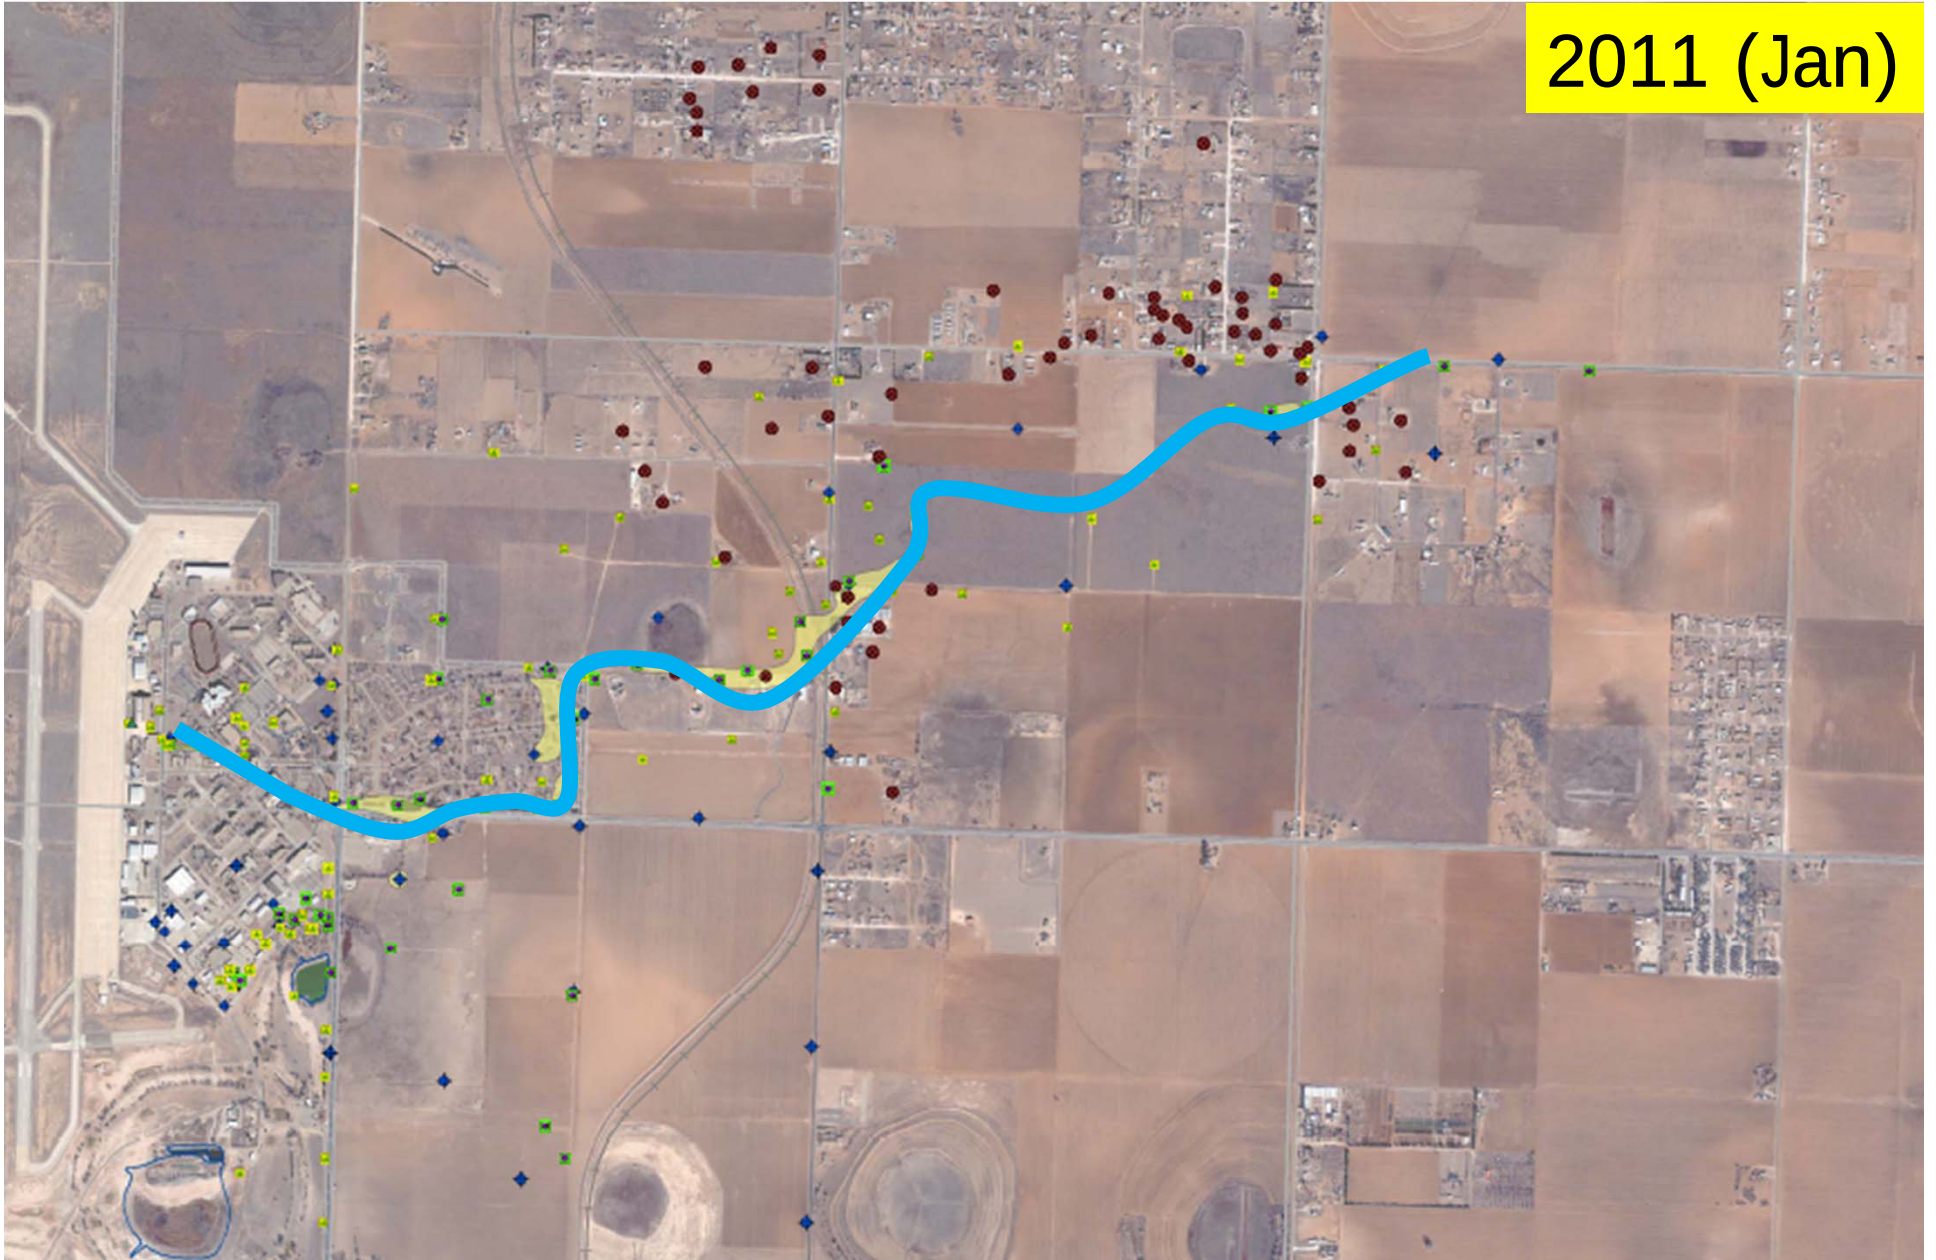

Argument for Rational Application of Compliance Standards

- Higher-resolution mappings are unmasking complex contaminant distribution patterns
- High-K (transport) zones can meet standards, while adjacent low-K (storage) zones exceed standards
- Remedy designs need the higher-resolution mappings to be successful, *however*:
- Low-K zones cannot be treated to compliance.
- Dynamic groundwater monitoring is a potential solution:
 - Separate site characterization from compliance monitoring
 - Build and sample monitoring wells to reflect protected use (i.e. drinking water protection)
 - Avoids inevitable application of TI arguments in low-K zones



Questions and Discussion

For more information, contact:

Fred.Payne@arcadis-us.com

