

Modeling Water Waves with Smoothed Particle Hydrodynamics

Robert A. Dalrymple
Dept of Civil Engineering
The Johns Hopkins University
3400 North Charles Street
Baltimore, MD 21218
hone: (410) 516-7923 fax: (410) 516-7473 email: rad@jhu.edu

Award Number: N00014-11-1-0174
<http://www.ce.jhu.edu/dalrymple/>

LONG-TERM GOALS

Smoothed Particle Hydrodynamics (SPH) is a meshless numerical method that is being developed for the study of nearshore waves and other Navy needs. The Lagrangian nature of SPH allows the modeling of wave breaking, surf zones, ship waves, and wave-structure interaction, where the free surface becomes convoluted or splash occurs.

OBJECTIVES

To improve the ability of the meshfree Lagrangian numerical method Smoothed Particle Hydrodynamics (SPH) to be a useful hydrodynamics model for breaking waves and the nearshore zone, particularly for case where spray and splash are important. To utilize the massively parallel graphics processing units on computers to develop the GPU-accelerated model GPUSPH to solve a number of problems relevant to the U.S. Navy. The science objective is to be able to accurately model the complex flows associated with breaking water waves, including instantaneous motions as well as (time-averaged) wave-induced flows, such as undertow, longshore currents, and rip currents.

APPROACH

The approach is based on improving various aspects of the SPH code, including the development of a multi-graphics processing unit (GPU) version of the code (GPUSPH); applying the code to more validation tests; and to examine in some detail new aspects of the model by applying it to different situations relevant to Navy needs.

WORK COMPLETED

- Open source version of GPUSPH released on the web: January 17, 2011
- GPUSPH model was extended to find fluid parameters at fixed (Eulerian) test points
- Further validation of nearshore modeling, including waves, a rip current system and related surf zone circulation using the test points

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 30 SEP 2011		2. REPORT TYPE		3. DATES COVERED 00-00-2011 to 00-00-2011	
4. TITLE AND SUBTITLE Modeling Water Waves with Smoothed Particle Hydrodynamics				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) The Johns Hopkins University, Dept of Civil Engineering, 3400 North Charles Street, Baltimore, MD, 21218				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 9	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

- Free-surface particle detection implemented to simplify determination of the free surface location

RESULTS

Open source release--the GPUSPH model was released as open source in January after a month long interaction with some of the code developers (Alexis H  rault, Eugenio Rustico) in Baltimore, Maryland. The code, in C++, with test problems, is available at www.ce.jhu.edu/dalrymple/GPUSPH.

Test particles--The Lagrangian nature of SPH acts as an advantage to model problems with large deformations. On the other hand, as the SPH particles (or nodes) are moving with each time step, it is difficult to record the fluid parameters in fixed positions as might be recorded in a field or laboratory experiment. In order to look at time-averaged horizontal velocity profiles and time-averaged water elevations, velocities and elevations are required to be measured at fixed spatial positions.

To solve this problem, the GPUSPH was extended to find fluid parameters at fixed spatial positions (as well on the moving particles). A set of testpoints, which have fixed positions in the computational domain, were introduced. Velocity and pressure at these testpoints are computed as a function of time with the SPH interpolation formula, using the properties of moving particles that are currently located in the neighborhood of the testpoint.

In order to validate the extended model, experimental results of a rip current system (Dr  nen et al., 2002) have been compared to the numerical results of extended GPUSPH model. The laboratory experiments were done in a 4 m wide and 30 m long wave tank. An idealized sand bar was located on one side of the tank that triggers local breaking, leading to the rip current creation. Figure (1) shows the numerical results. Rip currents, which are strong currents flowing in the opposite direction of water waves, are evident on the right side of wave tank.

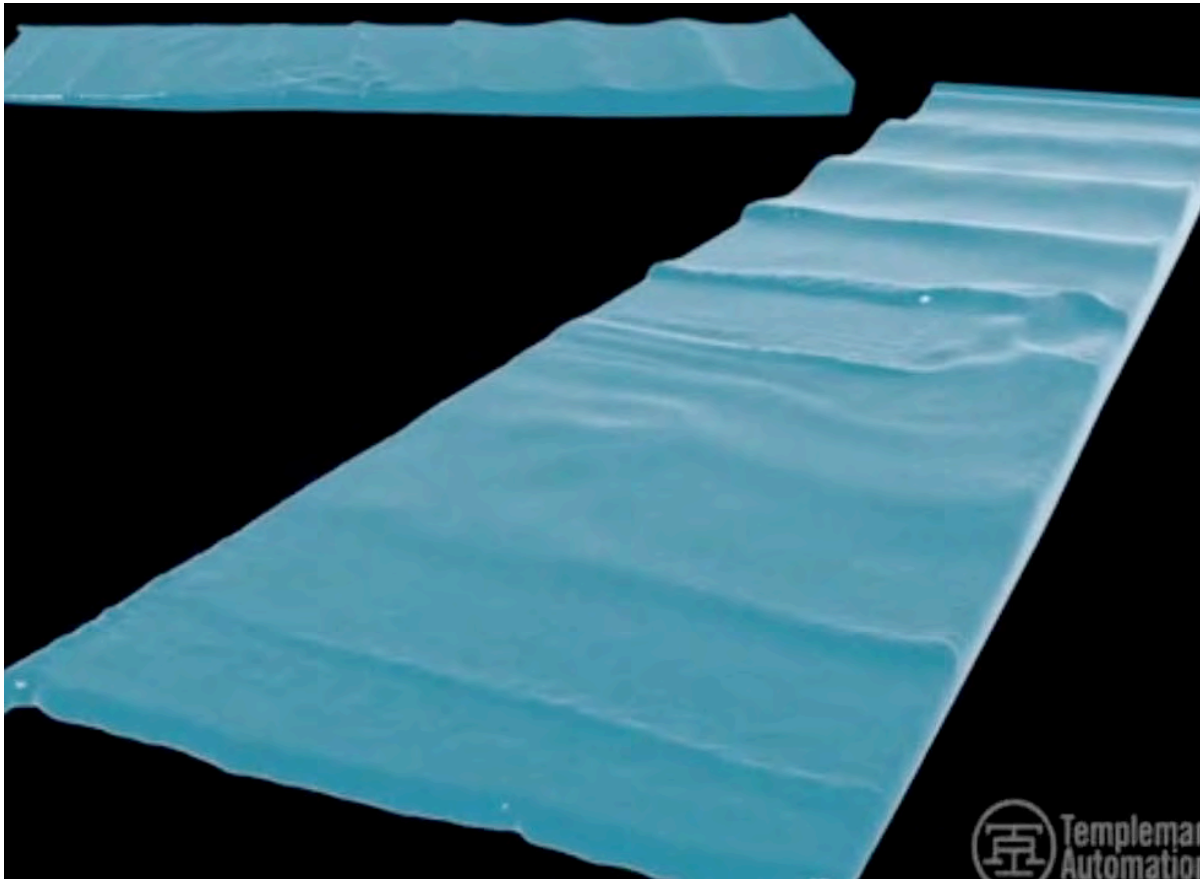


Figure 1. Numerical results of rip current simulation based on the laboratory experiments of Drønen et al. 2001. The wavemaker is located at the upper right, and an idealized sand bar on the left side. In this frame, wave breaking, harmonic generation over the bar, wave refraction, diffraction, shoaling, and wave-current interaction are all visible. Visualization provided by Templeman Automation.

The numerical model is capable of modelling wave-current interaction, harmonic generation (a shallow water nonlinear process), wave breaking, wave diffraction, refraction and nearshore circulations. The rip current system, which consists of (1) an offshore-directed rip current in the channel on the right of Figure 1, (2) a circulation cell over the sand bar, and (3) an onshore oppositely-rotating circulation cell in the bar trough is successfully modeled.

Figure 2 shows the mean vorticity, mean horizontal velocity profile and related wave-induced circulation. Here, wavemaker is located outside of the figure to the right and beach is located in the left hand side. In the bottom frame of Figure 2, the mean water elevation is also shown in different parts of the tank. A large portion of the elevation is the set-up on the beach and in the bar trough, induced by the breaking on the bar. Gradients of the mean water level provide the hydrostatic head to drive the rip current (in the rip channel) and the associated circulation cells.

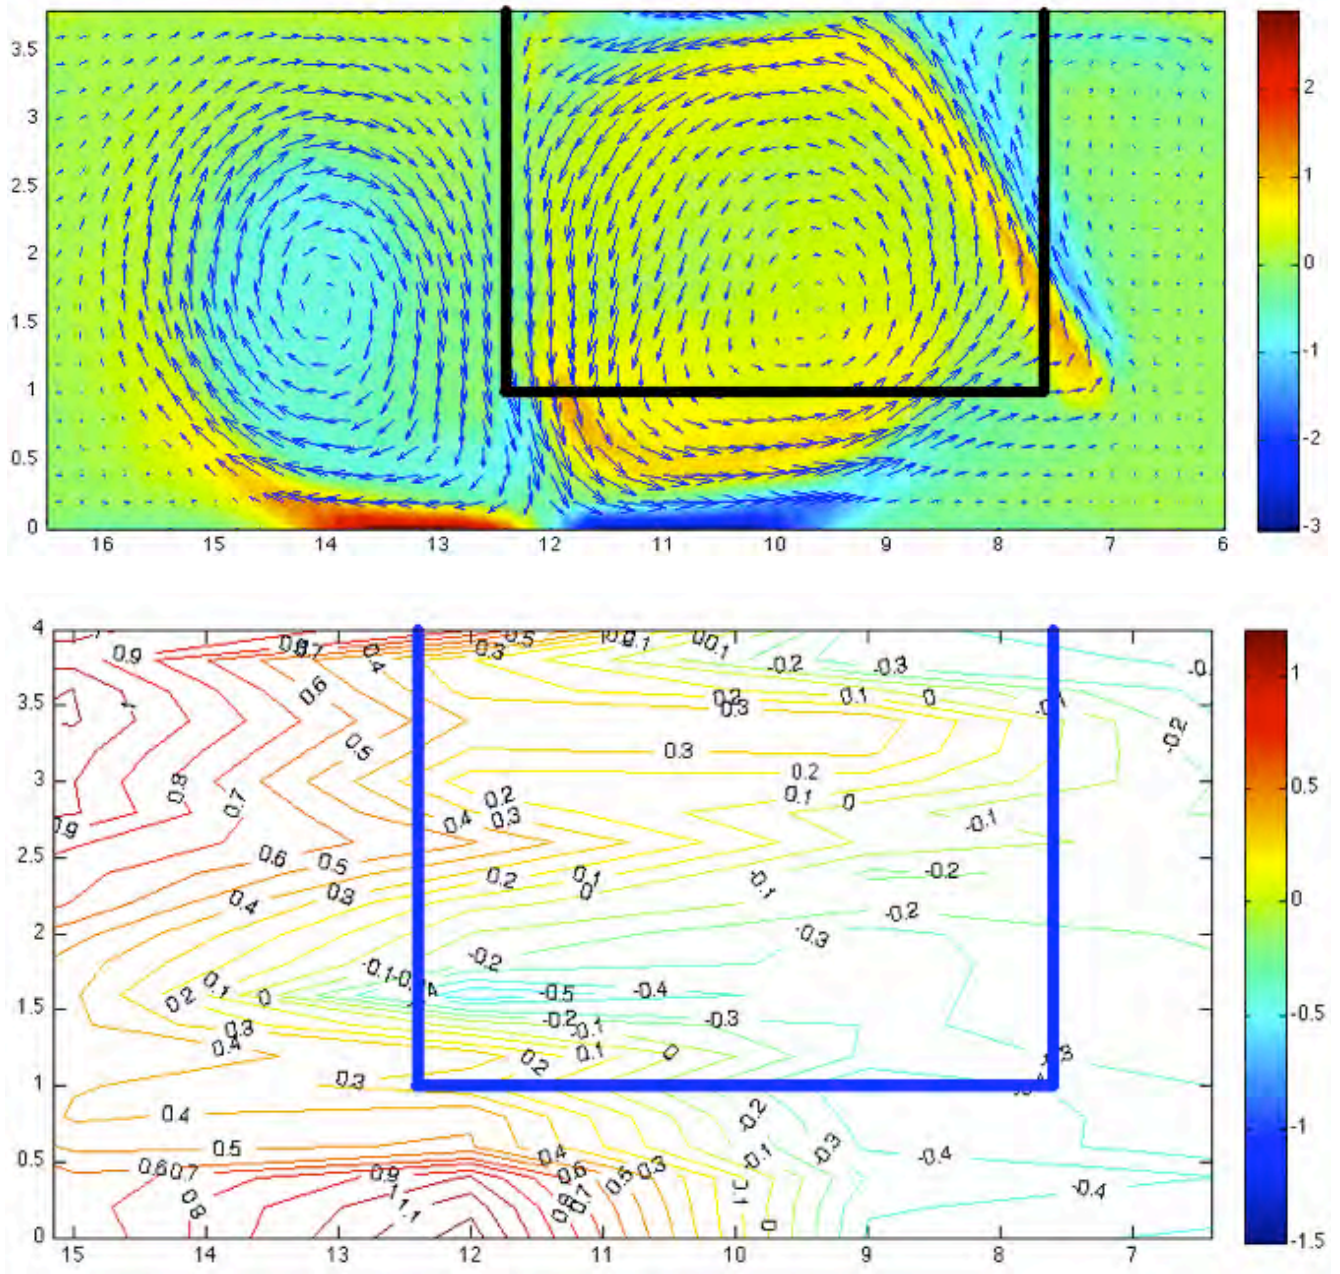


Figure 2. Top: Mean vorticity associated with the wave-induced currents and mean horizontal velocity. Bottom: Mean water level elevations, including the wave set-up.

GPU-SPH is capable of three dimensional analysis of flow which leads to a better understanding of flow structure. Three dimensional velocity profiles in different positions located in rip channel, over the bar and near the beach, are illustrated in figure (3).

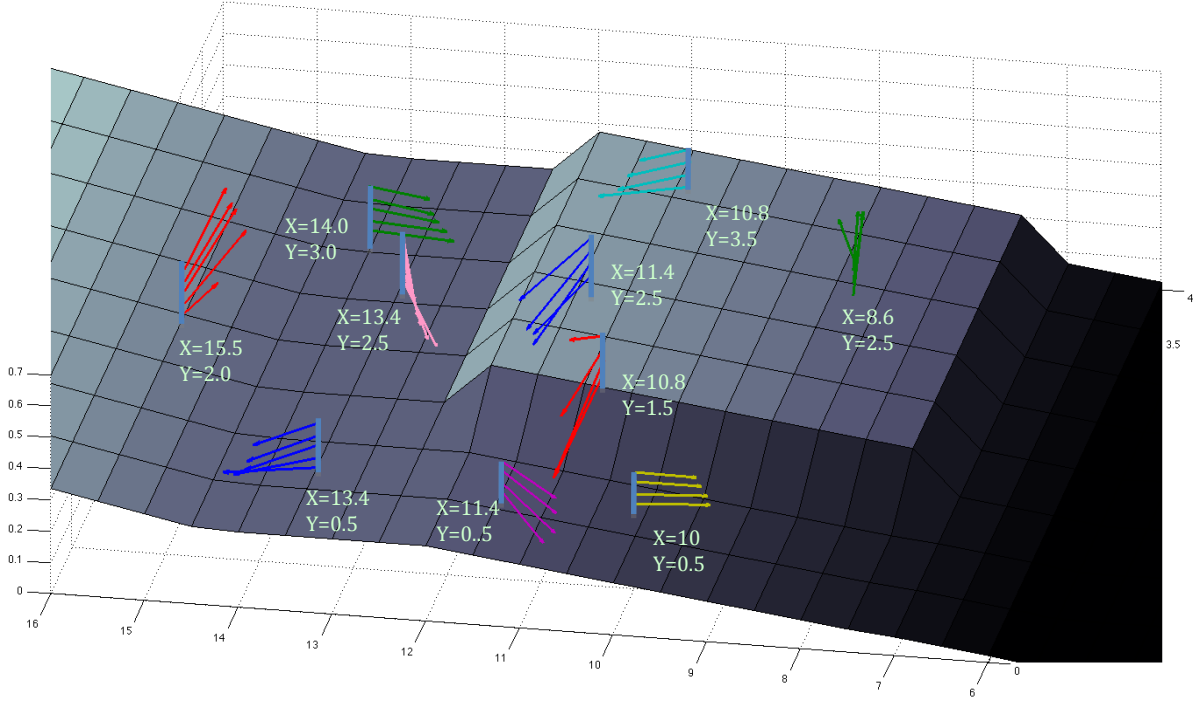


Figure 3. Three dimensional velocity profiles at fixed locations over the Drønen et al. bathymetry

Free-surface particle detection--To study free surface flows and analyze their complex deformations, we need to know which particles are located on the free surface. Free surface detection algorithm that is used here is similar to Marrone et al. (2010) approach and consists of two steps: first, the local normal vector for each particle is computed using gradient of kernel function. In the second step, geometric properties of free surface particles are used for their accurate detection. For each particle a cone is defined with particle's normal vector as its axis and a cone angle that has been set to be equal to $\frac{\pi}{6}$. Then a control check is applied to find whether or not at least one neighboring particle exist in this cone region. If no neighboring particle is found within the cone region, then that particle belongs to the set of surface particles. This control condition is given as:

$$\left[\forall j, \frac{\vec{n}_i \cdot \vec{r}_{ij}}{r} < \cos(\text{cone_angle}) \Rightarrow i \in \text{Free_surface_particles} \right]$$

where i is the particle of interest, j is its neighboring particle, $\vec{n}$ is local normal vector for particle i and $\vec{r}_{ij}$ is the distance from particle i to particle j . Figure (4) shows a sketch of fluid domain and free surface detection using cone region. Since we are using the gradient of kernel function that has been computed previously in another part of the model, this algorithm doesn't impose a significant increase in computational cost.

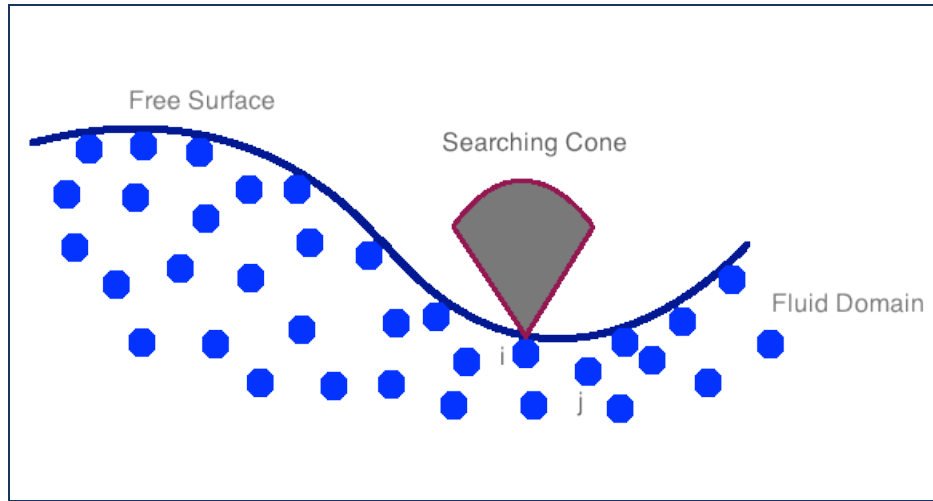


Figure 4. Schematic plan of fluid domain and free surface

The free surface detection algorithm as applied to different cases is shown in figure 5 and 6. Free surface particles are shown in red and other particles are shown in light blue. Note that the model resolution is deliberately low, so that the free surface particles are readily viewed. The first case shows a plunging wave. As it can be seen in the picture, free surface detection algorithm is capable of capturing the cavity that occurs with a plunging wave. The second case shows a dam break problem and the interaction of the waves with a structure. The last case shows an open channel problem with periodic boundary condition.

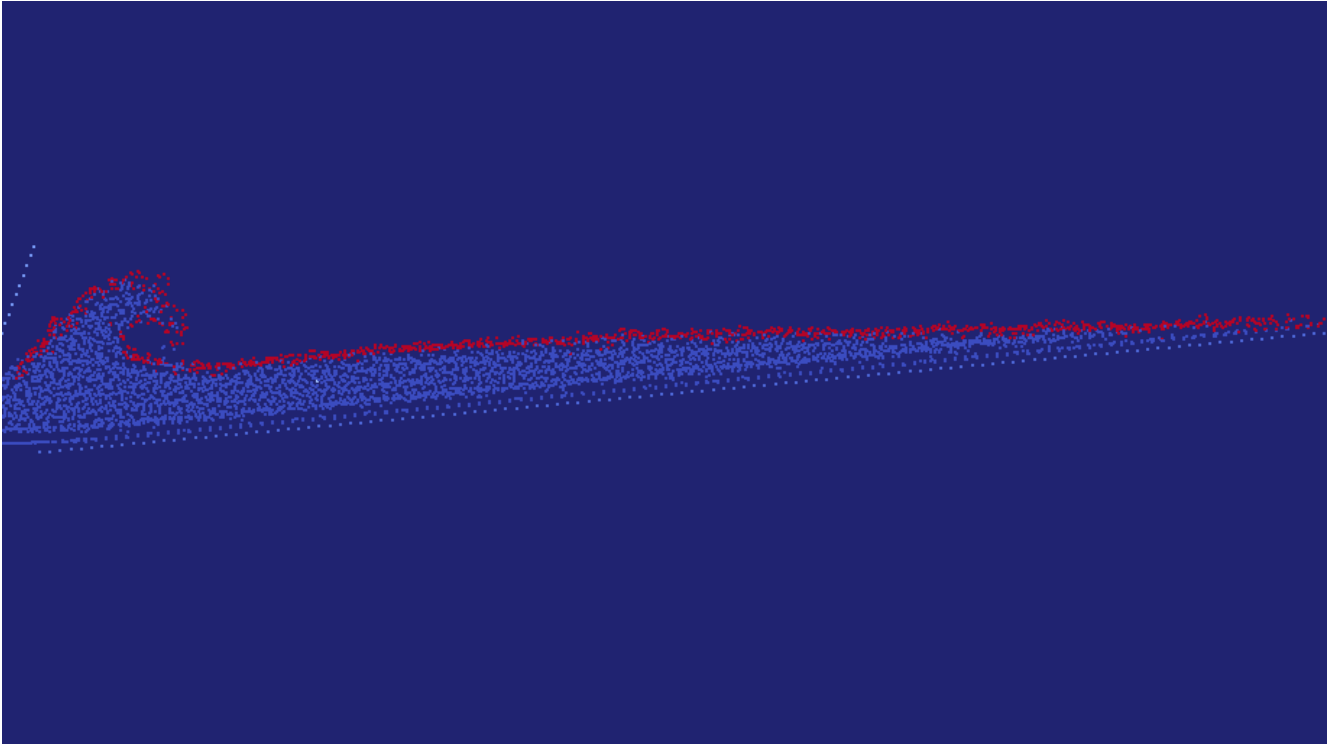


Figure 5. Free surface detection for plunging wave. The irregularity of the free surface particles is due to the low number of particles used to clearly show the free surface particles, and the 3D nature of the irregular free surface as viewed from the side.

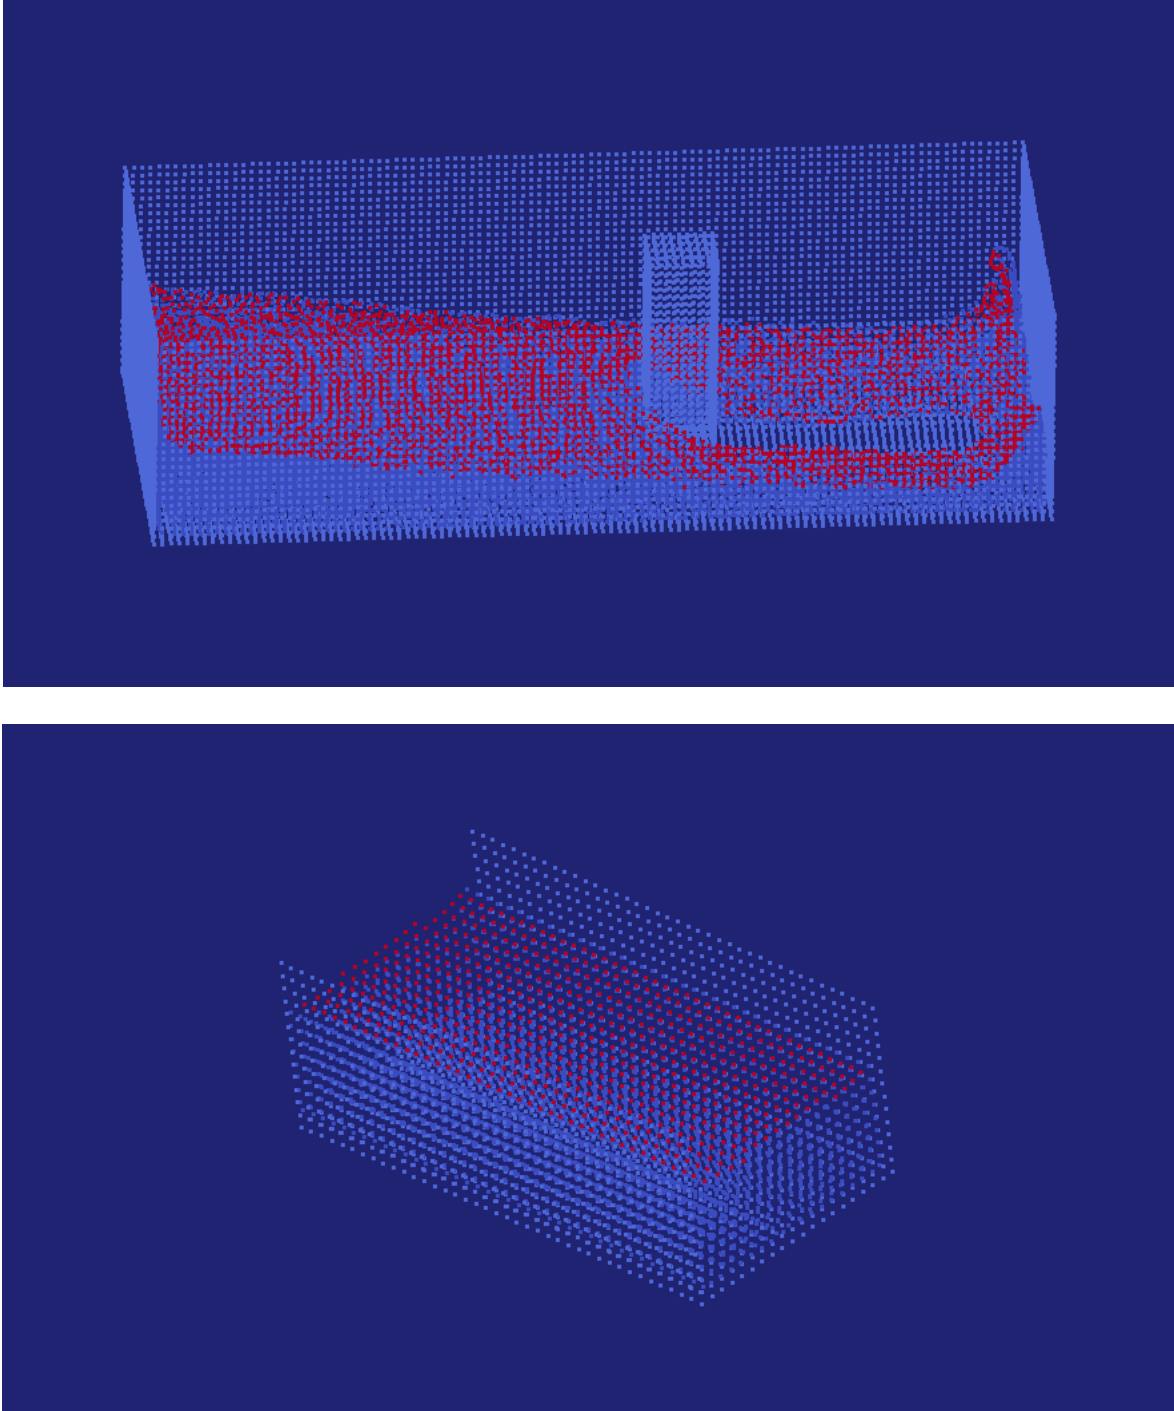


Figure 6. Free surface detection for (a) dam break problem with an obstacle, and (b) open channel flow problem

International Collaborations: We currently have a strong international collaboration in the developer group for GPUSPH with the Istituto Nazionale di Geofisica e Vulcanologia (sezione di Catania), the Università di Catania, Conservatoire National des Arts et Métiers, Paris, for the development of GPU-SPHysics. Dr. Hérault (CNAM and INGV), Dr. Bilotta (UC), and Mr. Eugenio Rustico (UC) are

members of this collaboration. A new collaborative organization is being set up in October 2011 that will include the original GPUSPH developers and EDF R&D (the research and development division of Electricité de France) for the joint development of GPUSPH. EDF has an existing SPH code, SPARTACUS, but is interested in co-developing the GPU accelerated GPUSPH code. It is anticipated that other European institutes will join the effort.

Ongoing efforts—There are three major initiatives underway. The first involves adding the ability to model floating bodies with GPUSPH. This involves determining the forces on an object and then allowing the object to respond to the forces appropriately. The second is lead by Eugenio Rustico, which is the development of multi-GPU configurations of the GPUSPH. This is critical as the GPUSPH code on a single GPU card is only capable of handling 5 million particles in a simulation. JHU is currently completing the construction of a 100 GPU computing cluster, which will permit extensive testing of high resolution GPUSPH simulations. Finally multi-fluid versions of GPUSPH are underway.

IMPACT/APPLICATIONS

Smoothed Particle Hydrodynamics is proving to be a competent modeling scheme for free surface flows in two and three dimensions. As the GPU hardware improves, it is expected that the resolution of SPH will increase tremendously bringing the modeling into realistically sized domains.

REFERENCES

Marrone S., Colagrossi A., Le Touzé D., Graziani G., 2010, Fast free-surface detection and level-set function definition in SPH solvers, *Journal of Computational Physics*, 229, 3652-3663.

Monaghan, J.J. and Kajtar, J.B., 2009, SPH Particle Boundary Forces for Arbitrary Boundaries, *Computer Physics Communications*, doi:10.1016/j.cpc.2009.05.008.

Drønen N., Karunarathna H., Fredsoe J., Sumer B., Deigaard R., 2002, An experimental study of rip channel flow, *Coastal Engineering*, **45**, 223-238.

PUBLICATIONS

Dalrymple, R.A., A. Hérault, G. Bilotta, and R. Jalali Farahani, 2010, GPU-accelerated SPH Model for Water Waves and Other Free Surface Flows, *Proceedings 31st International Conf. Coastal Engineering*, Shanghai, 2010.

Hérault, A., Bilotta G., Dalrymple, R., 2010, SPH on GPU with CUDA, *Journal of Hydraulic Research*, **48**, 74-79.

Jalali Farahani, R., Dalrymple, R.A., Hérault, A., Bilotta, G., 2011, Numerical investigation of wave-induced mean flows in the surf zone using the SPH method', Proc. 6th Workshop, SPHERIC, Hamburg, Germany.