

Flexible and Conformal Thermal Ground Planes

Christopher Oshman¹, Qian Li¹, Wei Wang¹, Ching-Yi Lin¹, Li-Anne Liew¹, Aziz Abdulagatov¹, Ming Kong¹, Susan Song¹, Xianming Dai², Ronggui Yang¹, Chen Li², Steven M. George¹, Victor M. Bright¹, Suraj P. Rawal³, Robert J. Monson³ and Yung-Chen Lee¹

¹University of Colorado at Boulder, Boulder, CO 80309, U.S.A.

²University of South Carolina, Columbia, SC 29208, U.S.A.

³Lockheed Martin Corp., Denver, CO

Abstract: *We report novel flexible thermal ground planes (FTGPs) based on heat pipe technology. FTGP's effective thermal conductivities are much higher than those of copper and graphite heat spreaders'. We report mylar-aluminum, copper-Kapton, and all-polymer FTGP prototypes and advanced technologies which will further enable high-performance FTGPs.*

Keywords: flexible; thermal ground planes; heat pipe; copper, thermal management; atomic layer deposition.

Introduction

Various strategies have been employed for thermal management of electronics and integrated circuits including: forced convection, liquid cooling, solid-state cooling and refrigeration, heat spreaders include high thermal-conductivity materials, as well as vapor chambers and heat pipes. Flexible and conformal thermal ground planes (FTGPs) are enabling components for effective thermal management of future electronic systems. A FTGP follows the same thermal transport principle as that of a heat pipe but possesses superior features because it is two-dimensional and is also flexible and conformal resulting from the polymer-based structural layers.

Flexible and Conformal Thermal Ground Planes

Figure 1 shows a FTGP prototype demonstrated and a mechanical scaled-up model. The FTGP is made from polymer-and-metal laminates. The polymeric layer gives it flexibility while the metal layer provides hermetic sealing needed for heat pipe operation.

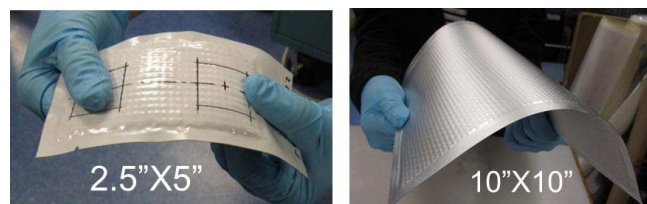


Figure 1. Photographs of FTGPs under development. Left: working prototype. Right: scaled up model.

Figure 2 shows how FTGPs may be used as flexible heat spreaders for electronics cooling in handheld devices. The state of the art is flexible graphite heat spreaders, such as GrafTech International's eGRAF SpreaderShield™. This graphite heat spreader has variable in-plane thermal conductivity up to 1500 W/mK, but its through-thickness thermal conductivity is up to 2 orders of magnitude lower. The FTGP has the potential to outperform graphite due to its higher effective thermal conductivity (2,000 to 5,000 W/mK) as well as its much lower vertical thermal interface resistance from the chip-to-FTGP.

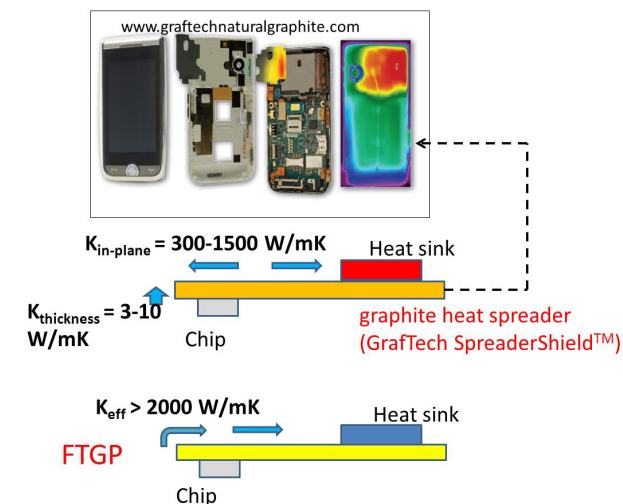


Figure 2. Illustration of a graphite heat spreader application, and FTGP's enhanced capability to replace graphite.

The novelty of our FTGP technology lies in the fact that it is a 2D heat pipe that is thin, flat, flexible (not just bendable), and inexpensive to fabricate. Figure 3 shows our FTGP with 90-degree bending [1]. As shown in the figure, a commercial flat ceramic heater is placed at one end (the "evaporator") to provide an input heat flux. The FTGP's other end (the "condenser") is placed in contact with a heat sink, in this case a liquid cooled coldplate. The figure of merit for the FTGP is its thermal resistance, or R_{th} :

$$R_{th} = \frac{\Delta T}{Q} \quad (1)$$

Report Documentation Page				Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.						
1. REPORT DATE MAR 2012		2. REPORT TYPE N/A		3. DATES COVERED -		
4. TITLE AND SUBTITLE Flexible and Conformal Thermal Ground Planes				5a. CONTRACT NUMBER		
				5b. GRANT NUMBER		
				5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)				5d. PROJECT NUMBER		
				5e. TASK NUMBER		
				5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) University of Colorado at Boulder, Boulder, CO 80309, U.S.A.				8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)		
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited						
13. SUPPLEMENTARY NOTES See also ADB379283. GOMACTech12: Government Microcircuit Applications and Critical Technology Conference (37th) Spanning the Spectrum: Innovations in Micro-Technologies for System Supremacy. Held in Las Vegas, Nevada on 20-22 March 2012., The original document contains color images.						
14. ABSTRACT We report novel flexible thermal ground planes (FTGPs) based on heat pipe technology. FTGPs effective thermal conductivities are much higher than those of copper and graphite heat spreaders. We report mylaraluminum, copper-Kapton, and all-polymer FTGP prototypes and advanced technologies which will further enable high-performance FTGPs.						
15. SUBJECT TERMS						
16. SECURITY CLASSIFICATION OF:				17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 4	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified				

where ΔT is the temperature difference between the evaporator and condenser, and Q is the heat extracted from the condenser (which should theoretically equal the input heat from the ceramic heater if there are negligible heat losses from the FTGP surfaces). R_{th} and thermal conductivity are inversely proportional, therefore it is desired that the R_{th} be as low as possible. In Figure 3, the evaporator is placed at the vertical end, thereby forcing the FTGP to work against gravity. The R_{th} is around 1.6 K/W, which is not affected by the bending angle. As a reference, the R_{th} is over 20 K/W without water charged. This FTGP prototype works effectively as a 2-D heat pipe with good flexibility. Details of this study will be published in the near future [1].

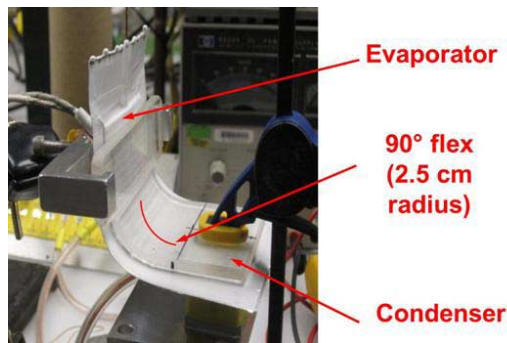


Figure 3. Photograph of FTGP made from mylar-aluminum, being bent at 90°.

We have developed 3 versions of the FTGP, based on different structural materials but with similar design and manufacturing approach using commercially-available materials and manufacturing technologies. The FTGP in Figure 3 was made from mylar-aluminum laminates and was our first test bed for developing this approach to making such 2-D heat pipes. From there, we have developed other versions of the FTGP by using different materials but following the same design, operating principles, and manufacturing processes. Figure 4 shows a FTGP made from copper-clad Kapton and a simple experimental setup. Its R_{th} values measured are around 1.5K/W, which is much lower than 3.5 K/W of an equivalent copper reference. The FTGP and copper reference were each 1.7mm thick. This copper-clad Kapton FTGP is much more thermally conductive than the copper reference. The commercially available graphite heat spreader with a thickness close to 1 mm has thermal conductivity close to 400 W/mK. Its thermal performance is worse than copper because of its low out-of-plane thermal conductivity (see Figure 1). As a result, this copper-clad Kapton FTGP is expected to be more thermally conductive than the graphite heat spreader. It should be noted that FTGP performance can be further improved by using thermal vias as illustrated in the next section.

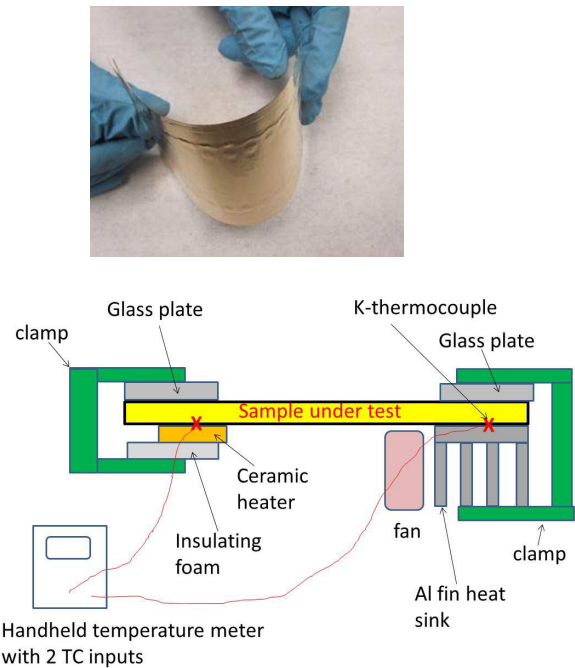


Figure 4. Photograph of copper-clad Kapton FTGP and the simple experimental set up [1].

A third version of our FTGP is made using all-polymer materials, both for the outer casing as well as the internal wicking structures. Figure 5 shows a photograph of the all-polymer FTGP. The R_{th} , measured using the set up in Figure 4, decreased from 14.7 K/W to 5.1 K/W when the heater input power was increased from 5 W to 20W. This decrease in R_{th} with increasing power shows that the all-polymer FTGP is functioning as a 2-D heat pipe and is the first demonstrated all-polymer thermal ground plane. The technological advantages of using only polymers include increased flexibility and conformability in the form factor, much lighter weight than metal TGP's, and inexpensive manufacturing that is easily scalable to large sizes. As this is the first prototype there is much room for performance improvements.



Figure 5. Photograph of all-polymer TGP [1].

Supporting Technologies for Advanced FTGPs

We have developed several technologies that will advance the state of the art in FTGPs.

We have demonstrated printed-circuit-board (PCB) fabrication-based TGP using copper-clad Kapton and copper-clad liquid crystal polymer (LCP) as structural layers, and with features including microfabricated wick structures, and microfabricated thermal vias. These were reported in our previous publications [2, 3] and shown in Figure 6.

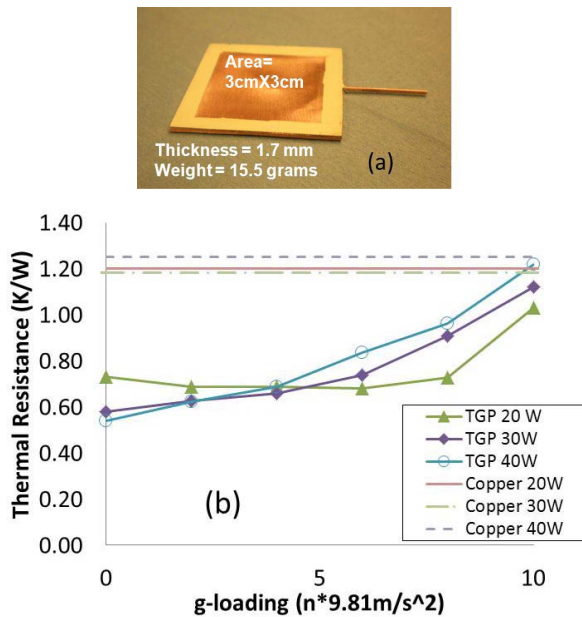


Figure 6. (a) Photograph of PCB-based TGP used in 10-g test (b) thermal resistance of TGP compared with copper, at different g-loading and input power (data is replotted from [2]).

Figure 6 shows a PCB-based TGP that was tested at up to 10-g of adverse gravity. Since TGP's rely on the wicking structures to provide capillary pumping pressure to return the condensate to the evaporator, TGP's in general are susceptible to performance degradation under adverse acceleration. The wicking structures must be able to function against the hydrostatic pressure drop caused by gravitational acceleration. The PCB-based TGP was tested under high-g loading in a centrifuge by Army Research Laboratories (contact: Dr. Brian C. Morgan) and the results shown in Figure 6 show that the TGP maintained much lower R_{th} than for an equivalent copper reference, at up to 10-g, and for various heater input powers ranging from 5 – 40 W.

Hermetic sealing is critical to the long term reliability of TGP's. To support the development of the PCB-based TGP,

we developed hermetic sealing technology for LCP based on solder bonding. We then developed non-solder technologies to enable flexibility. Figure 7 shows the results of hermeticity tests on a test vehicle, which consisted of a sheet of copper-clad Kapton bonded to an evacuated and water-containing copper cavity using Fluorinated Ethylene Propylene (FEP) adhesive [4]. The test vehicle was placed in an oven at 100 °C and the change in weight from water loss was measured over time. Figure 7 shows that the test vehicle exhibited less than 1% yearly weight loss at 100 °C over a period of 250 days.

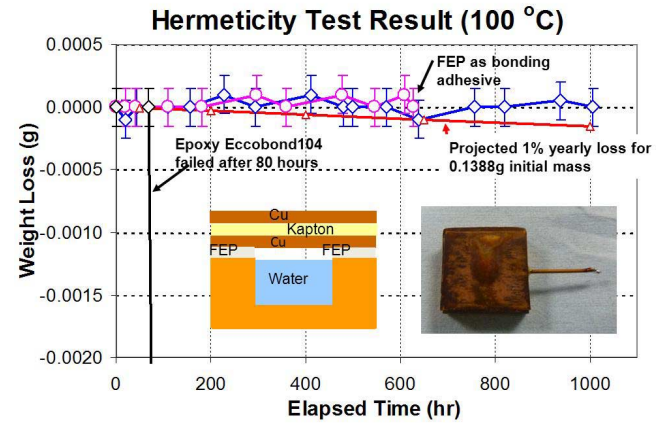


Figure 7. FEP hermetic sealing technology for FTGP [4].

We have also developed hybrid micro/nano structures that exhibit significant enhancement of heat transfer and pool boiling, and which show promise as advanced wick structures [5]. Figure 8 shows 3 microfabricated copper square pillars (43 μm x 43 μm x 20 μm tall and with 57 μm pitch), copper nanowires (of lengths 4 μm and 30 μm) and a hybrid structure consisting of the nanowires on top of the micropillars. Pool boiling experiments showed that the heat transfer coefficient and critical heat flux (CHF) are higher for the hybrid structure than for either the micropillars or nanowires alone, and that the long nanowires were more effective than the short nanowires. We have thus found that hybrid micro/nano structures of the configurations we studied can greatly enhance pool boiling performance to remove ultra-high heat flux and show potential for future application in the TGP.

We have also developed water corrosion-resistant barrier layers based on atomic layer deposited (ALD) films of Al_2O_3 and TiO_2 [6]. Figure 8(a) shows that a copper substrate, which is exposed to water at 90°C for 120 days, exhibits a drastic reduction in the percentage of area corroded when coated with ALD Al_2O_3 followed by ALD TiO_2 . This barrier coating is critical to the long term reliability of TGP's by protecting copper meshes and by hermetically sealing all polymer TGP's.

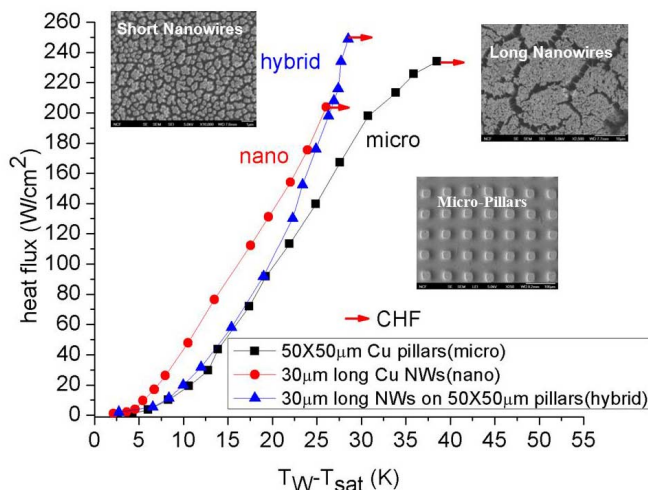


Figure 8. Enhanced critical heat flux of copper hybrid micropillar/nanowire structures, as next-generation TGP wicking structures [5].

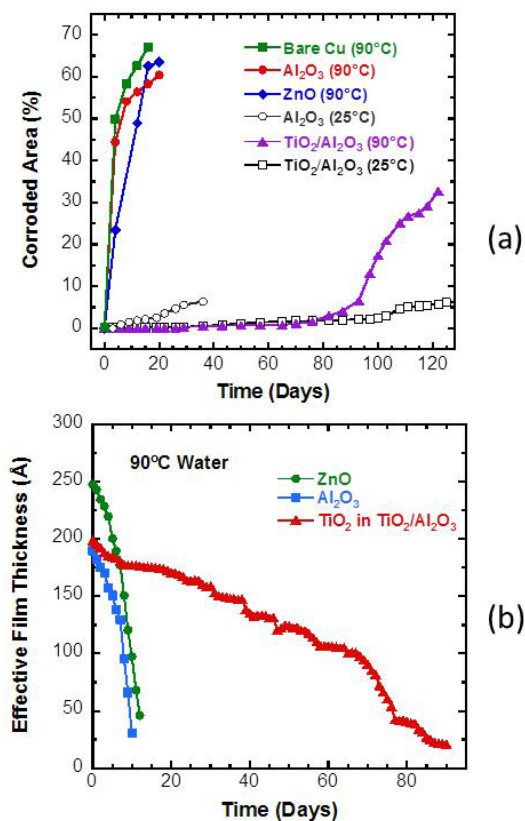


Figure 9. (a) Corroded area of a copper substrate with and without ALD barrier layer (b) ALD thickness over time [6].

Summary and Conclusion

We have developed Flexible Thermal Ground Planes (FTGP) and demonstrate their performance to be superior to that of copper and graphite heat spreaders. We have also demonstrated the first all-polymer FTGP. We then summarized FTGP-enabling technologies: we described our PCB-based TGPs that have been shown to outperform copper at up to 10-g adverse acceleration, and the hermetic sealing technology developed for TGPs. We developed hybrid micro/nano structures which show promise as advanced wick structures by significantly enhancing pool boiling and evaporation heat transfer. Finally, we have demonstrated ALD Al_2O_3 and ALD TiO_2 as effective barrier layers against water corrosion for long term reliability of FTGPs.

Acknowledgements

This work was supported by the DARPA Thermal Ground Plane Program managed by Dr. Thomas W. Kenny and Dr. Avram Bar-Cohen (N66001-08-C-2006). The views expressed are those of the author(s) and do not reflect the official policy or position of the Department of Defense or the U.S. Government.

References

1. C. Oshman, et al., "Flexible Thermal Ground Planes," a manuscript is submitted for publication in *J. App. Phys.* in the near future.
2. C. Oshman, Q. Li, L. Liew, R. Yang, Y.C. Lee, and V.M. Bright, "Flat Polymer Heat Spreader with High Aspect Ratio Micro Hybrid Wick Operating Under Adverse Gravity," *Proc. IMECE2011-63264*, Denver, CO, Nov 2011.
3. C. Oshman, B. Shi, C. Li, R.G. Yang, Y.C. Lee and V.M. Bright, "The Development of Polymer-Based Flat Heat Pipes," *J. Microelectromechanical Systems*, Vol. 20, no.2, pp. 410-17, 2011
4. C.-Y. Lin, et. al, "Hermetic Sealing of Flexible Thermal Ground Planes Using FEP," a manuscript is submitted for publication in *IEEE Trans on Components and Packaging Tech.* in the near future.
5. Q. Li, W. Wang, C. Oshman, B. Latour, C. Li, V.M. Bright, Y.C. Lee and R. Yang, "Enhanced Pool Boiling Performance on Micro-, Nano- and Hybrid-Structured Surfaces," *Proc. IMECE2011-64921*, Denver, CO, Nov 2011
6. A. Abdulagatov, Y. Yan, J.R. Cooper, Y. Zhang, Z.M. Gibbs, A.S. Cavanagh, R.G. Yang, Y.C. Lee, and S.M. George, " Al_2O_3 and TiO_2 Atomic Layer Deposition on Copper for Water Corrosion Resistance," *Applied Materials and Interfaces*, accepted