



Disclaimer: Reference herein to any specific commercial company, product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the Department of the Army (DoA). The opinions of the authors expressed herein do not necessarily state or reflect those of the United States Government or the DoA, and shall not be used for advertising or product endorsement purposes.**

Battery Research & Development Need for Military Vehicle Application



TECHNOLOGY DRIVEN. WARFIGHTER FOCUSED.

Yi Ding, PhD

**Energy Storage Team, US Army Tank Automotive Research Development Engineering
Center (TARDEC), Ground Vehicle Power & Mobility (GVPM)**

June 19, 2012


Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 18 JUN 2012		2. REPORT TYPE Briefing Charts		3. DATES COVERED 01-05-2012 to 01-06-2012	
4. TITLE AND SUBTITLE Battery Rsearch & Development Need for Military Vehicle Application				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Yi Ding				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army TARDEC ,6501 E.11 Mile Rd,Warren,MI,48397-5000				8. PERFORMING ORGANIZATION REPORT NUMBER #23003	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army TARDEC, 6501 E.11 Mile Rd, Warren, MI, 48397-5000				10. SPONSOR/MONITOR'S ACRONYM(S) TARDEC	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) #23003	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES For IEEE Transportation Electronic Conference and Expo					
14. ABSTRACT The Battery Management System (BMS) laboratory is TARDEC's Lab for analyzing and evaluating prototype, near production ready, and commercial-off-the-shelf BMS units for lead acid and Li-ion batteries. BMS evaluation in this lab supports the PM/PEO to determine if the system is ready for fielding. Testing also aids TARDEC in updating the BMS specification that is used by the customer for battery management qualifications that will be used in fielded vehicles.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Public Release	18. NUMBER OF PAGES 15	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Challenges we have:


- Delivering reliable battery solutions in standardized military form factors
- Safety – Understanding thermal runaway process and its control, improved BMS and alternative cell technologies.
- Developing energy storage systems with higher energy and higher power densities (focus on designs and chemistries).
- Manufacturing process development, quality and cost control.

Solutions we are investigating:


Development of advanced manufacturing technologies & form factor standardization

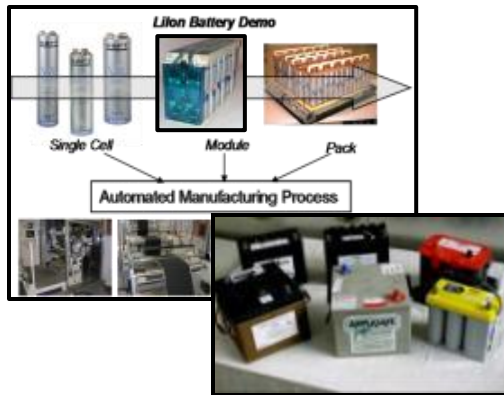

Develop of Power Brick battery for EM Armor and pulse power applications

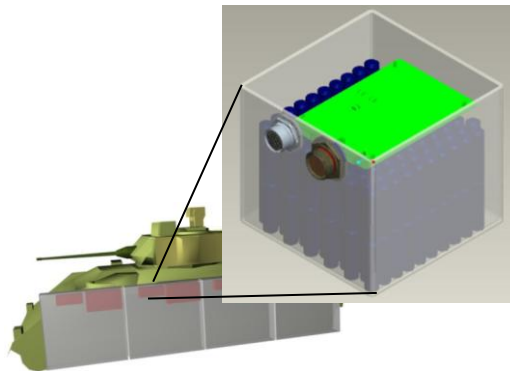


R&D of new materials to improve performance and safety

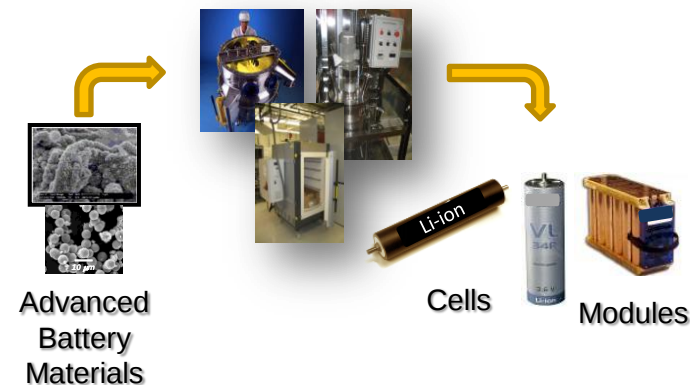

Where we need your help:


- Identify materials/designs/technologies to significantly improve safety
- Develop technologies to improve both energy and power density as well as life (calendar and cycle).
- Develop energy storage systems that focus on standardized form factors (6T, 4HN, Group 31 and Group 34).
- Cost reduction technologies

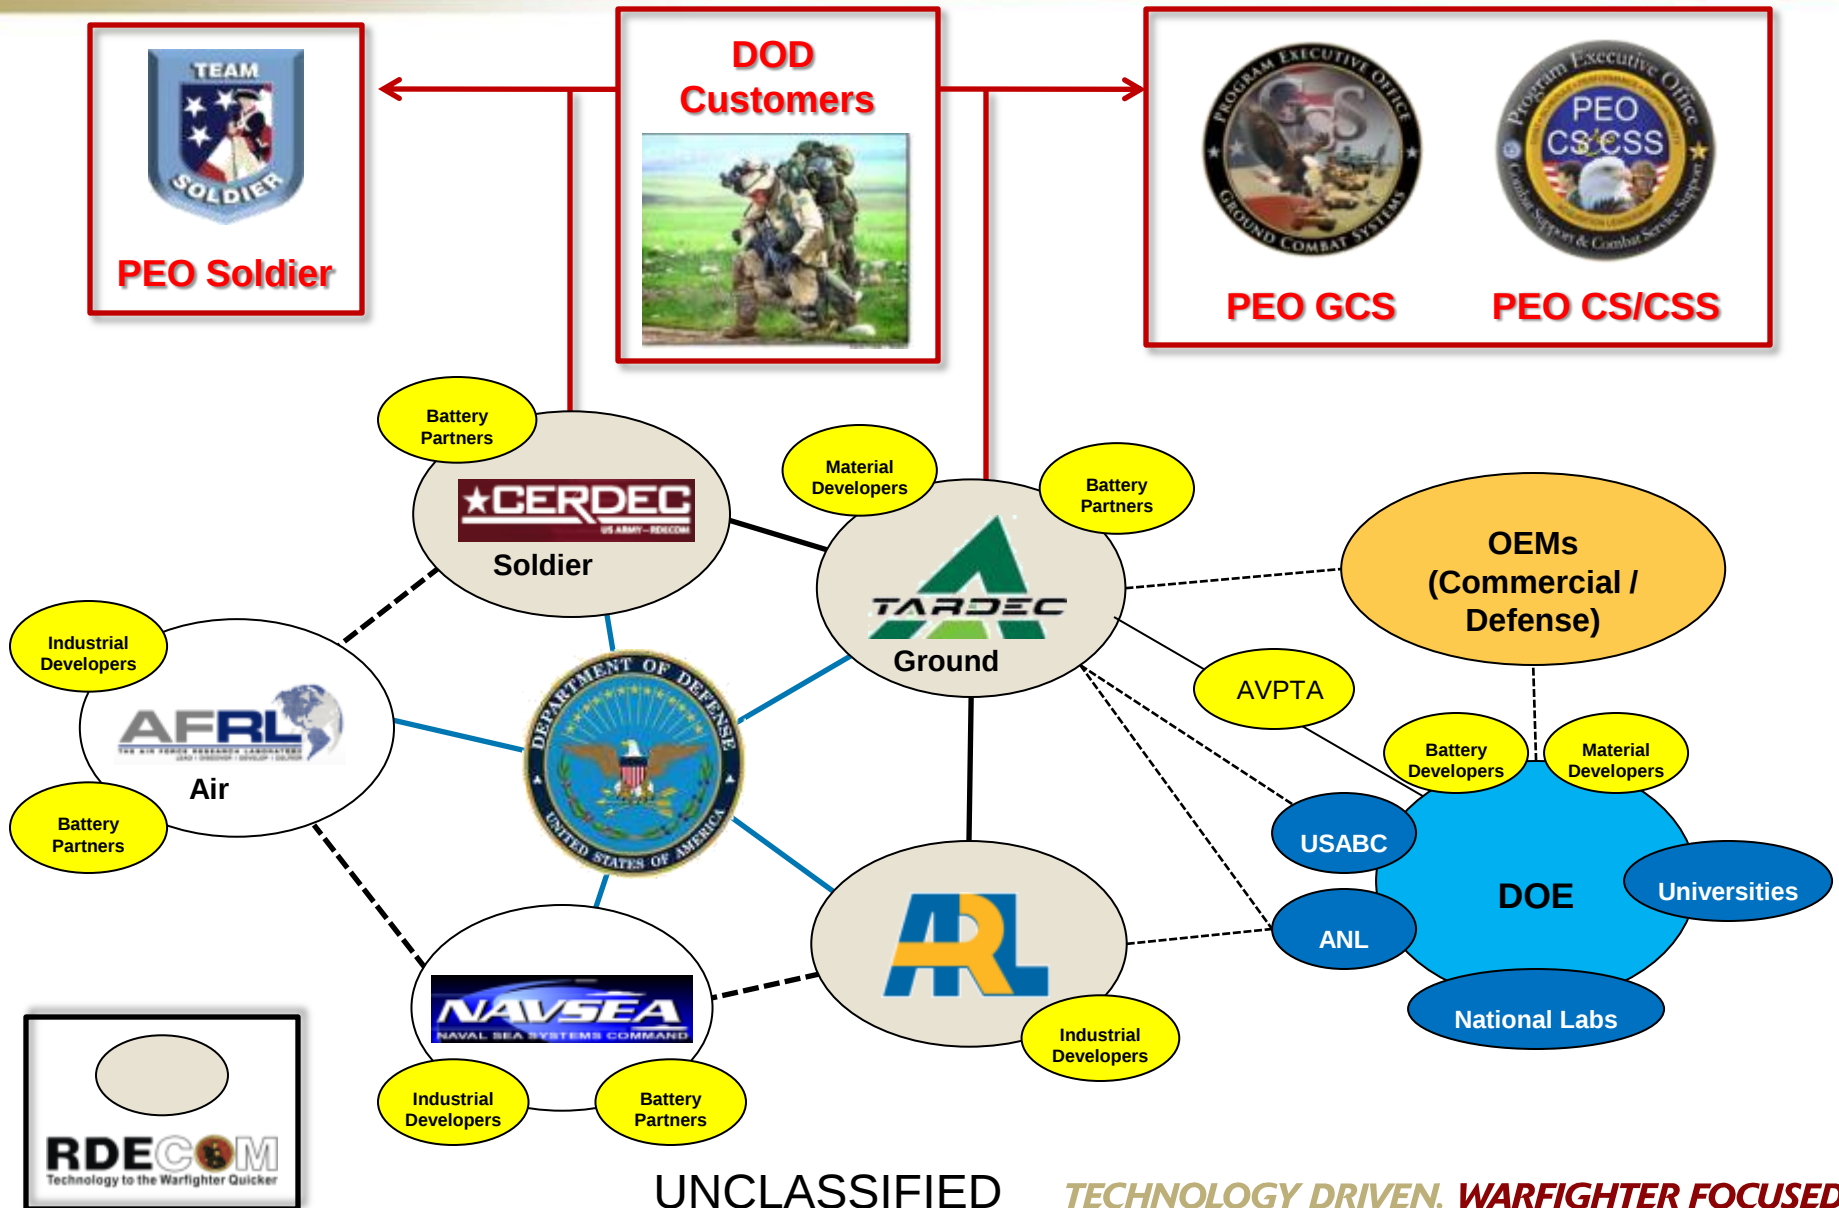




UNCLASSIFIED

Energy Storage Technology Areas of Research

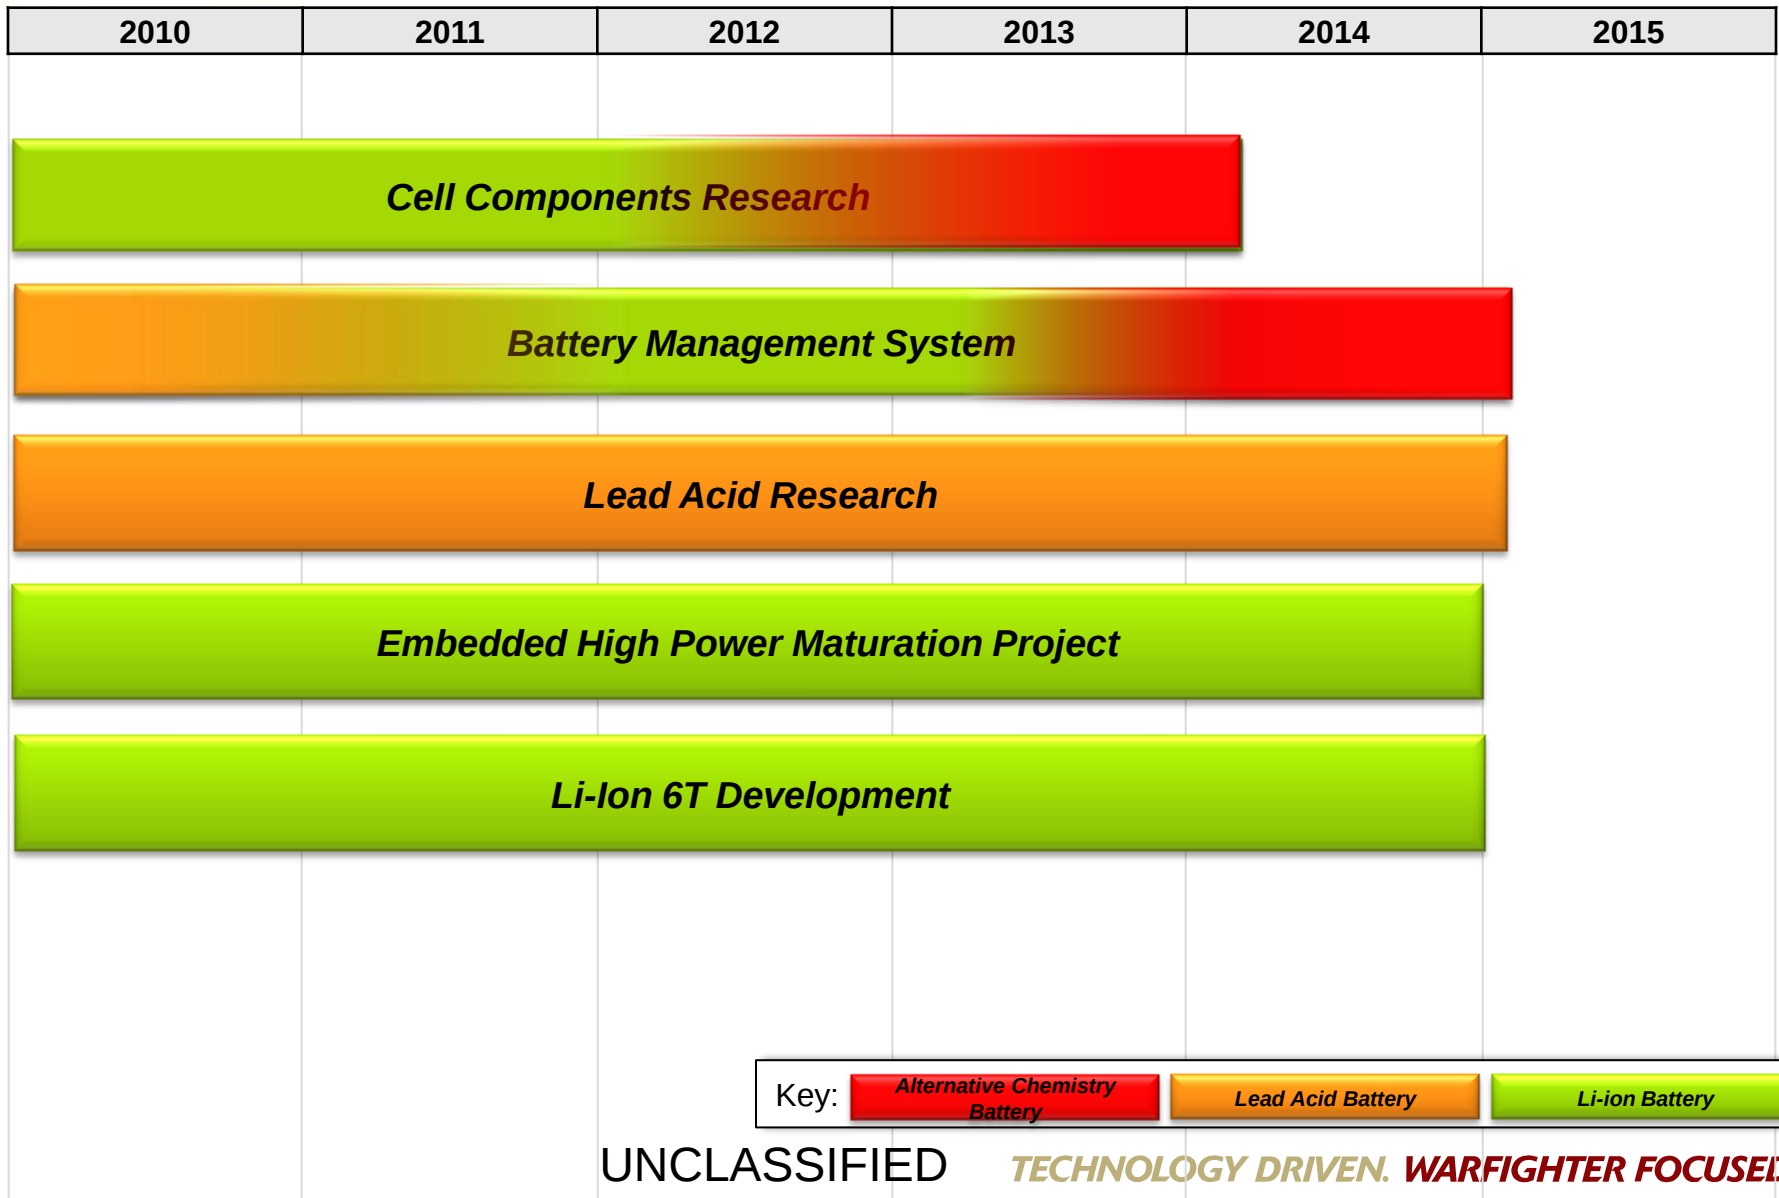

Commercial vs. Military Energy Storage Requirements

Heavy Duty Truck Demo Pack

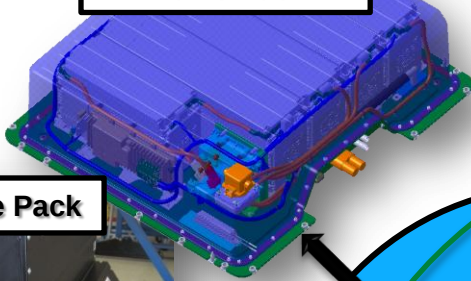

Automotive Pack




Automotive Pack



>200 Cells

Modules

Automotive Pack

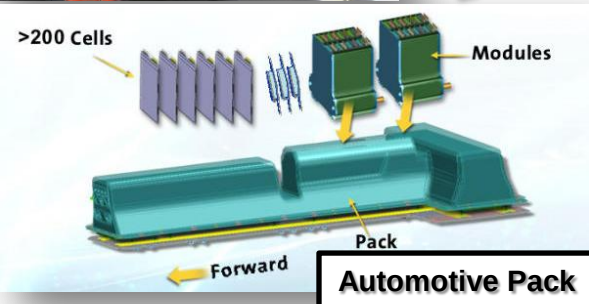

Divergence of Military and Commercial Requirements:

Commercial Focus

- Fuel Economy/Hybridized vehicles
- Increased energy – EV applications
- Increased power – HEV applications
- Cost (\$250/kWhr)
- Life (cycle/10-15 year calendar life)
- Safety
- SAE Standards
- Operation from to -20°C to +55°C

Military Requirements:

- ✓ Operating Temperatures: **-46°C to 71°C**
- ✓ Storage Temperatures: **-54°C to 88°C**
- ✓ Electromagnetic Interference: MIL-STD-461F
- ✓ Ballistic Shock: MIL-STD-810G
- ✓ Life Fire: MIL-STD-810G
- ✓ Explosive Environment: MIL-STD-810G
- ✓ Altitude to 60,000ft: MIL-STD-29595
- ✓ Explosive Decompression: MIL-STD-810G
- ✓ Salt fog: MIL-STD-810G
- ✓ Sand and Dust requirements: MIL-STD-810G

Additional Military Focus:

- ✓ NATO **Standardized** Form Factors (i.e. 6T)
- ✓ Maximized Power AND Energy density
- ✓ Sustainability and Logistics issues
- ✓ Silent Watch/Silent Mobility
- ✓ On-board Electric Power

Extreme operating environments



Commercial

Military



Standardized Military Batteries (i.e. 6T)
Used in 95% of Military Vehicles



- **Low temperature operation (-40°C)**

- Difficulty meeting startup requirements
 - Reduced power from increased impedance
- Reduced discharge current and capacitance
- Reduced charge acceptance/ Li Plating
- ✓ Battery heater can be added
- ✓ New electrolytes and additives are being developed



- **High temperatures operation (70°C)**

- ✓ Improves battery performance
 - Increased electrochemical reactions
- Reduced lifetime
 - Increased corrosion
- Increased safety hazard



- **Optimization**


- ✓ Operating temp between 0-50°C
- ✓ Uniformity within and between modules




Li-ion 6T Development

Gen1 Cold Crank:

-19°C 1100A, 30 sec discharge

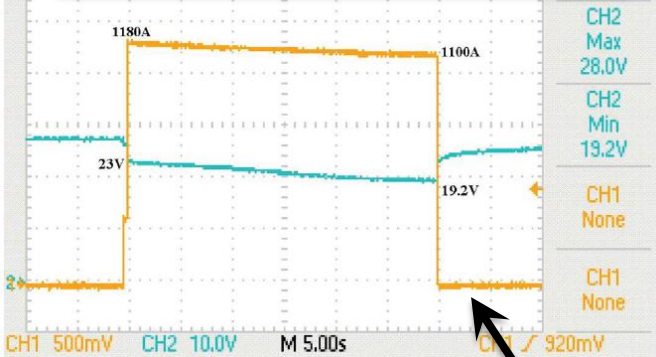


	Baseline 6T Lead acid	Generation 1 Li-ion 6T	
		Vendor A	Vendor B
Voltage	12V	24V	24V
Capacity (rate)	120Ahr (C/20)	60Ahr (C-rate)	70Ahr (C-rate)
Peak Current (-19C, 30sec)	1100A	>900A	1100A
Deep Cycle Life (100% DOD)	120	500-1000	500-1000
Weight	40kg	20kg	20kg
Energy Density	36Wh/kg	75Wh/kg	88Wh/kg

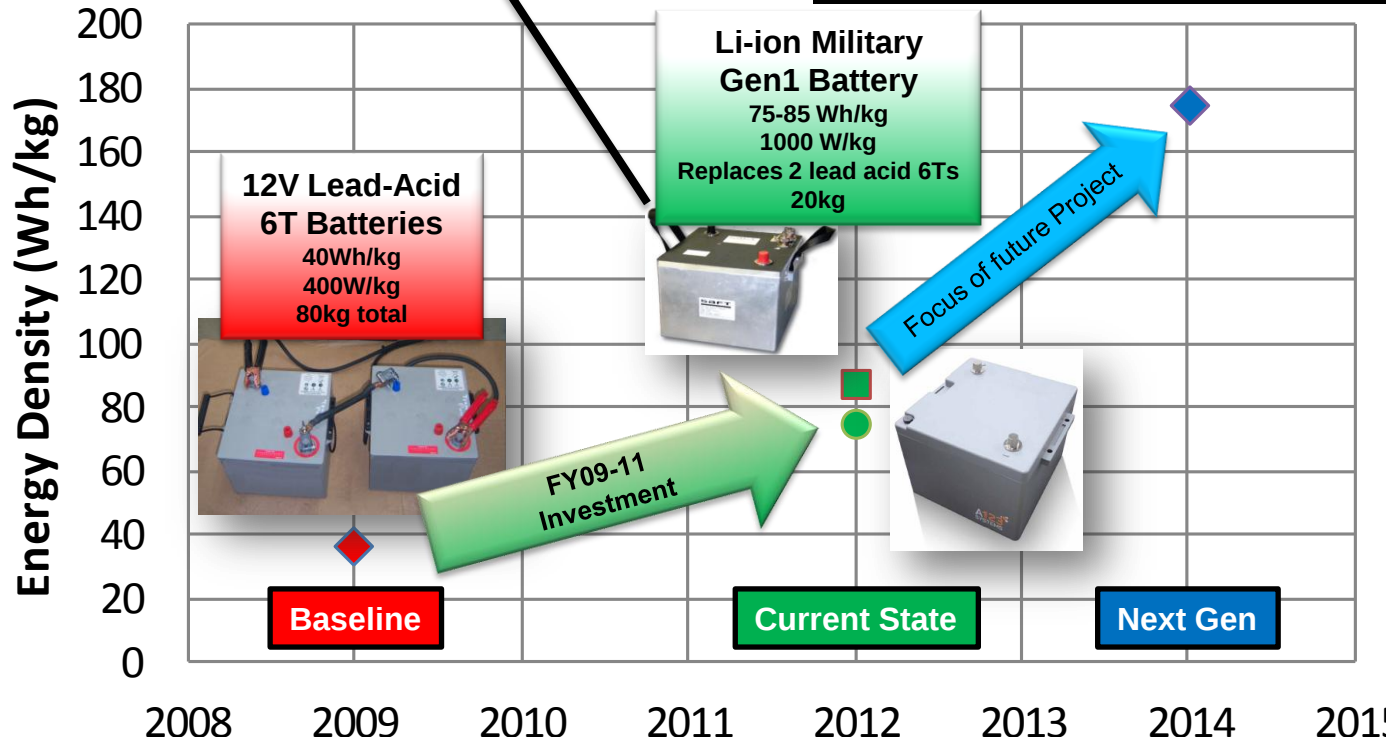

Project Targets:

170 Wh/kg
1500 W/kg
1000 Cycles
1400A



Accomplishments to date:

- Developed Gen1 Li-ion 6T batteries
- Demo 2x increase in energy density
- Cut weight of 6T in half (20kg vs. 40kg)
- Demo starting of HMMWV with single Gen1 24V battery (replaces 2 LA 6T!)
- Gen1 TRL 5/6 testing underway.
- Gen1 batteries to be field tested.

- Needed to reduce safety hazard
- Required to increase battery life
- Monitors and reports
 - State of Charge (SOC)
 - State of Health (SOH)
 - Voltage
 - Current
 - Temperature



**Battery Management is important
for battery safety**




• Design challenges


- Handling transient spikes
 - Over-charge
 - Over-discharge
 - Over-current
- Affordability
- Varied charge/discharge methods
- Communication interface
- Battery self-discharge

Battery Charging

- The charge control for lithium ion battery chemistries is different from those of flooded and sealed lead acid batteries.
- The discharge control for lithium ion battery chemistries is different from those of flooded and sealed lead acid batteries.
- Battery charging voltage changes with the temperature

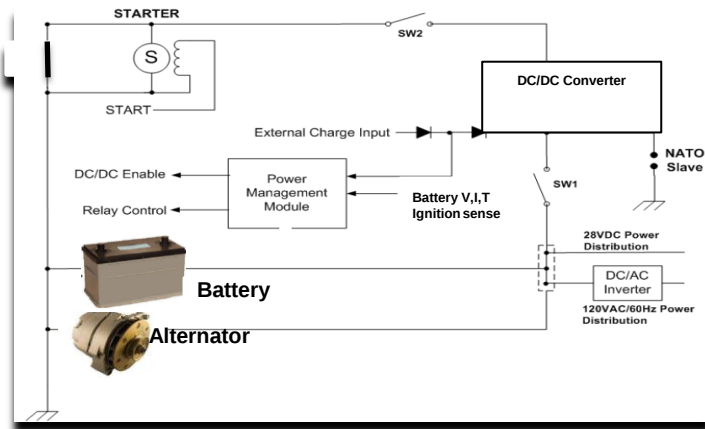


Typical Alternator Circuit

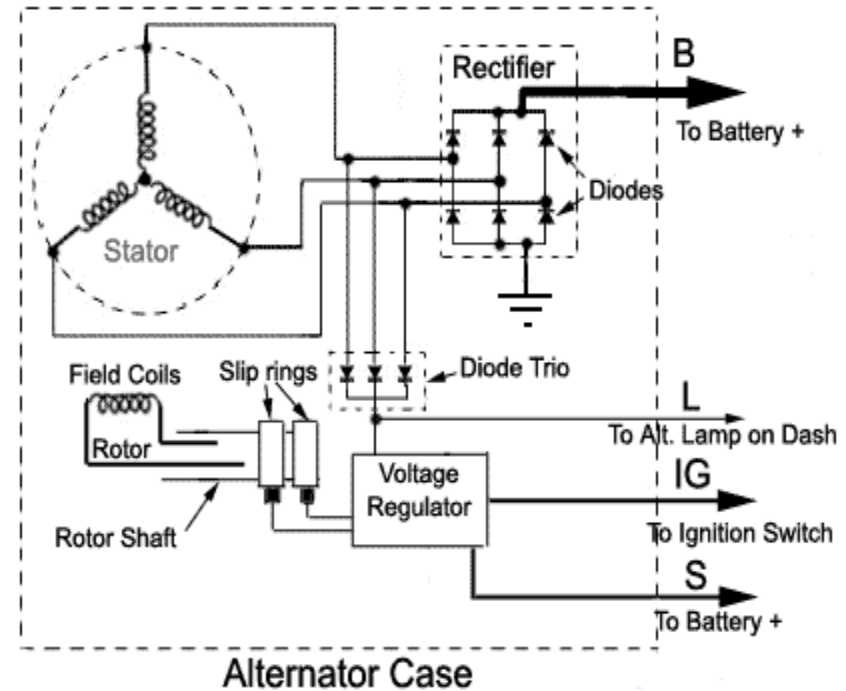

Capabilities

- Provides steady state and transient (mission profile based) testing
- Ability to test current and emerging classes of ground vehicles
- 32,000 ft² of laboratory space
- Environmental chamber able to test between -60° to 160° F with winds up to 60 mph
- Provides 10 dynamometers to allow testing of up to 5 axle wheeled vehicles

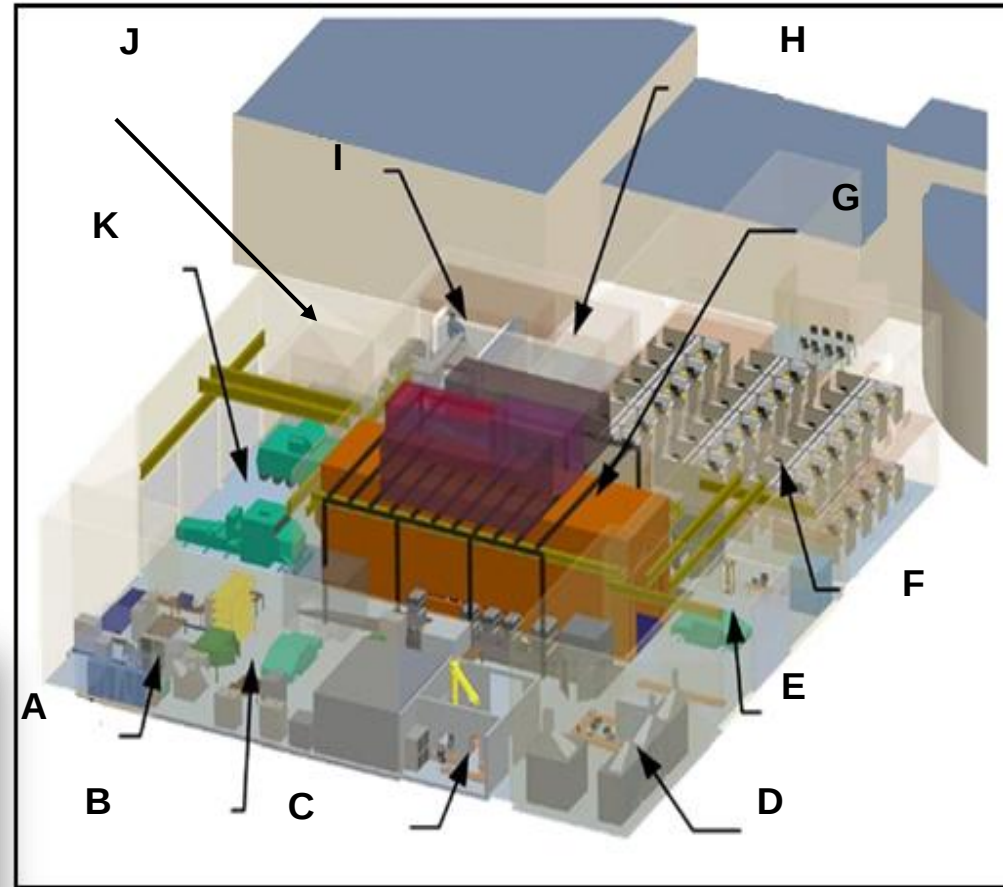

Grand Opening April 11, 2012



B: Battery lab

Purpose:

The GSPEL Energy Storage Lab is TARDEC's testing laboratory and will be used to safely analyze, evaluate and test battery and other electrochemical technologies at the cell, module level, and pack level.

Capabilities:

- Characterize and evaluate advanced technologies (lithium-ion, nickel-zinc, lead acid, ultra capacitors families, and any future new chemistry that is developed)
- Centrally controlled and monitored cyler circuits of varying current and voltage capabilities
- Characterization at different charge/discharge rates/temperatures/life cycling/pulse power/stand testing/& drive profile cycling
- Temperature test ranging from -73°C to 200°C.
- Lead acid batteries battery life analysis



Equipment:

- 3 blast proof rooms
- 2 pack external battery pack test chambers
- ~100 cell level cyler channels
- ~100 (0-60V) module/pack level cyler channels
- 6 pack test cyler channels (AV900)
- 12 environmental chambers
- 6 water baths for testing Pb Acid batteries
- Accelerated rate calorimeter

UNCLASSIFIED

TECHNOLOGY DRIVEN. WARFIGHTER FOCUSED.

Safety Features:

- The rooms are designed to withstand 25 psi
- Room and doors are designed to withstand this pressure and actually hold it for a controlled release.
- Walls are ~8 inches thick concrete and are re-enforced with tie rods.
- 100% air is replaced 8 times per hour. In emergency, air changes increase to 24 per hour.
- All air is passed thru a scrubber located on the roof.
- Sensors include heat, smoke, hydrogen, and organic vapors
- Fire suppression includes - Nitrogen/Argon gas fire suppression, water sprinkler system, and capability to flood the room
- E stops located in the control room, test chamber, and outside the rooms shut down all electrical equipment operating in the room and feeding the room from the mezzanine.
- Spill containment is located under the floor to contain and control spills.



Purpose:

The EARL is TARDEC's testing laboratory for analyzing and evaluating battery and other electrochemical technology at the cell & module level. Testing in this laboratory aids TARDEC in understanding new breakthrough technologies for Army ground vehicle energy storage systems.

Capabilities:

EARL contains a number of battery cyclers for charging and discharging batteries, along with thermal chambers and a centralized control system that enables assessment of electrochemical cells with a variety of tests including:

- Characterization at different charge/discharge rates and temperatures
- Life cycling
- Hybrid pulse power characterization
- Stand testing
- Tests are monitored with thermocouples and video feed

Equipment:

Three Battery Cyclers

- 16 & 4 Channel Bitrode, 4 Channel Maccor
- Two Solartron SI 1287 Electrochemical Impedance Spectrometers
- Parstat 2273 Potentiostat
- Walk-in Hood with 4 chamber fire suppression system
- Three Tenny thermal chambers
- Centralized Control System



**Battery Cycling
Equipment**



Thermal Chambers & Exhaust Hood



**Electrochemical
Characterization**

Purpose:

The Battery Management System (BMS) laboratory is TARDEC's Lab for analyzing and evaluating prototype, near production ready, and commercial-off-the-shelf BMS units for lead acid and Li-ion batteries. BMS evaluation in this lab supports the PM/PEO to determine if the system is ready for fielding. Testing also aids TARDEC in updating the BMS specification that is used by the customer for battery management qualifications that will be used in fielded vehicles.

Capabilities:

The BMS lab contains

- BMS Hardware-In-the-Loop (HIL) which can simulate a battery profile
- Thermal chambers
- Analog and digital input/output (I/O)
- Centralized control system



**Hardware-in-the-loop
(HIL) Battery Simulator**



Thermal chambers

Equipment Specification:

- BMS HIL – Independently simulate and control up to 180 cells from 0 to 5 volts.
- Pack voltages up to 750V can be simulated.
- Large Thermal Chamber – 8 cubic feet, remotely programmable from -73°C to 200°C.
- Two Small Thermal Chambers – 1 cubic foot, remotely programmable from -73°C to 200°C.
- Independent Data Acquisition (I/O)
 - 16 channels of digital input
 - 16 channels of digital output
 - 16 channels of analog input
 - 16 channels of analog output
 - 16 channels of thermocouple
- Centralized Control System – control all lab equipment



**Centralized data
acquisition & control
system**



UNCLASSIFIED

It's All About The Warfighter



UNCLASSIFIED

TECHNOLOGY DRIVEN. WARFIGHTER FOCUSED.