



RDECOM



TECHNOLOGY DRIVEN. WARFIGHTER FOCUSED.

Tom Cat Designs LLC Protective Hull Modeling & Simulation CORRECTED Results For Iteration 1

Sebastian Karwaczynski

23-May-2012

UNCLASSIFIED: Distribution Statement A. Approved for public release.

Report Documentation Page


Form Approved
OMB No. 0704-0188


Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE 13 JUN 2012		2. REPORT TYPE Briefing Charts		3. DATES COVERED 13-06-2012 to 13-06-2012	
4. TITLE AND SUBTITLE Tom Cat Designs LLC Protective Hull Modeling & Simulation CORRECTED Results For Iteration 1				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Sebastian Karwaczynski				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army TARDEC ,6501 E.11 Mile Rd,Warren,MI,48397-5000				8. PERFORMING ORGANIZATION REPORT NUMBER #23020	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army TARDEC, 6501 E.11 Mile Rd, Warren, MI, 48397-5000				10. SPONSOR/MONITOR'S ACRONYM(S) TARDEC	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) #23020	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT Fit and Function Analysis Mobility Analysis Blast Analysis Design Suggestions					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Public Release	18. NUMBER OF PAGES 66	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

- **Fit and Function Analysis**
- **Mobility Analysis**
- **Blast Analysis**
- **Design Suggestions**
- **Conclusion**


Fit and Function Analysis 9°

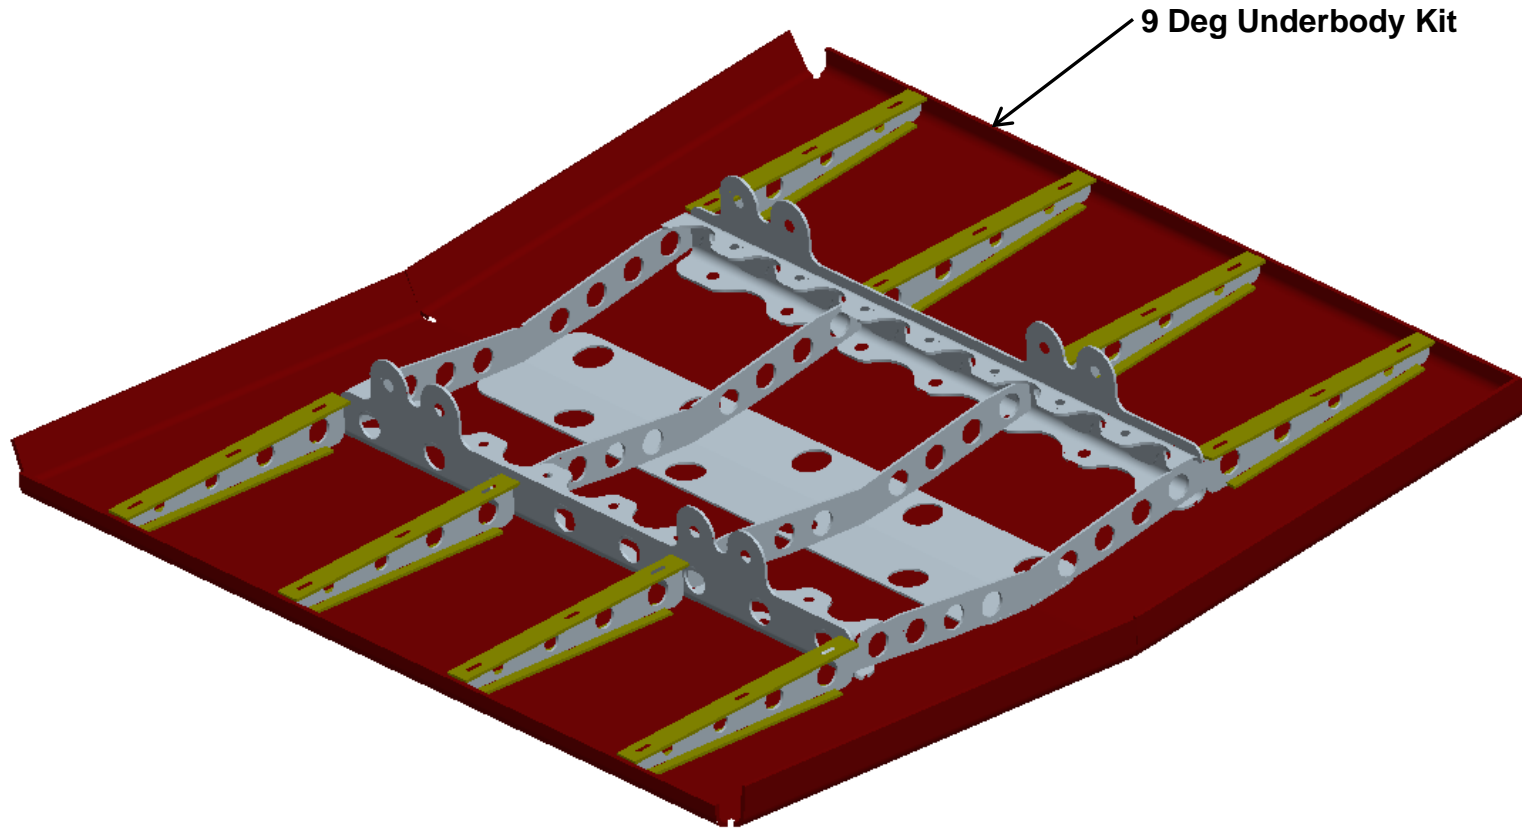


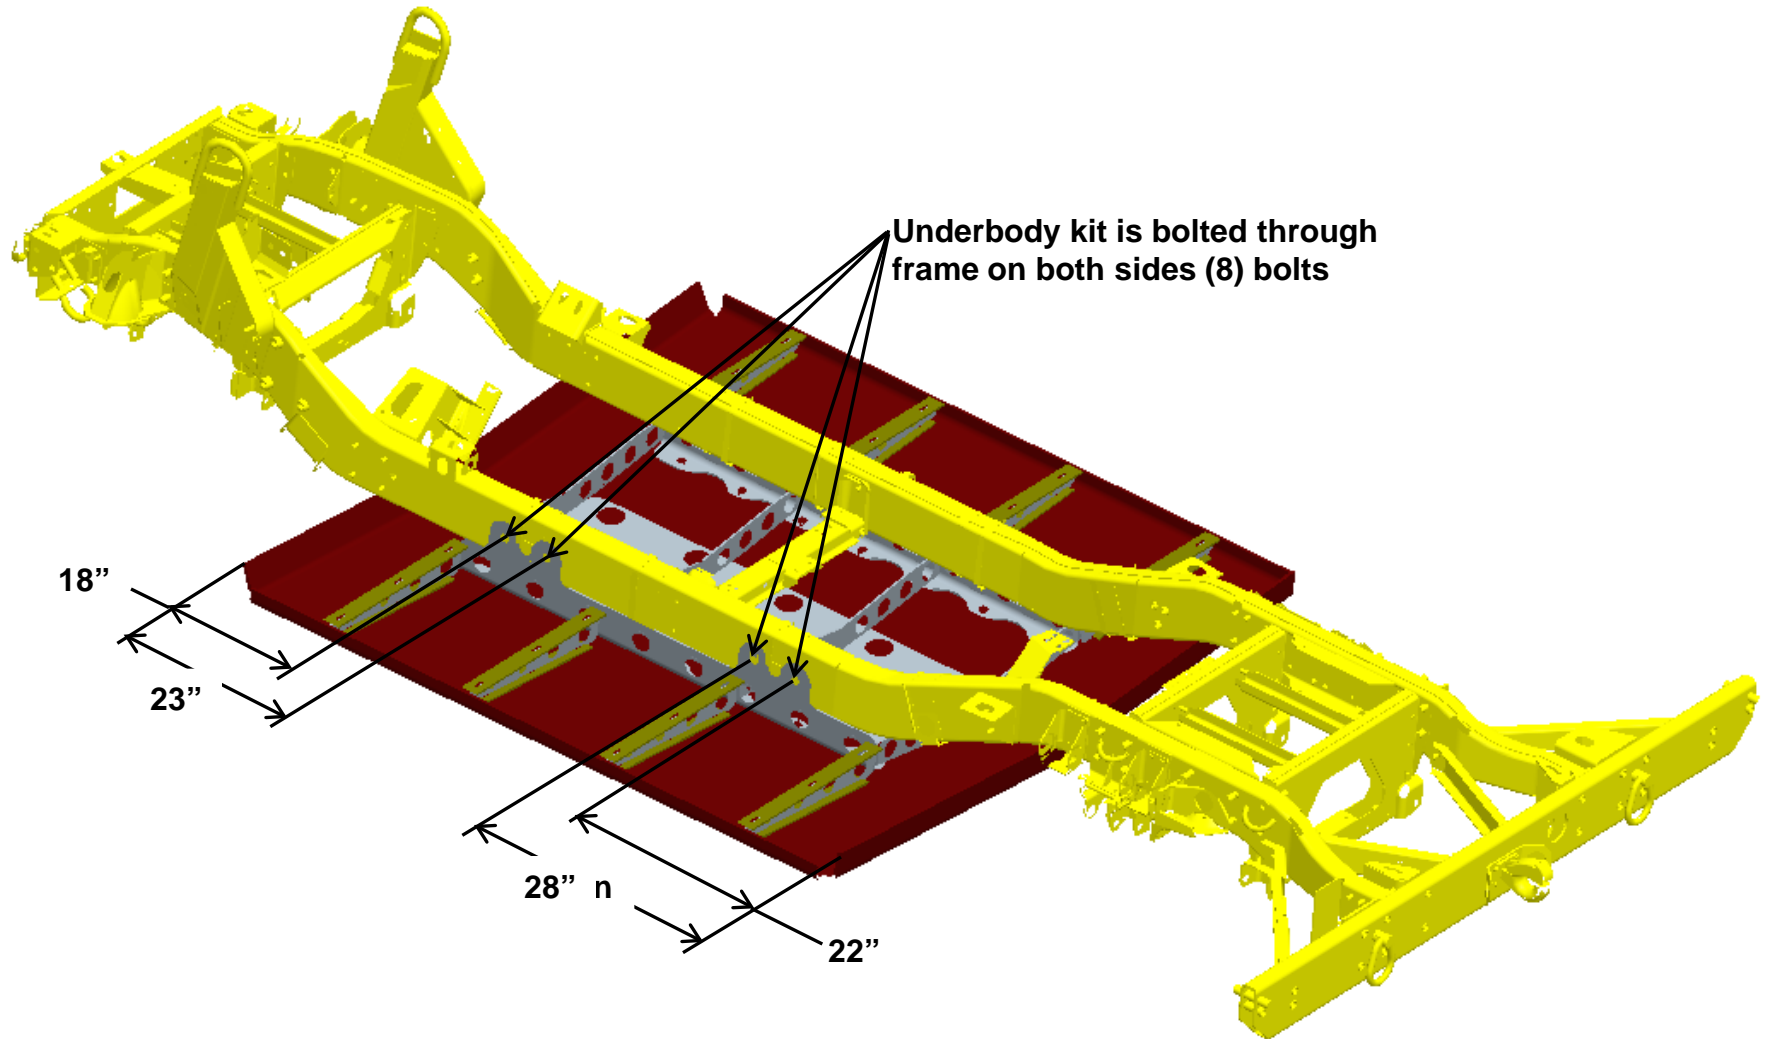


- During installation/removal of the underbody kit, the attachment locations are potentially difficult to reach.
- All 8 bolts are blind operation.

Fit and Function Analysis 9°

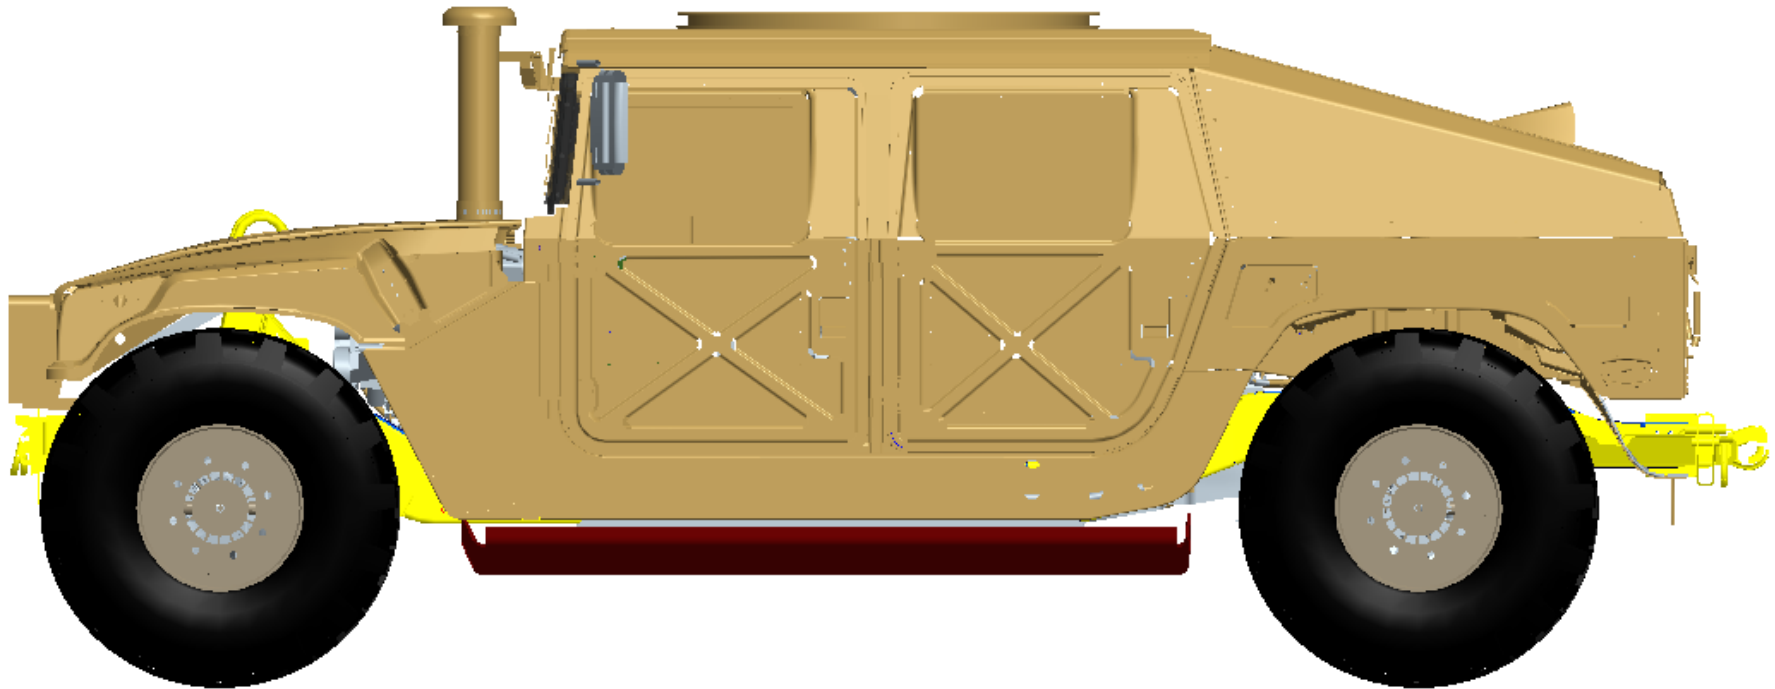

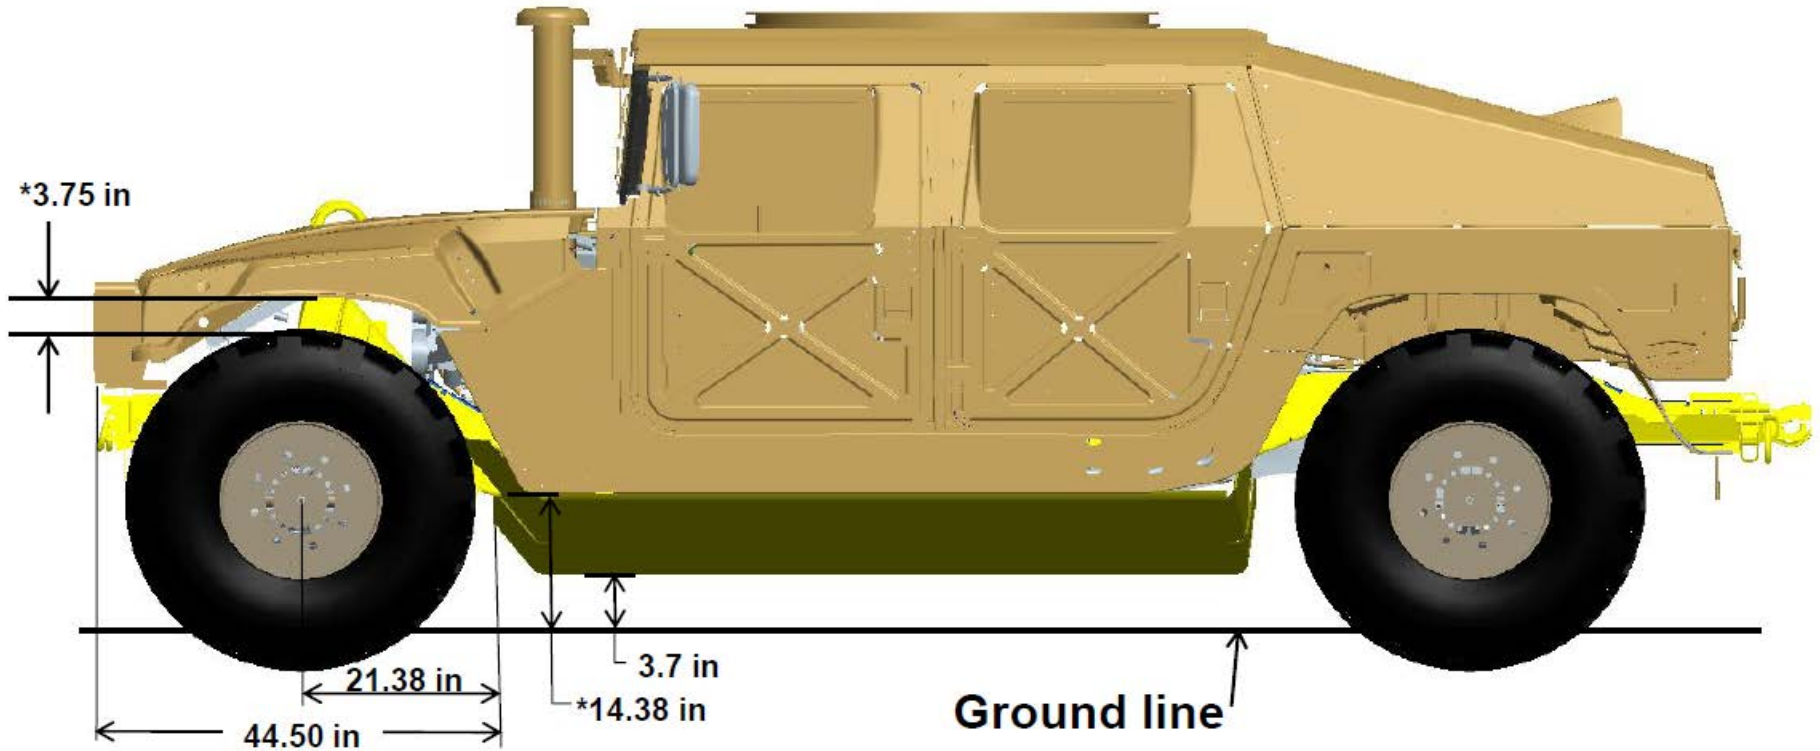

* Measured from actual vehicle

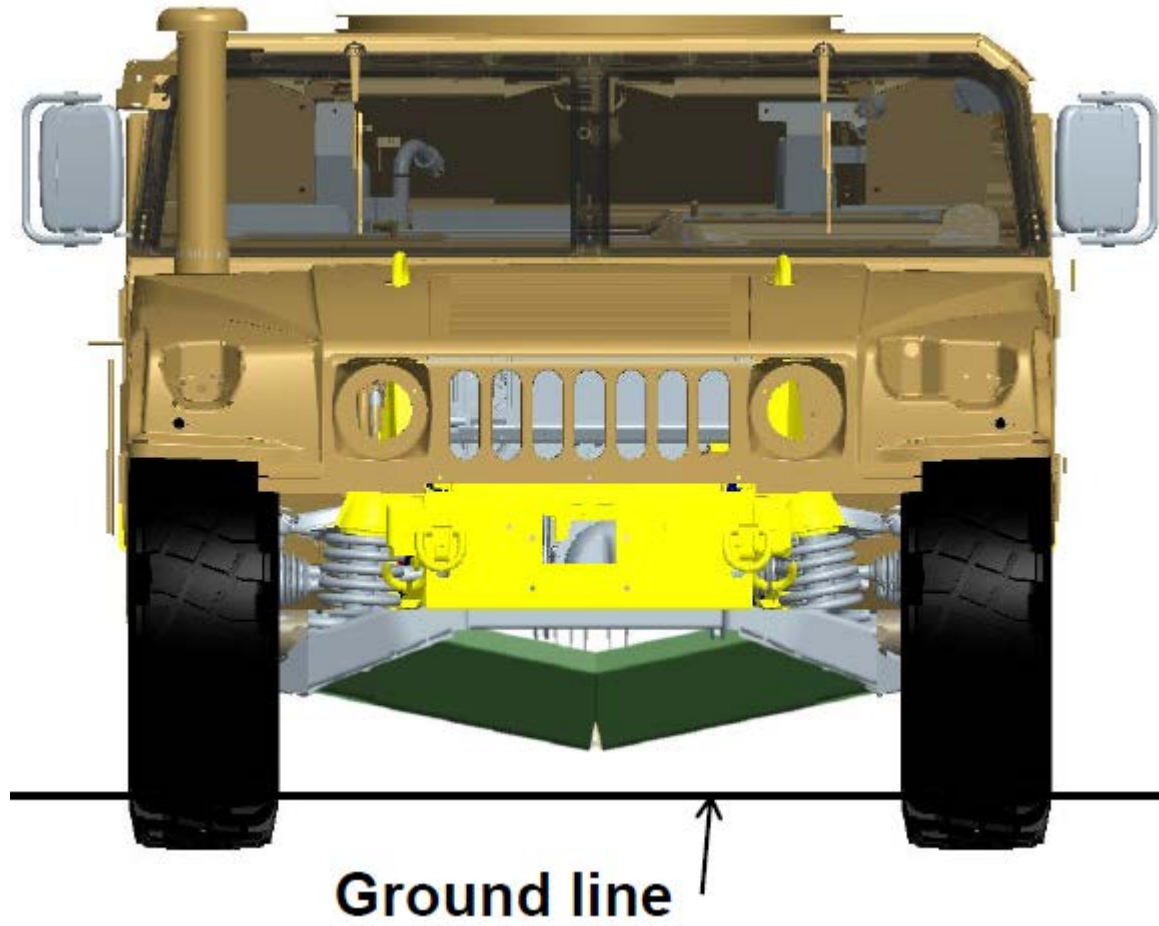

- During installation/removal of the underbody kit, the attachment locations are potentially difficult to reach.
- All 8 installation bolts are blind operation.
- Ground clearance is significantly reduced with the 24° belly plate

Mobility Analysis

Maneuver	Requirement	Baseline w/V-hull			Baseline w/OGPK & V-hull		
AVTP	43 MPH	44			42		
SS	40%	93.0			87.6		
RMS 1.00	30 MPH	50			50		
RMS 1.50	20 MPH	20			20		
RMS 2.00	15 MPH	10			10		
RMS 2.50	13 MPH	5			5		
HR4	50 MPH	50			50		
HR6	16 MPH	45			45		
HR8	15 MPH	35			35		
HR10	5 MPH	30			30		
CLEARANCE - HULL TO GROUND (IN)							
STEP	18 IN	Front	Middle	Rear	Front	Middle	Rear
	5	5.2	4.0	2.8	5.2	4.0	2.7
	6	5.0	3.5	2.0	5.0	3.5	2.0
	7	4.7	3.0	1.3	4.8	3.0	1.2
	8	4.5	2.5	0.5	4.6	2.5	0.5
	9	4.3	2.0	-0.2	4.3	2.0	-0.3
	10	4.0	1.5	-1.0	4.1	1.6	-1.0
	11	3.8	1.0	-1.7	3.9	1.1	-1.8
	12	3.6	0.6	-2.5	3.7	0.6	-2.5
	13	3.4	0.1	-3.2	3.4	0.1	-3.2
	14	3.1	-0.4	-4.0	3.2	-0.4	-4.0
	15	2.9	-0.9	-4.7	3.0	-0.9	-4.7
	16	2.7	-1.4	-5.5	2.8	-1.4	-5.5
	17	2.5	-1.9	-6.2	2.6	-1.8	-6.2
	18	2.3	-2.3	-6.9	2.3	-2.3	-7.0
	19	2.0	-2.8	-7.7	2.1	-2.8	-7.7
	20	1.8	-3.3	-8.4	1.9	-3.3	-8.4


Mobility Analysis

Maneuver	Requirement	Baseline w/V-hull			Baseline w/OGPK & V-hull		
		Front	Middle	Rear	Front	Middle	Rear
STEP	18 IN	CLEARANCE - HULL TO GROUND (IN)					
	5	1.3	0.1	-1.1	1.3	0.1	-1.2
	6	1.1	-0.4	-1.9	1.1	-0.4	-1.9
	7	0.8	-0.9	-2.6	0.9	-0.9	-2.7
	8	0.6	-1.4	-3.4	0.7	-1.4	-3.4
	9	0.4	-1.9	-4.1	0.4	-1.9	-4.2
	10	0.1	-2.4	-4.9	0.2	-2.3	-4.9
	11	-0.1	-2.9	-5.6	0.0	-2.8	-5.6
	12	-0.3	-3.3	-6.4	-0.2	-3.3	-6.4
	13	-0.5	-3.8	-7.1	-0.5	-3.8	-7.1
	14	-0.8	-4.3	-7.8	-0.7	-4.3	-7.9
	15	-1.0	-4.8	-8.6	-0.9	-4.7	-8.6
	16	-1.2	-5.2	-9.3	-1.1	-5.2	-9.3
	17	-1.4	-5.7	-10.1	-1.3	-5.7	-10.1
	18	-1.6	-6.2	-10.8	-1.5	-6.2	-10.8
	19	-1.8	-6.7	-11.5	-1.7	-6.6	-11.5
	20	-2.0	-7.1	-12.3	-2.0	-7.1	-12.3


- With the V-hull configuration, **performance improved** for Double Lane Change Maneuver (AVTP) , Side Slope, Ride Quality, and Shock Quality due to lower CG height and increased weight. However, for course roughness's greater than 2.0" RMS and bump heights greater than 8" HR (Half Round) ground/hull **interference occurred.**
- With the V-hull configuration, **performance was reduced** for the Vertical Step due to ground/hull interference
- **Biggest risk is reduction in mobility over obstacles for the V-hull configuration**

- **The following slides illustrate blast simulations for both the 9° and 24° V-Hull Designs**


LS-DYNA keyword deck by LS-PrePost
Time = 0

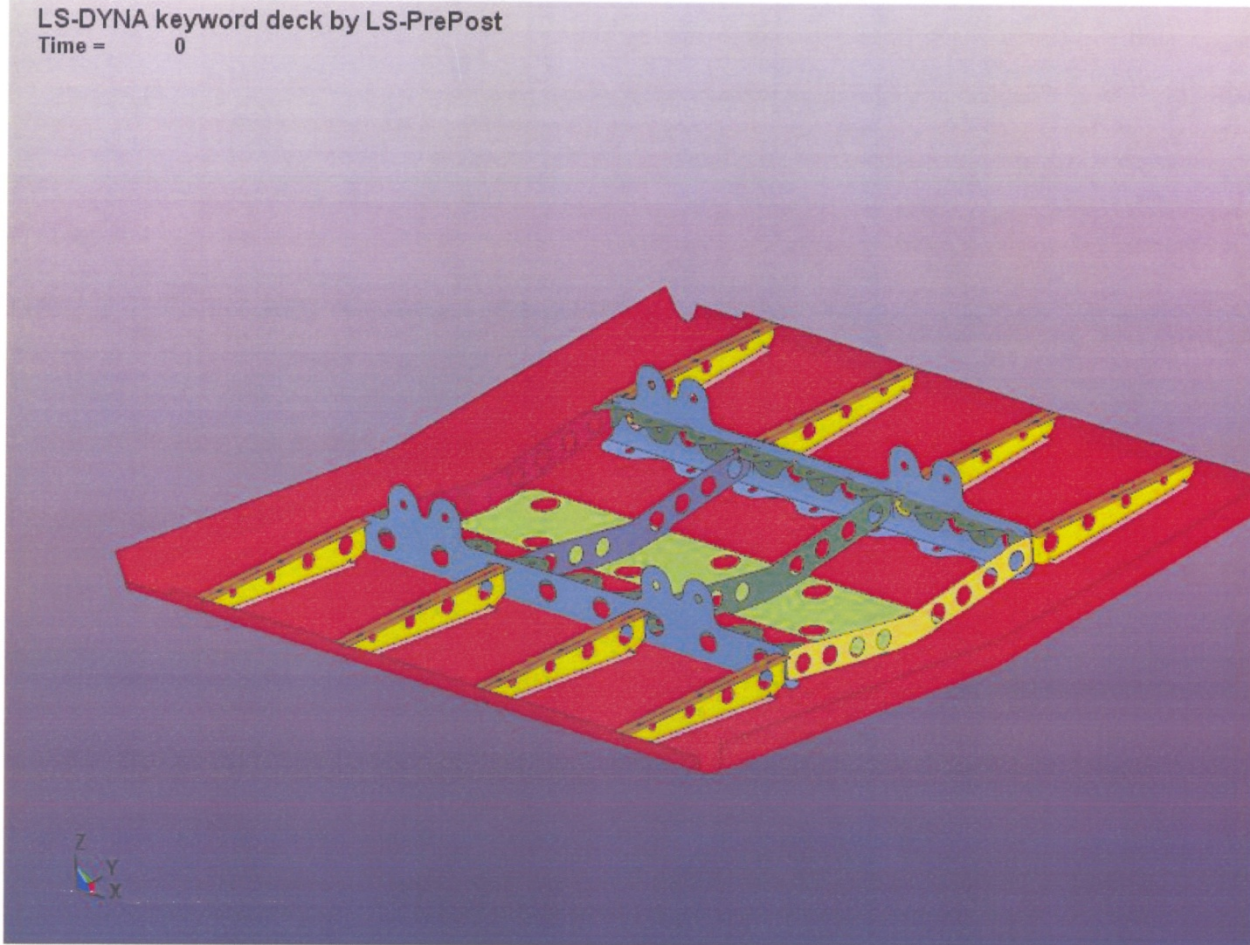


LS-DYNA keyword deck by LS-PrePost
Time = 0.00012492

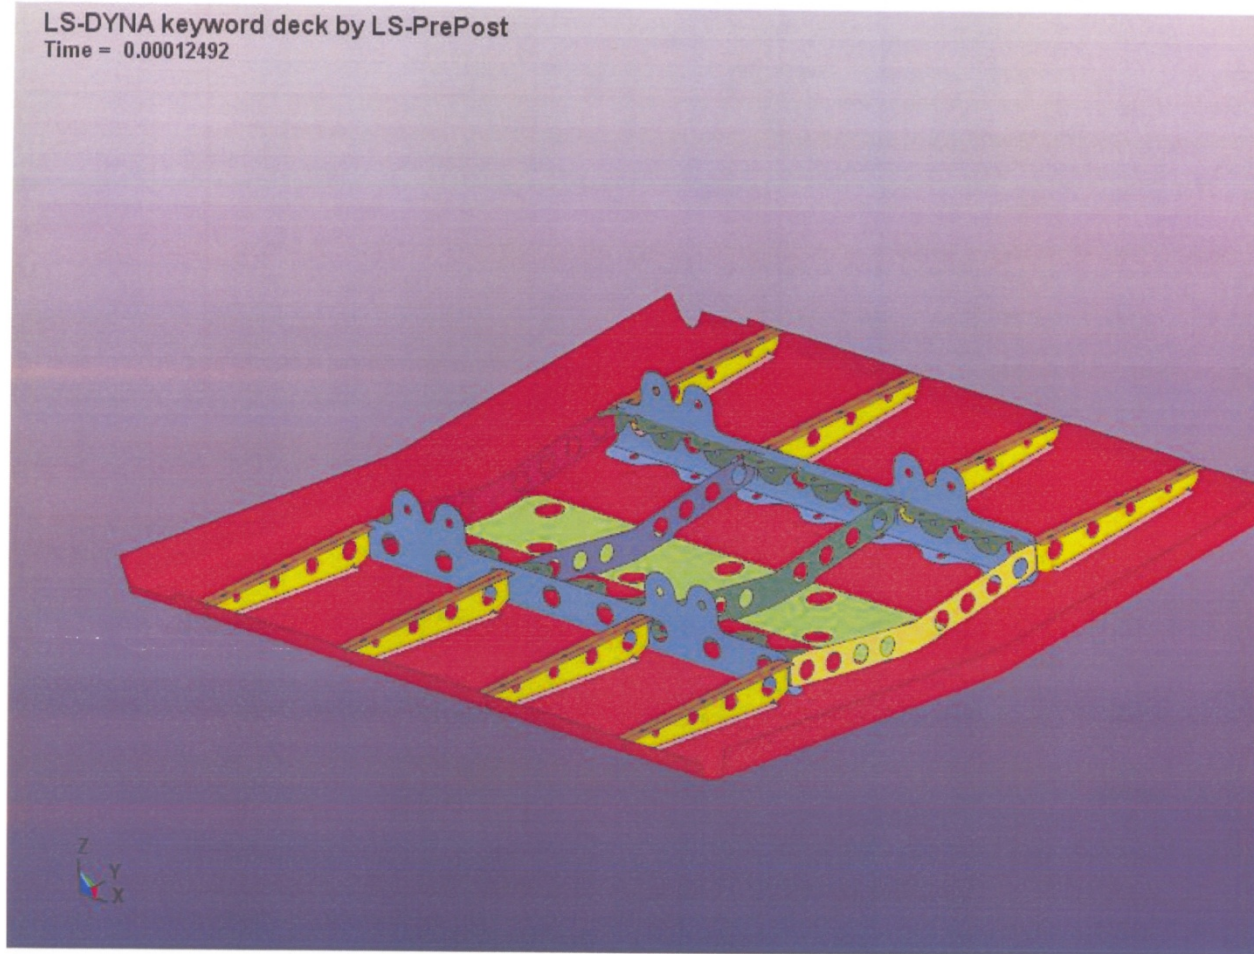


LS-DYNA keyword deck by LS-PrePost
Time = 0.00019998

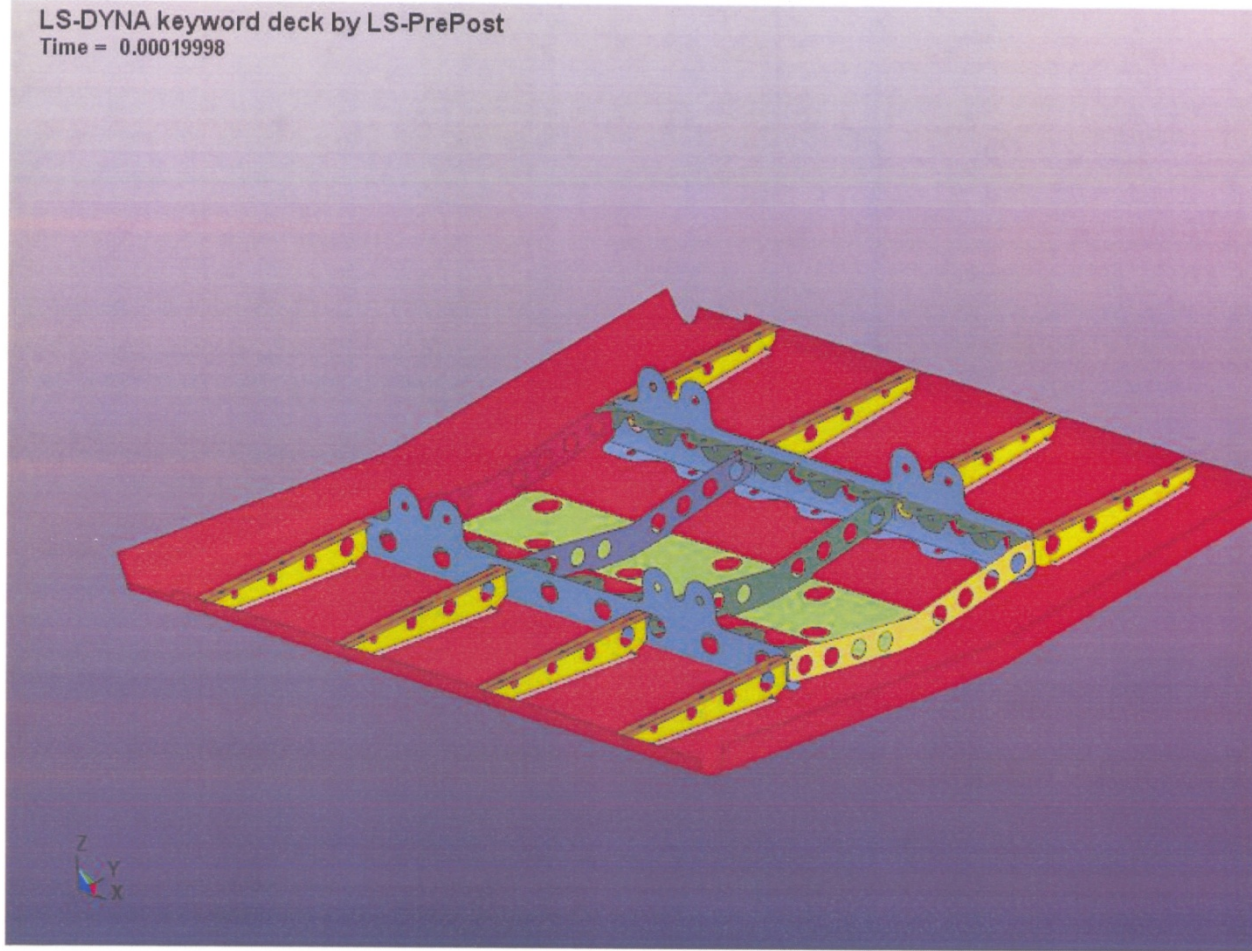


LS-DYNA keyword deck by LS-PrePost
Time = 0.00027486

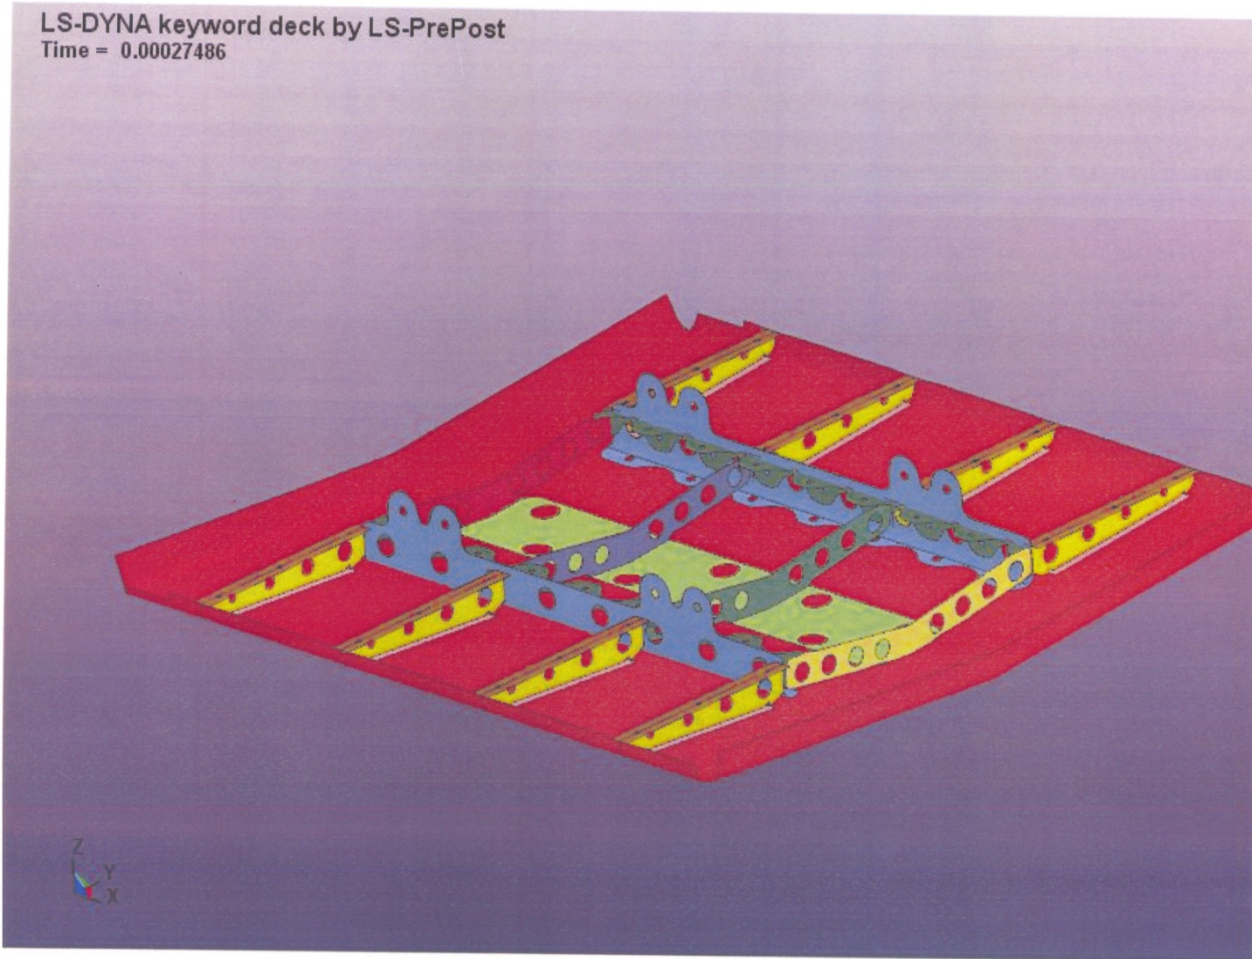


LS-DYNA keyword deck by LS-PrePost
Time = 0.00034992

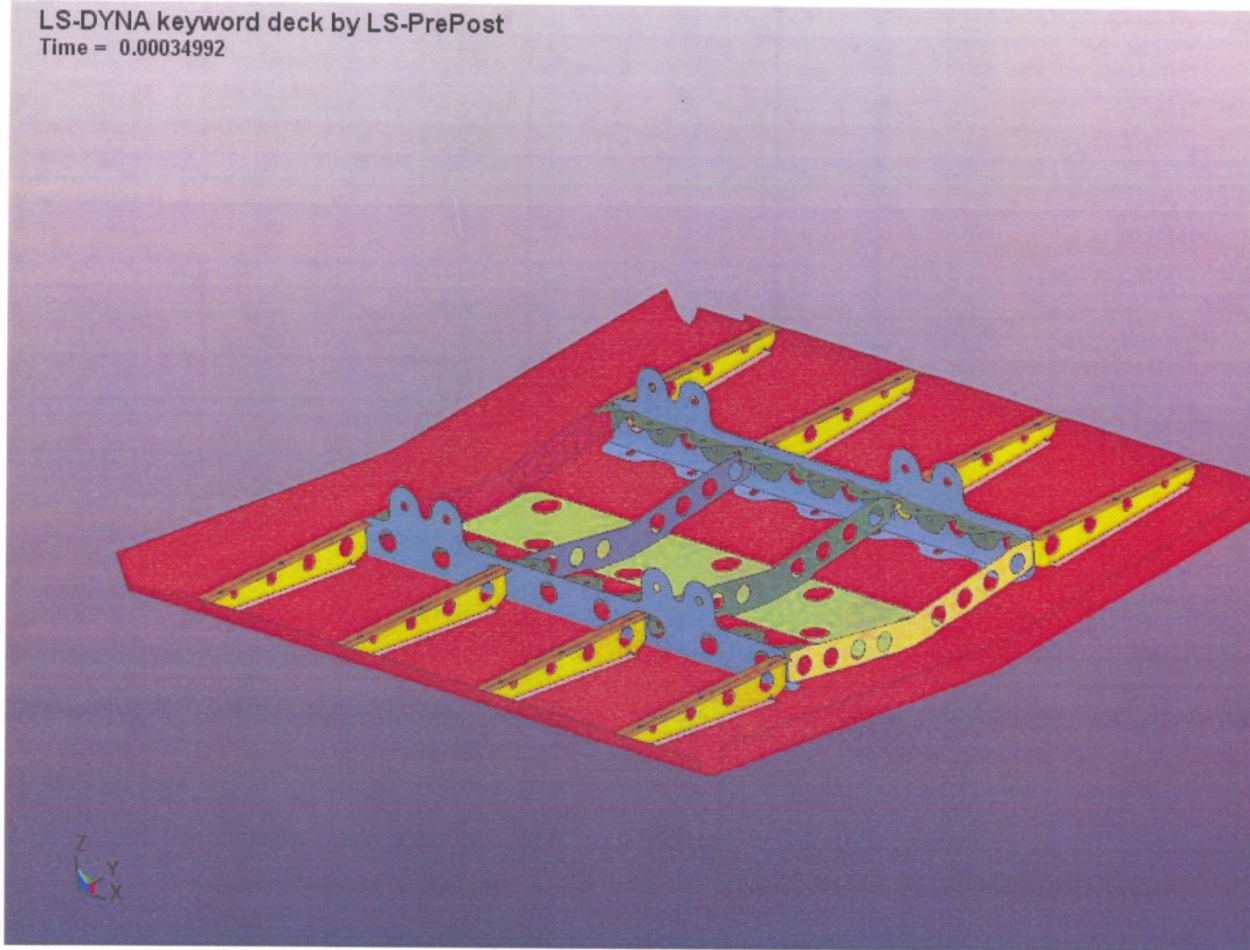


LS-DYNA keyword deck by LS-PrePost
Time = 0.00044982

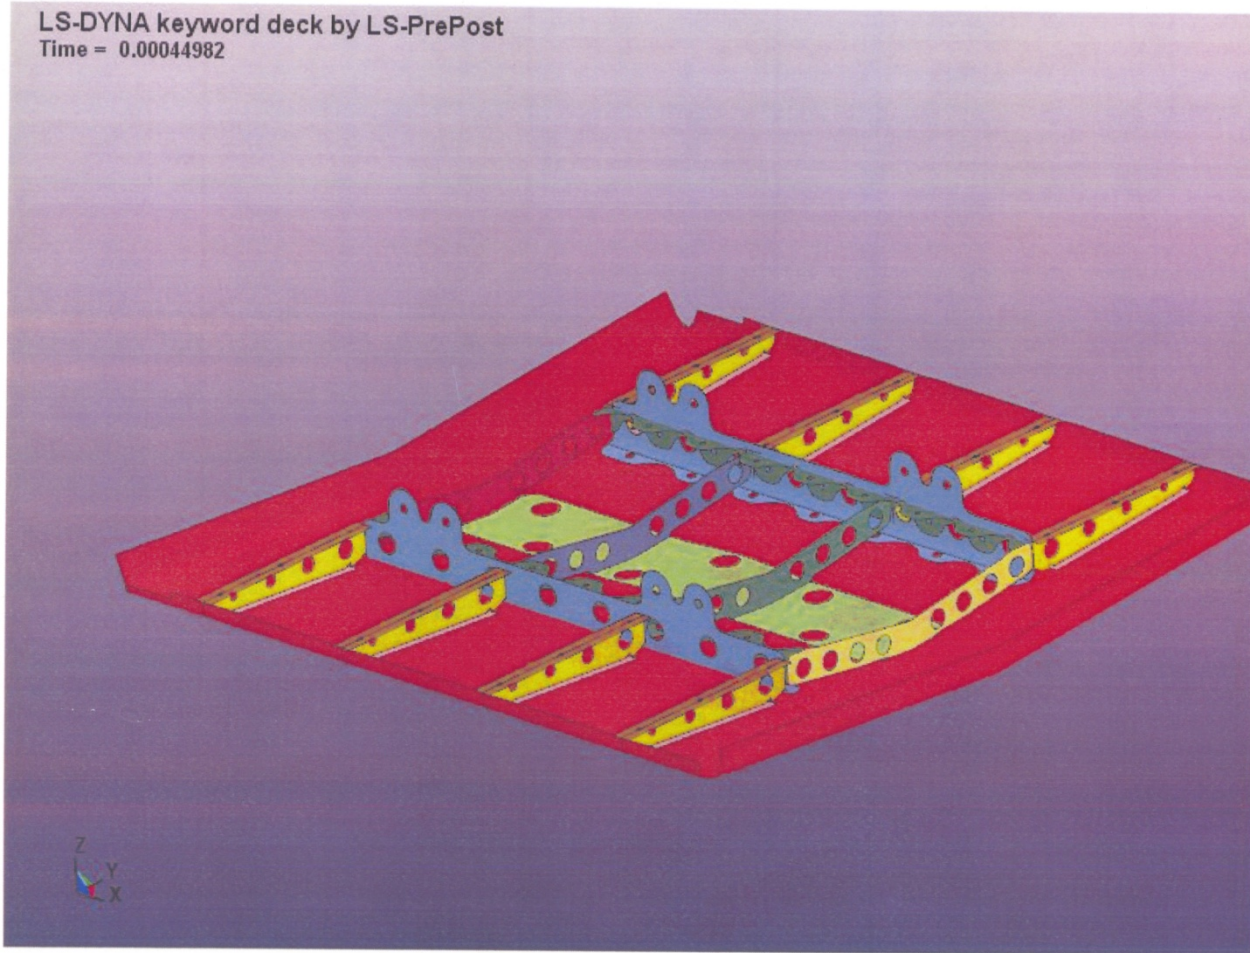


LS-DYNA keyword deck by LS-PrePost
Time = 0.00052488

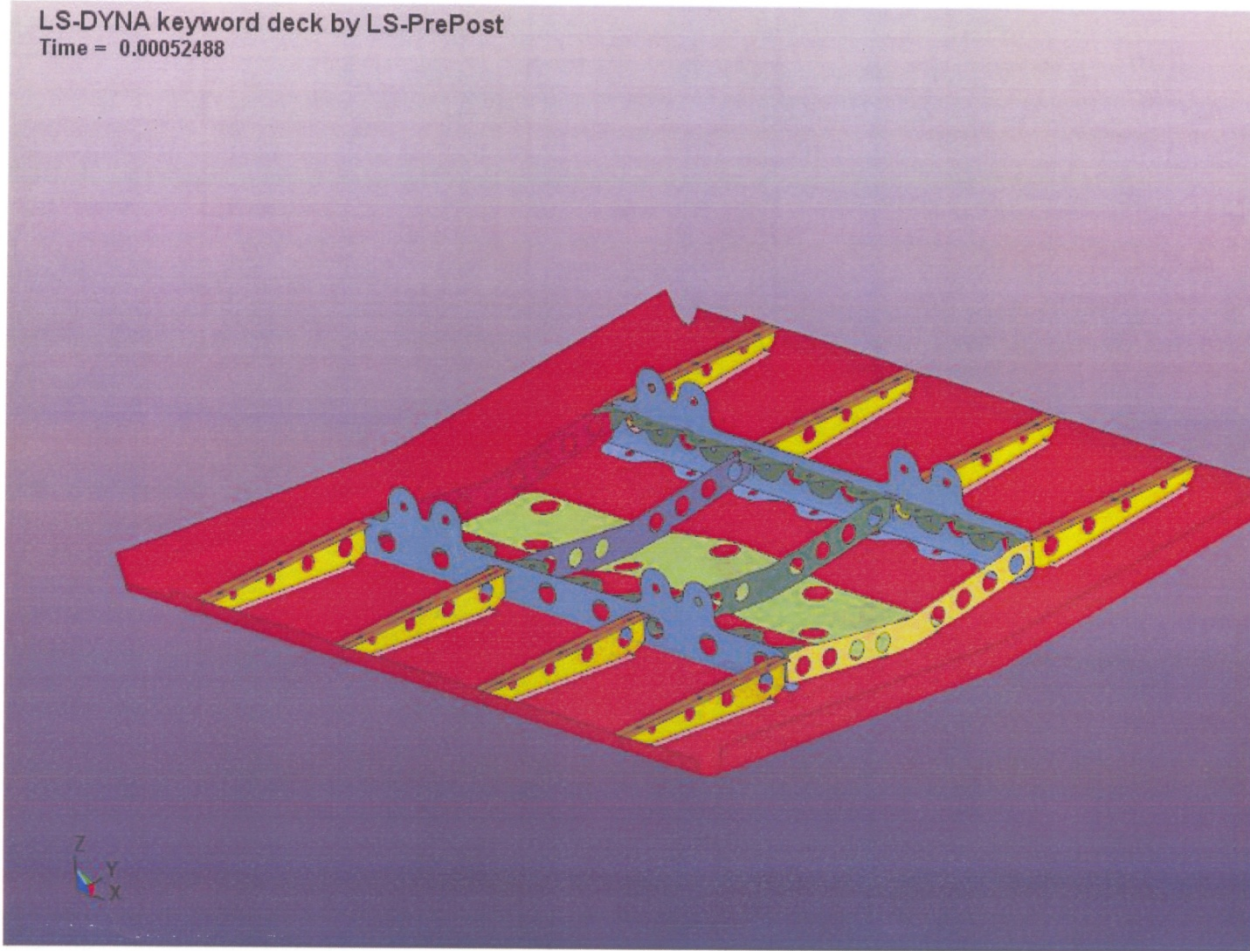


LS-DYNA keyword deck by LS-PrePost
Time = 0.00059994

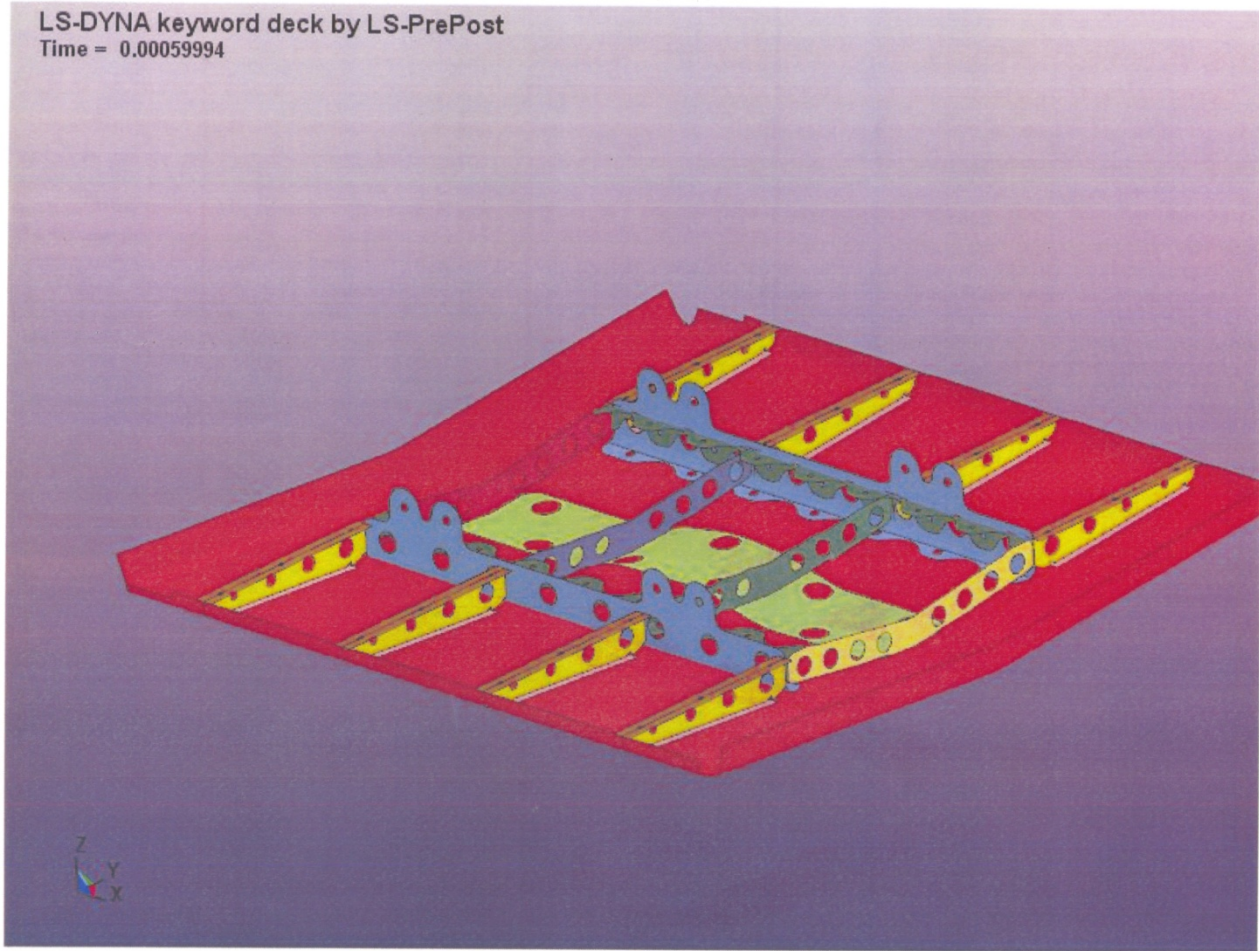


LS-DYNA keyword deck by LS-PrePost
Time = 0.00074988

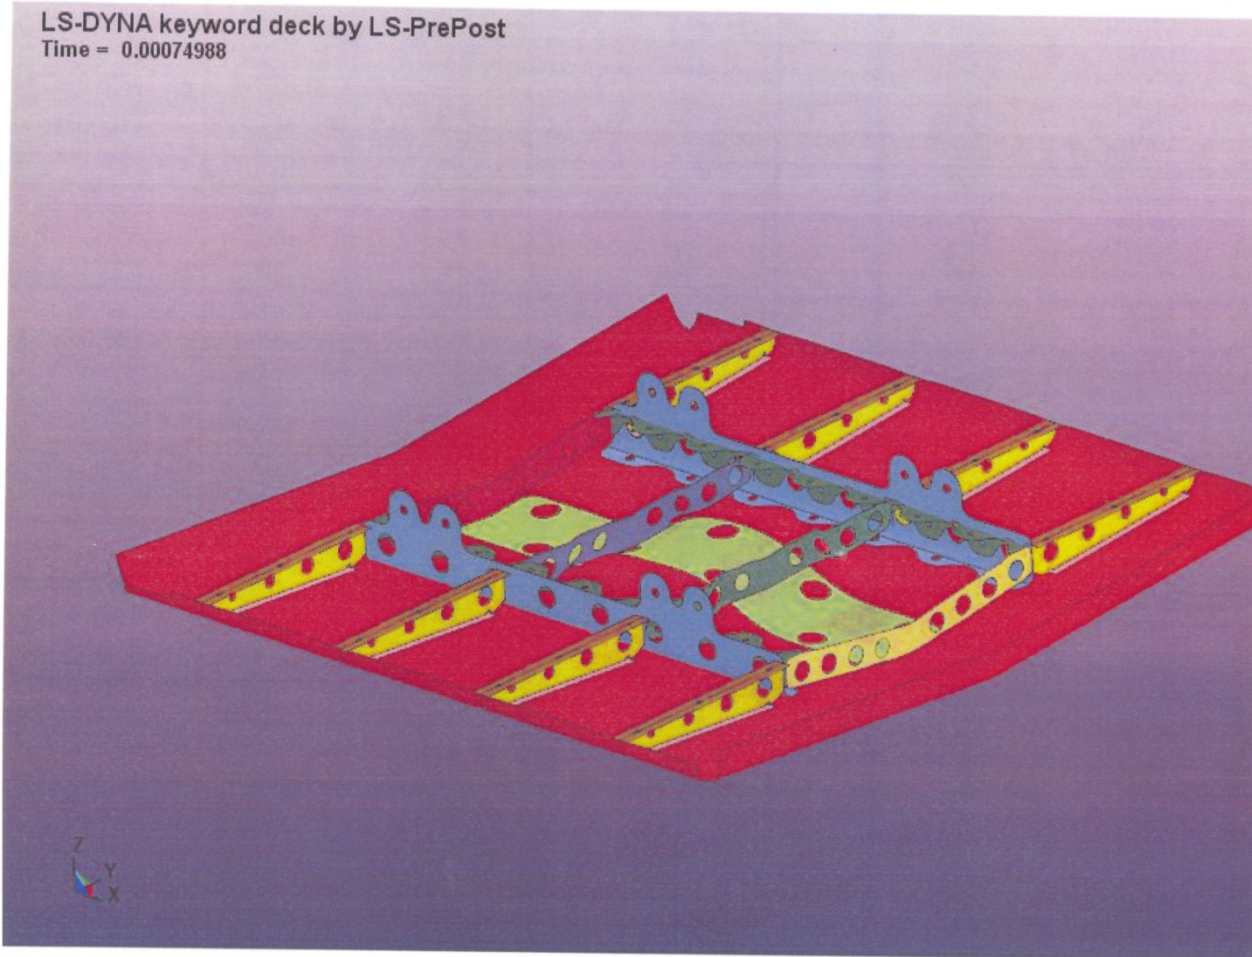


LS-DYNA keyword deck by LS-PrePost
Time = 0.00089982

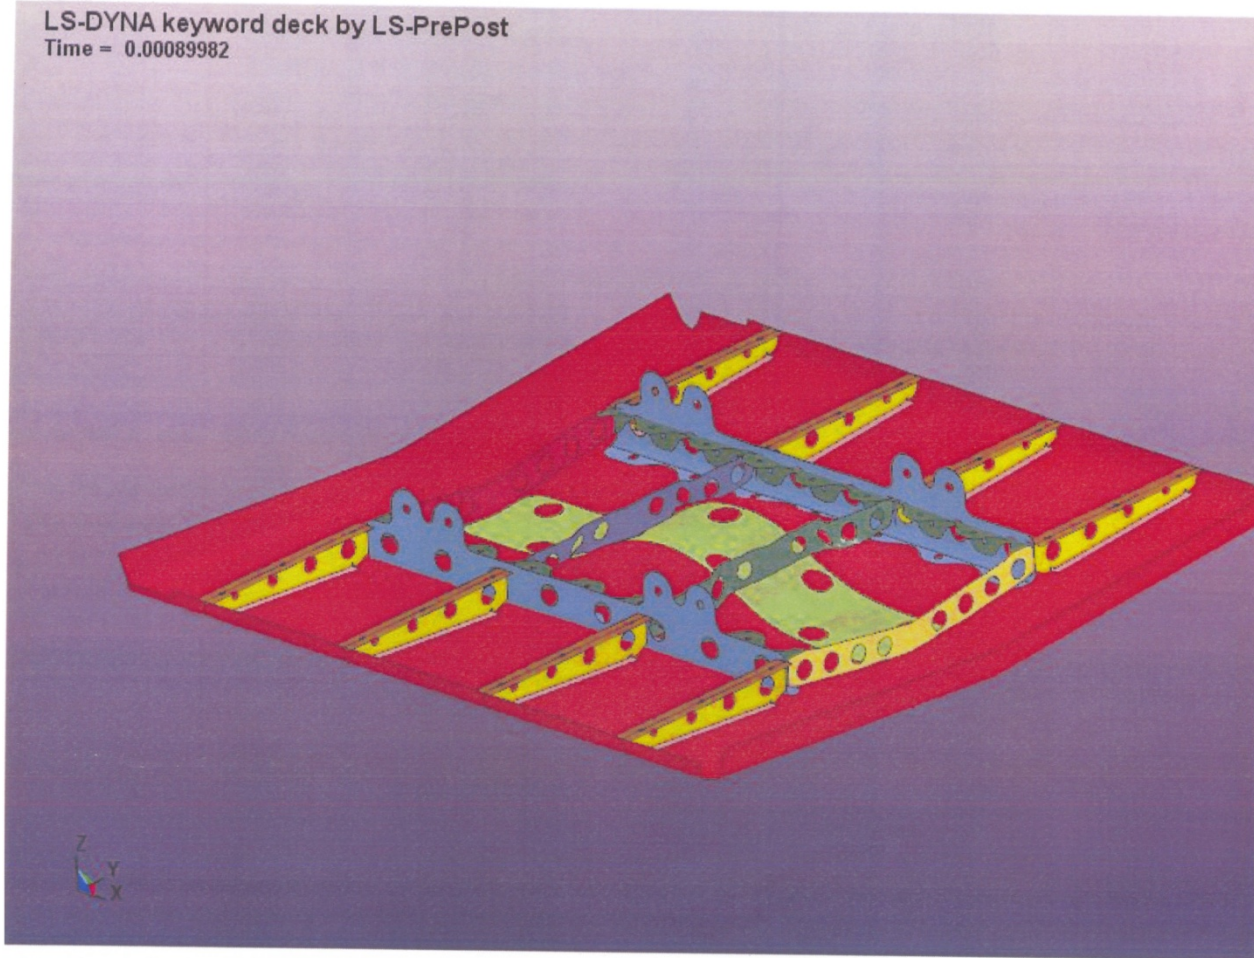


LS-DYNA keyword deck by LS-PrePost
Time = 0.0014999

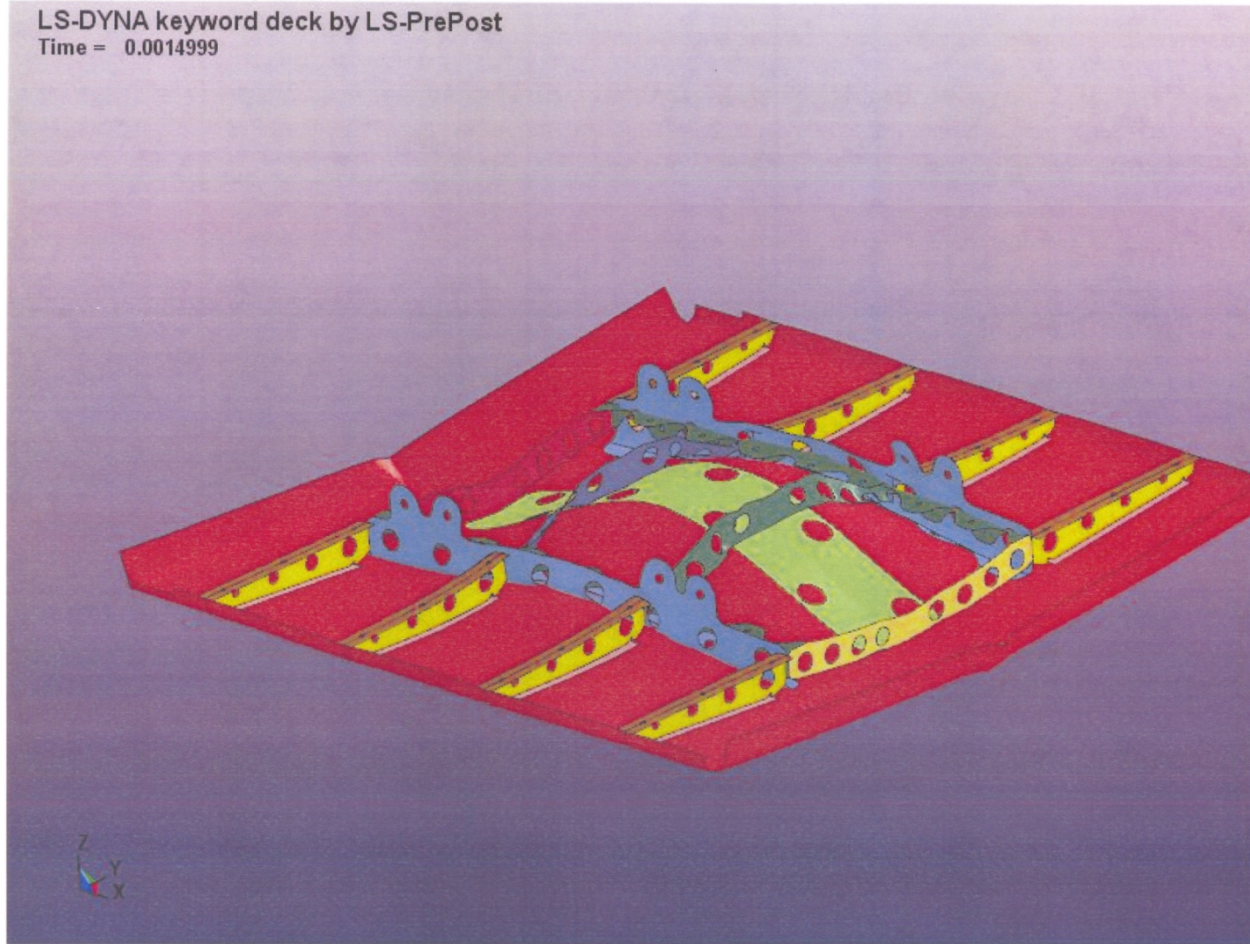


LS-DYNA keyword deck by LS-PrePost
Time = 0.0029999

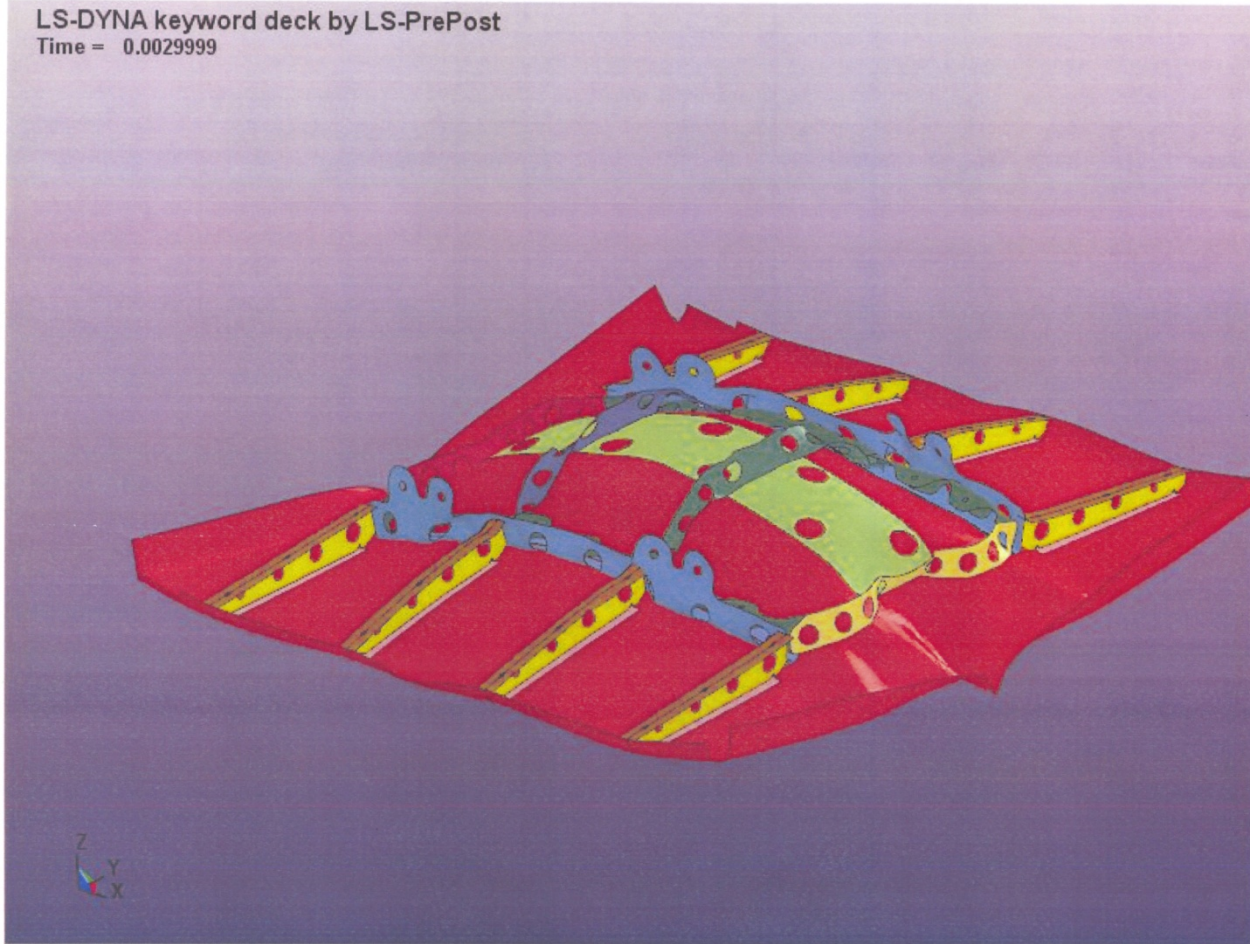


LS-DYNA keyword deck by LS-PrePost
Time = 0.0044998

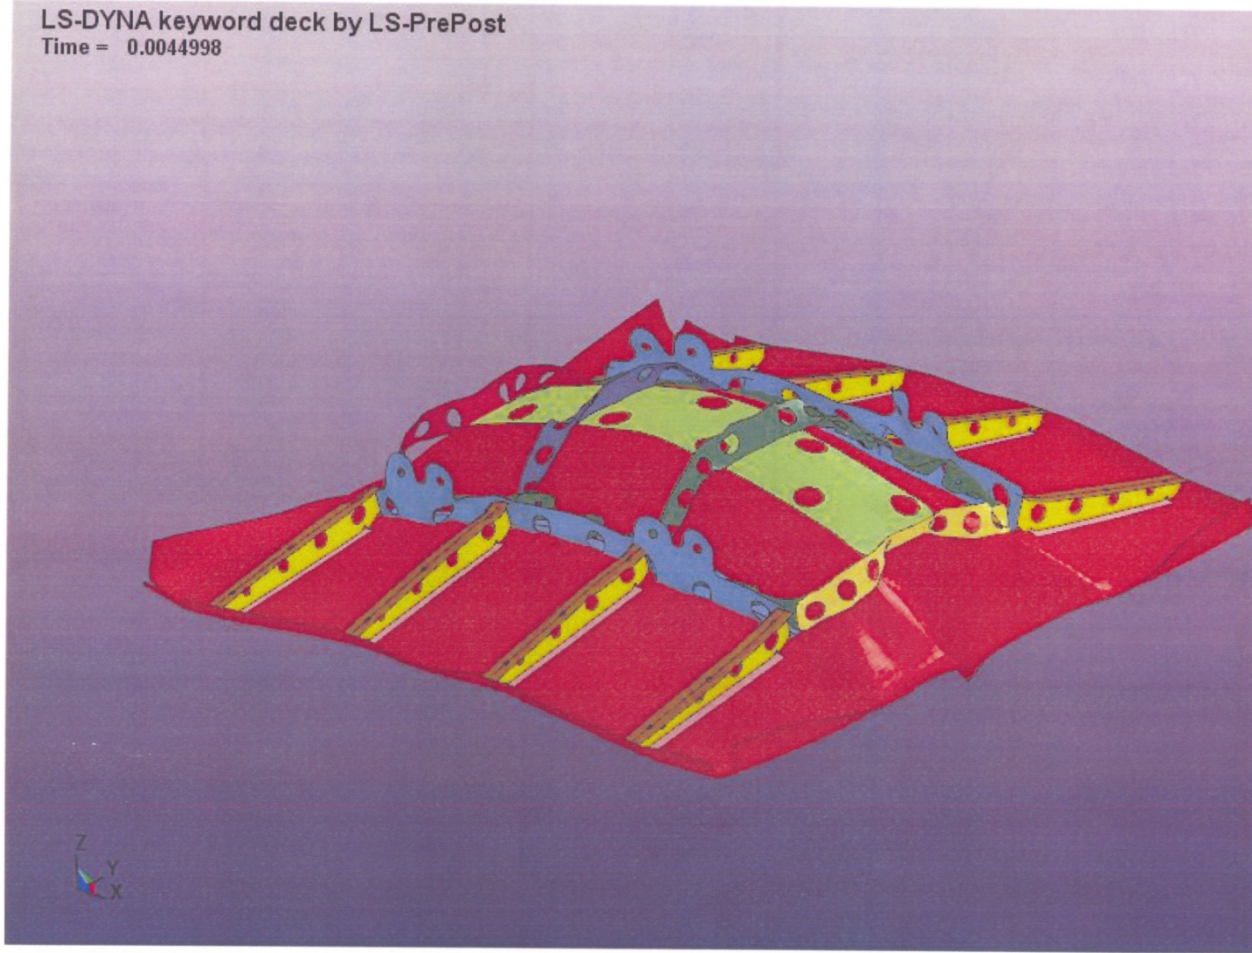


LS-DYNA keyword deck by LS-PrePost
Time = 0.0059999

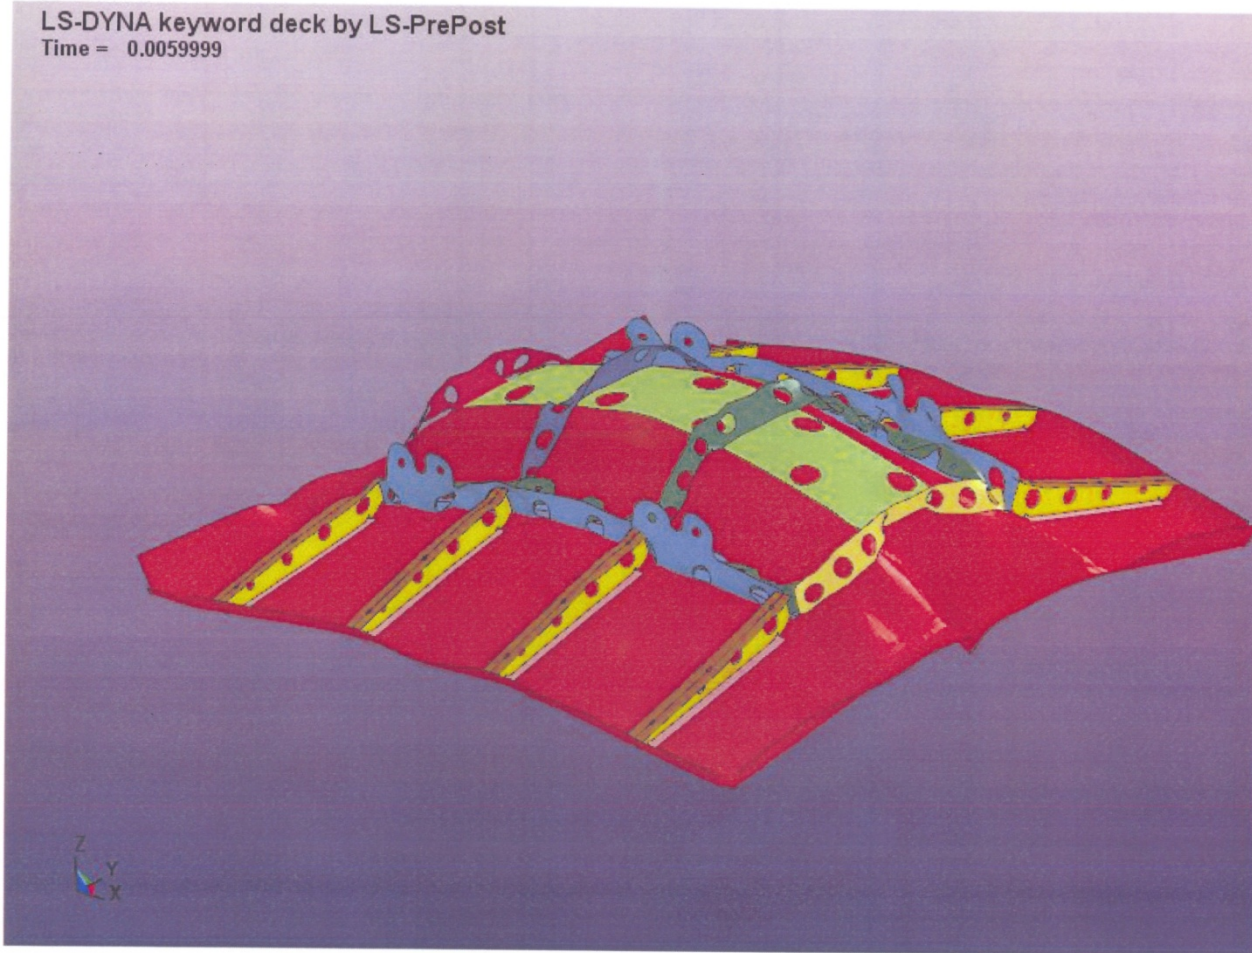


LS-DYNA keyword deck by LS-PrePost
Time = 0.0089998

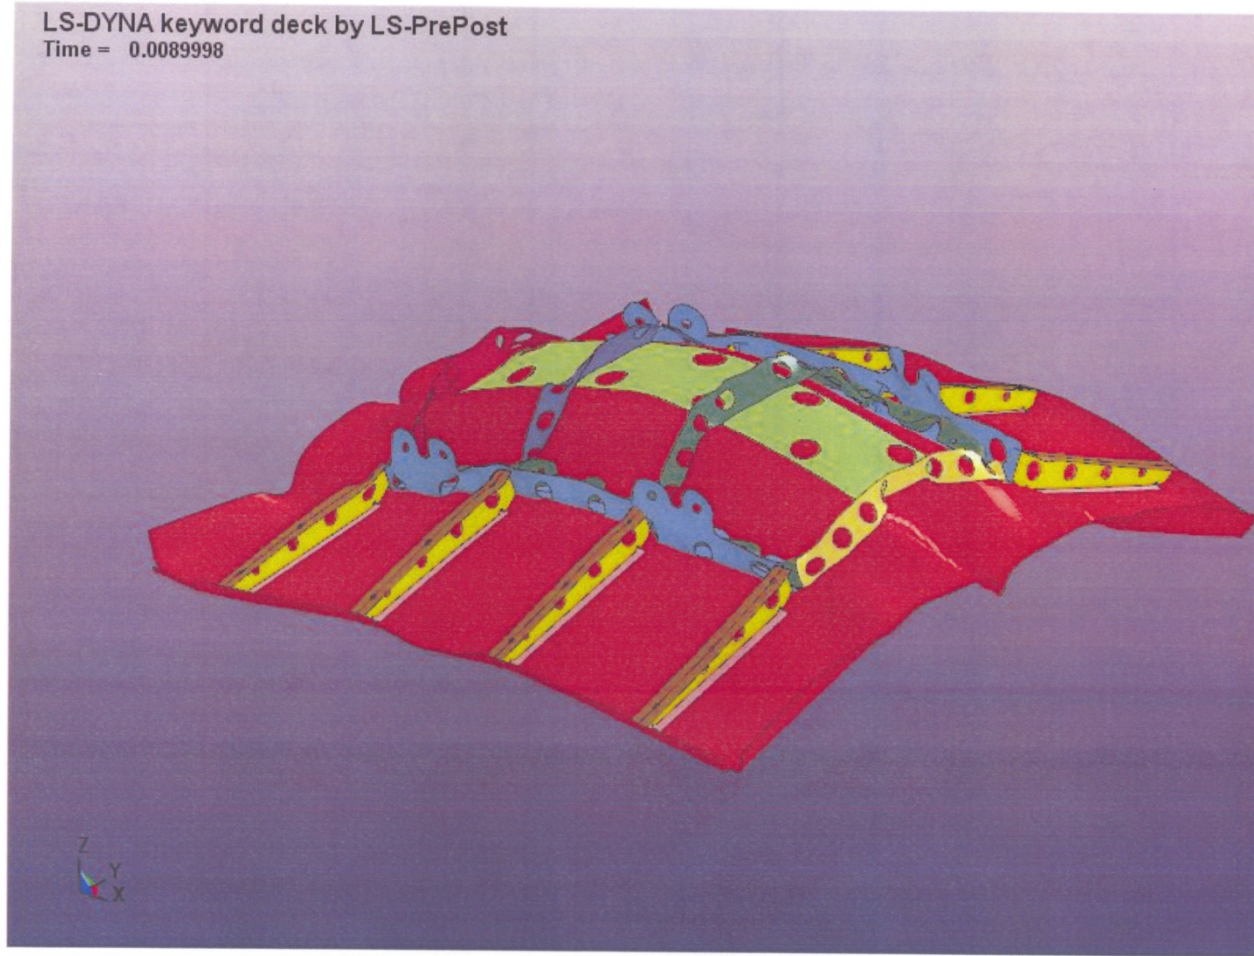


LS-DYNA keyword deck by LS-PrePost
Time = 0.015

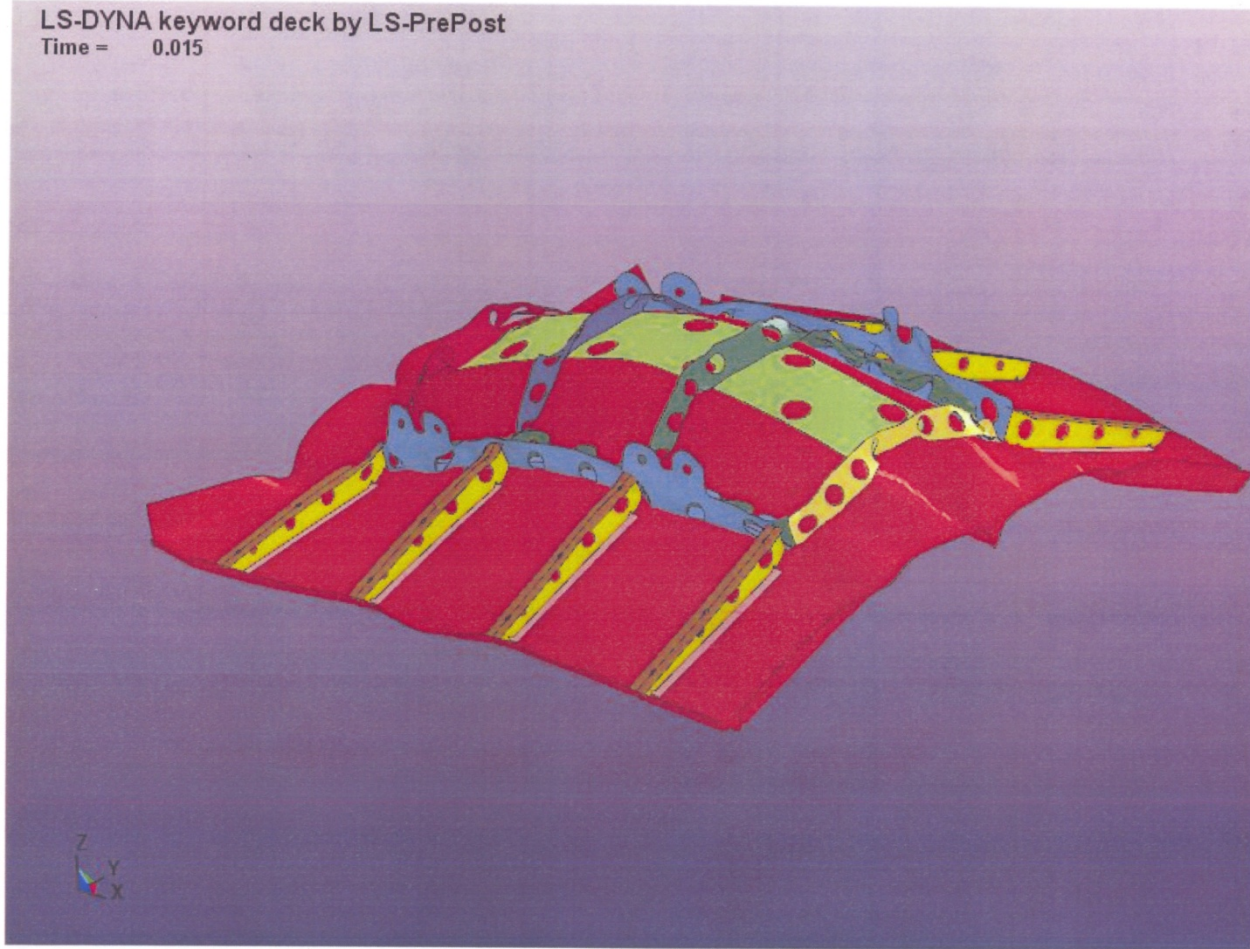


LS-DYNA keyword deck by LS-PrePost
Time = 0.0225

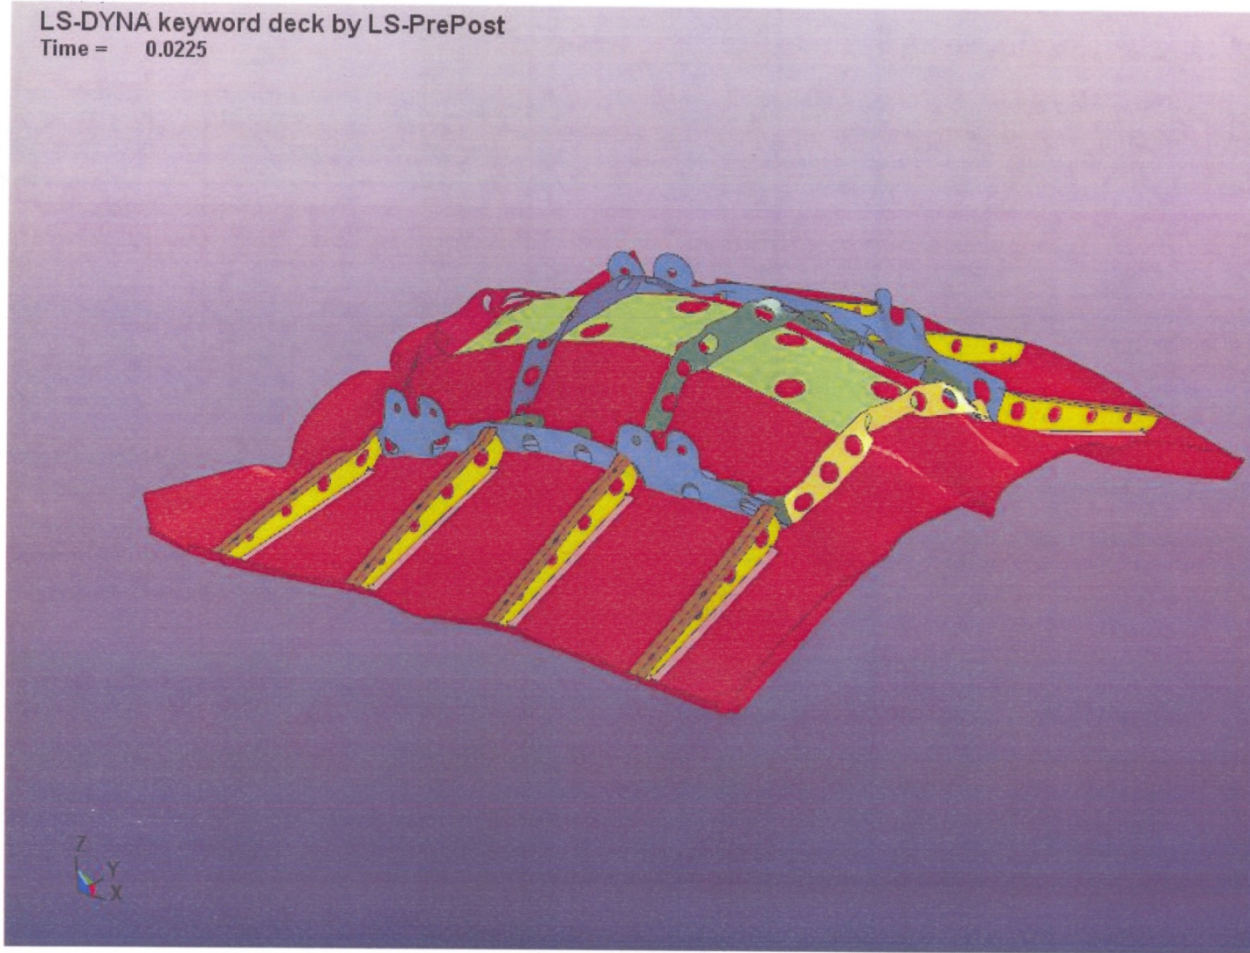


LS-DYNA keyword deck by LS-PrePost
Time = 0.03

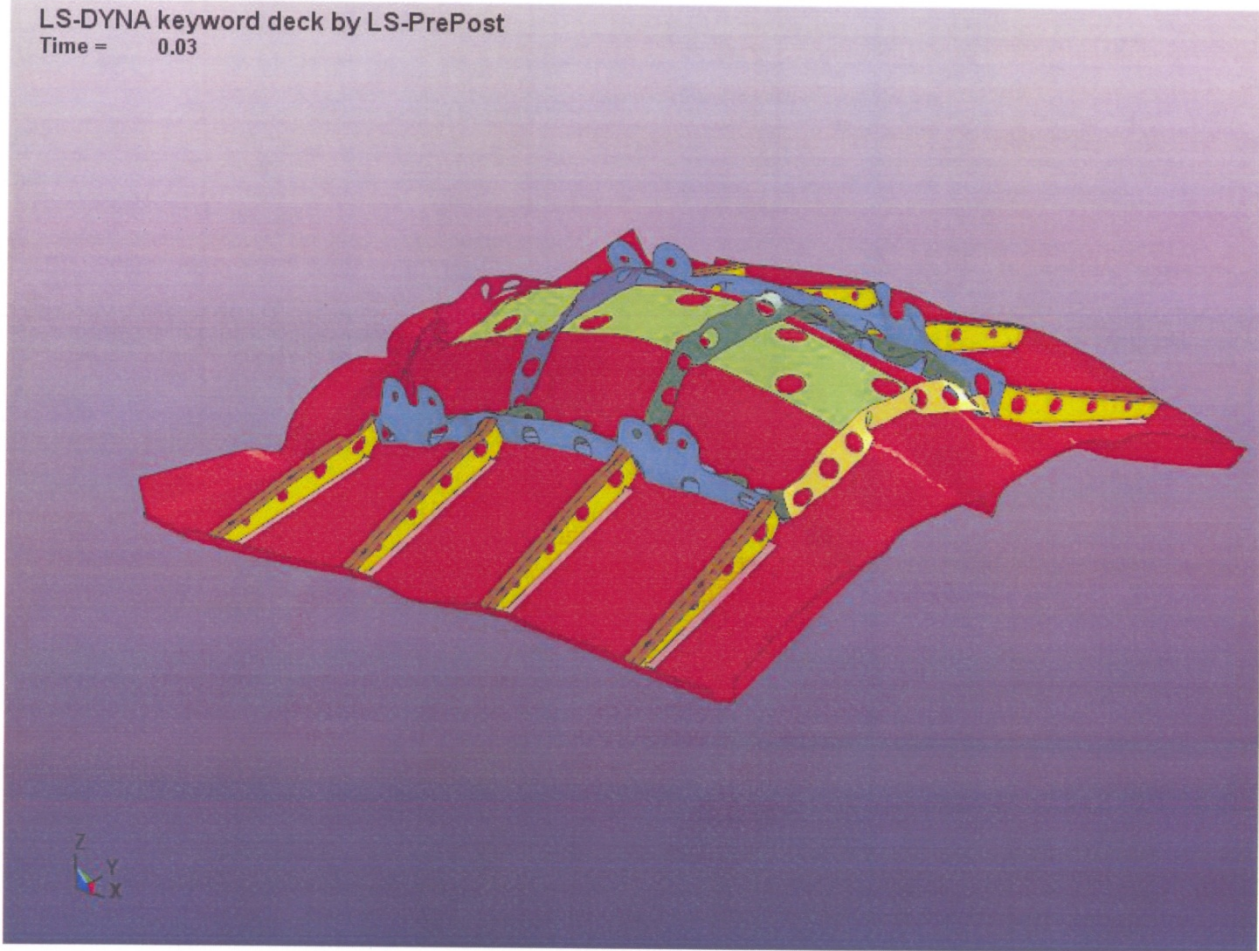


LS-DYNA keyword deck by LS-PrePost
Time = 0.0375

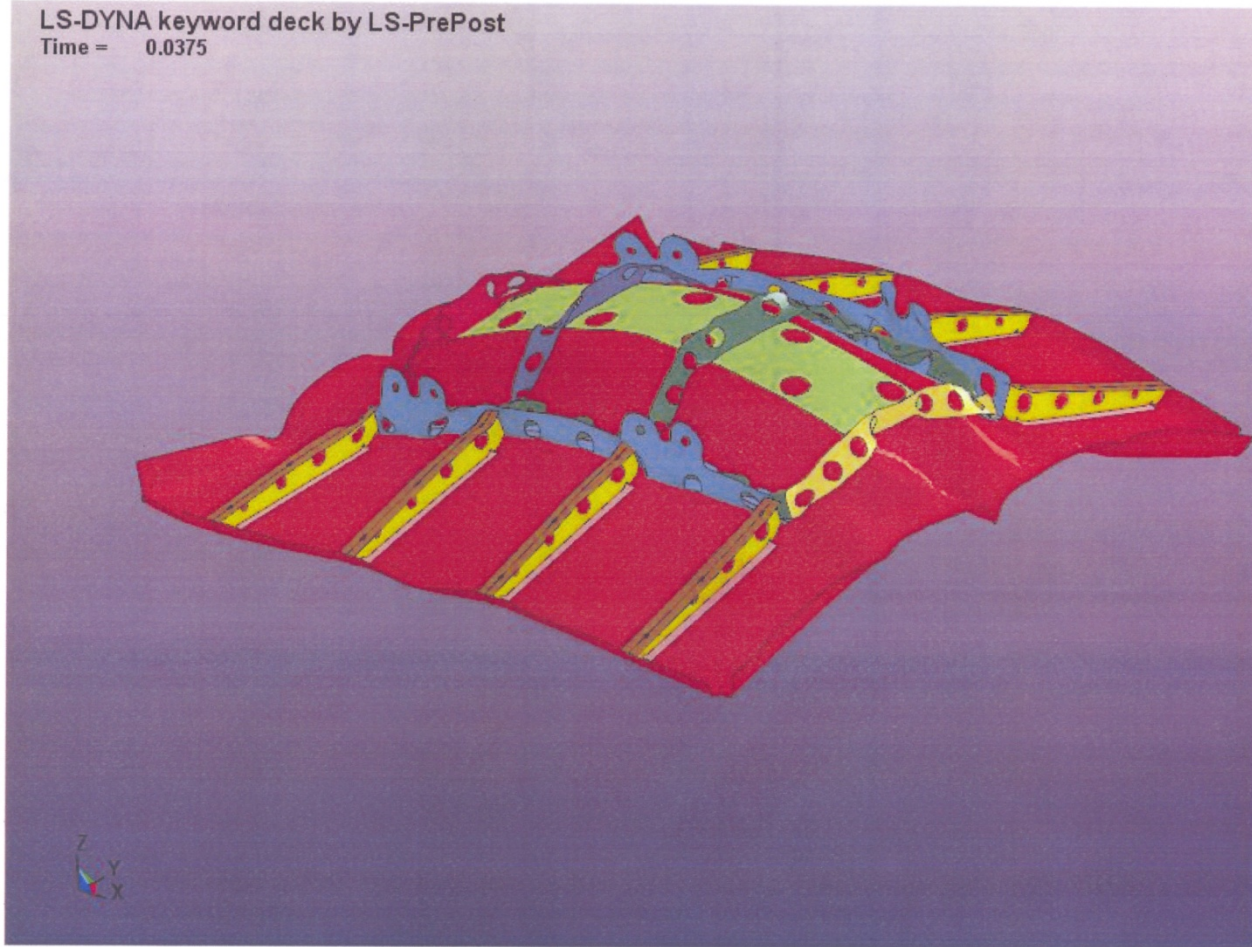

LS-DYNA keyword deck by LS-PrePost
Time = 0.045

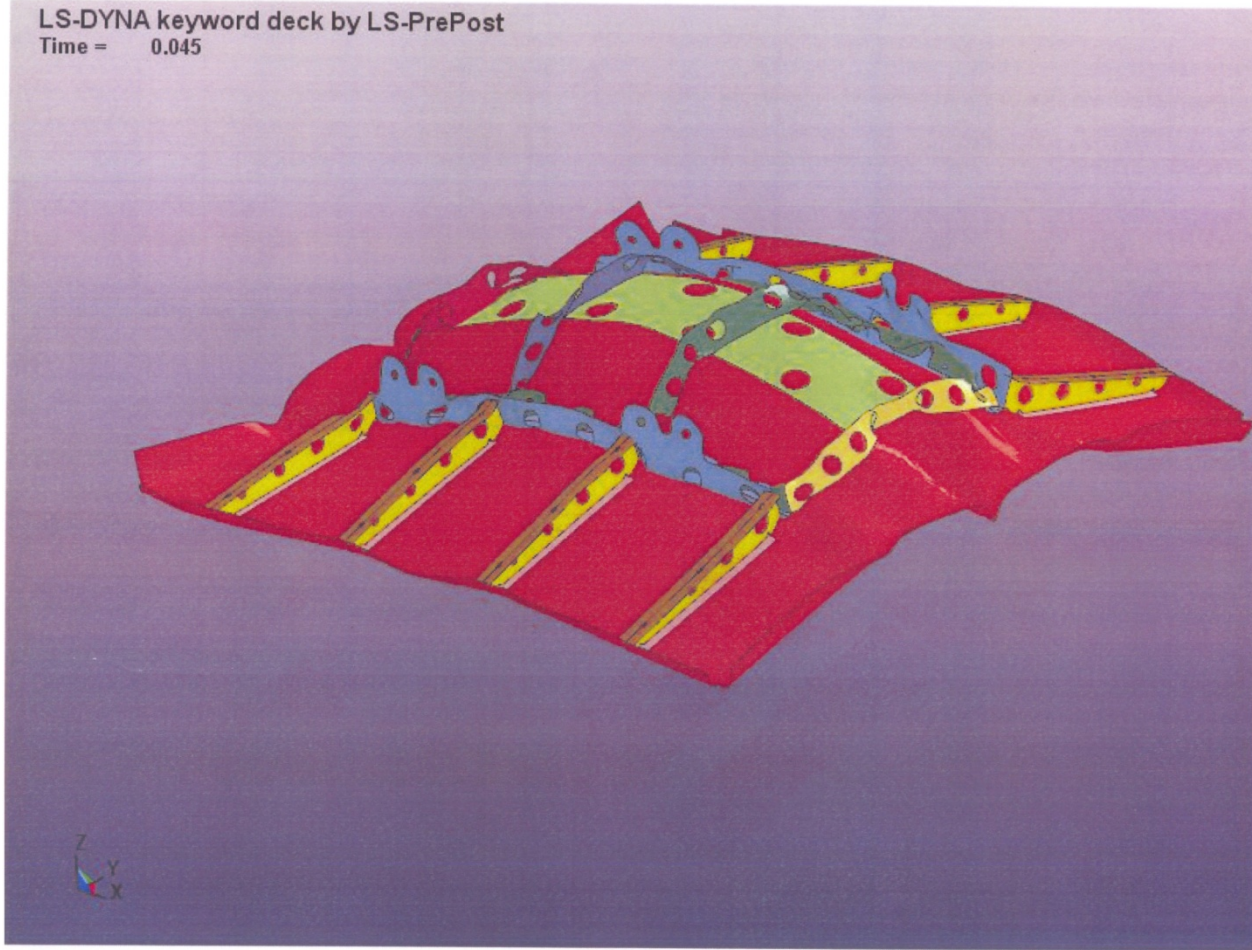


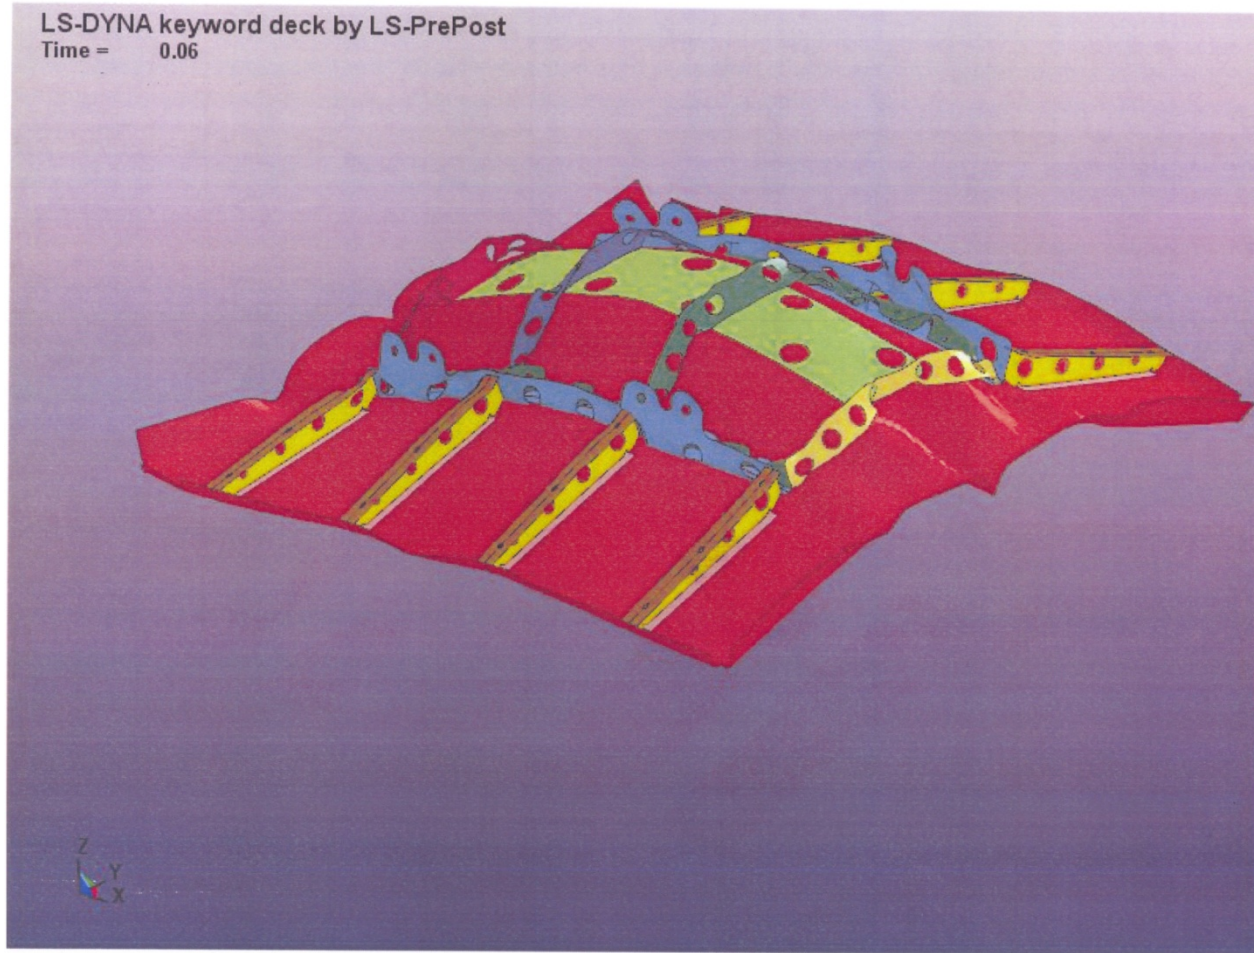







LS-DYNA keyword deck by LS-PrePost
Time = 0.0001497

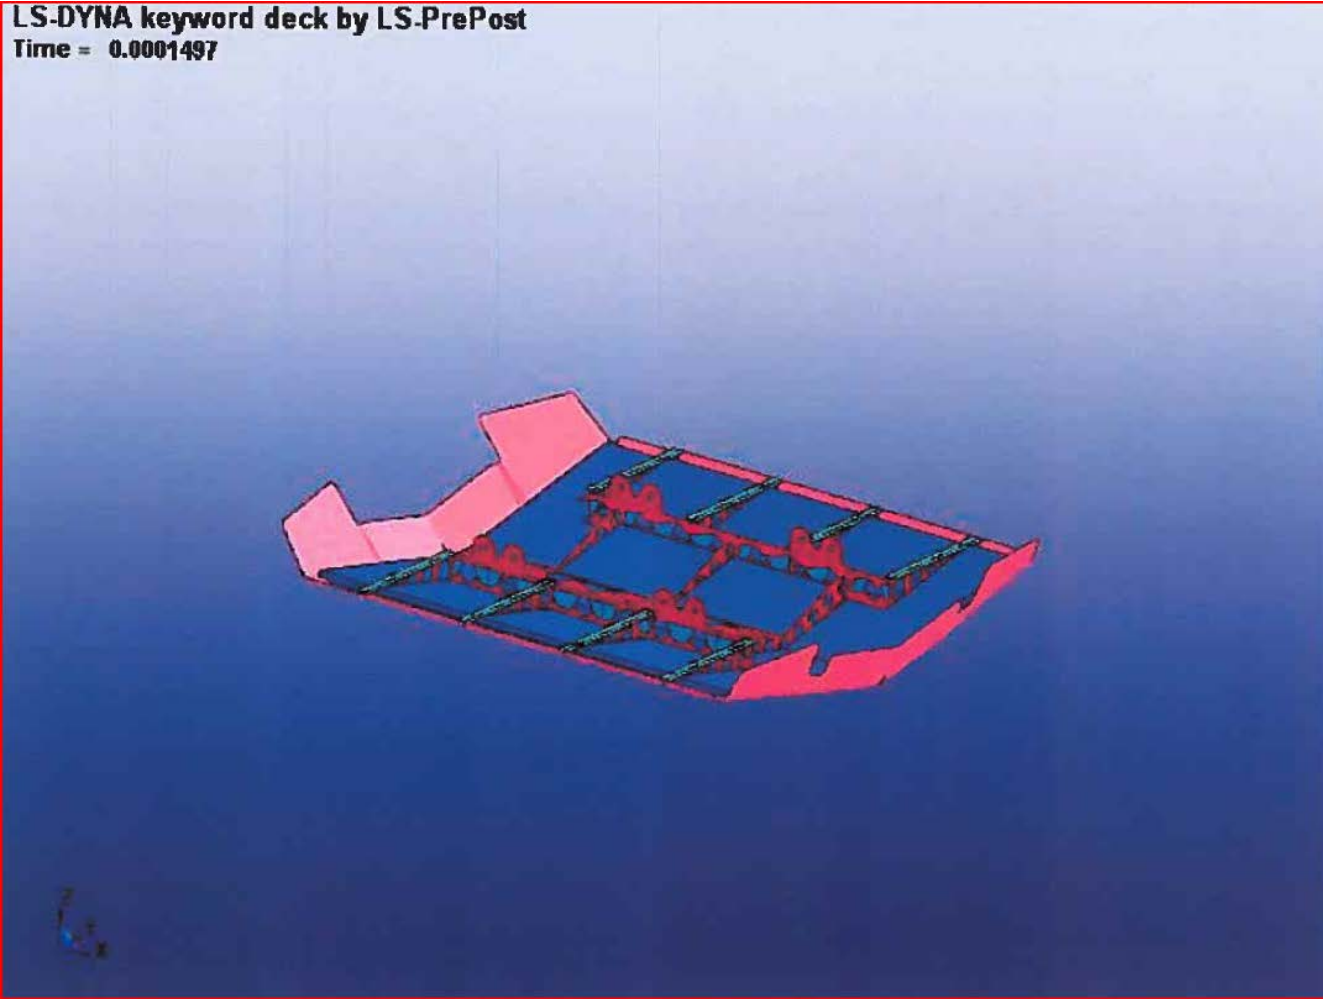


LS-DYNA keyword deck by LS-PrePost
Time = 0.0001998

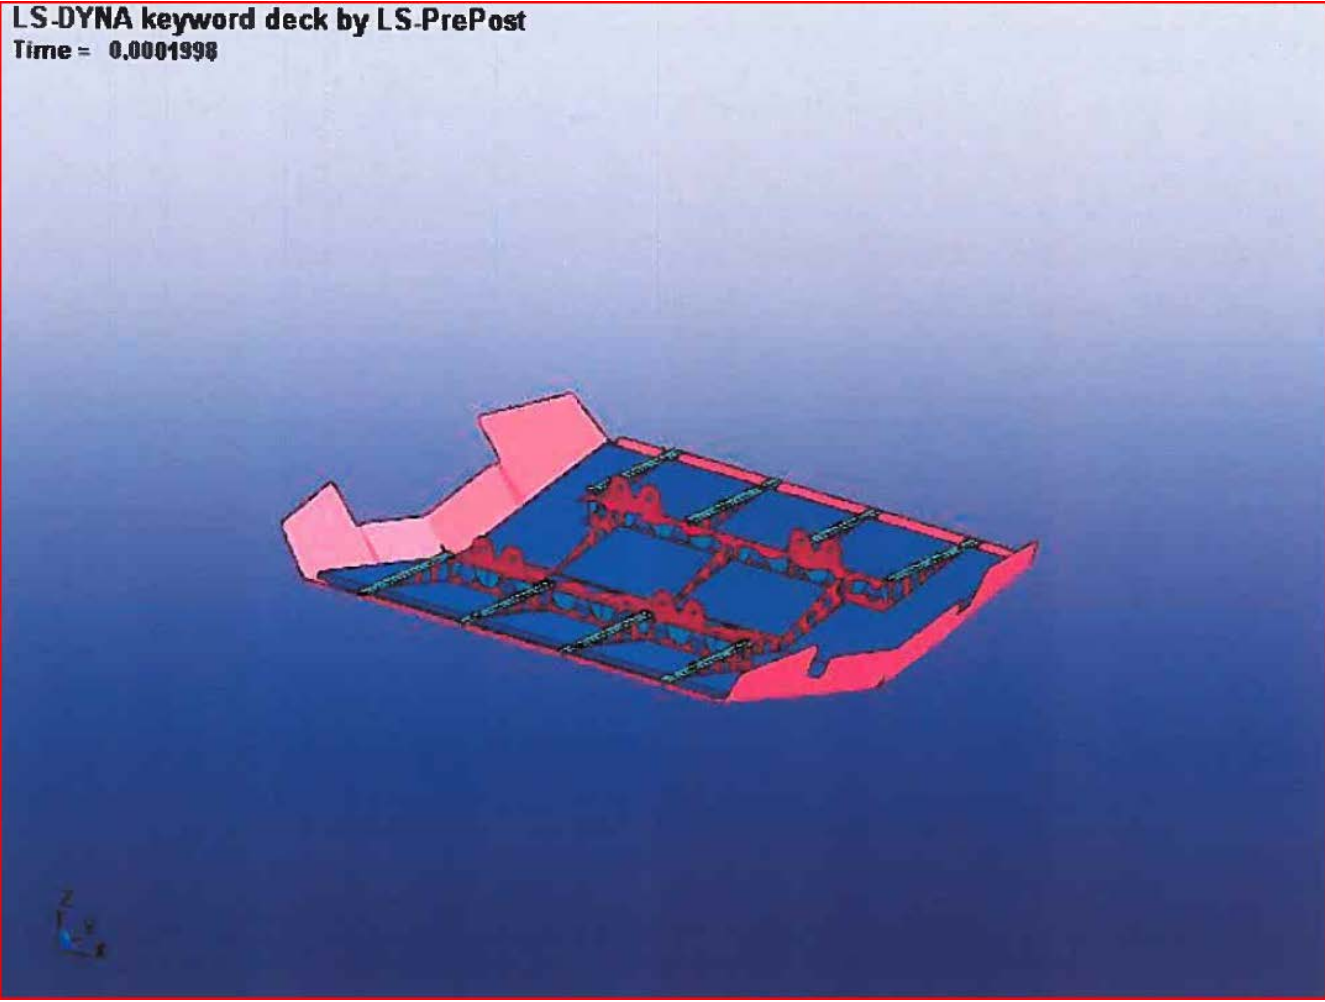

LS-DYNA keyword deck by LS-PrePost
Time = 0.0002499

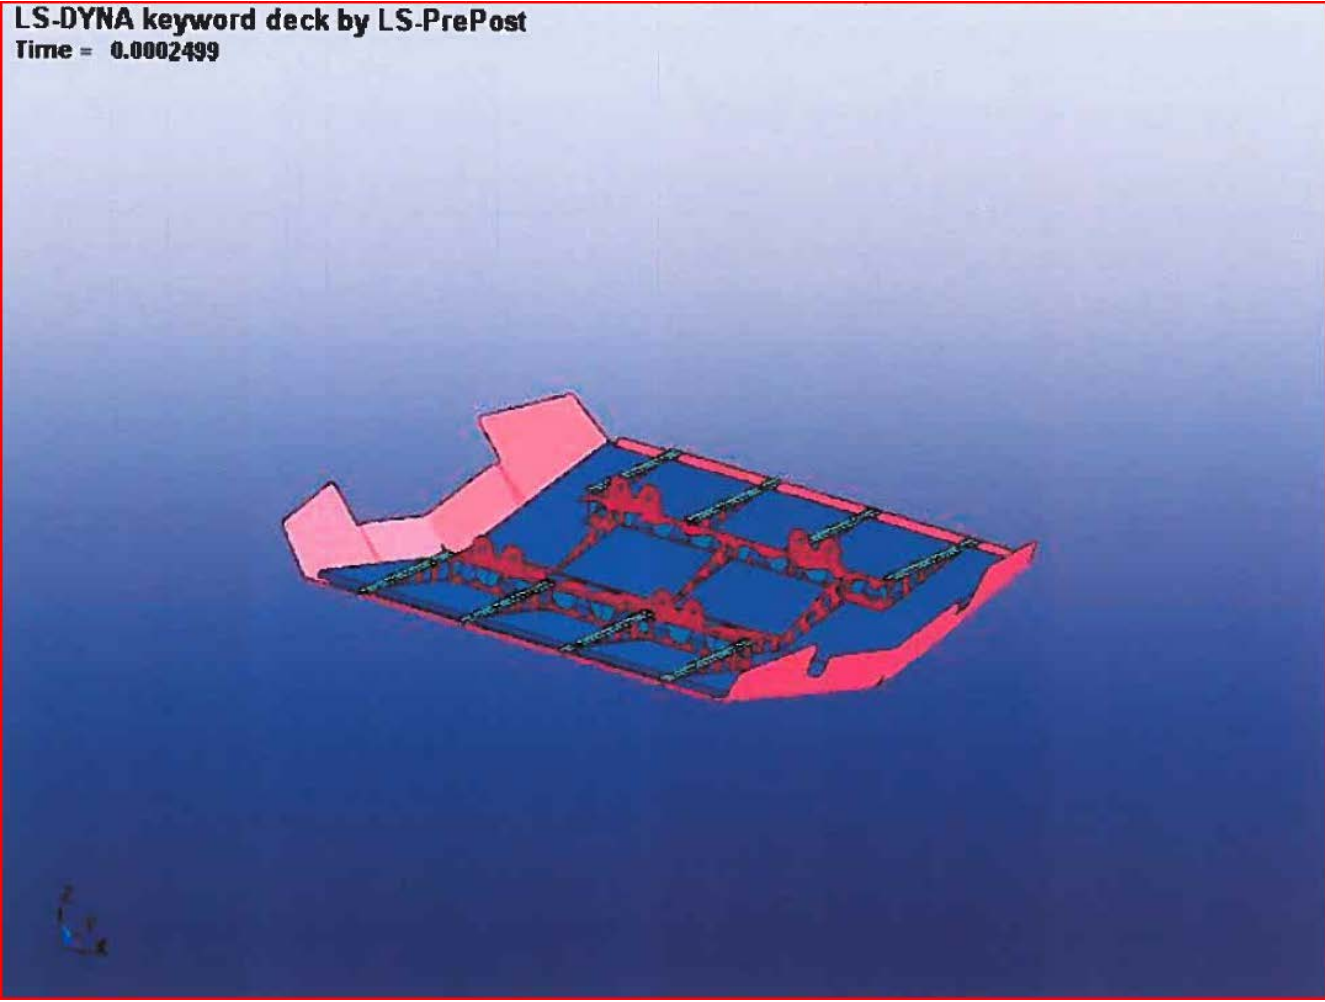

LS-DYNA keyword deck by LS-PrePost
Time = 0.0002997

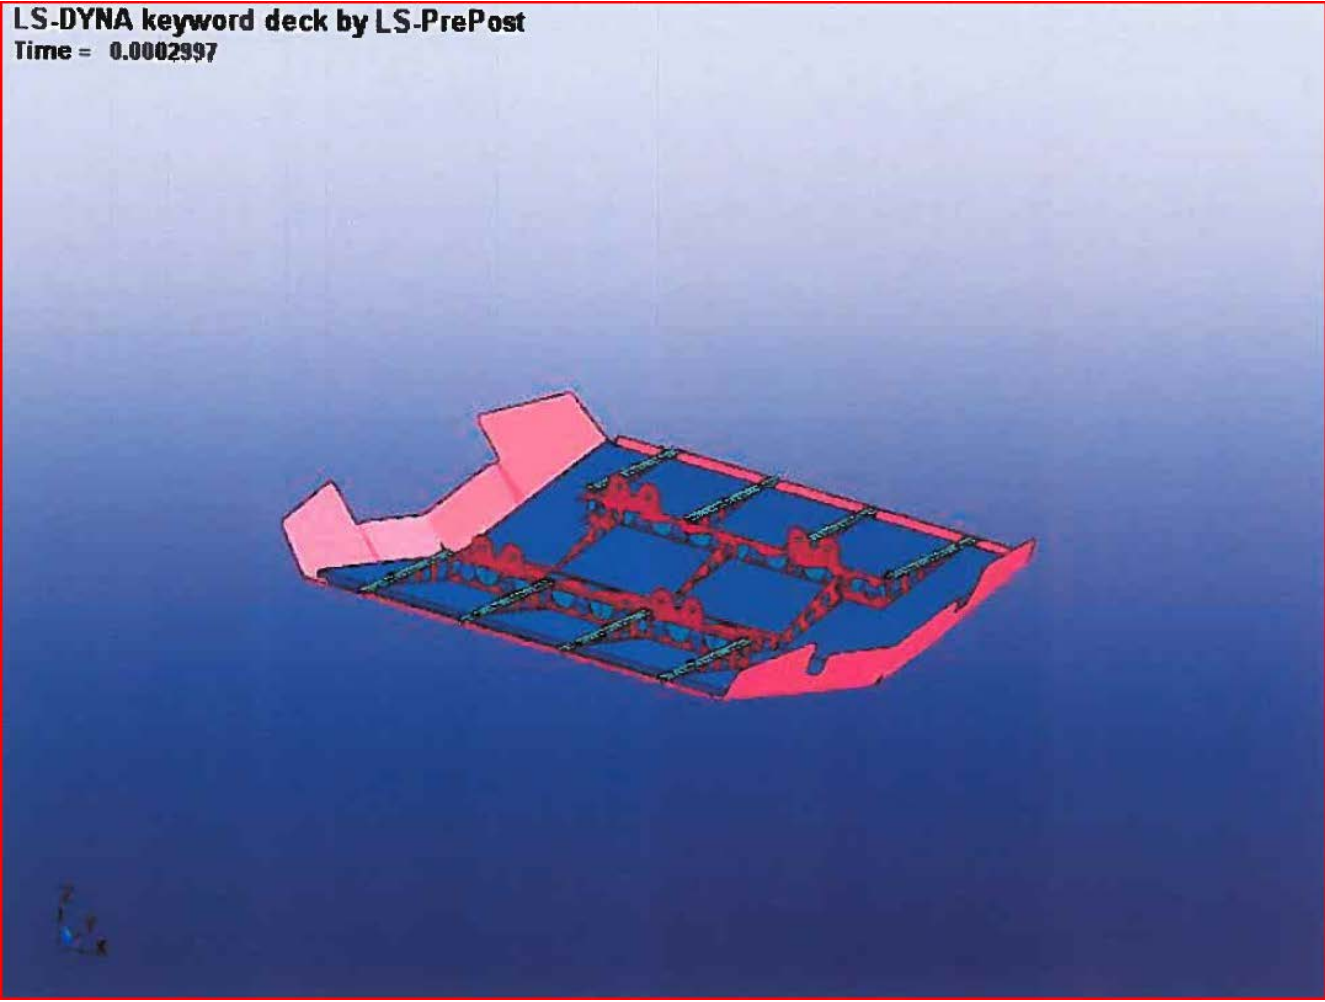





LS-DYNA keyword deck by LS-PrePost
Time = 0.0004248




LS-DYNA keyword deck by LS-PrePost
Time = 0.0004749

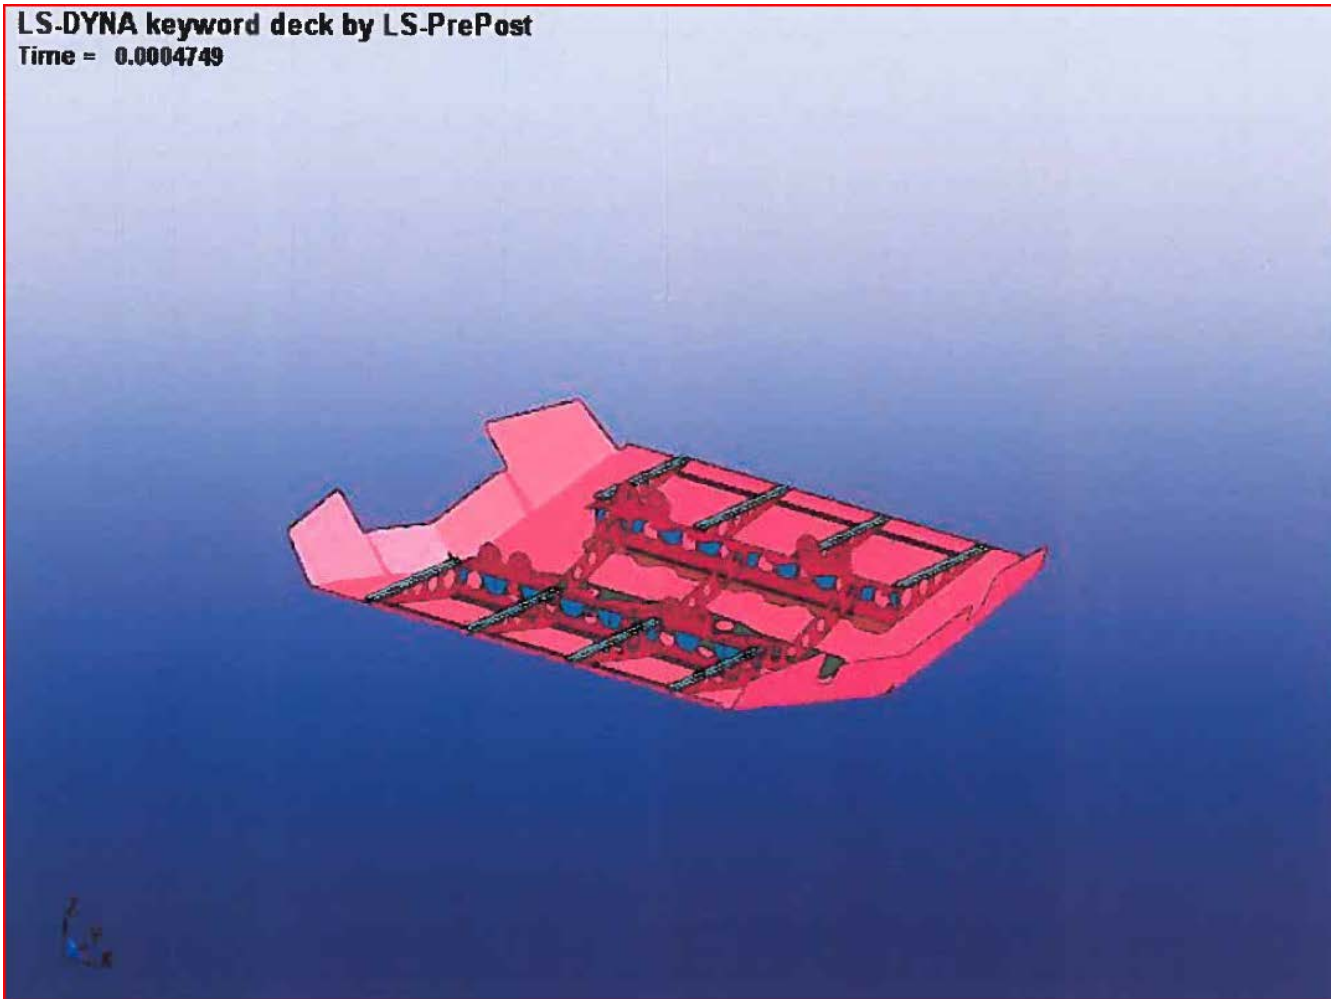


LS-DYNA keyword deck by LS-PrePost
Time = 0,0005247

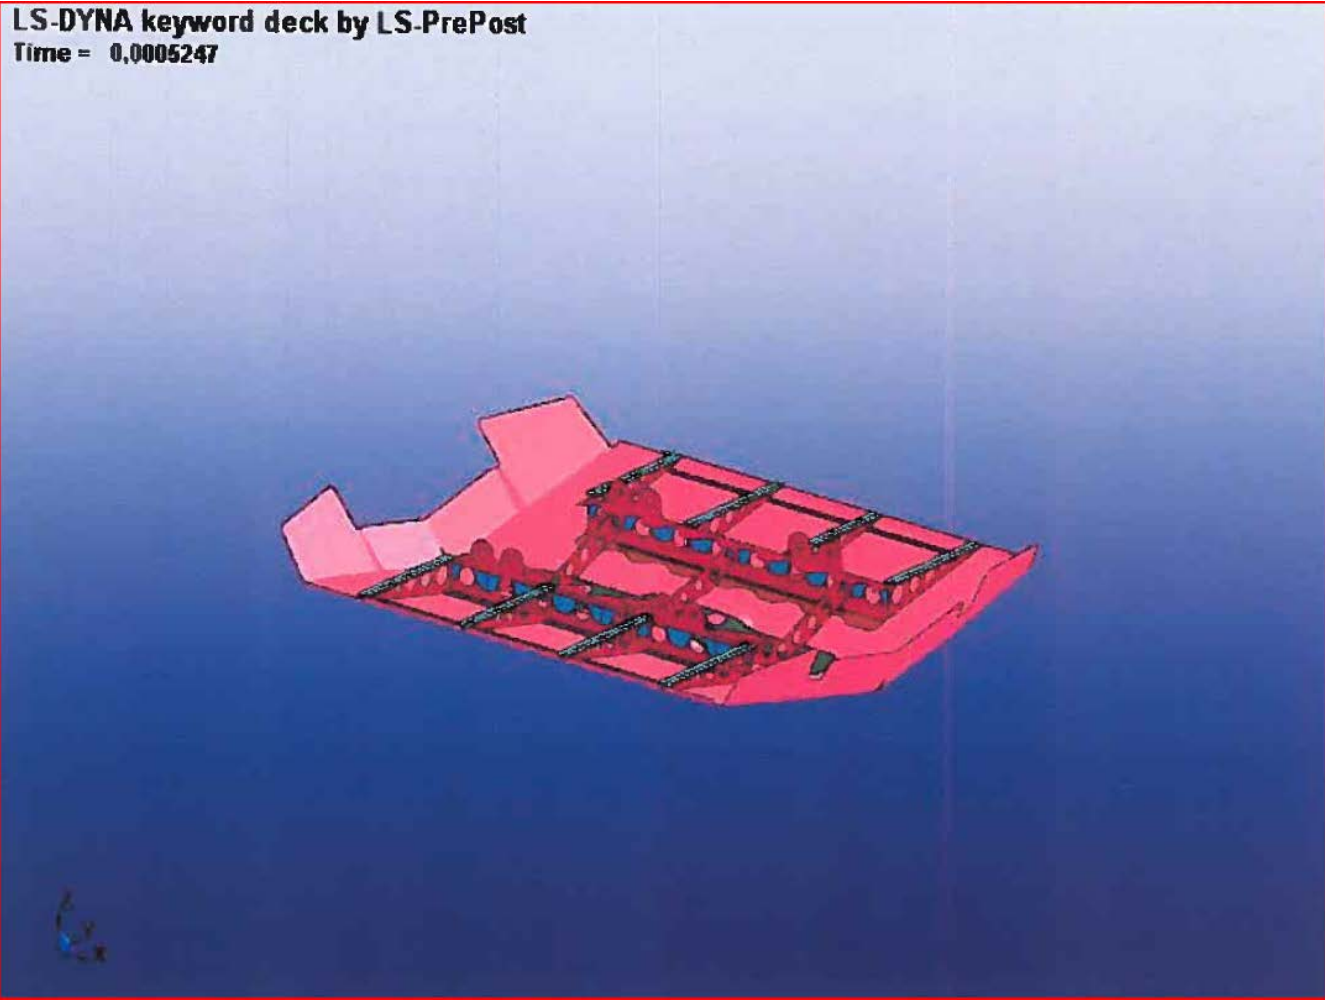


LS-DYNA keyword deck by LS-PrePost
Time = 0.0005748

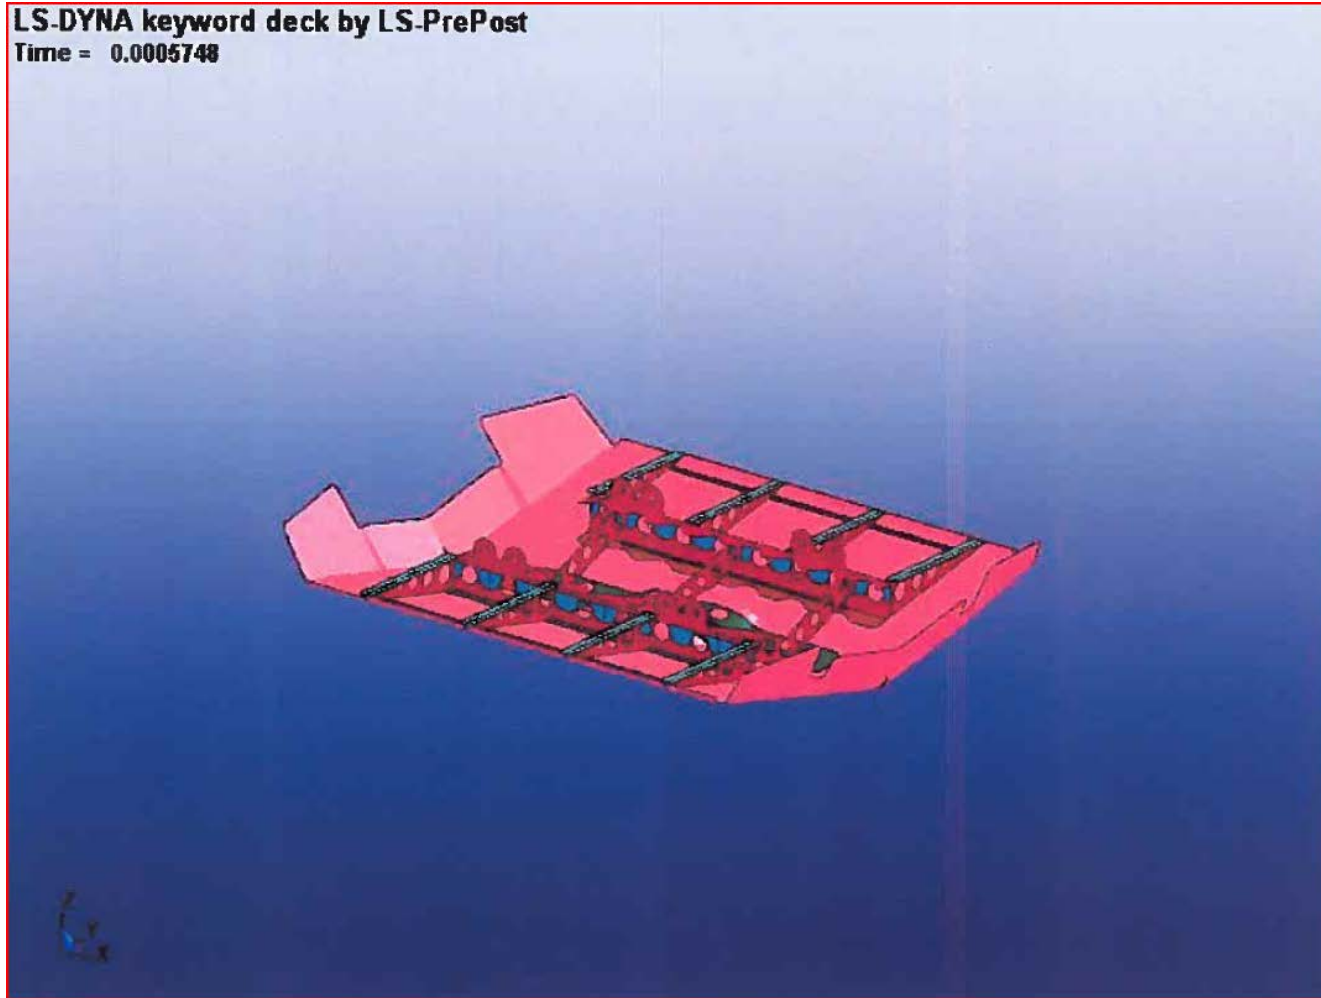


LS-DYNA keyword deck by LS-PrePost
Time = 0.0006498

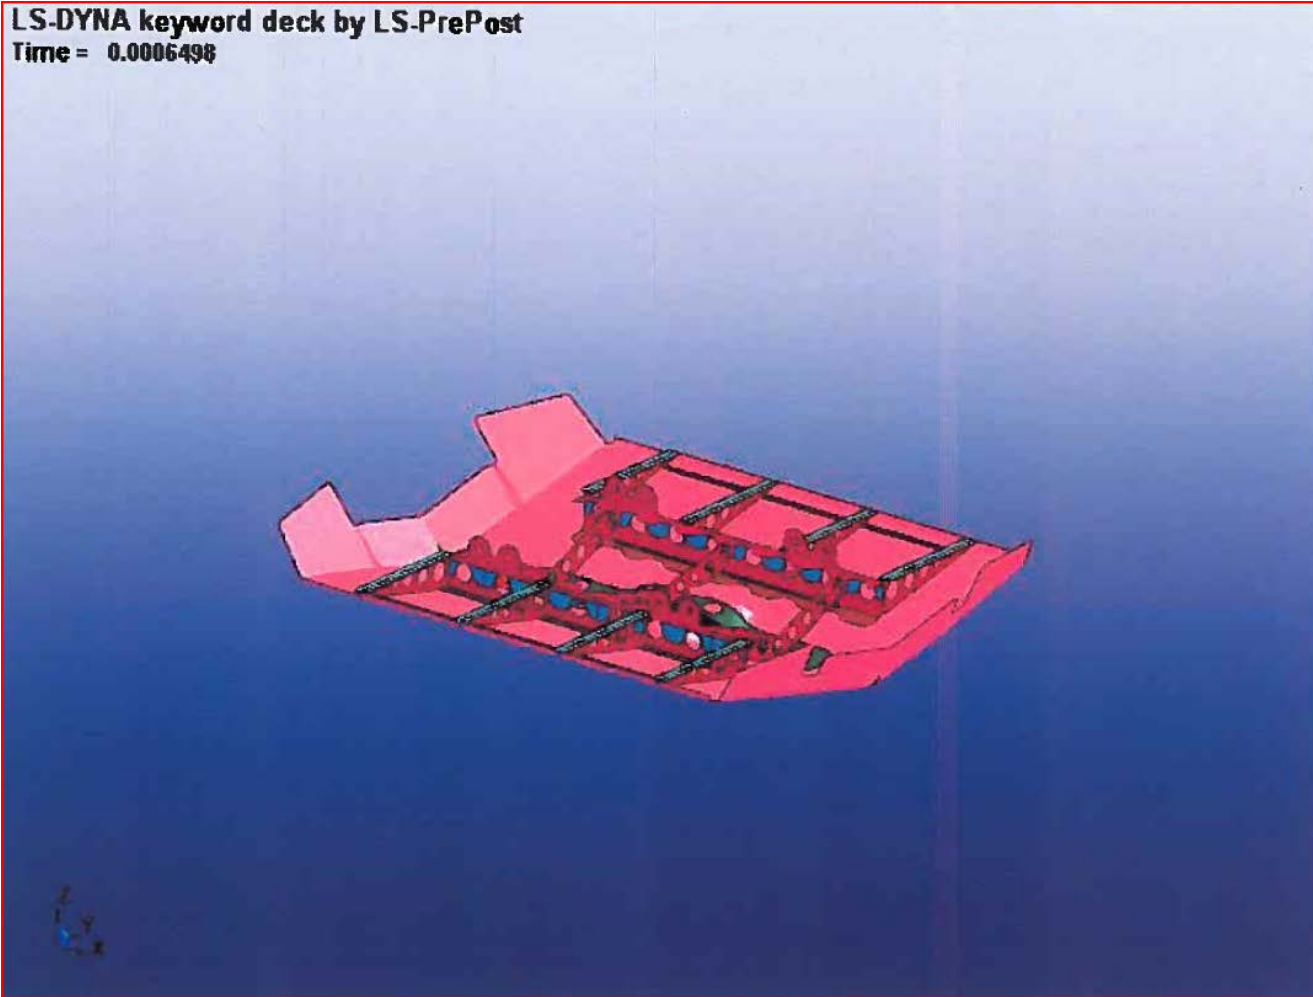


LS-DYNA keyword deck by LS-PrePost
Time = 0.0007497

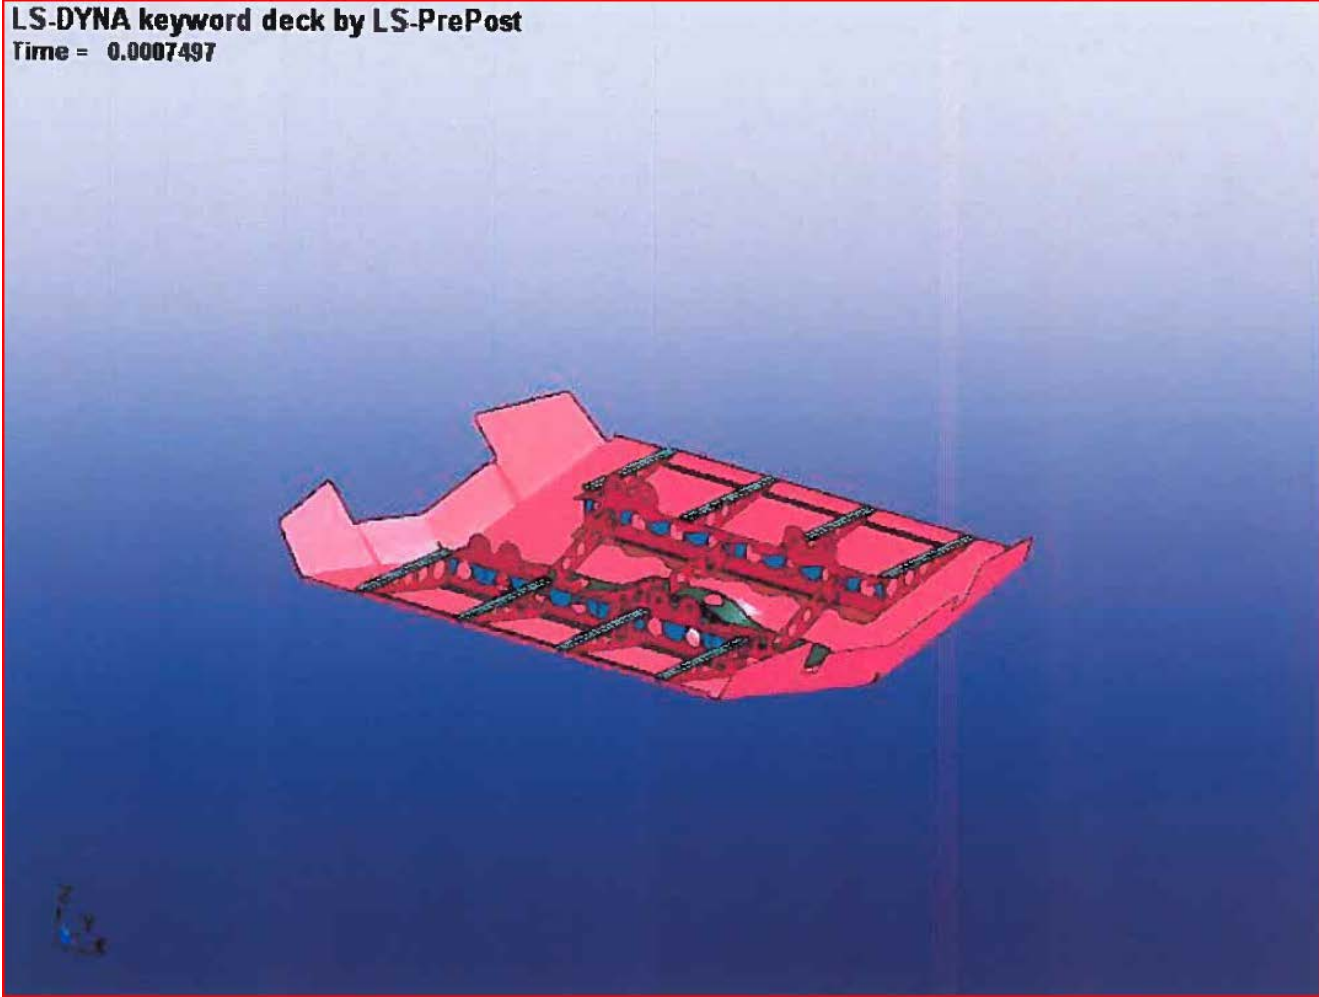


LS-DYNA keyword deck by LS-PrePost
Time = 0.0008499

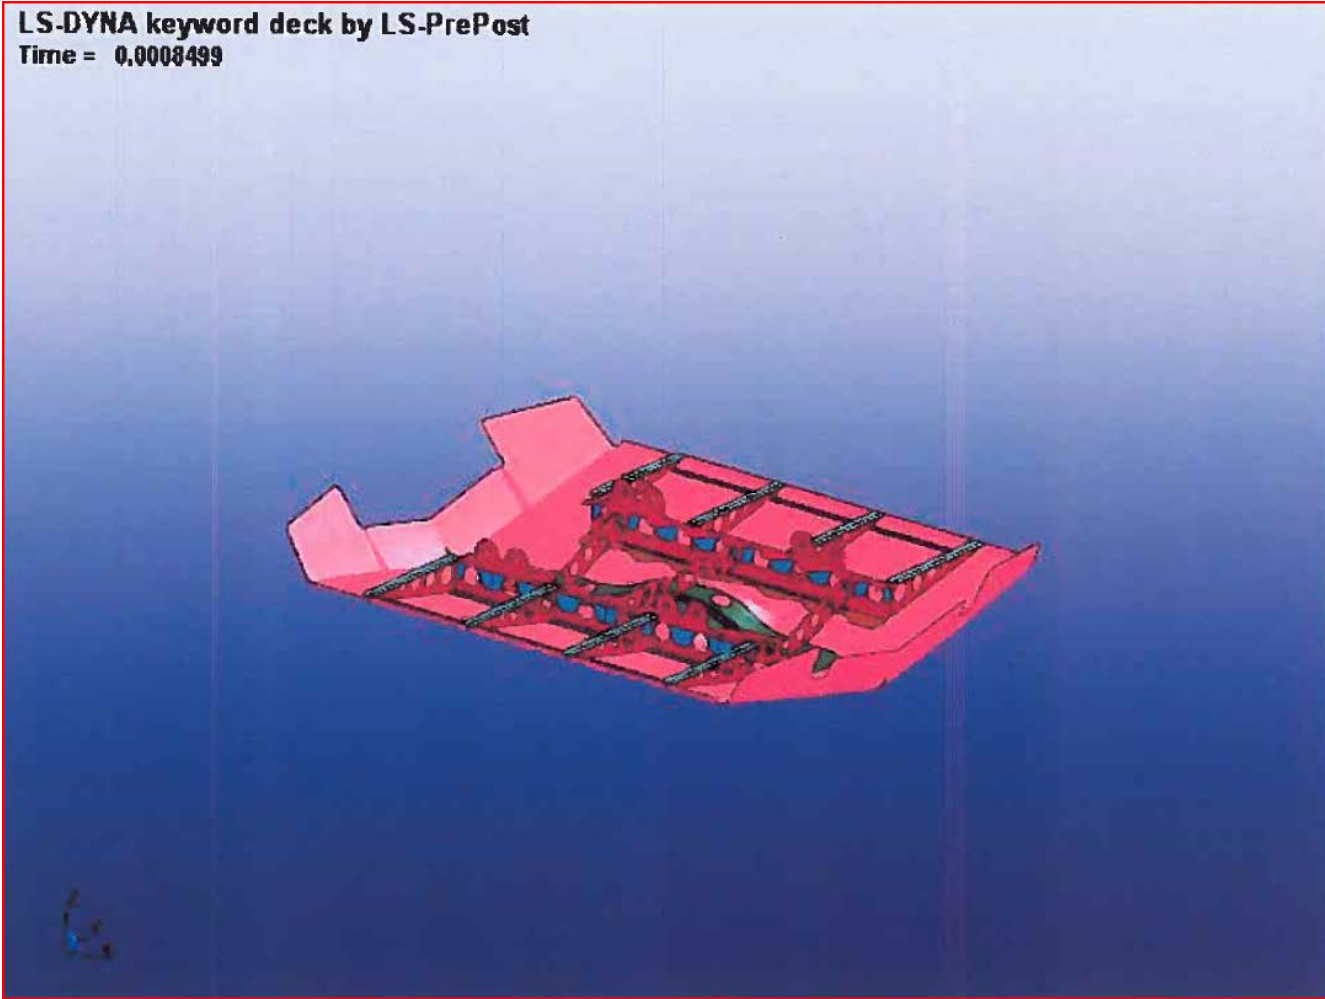


LS-DYNA keyword deck by LS-PrePost
Time = 0.0009498

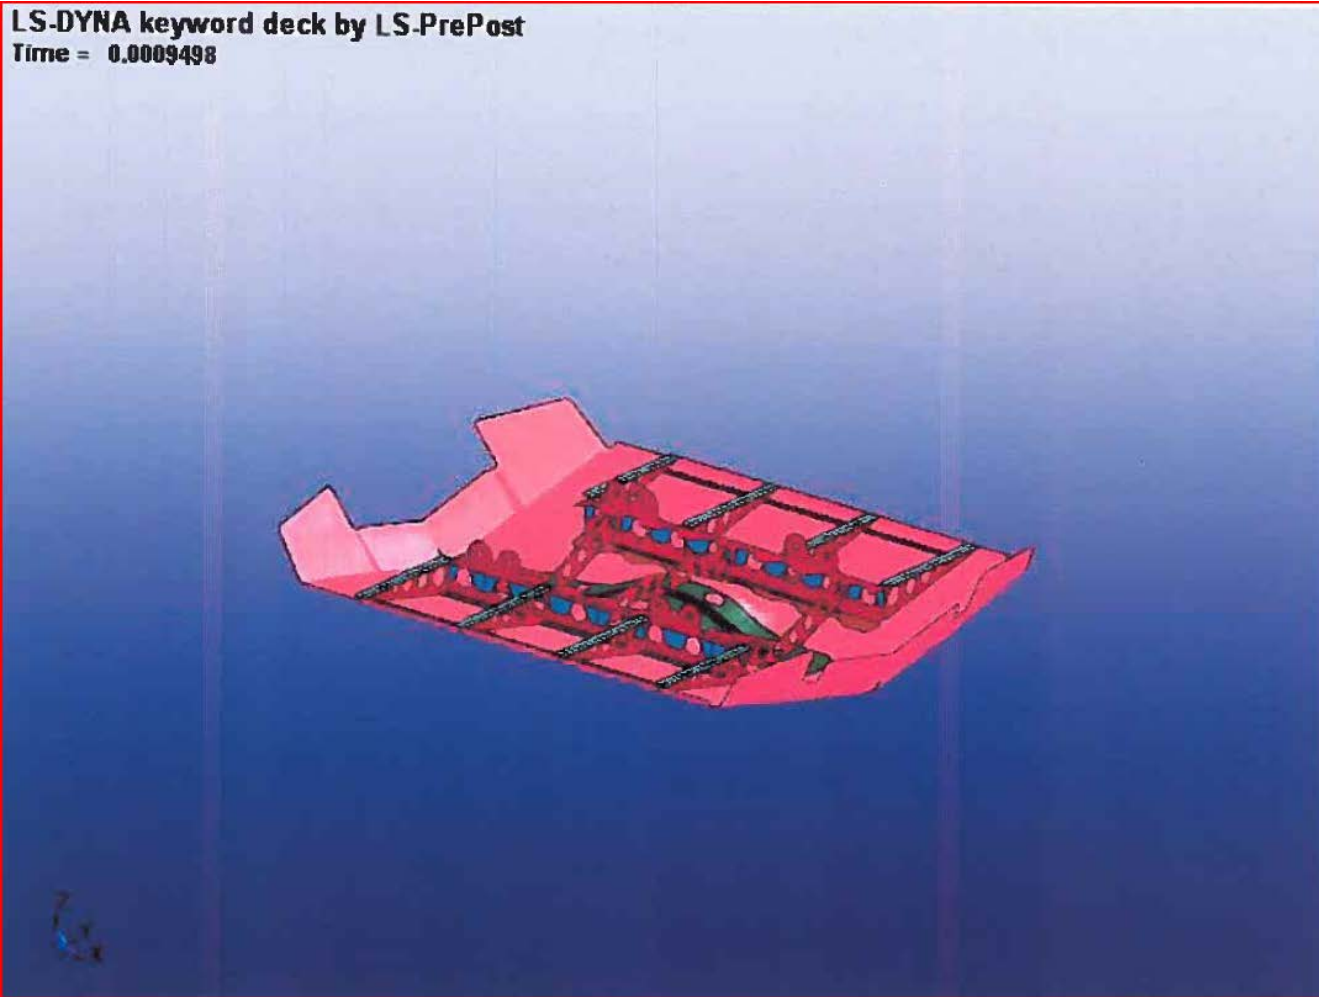

LS-DYNA keyword deck by LS-PrePost
Time = 0.0014997

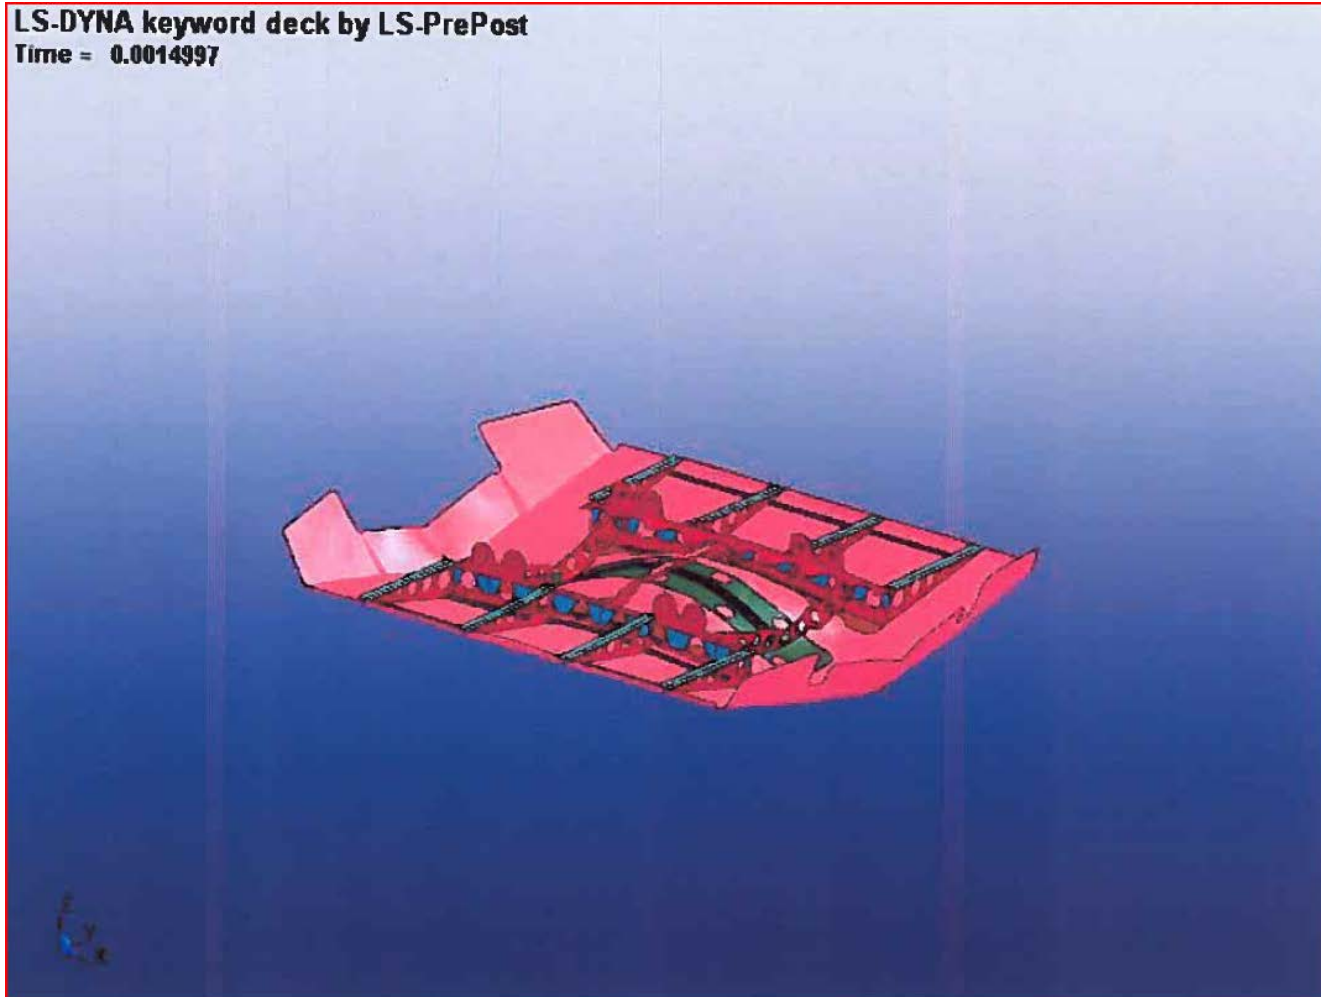


LS-DYNA keyword deck by LS-PrePost
Time = 0.0024999

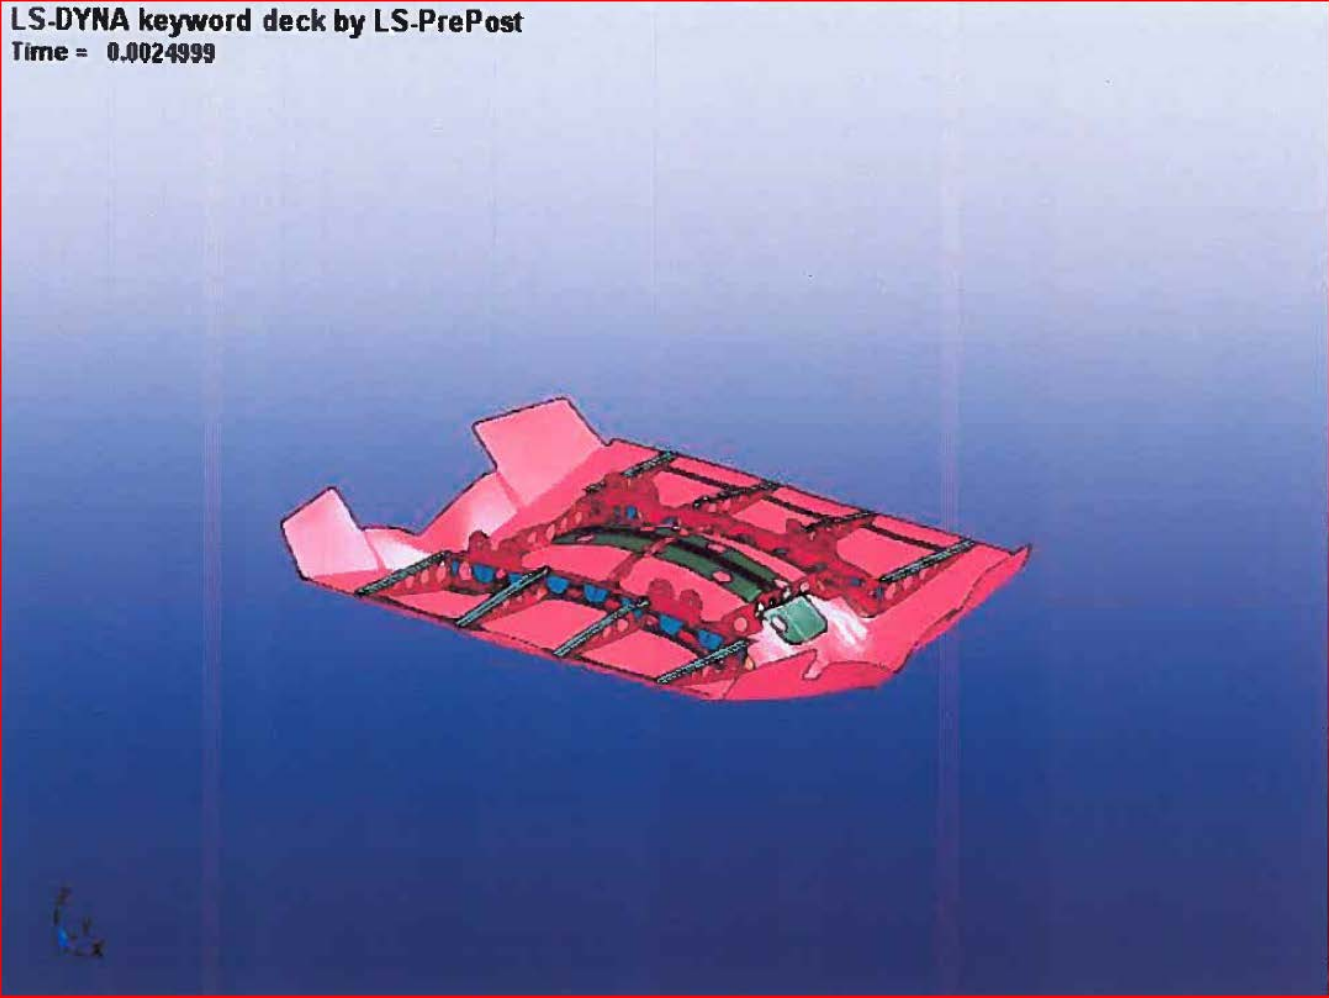


LS-DYNA keyword deck by LS-PrePost
Time = 0.0034998



LS-DYNA keyword deck by LS-PrePost
Time = 0.0044997

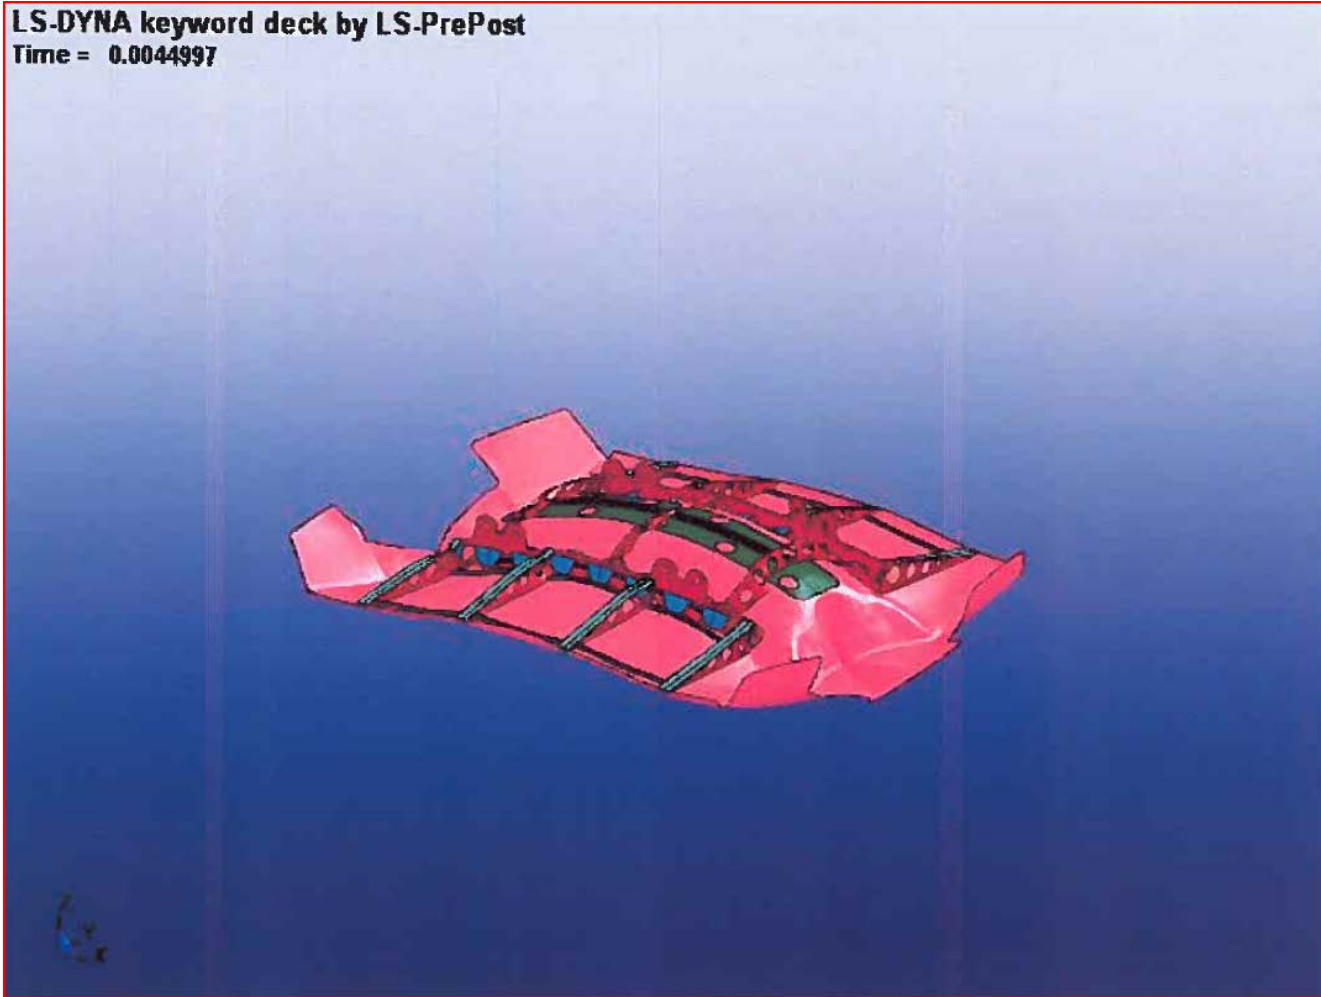


LS-DYNA keyword deck by LS-PrePost
Time = 0.0054999

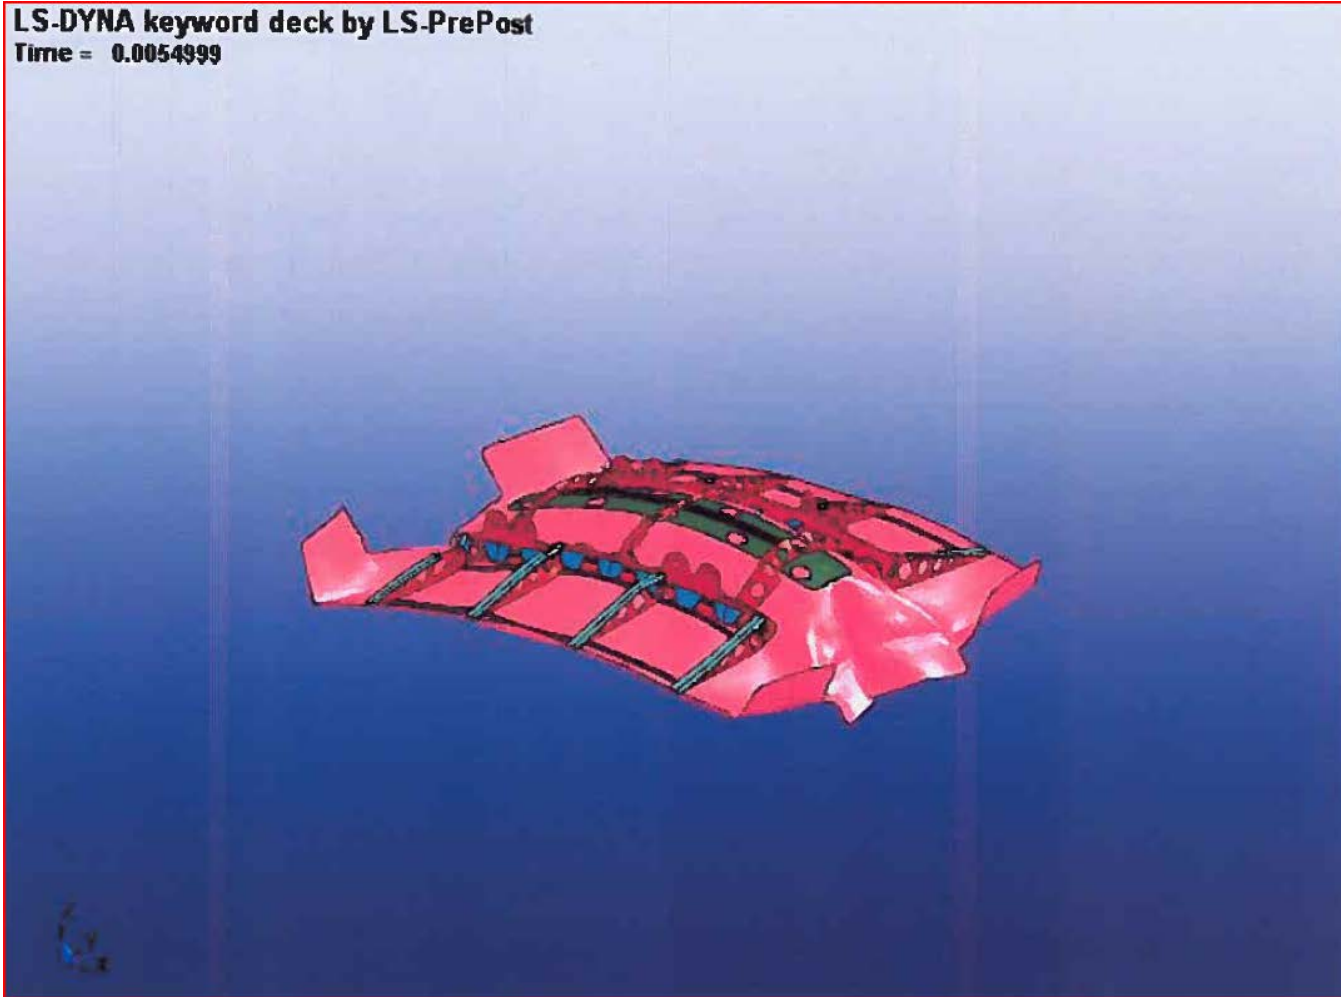

LS-DYNA keyword deck by LS-PrePost
Time = 0.0069999




LS-DYNA keyword deck by LS-PrePost
Time = 0.0089997

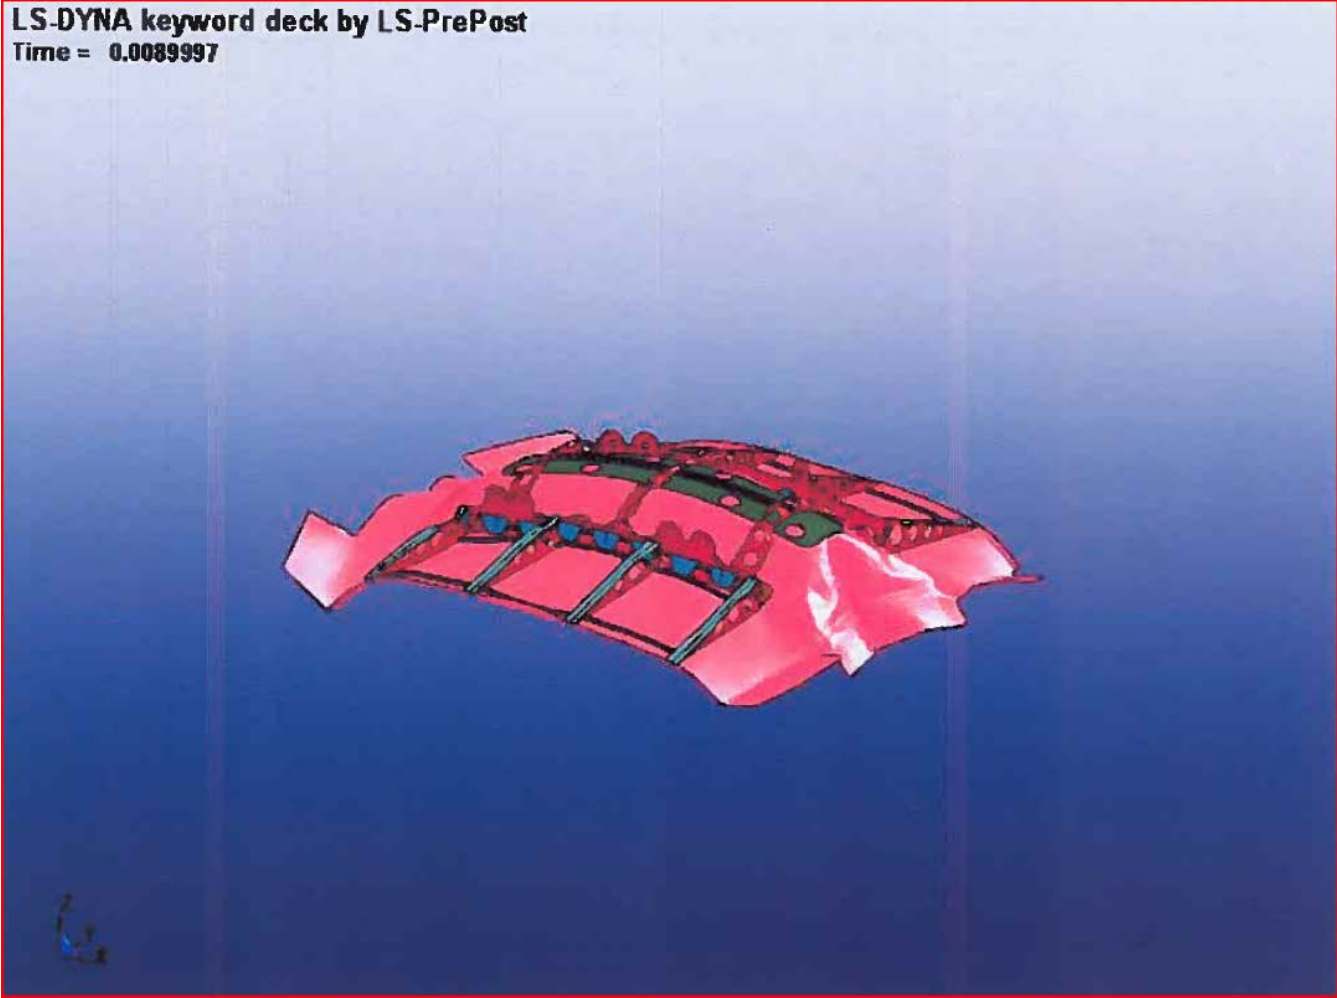


LS-DYNA keyword deck by LS-PrePost
Time = 0.0125



LS-DYNA keyword deck by LS-PrePost
Time = 0.0175

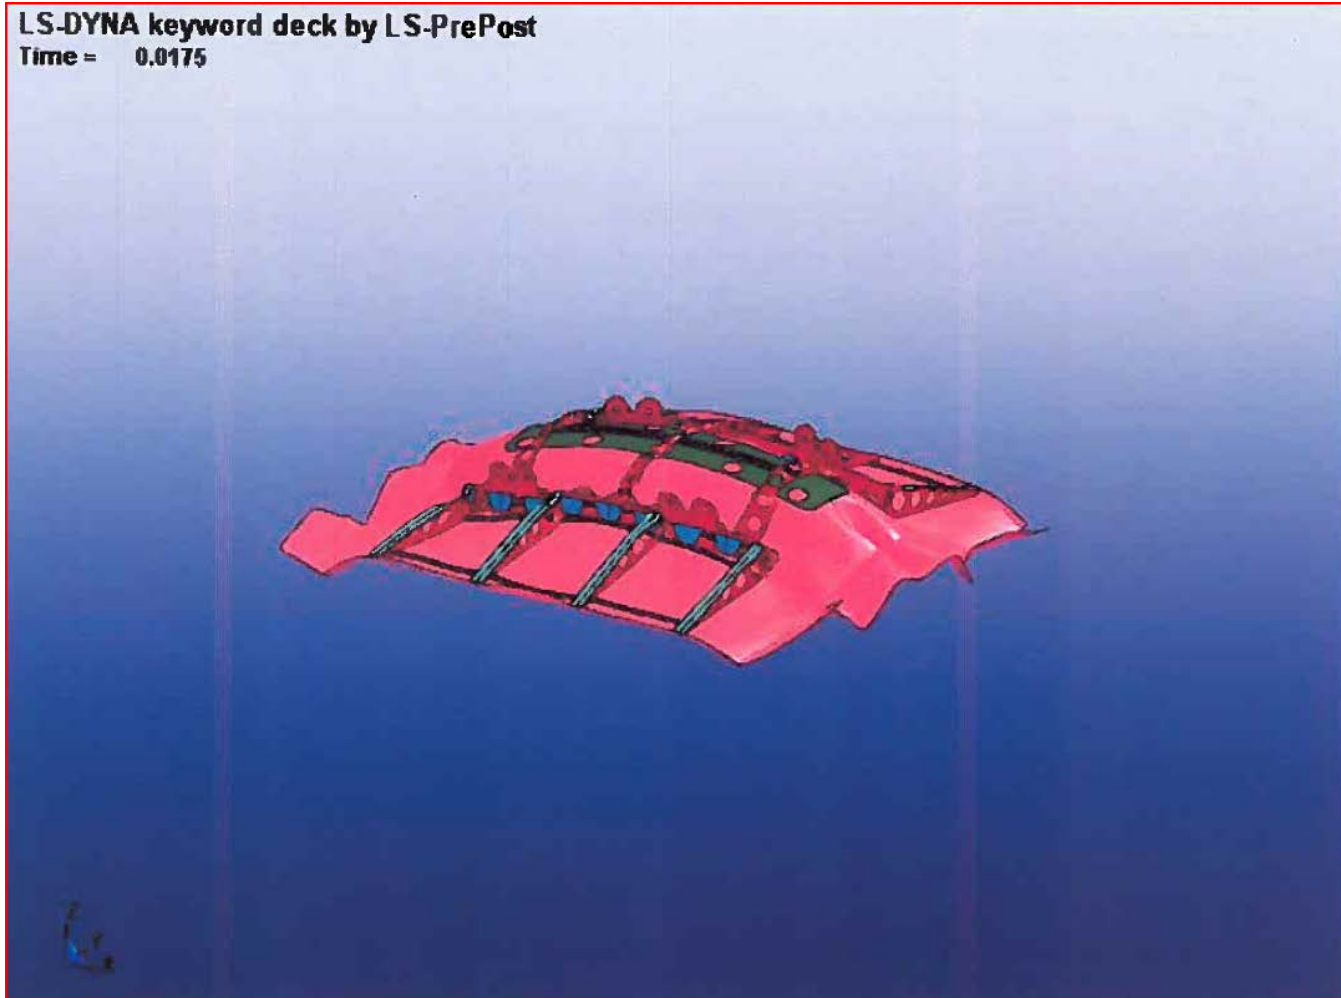

LS-DYNA keyword deck by LS-PrePost
Time = 0.0225

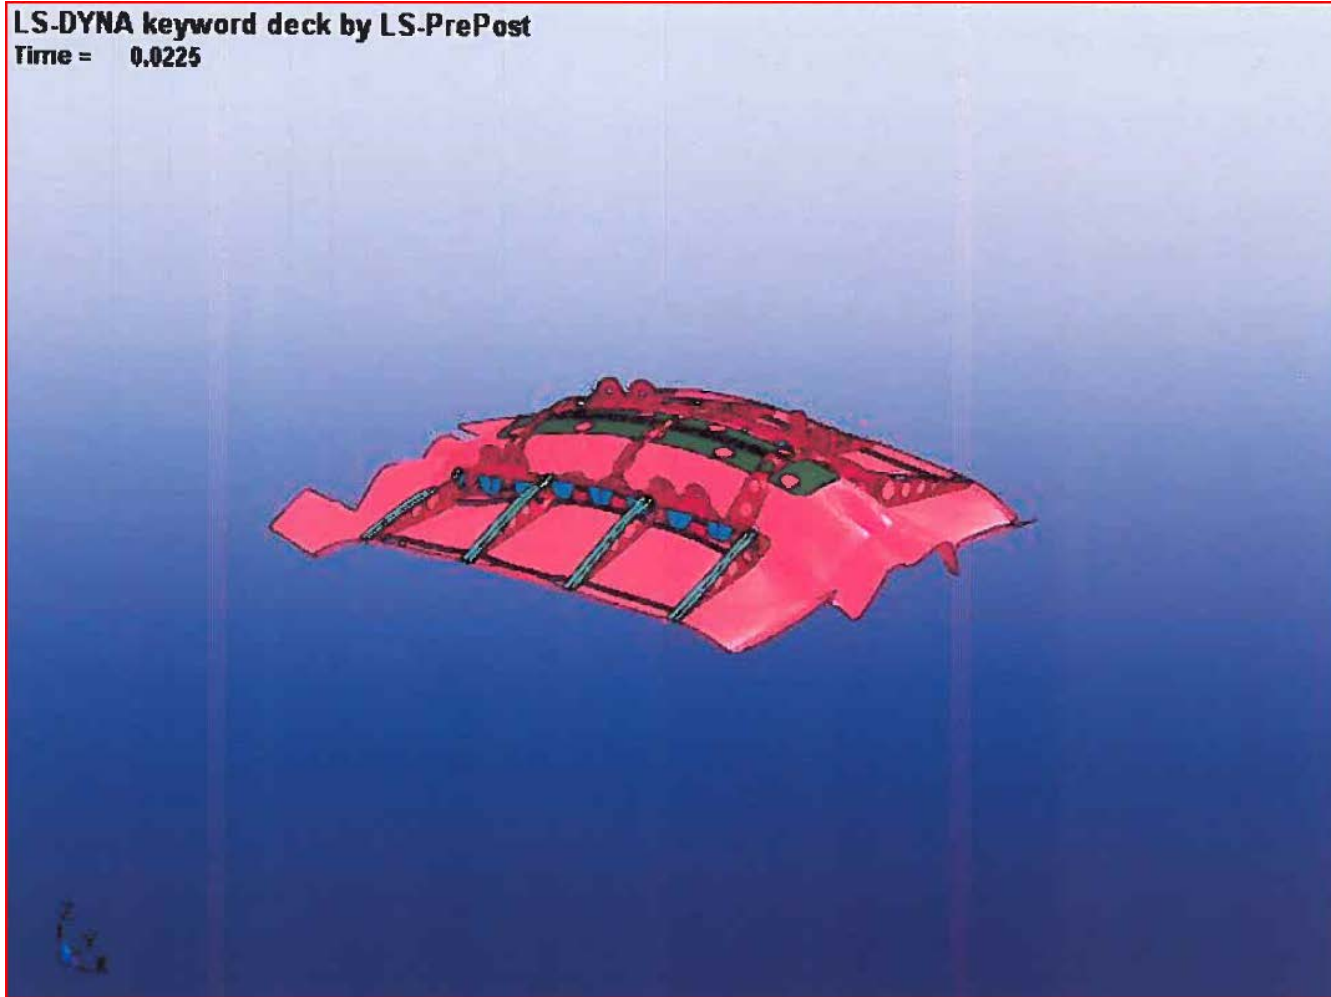


LS-DYNA keyword deck by LS-PrePost
Time = 0.0275



LS-DYNA keyword deck by LS-PrePost
Time = 0.0325




LS-DYNA keyword deck by LS-PrePost
Time = 0.0375

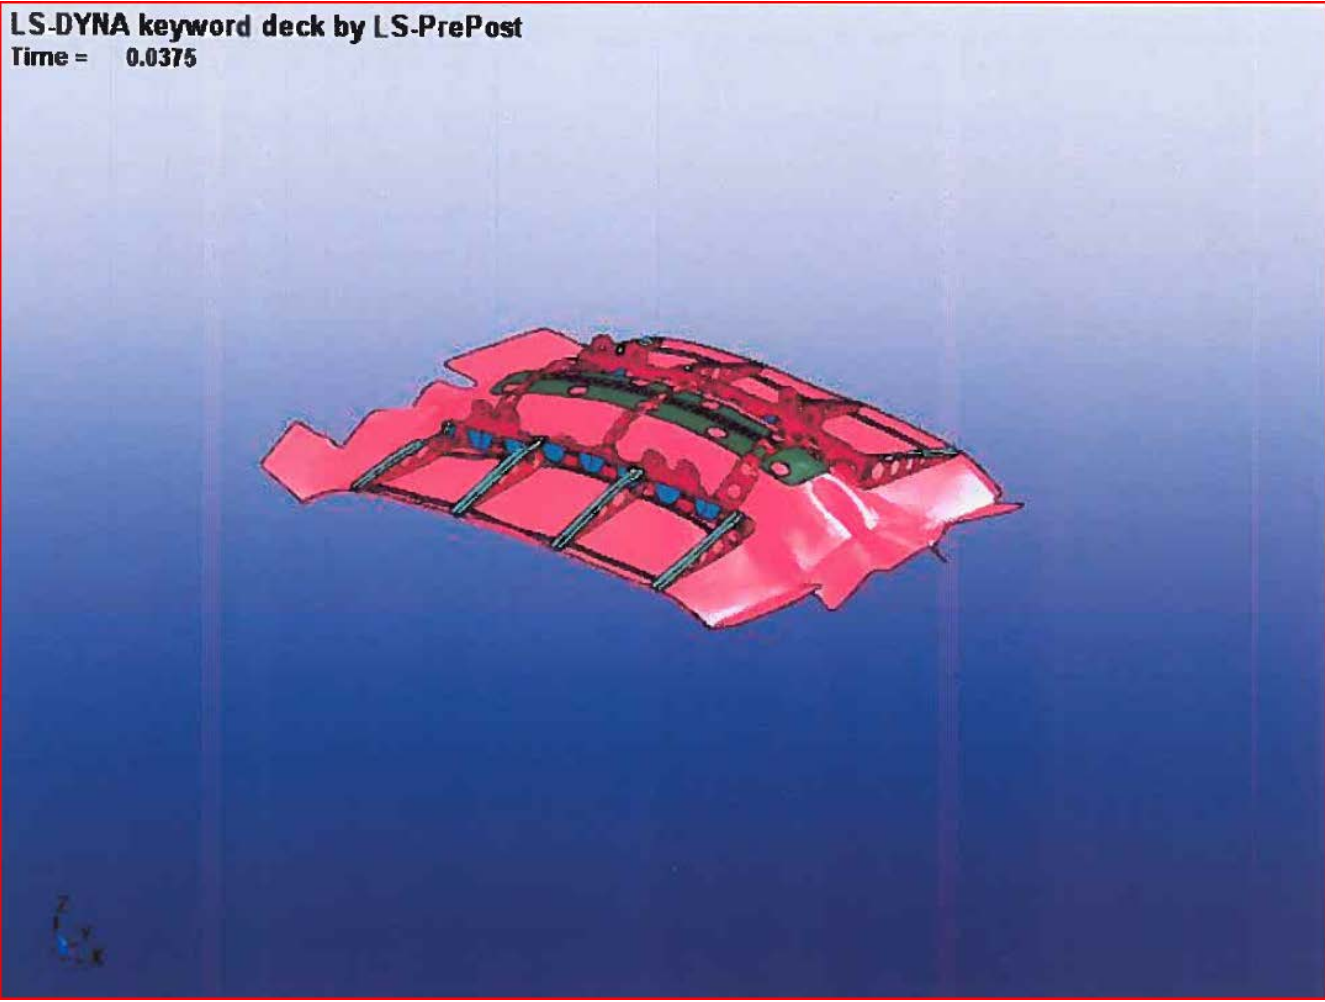


LS-DYNA keyword deck by LS-PrePost
Time = 0.0425



LS-DYNA keyword deck by LS-PrePost
Time = 0,05

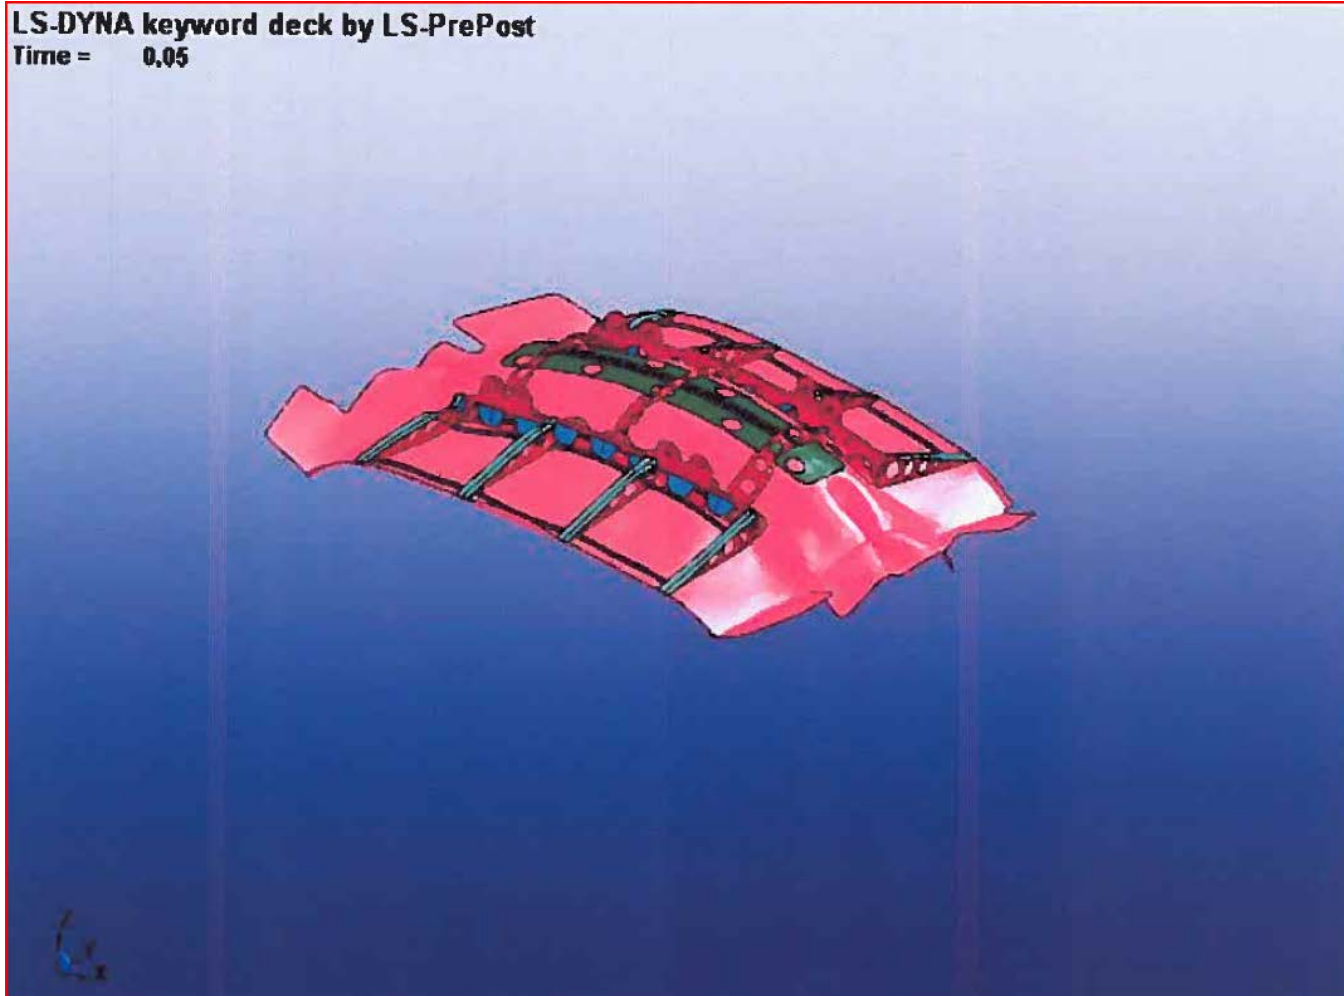

LS-DYNA keyword deck by LS-PrePost
Time = 0.06

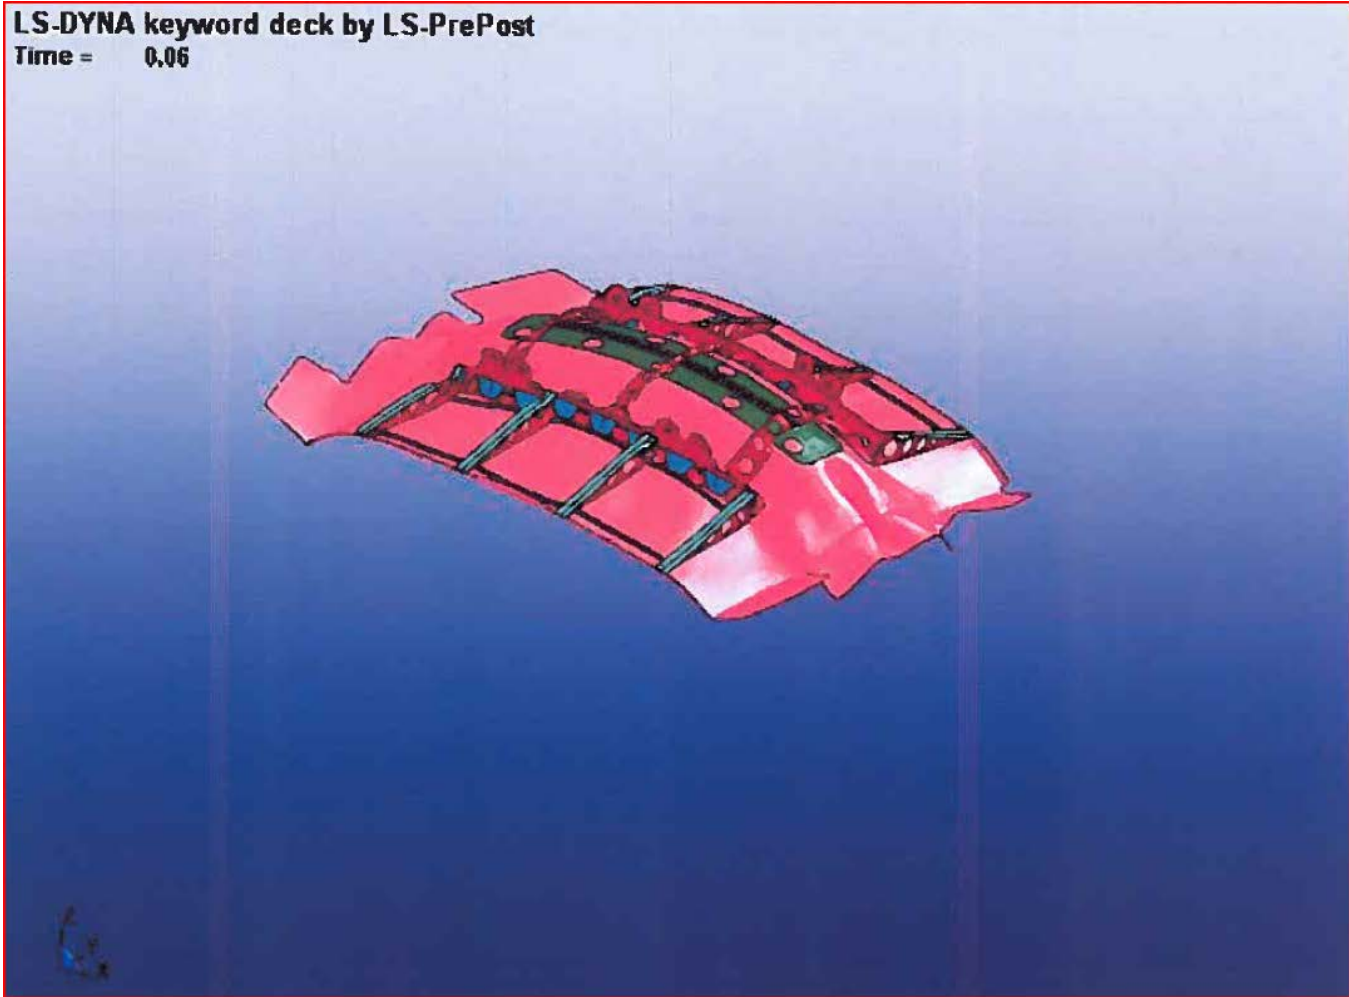

- **Performance of the 9° V-Hull Produced:**
 - High accelerative loads
 - Unfavorable displacement
- **Performance of the 24° V-Hull Produced:**
 - Improved accelerative loads, however still above acceptable levels
 - Improved vehicle displacement, however still above acceptable levels

Conclusion

- The system in its current configuration provides assembly issues due to the accessibility of the mounting holes
- Underbody produces an unfavorable drop in mobility