



Integrity ★ Service ★ Excellence

Adaptive Combinatorial Multimodal Sensing Physics & Methods

7 Mar 2012

**Dr. Kitt Reinhardt
Program Manager
AFOSR/RSE**

Air Force Research Laboratory

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 07 MAR 2012		2. REPORT TYPE		3. DATES COVERED 00-00-2012 to 00-00-2012	
4. TITLE AND SUBTITLE Adaptive Combinatorial Multimodal Sensing Physics & Methods				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Air Force Research Laboratory, Wright Patterson Air Force Base, OH, 45433				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT Presented at the Air Force Office of Scientific Research (AFOSR) Spring Review Arlington, VA 5 through 9 March, 2012					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 27	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Vision

Accelerate & exploit discovery of novel solid-state materials science, nano/microstructure device physics, and implementation schemes for future breakthrough-generations of adaptive, intelligent, compact and affordable combinatorial-multimodal sensing and exploitation methods enabling for game-changing adaptive & autonomous ISR.



2012 AFOSR SPRING REVIEW



NAME: Kitt Reinhardt

BRIEF DESCRIPTION OF PORTFOLIO: **Multimodal Sensing Physics & Methods**

LIST SUB-AREAS IN PORTFOLIO:

- **Heterogeneous Nanostructure Design & Synthesis**

- interface lattice-strain & defect mitigation in III-V & II-VIs
- energy band-edge alignment & barrier manipulation


- **EO/IR Photon - Micro/Nanostructures Interactions**

- new materials, structures, physics, and phenomenology
- novel photon-property transduction physics & methods

- **Novel Mixed-Mode Detector Design, Physics, Methods**

- adaptive spectral & polarimetric filters & tuning schemes
- embedded adaptive broadband absorption approaches
- embedded conductive conduits, transparent interconnects

- **Optical/Electric μ -Cooling, 3-D Memory/Exploitation, Solar PV**

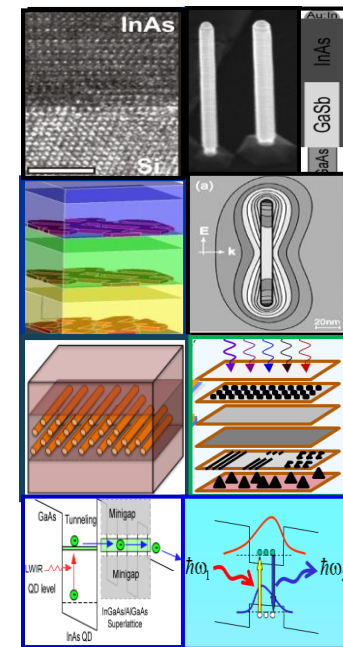



Motivation



Support Emerging Info-in-War Revolution:

- **THREATS HAVE CHANGED** → dispersed & elusive enemy
- Near-real-time full situational awareness of threats is paramount to maintain asymmetric advantage.
- Increased reliance on autonomous ISR platforms.
- Present com-links & exploitation methods and resources are struggling to keep up...



Zac Lemnios

“our warfighters are swimming in sensors but drowning in data – proliferation of sensors and large data sets are overwhelming analysts, who lack the tools to efficiently process, retrieve, store, and analyze vast amounts of data”

“data-to-decisions, cyber and autonomy are three of the seven strategic science & technology priorities for the Department”

Testimony of The Honorable Zachary J. Lemnios
Assistant Secretary of Defense for Research and Engineering (ASD(R&E))
Before the United States House of Representatives Committee on Armed Services
Subcommittee on Emerging Threats and Capabilities
March 1, 2011



Sensor Data Explosion...

more global hot spots → greater ISR needs → more sensor data → DoD com bandwidth & exploitation bottlenecks

ISR Enables Tasking, Collecting, Processing, Exploiting & Disseminating Timely Target & Scene Data



USAF RPA ISR Platforms: sensor packages include multi-spectral imagers, HD color & IR flowing video, laser designators, synthetic aperture radar, gnd moving target indicators...

United States Air Force
Unmanned Aircraft Systems
Flight Plan
2009-2047

RQ-4 Global Hawk

MQ-9 Reaper

MQ-1 Predator

today testing

< 5yrs






Tremendous ramp-up of UAS systems is planned - 'nano,' 'micro,' 'man-portable,' 'air-launched,' 'multi-mission'

... Entirely new classes of detectors are needed:

→ smarter, more capable, compact, affordable

→ REAL-TIME ADAPTIVE SENSING would reduce data/com bottlenecks!

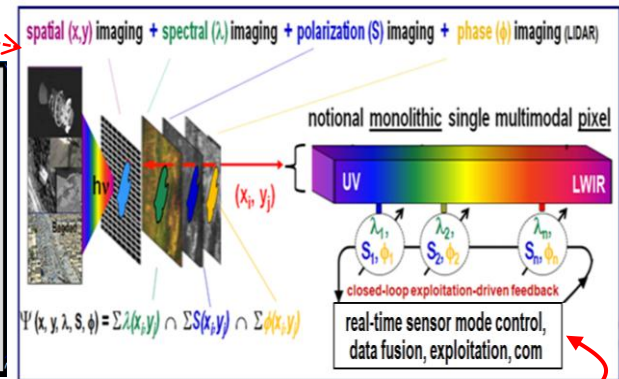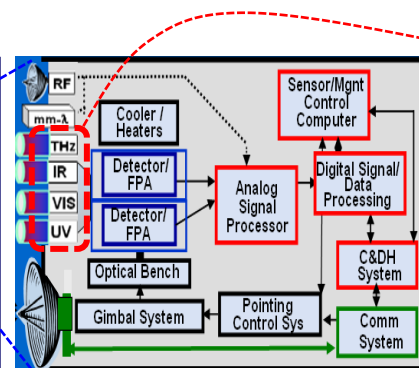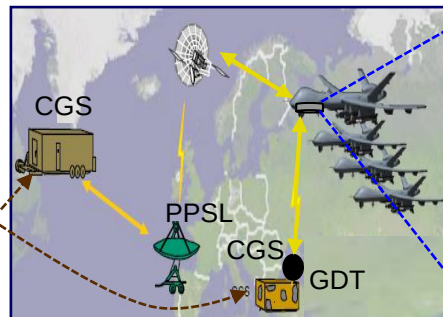


- Real-time optimum selection of perfectly registered spatial, spectral, polarimetric, phase signatures for a given scene to **dramatically increase decision speed and accuracy**.
- Trained operators (would) know the most probable 'layers' (modes) of sensor data to query in a given scene to achieve a specific knowledge objective – including which specific elements in the scene (pixel location) to collect, stamp, encrypt and forward – → could dramatically **reduce onboard processing & com bandwidth needs for the feed**.
- EXAMPLES:
 - Real-time tuning of EO/IR (UV-IR in space) spectral bands to optimally filter dynamic-clutter for enhance target-scene contrast → **REAL-TIME** target discrimination, ID confidence, & extended range
 - Real-time tuning of 5-10 EO/IR spectral bands for **REAL-TIME** optimized of temp/shape profiling and reflectance spectra for unique materials and subject identification.
 - Real-time selection of wavelengths for polarimetric measurements for **REAL-TIME** surface feature contrast and discrimination of natural versus manmade objects


Great! So where can we find one of these magical Real-Time Adaptive sensors?



Sensing Modes

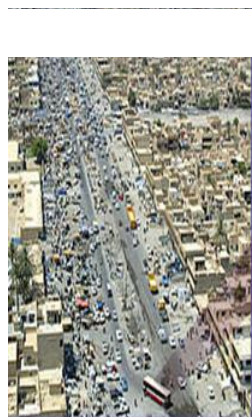

$$\vec{E}(\vec{r}, t) = \vec{E}_0 e^{i(\vec{k}\vec{r} - \omega t)}$$



Spatial (imaging): shape, internal features, context, range profile

Spectral (wavelength): materials characteristics & phenomenology

Polarization: shape, surface roughness, natural vs. manmade

Phase: 3D shape, interferometry

Time (temporal): motion, dynamics, vibration

Spectral Bands

- **VLWIR: 14-30 μ m**
 - very cold body detection
 - future STSS, SSA, ...
- **LWIR: 8-12 μ m**
 - midcourse track for STSS
 - cold body detect for SSA
- **MWIR: 3-5 μ m**
 - missile boost detect/track against Earth background
 - SBIRS-High, future SSA
- **SWIR: 1-3 μ m**
 - missile boost acquisition for SBIRS-High & STSS
 - air/gnd target ID and track
- **VIS: ~ 0.4-0.7 μ m**
 - midcourse track for STSS
 - SBSS, NFIRE, future SSA
- **UV: ~ 0.1-0.35 μ m**
 - future SSA


S/M/LWIR Spatial Discrimination




LWIR (14 μ m) vs VLWIR (28 μ m)




VIS Imaging for SSA




Earth is ~ Dark in UV $\rightarrow$ great for SSA



Spectral Discrimination

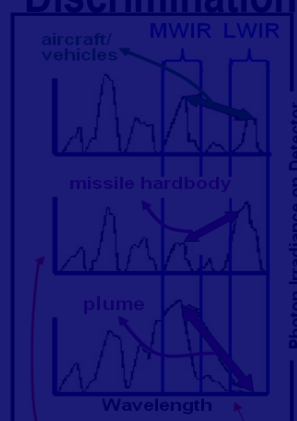

Polarization imaging adds contrast for enhanced discrimination

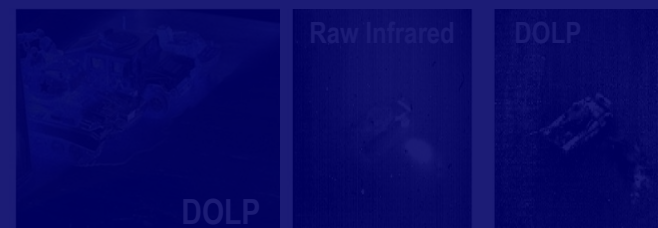

S_0 Intensity S_0 0°/90° S_2 45°/135°




6.1 Opportunities in Real-Time Adaptive Sensing

A Multitude of Fundamental Materials Science & Device Physics Challenges & Opportunities

- Sensor (FPA) mode agility/addressability (pixel location, multiple wavelengths, polarization) + compactness + affordability → vertically integrated-monolithic device constructs
- Must innovate integrated-multi-functional structures & new interactions/transduction methods

Desired New Functional Capabilities

- (a) integrated sense-modes (r , λ , S , ϕ vs. t)
- (b) vertically-aligned (boresight) modes
- (c) real-time mode addressing, tune & read
- (d) ... the holygrail: $\int[(a) + (b) + (c)]dt$

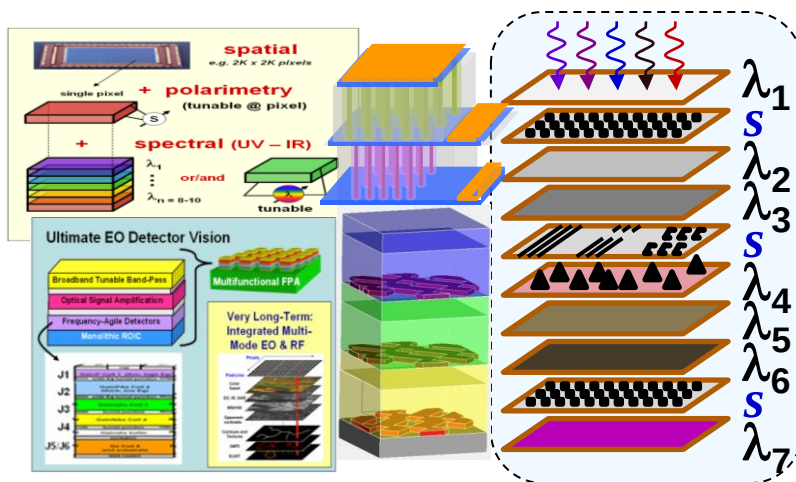

Key Scientific Challenges

(for which no suitable solutions currently exist)

- **Heterogeneous Mat'l's Integration**
 - novel strain mitigation methods
 - band-edge alignment manipulation
 - nano-structure interface compliancy
- **Novel Dynamic Sensing Methods**
 - dynamic mat'l & device property tuning: band-gap, abs. coef., carrier transport, low-D structure energy levels, N_{SS} , etc.
 - 'functionalized' nano-structures
- **Novel Interconnect Schemes**
 - grp II-thru-VI-based transparent (UV-IR) films & electronics → reconfigurable
 - embedded 3-D transport conduits & adaptive switching schemes; color & absorption-rate sensitive 'functions'



Novel Sensing Structures & Methods



A Multitude of Fundamental Materials Science & Device Physics Challenges & Opportunities

unsolved,
important,
potentially
breakthrough
technical
problems

6.1+

revolutionary
C4ISR capability
opportunities

6.1-


the 'what-if'
opportunity
driven,
potential
game-
changing
pay-offs

Desired 'Functional' Breakthroughs

- (A) epi/sub mismatch strain mitigation methods
- (B) epi-dislocation blocking barriers
- (C) band-edge alignment manipulation
- (D) dynamic bandgap/absorption-edge tuning
- (E) dynamic optical absorption-depth tailoring
- (F) dynamic wavelength & polarization filters
- (G) photon property-matter transduction methods
- (H) 3-D transparent pixel interconnects/conduits

Scientific Opportunities & Potential Enablers

- (1) carbon nanotubes: (A)-(H)
- (2) coaxial nanorods: (A)-(H)
- (3) core-shell nanocrystals: (A)-(H)
- (4) Q-dots / wires / wells: (A)-(G)
- (5) metamaterial structures (D)-(G)
- (6) functionalized (1-4) nanostructures: (A)-(H)
- (7) plasmonic structures & methods: (A)-(G)
- (8) novel transparent thin-film synthesis: (D)-(H)
- (9) compliant heterointerface methods: (A)-(C)
- (10) combinations & integration of (1)-(8): (A)-(H)

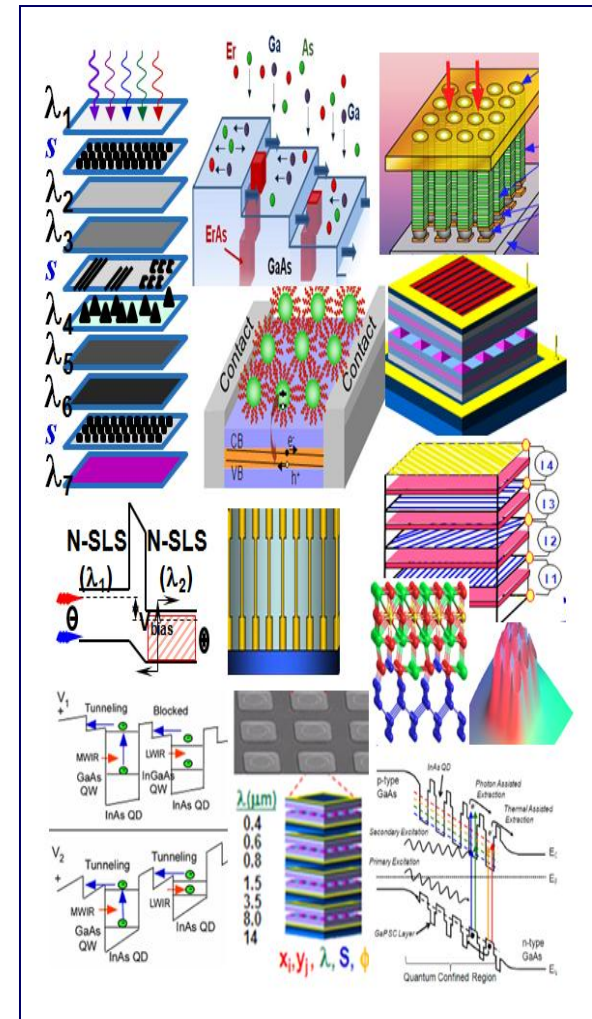






Diamond Nanowires – an accidental discovery





Jimmy Xu (Brown University)

All the fun discoveries in Carbon

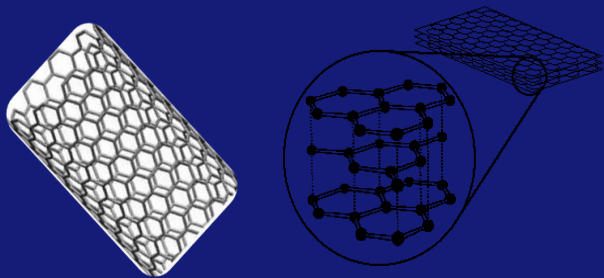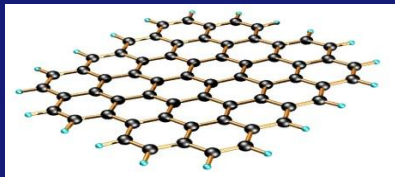

- all experimentally discovered -
- all forms on sp² bond side -

Accidental discovery of diamond nanowires – grown in CVD

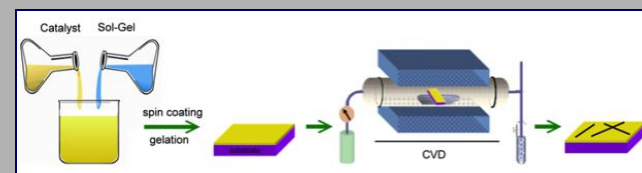

- Crystallography checked!
- Raman spectroscopy checked!
- e⁻ energy loss spectroscopy ✓

IT ALL CHECKED OUT!

- First found in 2008 - 1 atm and 900C.
- Did not know beforehand.
- Did not know the growth mechanism, still don't know.
- Worse - could not reproduce it for 3 yrs !
- Eventually decided to publish in Nano Lett 2010.




Diamond Nanowires – an accidental discovery



Jimmy Xu (Brown University)

... then on Nov 11th, 2011, after 100's of trials in 2 CVD reactors... reproducible Diamond Nanowires!

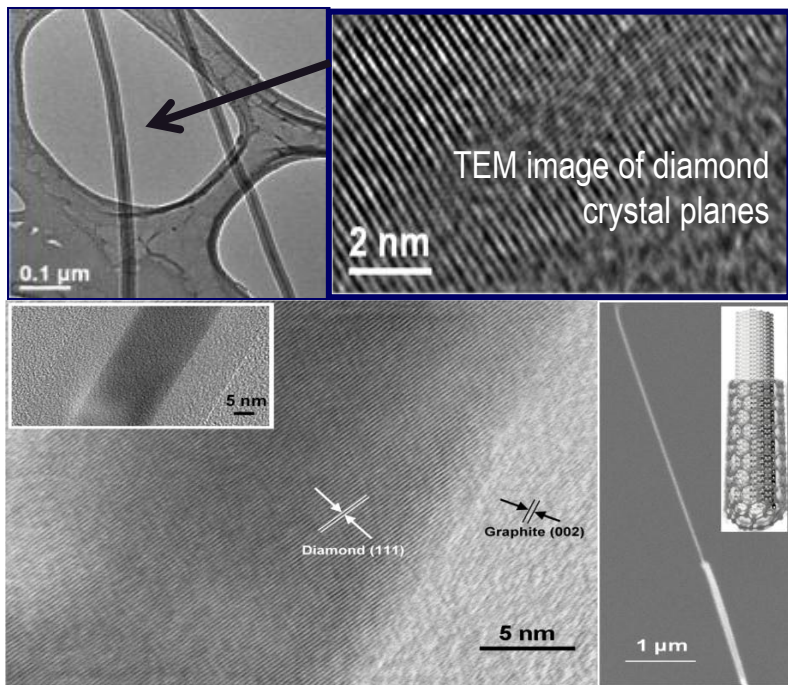

Potential Applications

Superior single-photon source vs. CNTs. Another spectral peak at 415nm, even brighter, stable at room temperature, achieved in 2011.


→ new options for high-speed computing, advanced imaging & secure communication.

EO/IR Sensing applications -- potentially

→ tunable absorbers & current conduction conduits
→ patterned elements for adaptive thin-film spectral and polarization filters and modulators

Open Questions:

- Does physics allow the growth of diamond nanowires under atmosphere pressure & 900C?
- Was the well-established graphite-diamond phase transition condition wrong?

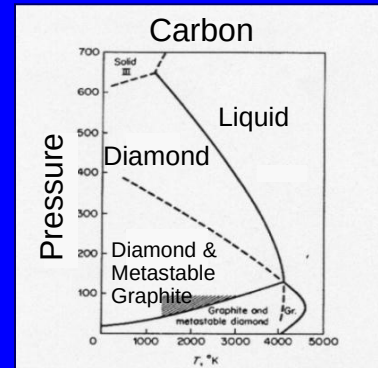

F. P. Bundy, et al., vol. 176, Nature, 1955, p. 51.

Invited Feature Article in "Nanoscale" of RSC (Royal Society of Chemistry) 2012




Multi-Phase III-V Nanocrystals - A New Generation of Electronic Materials -




Chris Palmstrom (UCSB)

Science: understand & exploit novel formation methods $\text{Ga}_x\text{Er}_{1-x}\text{Sb}$ nanowires in GaAs; growth condition dependencies of $\text{Ga}_x\text{Er}_{1-x}\text{Sb}$ nanostructure geometry, optical & electrical properties.


Novel Monolithic Heterogeneous Structures

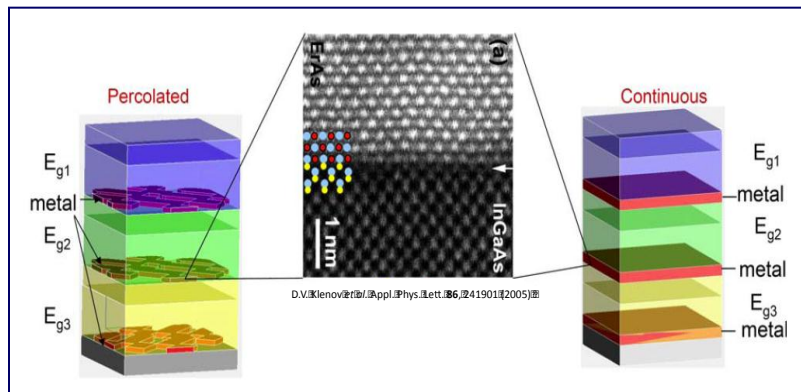

Embedding high concentrations of epitaxial $\text{Ga}_x\text{Er}_{1-x}\text{Sb}$ nanostructures in GaAs

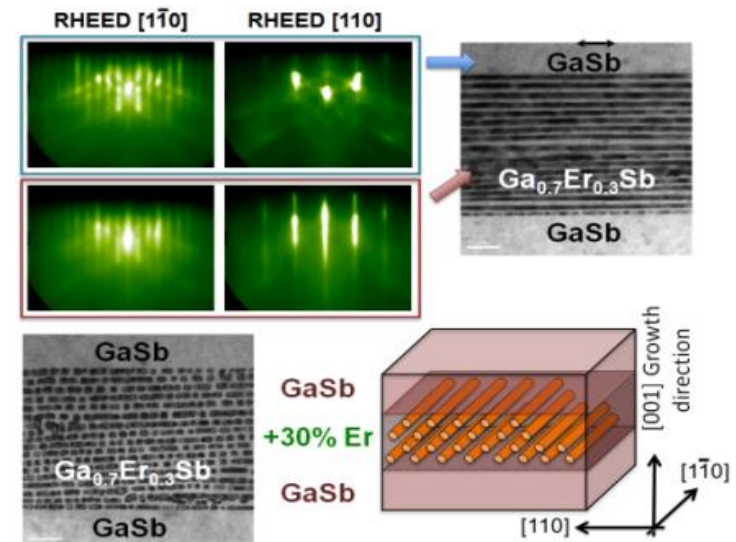

- RE-V's are thermodynamically stable with III-V's
- Share a common *fcc* sublattice
- Layers are semimetallic
- Growth of III-V epitaxial overlayers over percolated layers of RE-V layers

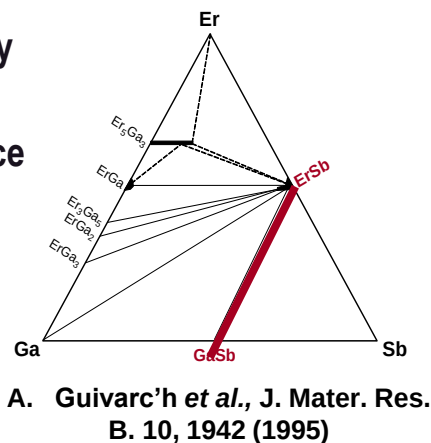

Phys. Rev. Lett. 107, 036806, July 2011
J. Vac. Sci. Tech. B 29(3) May/Jun 2011





Embedded Ordered ErAs Metal Nanostructures



Seth Bank (UT Austin)


Scientific Problem: Innovative novel methods for epitaxial semimetallic ErAs nanostructures/films in III-V stacks without degrading III-V layers grown above.

Epitaxial Metallic NanoStructures & Films

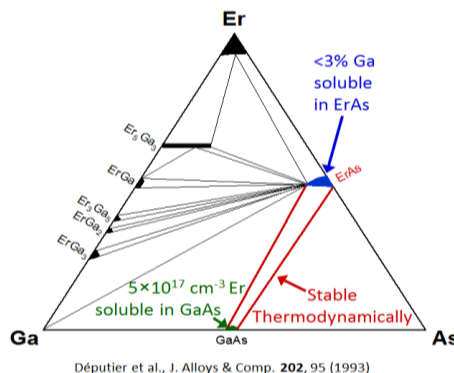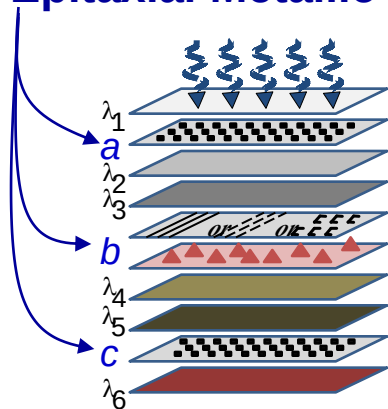


Approach:


1. ErAs growth on patterned templates:

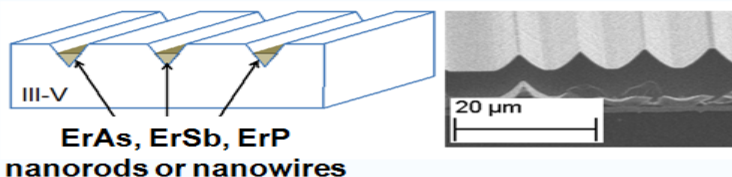

2. Embedded film growth method:



Developed Templated Regrowth

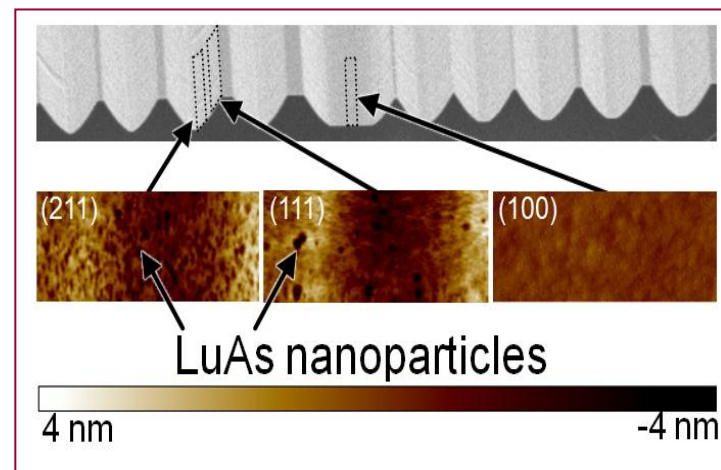

- *in situ* atomic hydrogen clean prior to regrowth:
 - No contaminants evident in MBE
 - PL comparable for structures grown before & after regrowth
- AFM: nanoparticle size & density vary based on surface orientation
 - Preferential LuAs growth on (111) and (211) planes
 - Signature of LuAs similar to AFM expts of ErAs on (100) GaAs




Embedded Ordered ErAs Metal Nanostructures




Seth Bank (UT Austin)

Novel Embedded Patterned Films

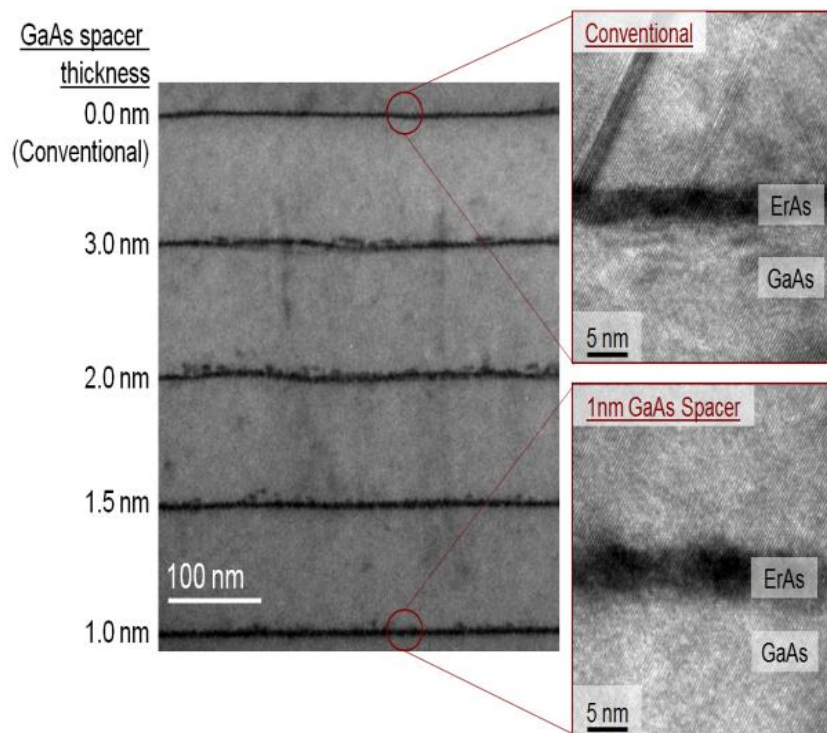

Embedded Film Characteristics

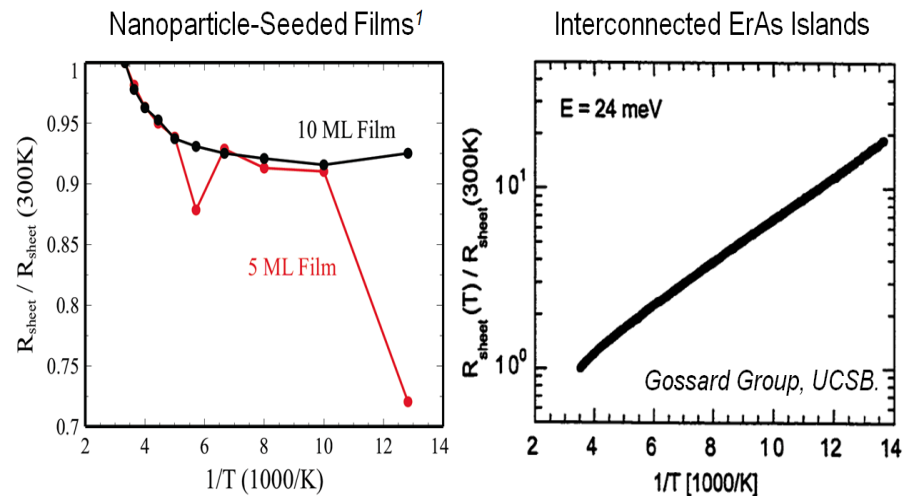

- Temperature-dependent conductivity
 - Films exhibit band-like transport
 - Distinct from thermally-activated hopping for interconnected islands

Films are continuous and suitable for buried contacts, conduits, and multifunctional patterned structures.

S.R. Bank et al., "Surface segregation effects of erbium in GaAs growth and their implications for optical devices containing ErAs nanostructures," *Appl. Phys. Lett.*, vol. 98, pp. 121108-1-3, March 2011.

S.R. Bank et al., "Suppression of Planar Defects in the Molecular Beam Epitaxy of GaAs/ErAs/GaAs Layered Heterostructures," *Appl. Phys. Lett.*, vol. 99, pp. 072120-1-3, Aug. 2011.

S.R. Bank et al., "Scanned Probe Characterization of Self-Assembled ErAs/GaAs Semimetal/Semiconductor Nanostructures Grown by Molecular Beam Epitaxy," *Appl. Phys. Lett.*, vol. 99, pp. 133114-1-3, Sept. 2011.




Lead Chalcogenide Nanorod Liquid Crystals





Joe Tischler & Janice E. Boercker (Navy Research Lab)

Science: innovate, understand, exploit synthesis of PbSe liquid crystals for polarization appl's


Vision: bias-tunable thin-film polarizers, modulators, filters

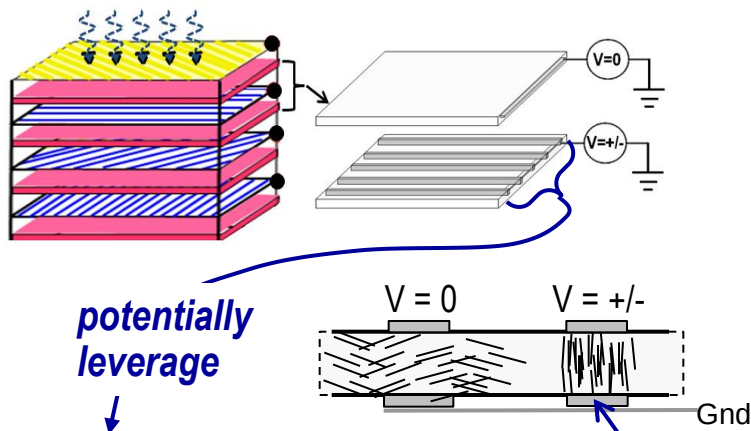



Approach: investigate viability of PbSe nanorod liquid crystals suspended in TCE – TCE transparent to 11 μ m.

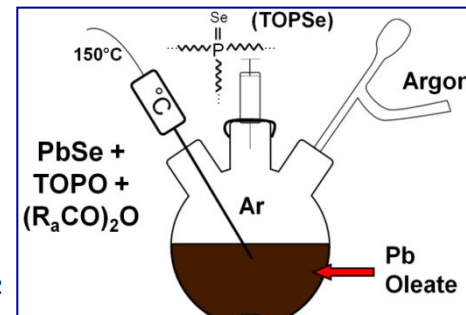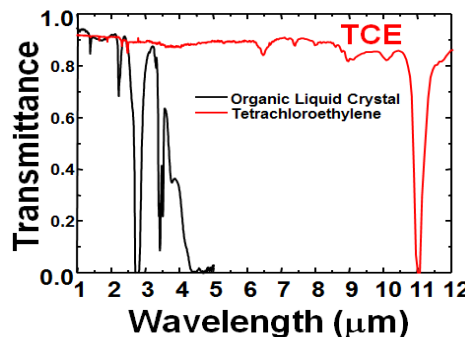

Increased nanorod density and aspect ratio: 4 $\rightarrow$ 12

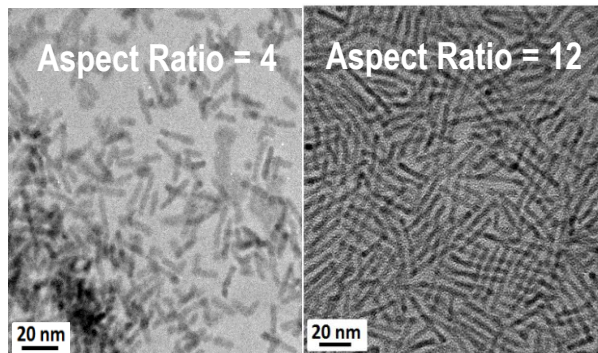

Increased bandgap from to 1.0-2.0 μ m

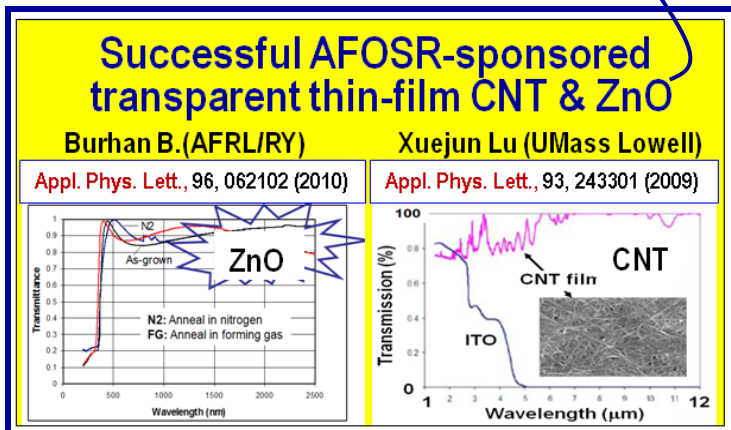




Lead Chalcogenide Nanorod Liquid Crystals



Joe Tischler & Janice E. Boercker (Navy Research Lab)

Electrical Configuration

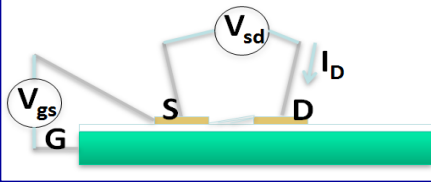


10 MHz ~ 10 V_{pp}
AC

Au pad



SiO₂

Alignment occurs between contact and substrate, not the neighboring contact.

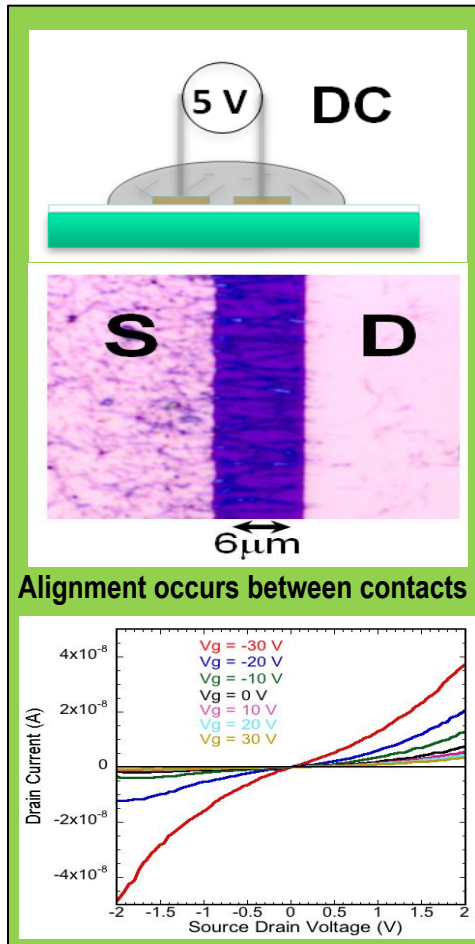

Alignment occurs between contacts

new theoretical and physical understandings

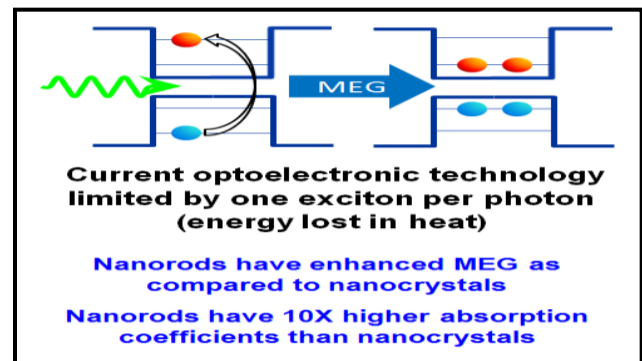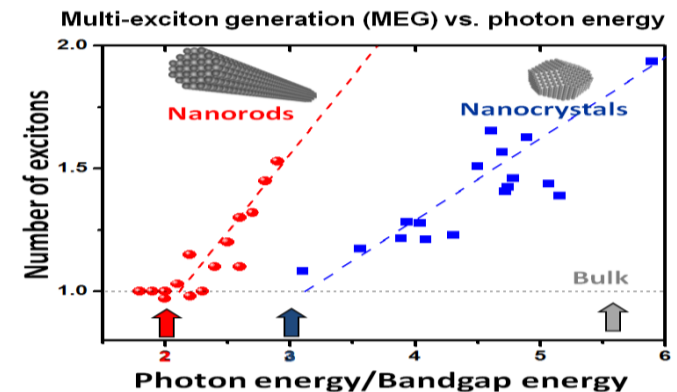

Current optoelectronic technology limited by one exciton per photon (energy lost in heat)


Nanorods have enhanced MEG as compared to nanocrystals

Nanorods have 10X higher absorption coefficients than nanocrystals

Nano Letters 11, 3476 (2011); *J. Phys. Chem. Lett.* 2, 527 (2011); *J. Mater. Chem.* 21, 2616 (2011)



Novel PV Cells: selective photogeneration and photocurrent enhancements of 30-50%

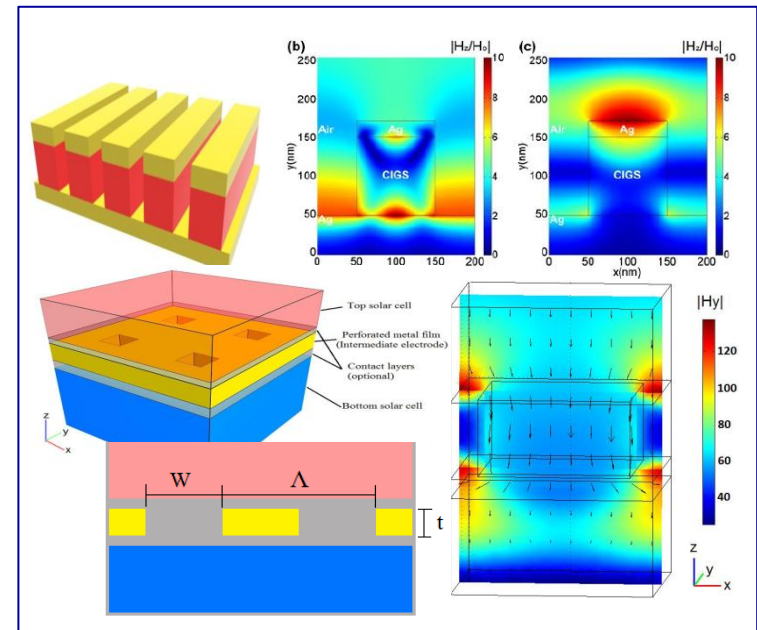

DISTRIBUTION A: Approved for public release; distribution is unlimited.



Breakthrough Carrier Lifetimes in Type-II Superlattice (T2SL) IR Photodetectors for Increased Temp Operation



Yong-Hang Zhang (ASU) - jointly supported by ARO MURI (Bill Clark)

Carrier lifetime in LWIR T2SL improved by 13 times from ~30 ns to 412 ns !!

Carrier lifetime for Ga-free InAs/InAsSb type-II superlattice of 412 ns was achieved

- within the same order of magnitude of the reported record for HgCdTe (1 μ s)
- could potentially lead to background limited T2SL MWIR-LWIR (3-12 μ m) performance higher operating higher temperatures than HgCdTe !

Detailed calculations in mid 90's predicted advantages of T2SLs

T2SLS detectors offer potential for:

- larger effective mass than HgCdTe for the equiv. E_g → less band-to-band tunneling
- suppressed Auger recombination in both the conduction & valence bands; generation & recombination can be reduced w/wider E_g 's.

However, the predicted enhanced lifetimes in T2SLs have eluded the community, until now.

	MCT	QWIP	T2SL	
			InAs/InGaSb	InAs/InAsSb
Performance	High	Low	High/medium	High
QE	60%	5-8%	60%	>60%
Dark current	High	Very high	Low	Low
Material Uniformity	Poor	High	High	High
Wafer size	Small	Largest	Large	Large
Wavelength range	Wide (MWIR and LWIR)	Narrower (LWIR)	Wide (MWIR and LWIR)	Wide (MWIR and LWIR)
Wavelength Uniformity	Poor	Good	Good	Good
Detection bandwidth	Broad	Narrow	Broad	Broad
Cost	High	Very low	Low	Low




Breakthrough Carrier Lifetimes in T2SL Detectors




Yong-Hang Zhang (ASU) - jointly supported by ARO MURI (Bill Clark)

How did they do it? → replaced Ga in conventional InAs/InGaSb T2SL with As → InAs/InAsSb

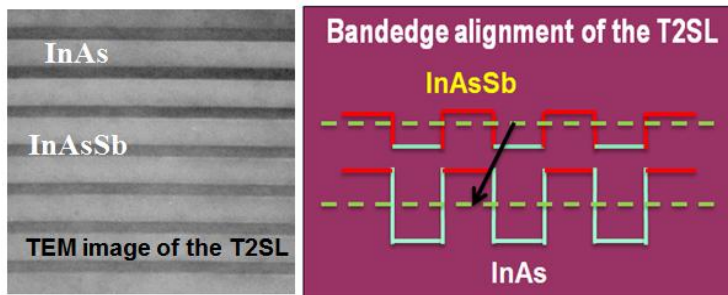


PL Intensity Comparison Between ASU Grown AsInAs/InAsSb and State-of-the-Art InAs/InGaSb Grown by an Industry Vendor

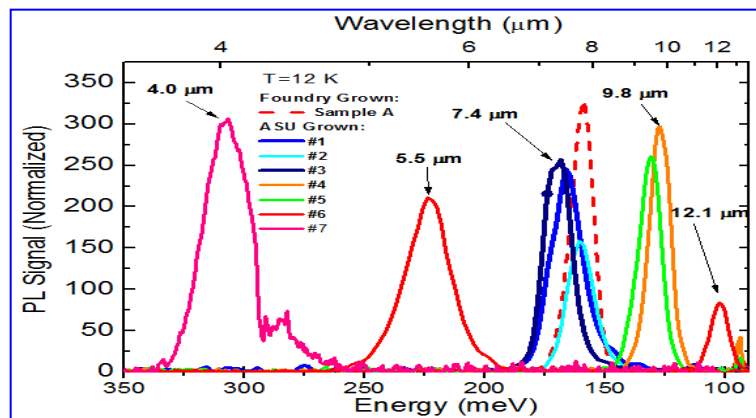


Y. H. Zhang et al., SPIE Defense and Security, Apr 2012

Breakthrough InAs/InAsSb T2SL Carrier Lifetimes

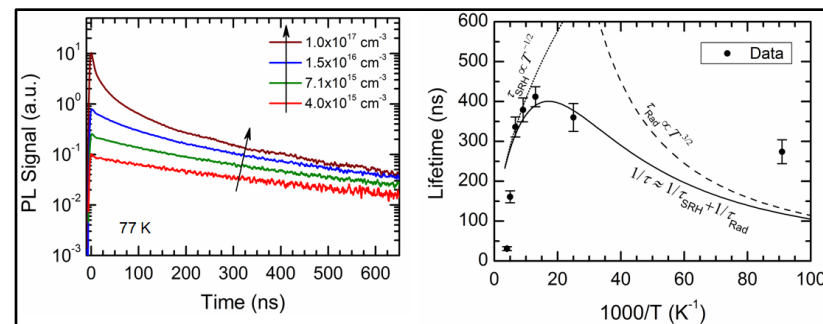

Y. H. Zhang et al., Appl. Phys. Lett. 99, 251110 (2011)

Why is carrier lifetime in Ga-free T2SL longer?

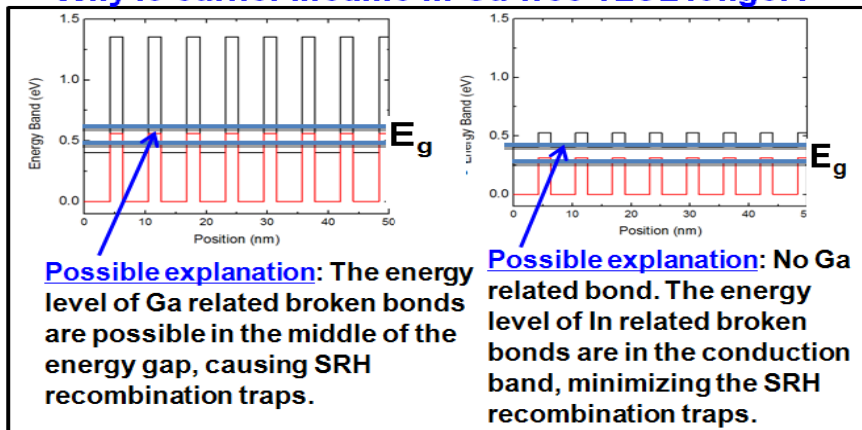

Possible explanation: The energy level of Ga related broken bonds are possible in the middle of the energy gap, causing SRH recombination traps.

Possible explanation: No Ga related bond. The energy level of In related broken bonds are in the conduction band, minimizing the SRH recombination traps.



Novel Interband Cascade IR Photodetector (ICIP)



Rui Yang (U. of Oklahoma)

Innovation: novel quantum-engineered interband cascade (IC) structures for near room temp mid-IR detector operation → ultra-low dark currents - detectivity close to 10^{10} Jones or higher.

Jan 2012

JOURNAL OF APPLIED PHYSICS 111, 024510 (2012)


Interband cascade infrared photodetectors with enhanced electron barriers and p-type superlattice absorbers

Z. Tian,^{1,a)} R. T. Hinkey,^{1,2} Rui Q. Yang,^{1,a)} D. Lubyshev,³ Y. Qiu,³ J. M. Fastenau,³ W. K. Liu,³ and M. B. Johnson²

¹School of Electrical and Computer Engineering, University of Oklahoma, Norman, Oklahoma 73019, USA


²Homer L. Dodge Department of Physics and Astronomy, University of Oklahoma, Norman, Oklahoma 73019, USA

³IQE Inc., Bethlehem, Pennsylvania 18015, USA

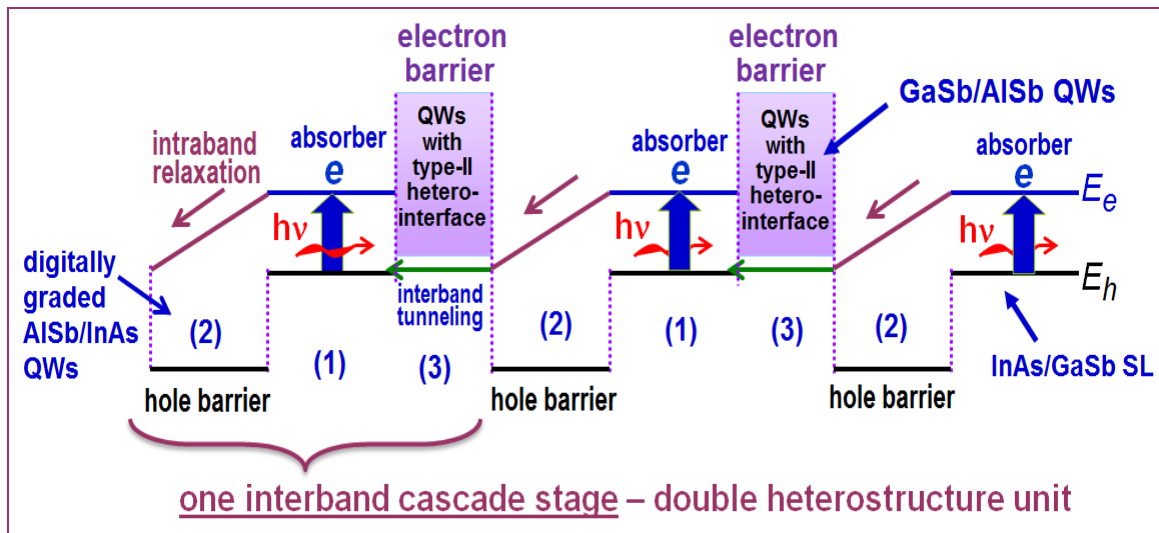

Key Features of ICIPs:

- **Conventional depletion region is eliminated** → suppression of SRH gen-current
- **Discrete architecture** → signal to noise ratio $S/N \propto 1/N_a^{1/2}$ (N_a : No. of absorbers) → **circumvent the diffusion length limitation** → **high absorption QE**
- **Photo-carriers move over a short distance, i.e. one stage** → **fast response** → **viable for high-speed devices: lasers-free-space com & heterodyne detection**

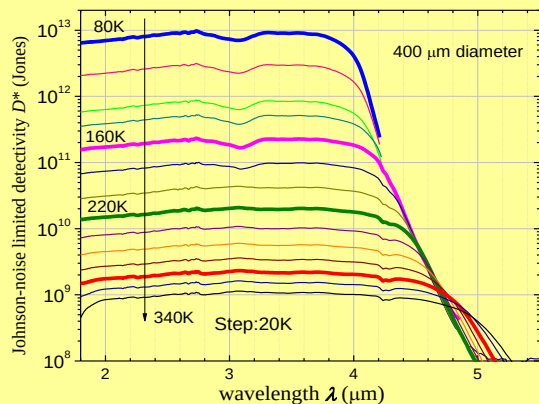



The Johnson-noise limited detectivity (D^*) exceeding 10^{12} , 10^{11} , 10^{10} , 10^9 Jones at 80, 160, 230, 300 K, respectively.

Novel Tunable NIR/LWIR Photodetector

Yong-Hang Zhang (ASU) – with joint support from ARO


2-Terminal Dual-Band IR Detector

NIR/LWIR optical addressing demonstrated for the first time...

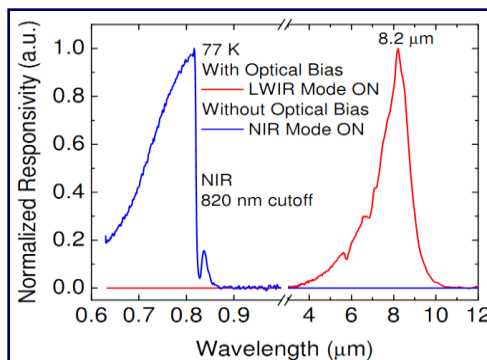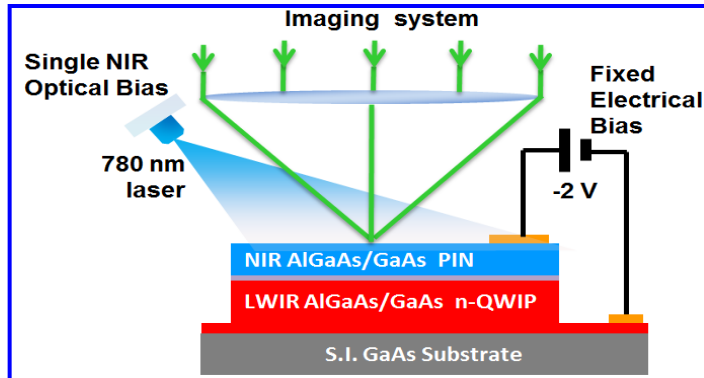

Y.H. Zhang, "Optically-Addressed Multiband Photodetector for Infrared Imaging Applications,"
Proc. of SPIE Vol. 8268,
Jan 2012

- A 2-band photodetector consisting of NIR, PIN, LWIR & QWIP was demonstrated.
- The device is compatible with *low-cost* standard ROICs for two-terminal FPA.

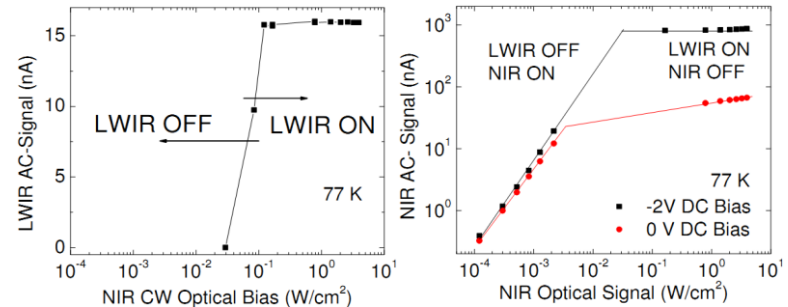

Other Pioneering Work Underway on Grant


- 3-color photodetectors using NIR PIN, MWIR QWIP and LWIR QWIP.
- 4-color InAs/InAsSb T2SL photo-detectors in MWIR and LWIR ranges.
- **UV to IR multi-color photodetectors using 6.1 Å II-VI and III-V materials.**



Sanjay Krishna (U. of New Mexico)


Innovation: 1st focal plan array (256x320) with integrated plasmonic resonators → 160% enhancement!

Approach:

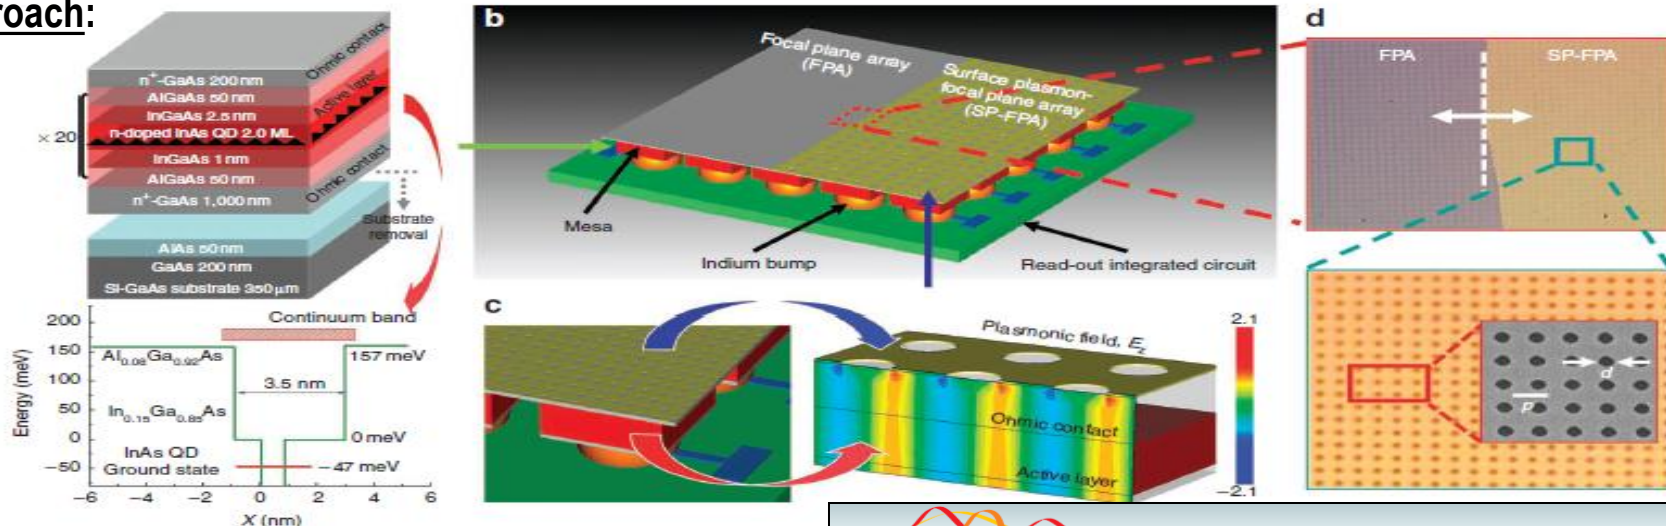

Results:

Plasmonic Enhancement

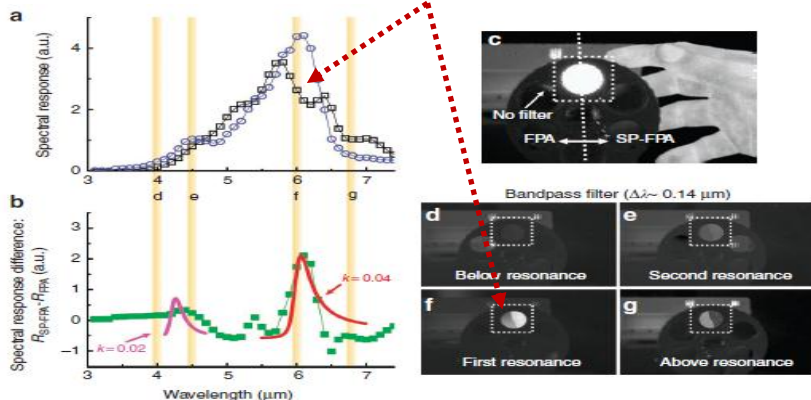

nature COMMUNICATIONS

ARTICLE

Received 5 Jan 2011 | Accepted 17 Mar 2011 | Published 19 Apr 2011

DOI: 10.1038/ncomms1283

A monolithically integrated plasmonic infrared quantum dot camera

Sang Jun Lee^{1*}, Zhyun Ku^{2,*,†}, Ajit Barve², John Montoya², Woo-Yong Jang², S.R.J. Brueck², Mani Sundaram³, Axel Reisinger³, Sanjay Krishna² & Sam Kyu Noh¹

... Raytheon has expressed strong interest in transitioning into their next generation (4th) detectors!



Three Color InAs/GaSb Superlattice IR Detector




THE UNIVERSITY of
NEW MEXICO

Sanjay Krishna (U. of New Mexico)




Innovation: 1st 3-terminal detector pixel implementing unipolar nBn/PbIbN architecture

Approach:

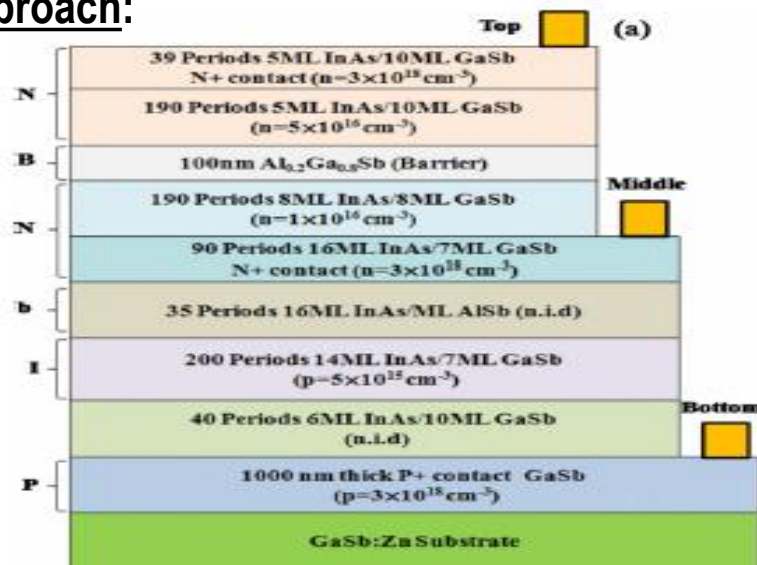

Results:

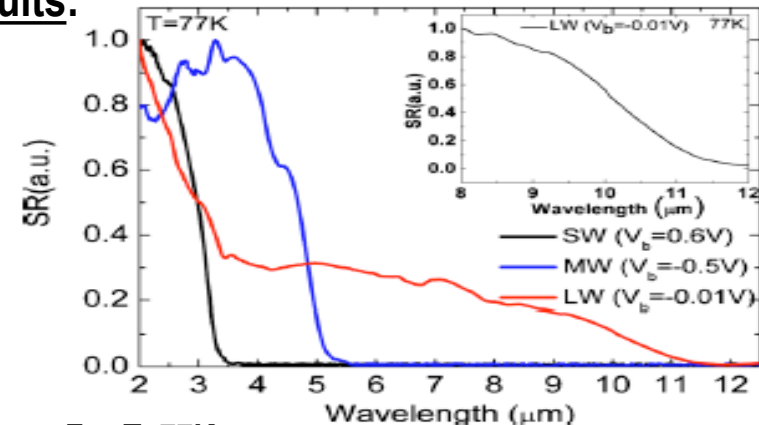


For T=77K:

SWIR at $V_b = +0.01V$, $D^* = 1.8 \times 10^{12} \text{ cmHz}^{1/2}/W$

MWIR at $V_b = -0.3V$, $D^* = 1.4 \times 10^{11} \text{ cmHz}^{1/2}/W$

LWIR at $V_b = -0.01V$, $D^* = 9.9 \times 10^{10} \text{ cmHz}^{1/2}/W$

simulations:

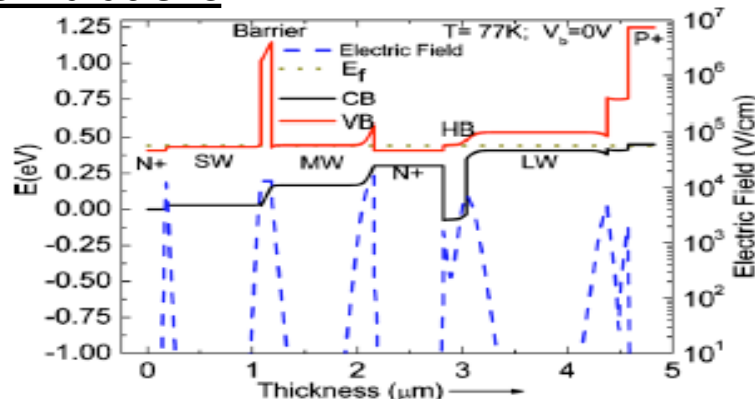

APPLIED PHYSICS LETTERS 98, 121106 (2011)

Three color infrared detector using InAs/GaSb superlattices with unipolar barriers

N. Gautam, M. Naydenkov, S. Myers, A. V. Barve, E. Plis, T. Rotter, L. R. Dawson, and S. Krishna^{a)}


Department of Electrical and Computer Engineering, Center for High Technology Materials, University of New Mexico, Albuquerque, New Mexico 87106, USA




Other Portfolio Investments



Electron Processes & Physics of Correlated Doped Q-Dots & Barriers (UB)


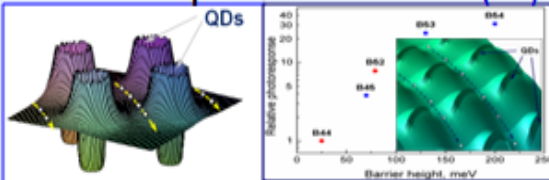


Doped Q-Dot PV Cells (ARL & UB)

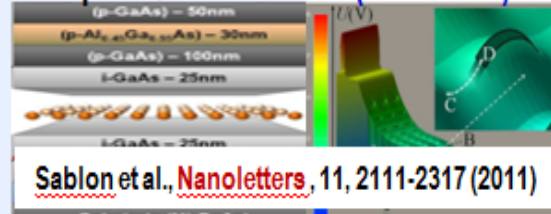


Sablon et al., *Nanoletters*, 11, 2111-2317 (2011)

Novel Q-Dot nipi PV Cell (STTR w/RIT)


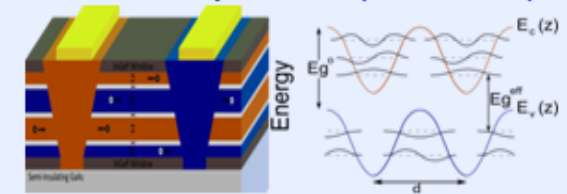


Nanotemplate-Enabled Highly-Heterogeneous Q-Nanostructure & Metamaterials Systems (USC)


Tunable MEMs for $\Delta\lambda$ & S (RIT)

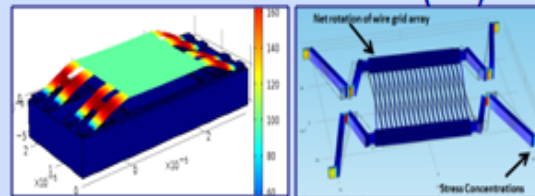

Peltier Cooling (Northwestern U.)

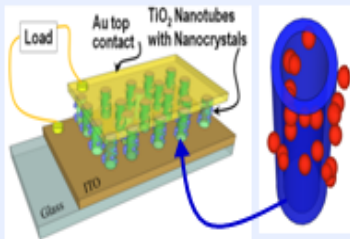
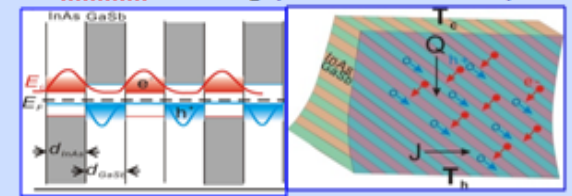


Functionalizing Coupled Nanorods, Nanotubes and Core/Shell Nanocrystals (U. Arkansas)




IR-Transparent CNT Membrane-based Tunable Spectral Filters (U. Mass Lowell)

Ridge-Waveguide Laser Cooling

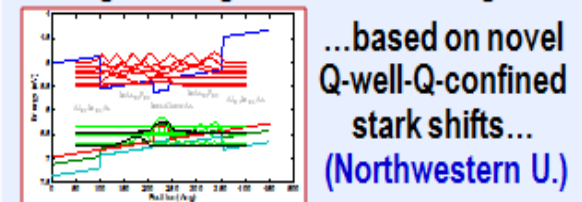


Non-Radiative Energy Transfer (NRET) Sensing via Q-Composite Structures (USC)



Monolithic Integrated Metamaterial-based Polarizer Grid (Tufts U.)

Novel Conformal Apertures - STTRs via RY

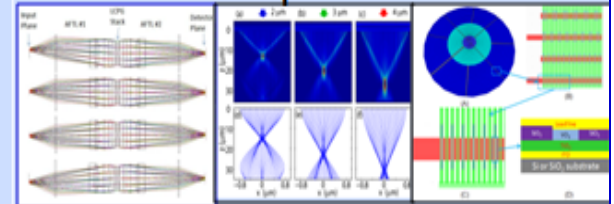



Coordination/Conferences/International



DoD Coordination:

- **ARO**: jointly fund efforts with ASU on novel detector materials science & device approaches
- **ARL**: support ARL in-house: novel Hg-based semiconductor epi-growth studies (Adelphi), collaboration with sensors group on doped Q-dot studies
- **NRL**: support in-house polarimetry filter research effort
- **DARPA**: coordinate w/Nibir Dhar in sensors -- their investments primarily 'applied' w/little 6.1
- **NSF**: follow nano-electronics investmnets, periodically attend reviews

Conferences/Workshops:

- SPIE DSS session organizer/speaker
- SPIE Photonics W. session organizer
- IEEE SISC: session organizer
- IEEE ICSC sponsor

International:

- National Cheng Kung University, Taiwan: CNTs
- Taras Shevchenko University, Kiev, Ukraine: polarimetry



Take Aways



- **Portfolio targets crucial long-term USAF ISR capability needs.**
- **Strong thrusts established in multiple fundamental science challenge areas spanning novel solid-state nanomaterials and quantum structures synthesis, and breakthrough mixed-mode multi-discriminate sensor device concepts and methods.**
- **Good portfolio balance between theoretical and experimental research – most efforts include elements of both.**
- **Excellent progress achieved in novel heterogeneous nano-structures synthesis and integration, novel photon//detector materials interactions & phenomenology, and novel mixed-mode sensing device concepts and methods.**