



**Environment, Energy Security, and Sustainability
(E2S2)
Symposium and Exhibition**

**Microgrid with Solar Power
and Fuel Cell Technology**

16 June 2010

**Dan Markiewicz
Senior Director, Electrical Design**

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE 16 JUN 2010		2. REPORT TYPE		3. DATES COVERED 00-00-2010 to 00-00-2010	
4. TITLE AND SUBTITLE Microgrid with Solar Power and Fuel Cell Technology				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Concurrent Technologies Corporation,Electrical Design,100 CTC Drive,Johnstown,PA,15904				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES Presented at the NDIA Environment, Energy Security & Sustainability (E2S2) Symposium & Exhibition held 14-17 June 2010 in Denver, CO. U.S. Government or Federal Rights License					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 21	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

OVERVIEW

- Background
- Terminology
- Project Objective
- Requirements
- Microgrid System
- Planned Testing

Background

- One of the primary energy challenges identified in the February 2008 Defense Science Board Task Force on Department of Defense (DoD) Energy Strategy was
 - “Military installations are almost completely dependent on a fragile and vulnerable commercial power grid, placing critical military and homeland defense missions at unacceptable risk of extended power outage.”
- Tasked by the United States Air Force (USAF) Advanced Power Technology Office (APTO) to develop a Microgrid using Solar Panels and Fuel Cell Technologies

Terminology

- General Definition

- An integrated energy system consisting of interconnected loads and distributed energy resources that can operate in parallel with the grid or in an intentional island mode.

- Key Defining Characteristics

- Integrated distributed energy resources (DERs), capable of providing sufficient and continuous energy to mission critical loads
- Independent controls; island and reconnect with minimal disruption
- Flexible configuration and operation of the power delivery system
- Optimized local DERs, large network loads, and broader power system

Project Objective

- Design, integrate, test and sustain a DC based 50 kW microgrid with multiple power sources which will demonstrate:
 - Reliably supply power to dedicated loads in a prioritized fashion
 - Supply excess power to the grid, when appropriate
 - Make intelligent decisions when the PV array (and other sources) should directly supply power to the load
 - Make intelligent decisions when the PV array (and other sources) should supply power to charge the battery energy storage system
 - Make intelligent decisions when none of the options are available and allow the load to be sourced via a grid connection or the government furnished back-up generator.


Requirements

- Ability to run grid tied or islanded
- High reliability electrical supply to identified loads
- Load prioritization
- Effectively manage energy storage to maximize energy supply to critical loads
- Control system to monitor loads and sources, and effectively manage these loads and sources to attain high reliability supply to critical loads
- Data collection to determine metrics of system operation
- Supply a maximum of 50 kW output


Requirements - Site

- Environmental and weather concerns
 - Lightning protection
- Stand-off distances from tents and specific equipment
- Footprint, size, and overall weight of equipment
- Ability to cover, conceal, and protect interconnecting wiring and cable from damage or safety concerns

Microgrid System – Schematic View

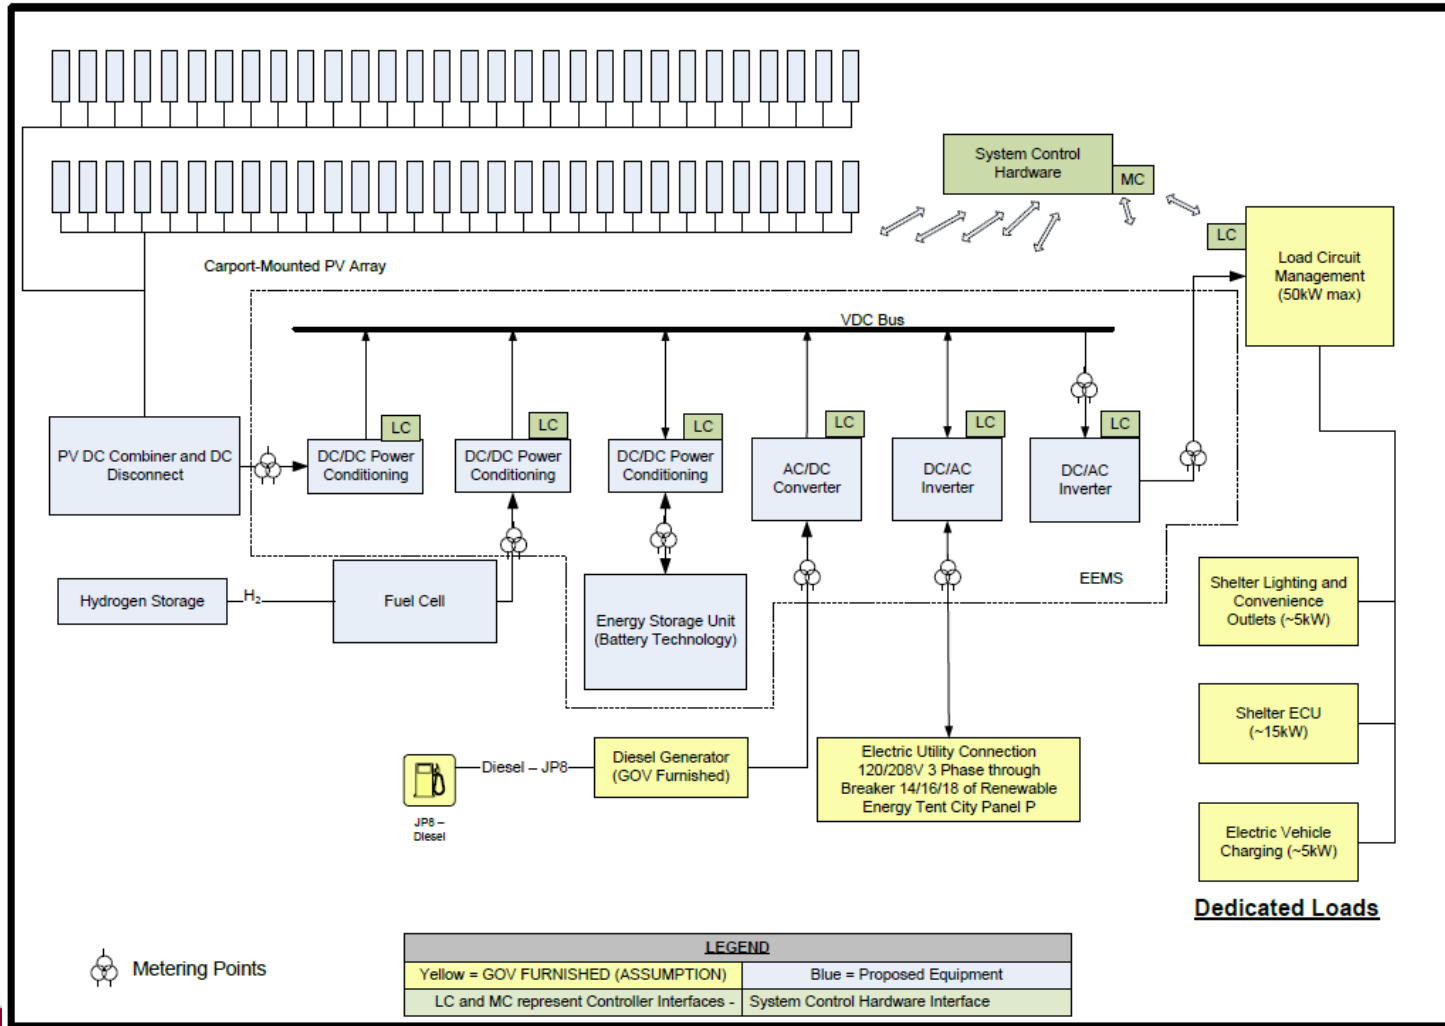


Microgrid System – Layout

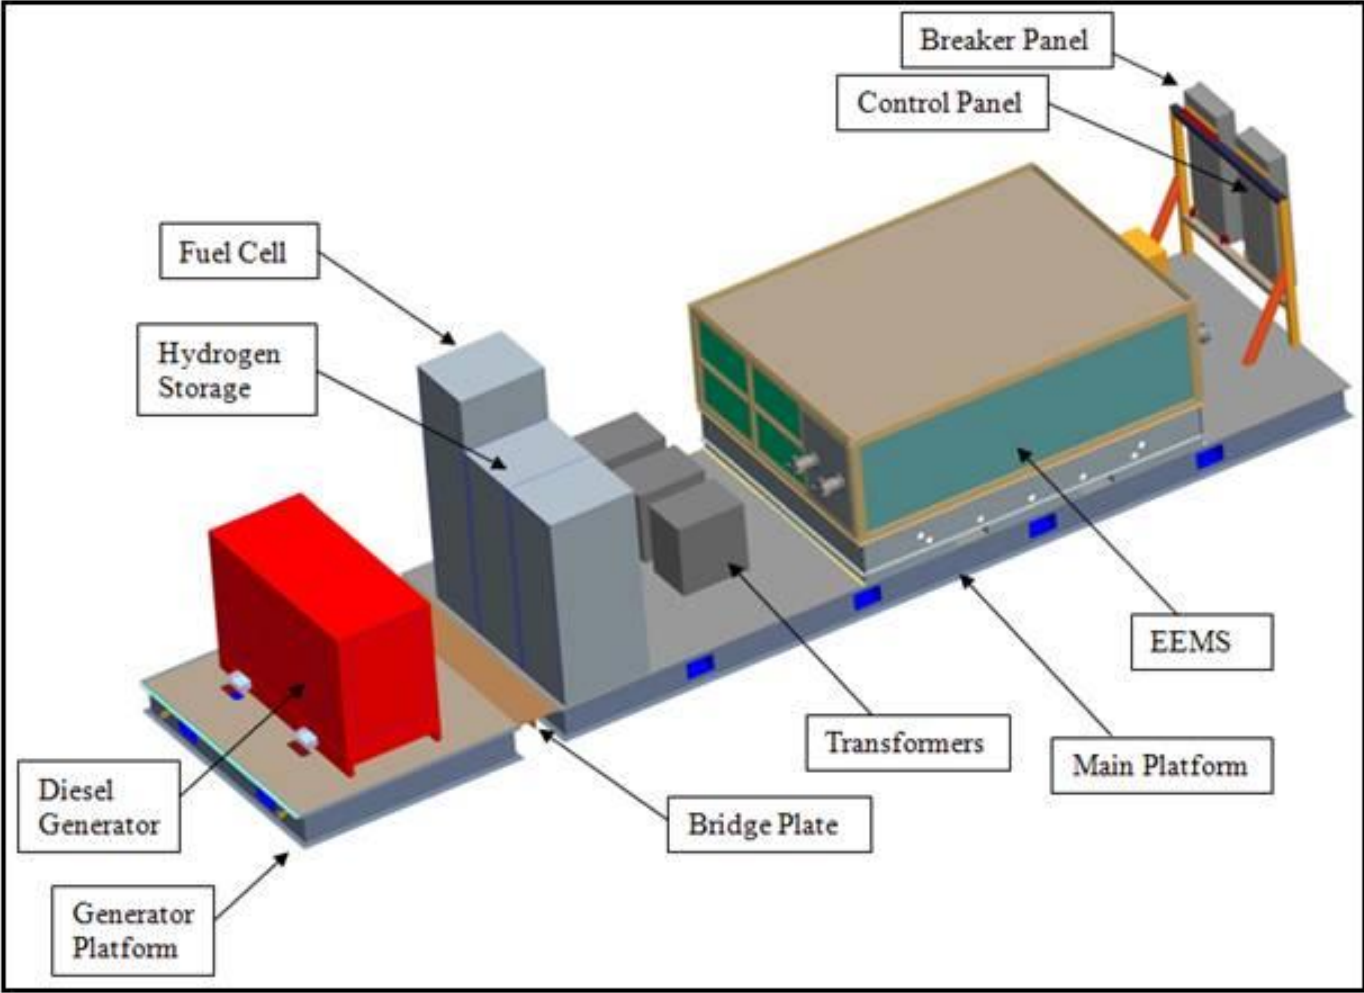

Microgrid System Sources – PV Array

- 140 individual 175 W modules
- 14 strings of ten modules each
- Peak power rating of 24.5 kW @ an operating voltage of approximately 360 VDC
- Footprint 111' x 20'

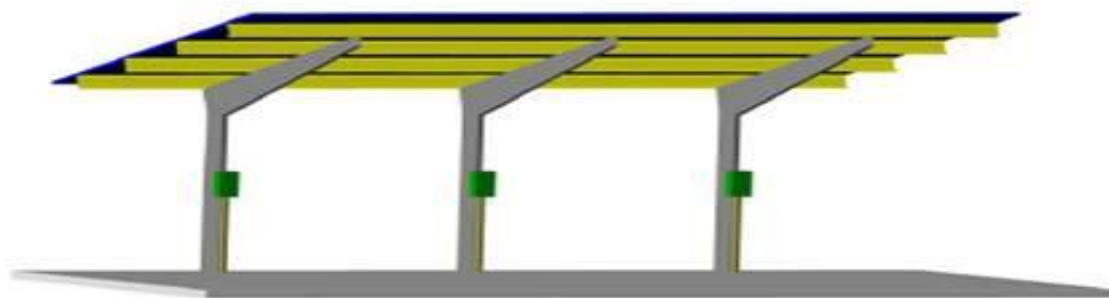

Microgrid System Sources – Fuel Cell

- 5 kW output
- 48VDC
- Proton Exchange Membrane (PEM)
- Up to 16 hours of full load operation w/ fuel storage



Microgrid System Sources – Diesel Generator


- MEP-805A generator
 - 30 kW, 120/208 volts AC (VAC), 3 phase, 60 Hz

Microgrid System Sources – Energy Storage

- Selected Zinc Bromide:
 - Improved cycle life; 30 years before stack replacement
 - Reasonable round-trip efficiency (70-80%)
 - Deep cycle (allows full capacity from 100% to 0% charge)
 - Environmentally acceptable
 - Commercial units - scalable to large systems
- 100kWhr/50kW capacity

Microgrid System Sources – Electrical Energy Management System

- Flow battery
- Source power conditioning
- Output power conditioning
- Isolation transformers
- Metering

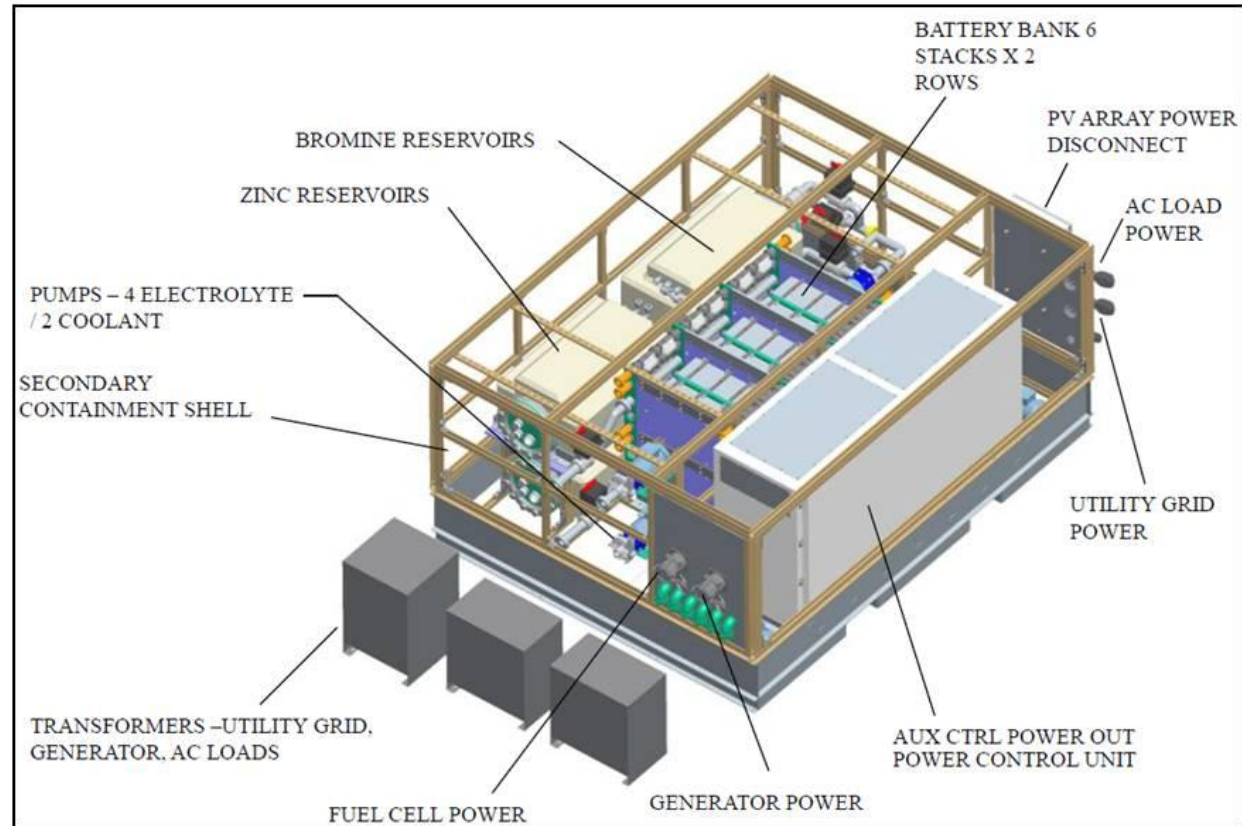

- 1741 compliant 200 Amp electrical utility connection point

Microgrid Control System

- Programmable Logic Controller based supervisory control.
- PC-based operator interface and data acquisition to provide oversight, configure testing, and capture operational data.

Microgrid Loads

- Environmental Control Unit (ECU) 17 kW
- Lighting 1.8 kW
- Convenience Receptacles 3.6 kW
- EV Charging Receptacles 6 kW
- Control Power / Control Panel AC < 4 kW

Microgrid Testing

- Determine and quantify operations performance characteristics
 - Efficiency of various components to produce or process energy
 - Quantifying the reliability of the microgrid configuration
 - Validate the benefits of energy storage
 - Prioritized load management

Microgrid Testing

- Interaction of subsystems
 - Diesel Generator Load changes w/ energy storage
 - Diesel Generator Efficiency w/ & w/o energy storage
 - Islanded PV and energy storage
 - Control system and algorithms

Benefits

- Improved Reliability
 - Critical load support
 - Integration of multiple generation sources (legacy and renewable)
- Risk Mitigation / Improved Energy Security
 - Eliminate dependence upon local utility
 - Integrating available energy sources for backup power
- Electrical Cost Reduction
 - Intelligent control for peak shaving
 - Renewable Energy Integration
 - Improved asset utilization by integrating distributed sources

Acknowledgements

- APTO
- Air Force Research Laboratory/Airbase Technologies Division (AFRL/RXQD), Tyndall AFB,

Contact Information

Dan Markiewicz

Concurrent Technologies Corporation

Senior Director Electrical Design

(814) 269-2786

Email: markiewi@ctc.com

Web Address: <http://www.ctc.com>