

REPORT DOCUMENTATION PAGE			<i>Form Approved</i> <i>OMB No. 0704-0188</i>		
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) 31 March 1954		2. REPORT TYPE Final report		3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE Electromagnetic Measurements Conducted by the Central Radio Propagation Laboratory During Operation Upshot-Knothole		5a. CONTRACT NUMBER			
		5b. GRANT NUMBER			
		5c. PROGRAM ELEMENT NUMBER			
6. AUTHOR(S)		5d. PROJECT NUMBER B/216/E/NBS			
		5e. TASK NUMBER			
		5f. WORK UNIT NUMBER			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Bureau of Standards, Gaithersburg, MD 20899		8. PERFORMING ORGANIZATION REPORT NUMBER NBS-3C102			
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) Air Force Technical Applications Center, Patrick AFB, FL 32925		10. SPONSOR/MONITOR'S ACRONYM(S)			
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)			
12. DISTRIBUTION / AVAILABILITY STATEMENT Statement A					
13. SUPPLEMENTARY NOTES Partially declassified version of AD0338549.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT U	b. ABSTRACT U	c. THIS PAGE U			19b. TELEPHONE NUMBER (include area code)

#12

DECLASSIFIED IN FULL
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02 2013

~~SECRET~~
~~RESTRICTED DATA~~

AD 338549

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA

Office of the Secretary of Defense SU.S.C.SS2(b)

Chief, RDD, ESD, WHS

Date: 02 Jan 2012 Authority: EO 13526

Declassify: _____ Deny in Full: _____

Declassify in Part: X

Reason: 6.2(a) + SU.S.C.SS2(b)(6)

MDR: 12-M-1573



~~RESTRICTED DATA~~

~~SECRET~~

~~RESTRICTED DATA~~

~~THIS DOCUMENT CONTAINS INFORMATION THAT IS RESTRICTED TO THE USE OF THE UNITED STATES GOVERNMENT AND ITS AGENCIES AND IS NOT TO BE DISTRIBUTED OUTSIDE THE GOVERNMENT WITHOUT AUTHORIZATION~~

12-M-1573

DECLASSIFIED IN FULL
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02 2013

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOTICE:

[REDACTED]
 AFFECTING THE NATIONAL DEFENSE OF
 [REDACTED]
 [REDACTED]
 [REDACTED] 8,
 [REDACTED] 1955 AND 1957. THE
 [REDACTED] OF
 [REDACTED]
 [REDACTED] PERSON IS PROHIBITED
 [REDACTED]

DECLASSIFIED IN FULL
Authority: EO 13526
Chief, Records & Declass Div. WHS
Date: JAN 02 2013

~~SECRET~~

~~CONFIDENTIAL~~
~~CONFIDENTIAL~~
~~CONFIDENTIAL~~
~~CONFIDENTIAL~~

49

**FINAL REPORT ON
OPERATION UPSHOT-KNOTHOLE
Project No. B/216/E/NBS**

25

scale 10

5 U.S.C. § 552 (b)(6)

ASTIA

MAY 17 1963

MAY 17 1963

3L Control
No. 0234
COPY 1/10/09 COMES

Department of Energy Declassification Review

1st Reviewing Date: 1/13/2012 Information: (Circle Number(s))
 Authority: ☒ 100 ☐ 100
☐ Classification Retained
☒ Classification DeClassified
☐ Contains No DOE Classified Info
☐ Coordinate With:
☐ Classification Cancelled
☐ Classified Info Bracketed
☐ Other (Specify) 2
 Name: R. Shankle 101-99-1-17410

Att 1

[REDACTED] A

~~RESTRICTED DATA~~
~~RESTRICTED DATA~~
~~RESTRICTED DATA~~
~~RESTRICTED DATA~~

U. S. DEPARTMENT OF COMMERCE

Stachle Weeks, Secretary

NATIONAL BUREAU OF STANDARDS

A. V. Astle, Director

DECLASSIFIED IN FULL

Authority: EO 13526

Chief, Records & Declass Div, WHS

Date: JAN 02 2013



THE NATIONAL BUREAU OF STANDARDS

The scope of activities of the National Bureau of Standards is suggested in the following listing of the divisions and sections engaged in technical work. In general, each section is engaged in specialized research, development, and engineering in the field indicated by its title. A brief description of the activities, and of the resultant reports and publications, appears on the inside of the back cover of this report.

Electricity. Resistance and Reactance Measurements. Electrical Instruments. Magnetic Measurements. Electrochemistry.

Optics and Metrology. Photometry and Colorimetry. Optical Instruments. Photographic Technology. Length. Engineering Metrology.

Heat and Power. Temperature Measurements. Thermodynamics. Cryogenic Physics. Engines and Lubrication. Engine Fuels. Cryogenic Engineering.

Atomic and Radiation Physics. Spectroscopy. Radiometry. Mass Spectrometry. Solid State Physics. Electron Physics. Atomic Physics. Neutron Measurements. Infrared Spectroscopy. Nuclear Physics. Radioactivity. X-Ray. Betatron. Nucleonic Instrumentation. Radiological Equipment. Atomic Energy Commission Radiation Instruments Branch.

Chemistry. Organic Coatings. Surface Chemistry. Organic Chemistry. Analytical Chemistry. Inorganic Chemistry. Electrodeposition. Gas Chemistry. Physical Chemistry. Thermochemistry. Spectrochemistry. Pure Substances.

Mechanics. Sound. Mechanical Instruments. Fluid Mechanics. Engineering Mechanics. Mass and Scale. Capacity, Density, and Fluid Meters. Combustion Control.

Organic and Fibrous Materials. Rubber. Textiles. Paper. Leather. Testing and Specifications. Polymer Structure. Organic Plastics. Dental Research.

Metallurgy. Thermal Metallurgy. Chemical Metallurgy. Mechanical Metallurgy. Corrosion.

Mineral Products. Porcelain and Pottery. Glass. Refractories. Enamelled Metals. Concreting Materials. Constitution and Microstructure.

Building Technology. Structural Engineering. Fire Protection. Heating and Air Conditioning. Floor, Roof, and Wall Coverings. Codes and Specifications.

Applied Mathematics. Numerical Analysis. Computation. Statistical Engineering.

Electronics. Engineering Electronics. Electron Tubes. Electronic Computers. Electronic Instrumentation. Process Technology.

Radio Propagation. Upper Atmosphere Research. Ionospheric Research. Regular Propagation Services. Frequency Utilization Research. Tropospheric Propagation Research. High Frequency Standards. Microwave Standards.

●Office of Basic Instrumentation

●Office of Weights and Measures

DECLASSIFIED IN FULL
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02 2013

(2) NA (5) 603 400

~~SECRET~~

This is a 104 Page Document

NATIONAL BUREAU OF STANDARDS REPORT

(16) NBS PROJECT
1401-40-6822

March 31, 1954

(17) NBS REPORT
3C102

(20) Rept. on (2) FINAL REPORT ON
OPERATION UPSHOT-KNOTHOLE
(14) Project No. B/216/E/NBS

(16) Electromagnetic Measurements Conducted by the Central Radio Propagation Laboratory During Operation Upshot-Knothole (24)

(2) NA
(1) 2

(11) 31 MAR 54

(12) 101 p.

(13) NA

(14) NA

(15) NA

(17) NA

(18) NBS

(20) SLD

(21) NA

(10) By

National Bureau of Standards
Washington 25, D. C.

For

Office for Atomic Energy, DCS/O
Department of the Air Force

OSD

5 U.S.C. § 552 (b)(6)



U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS

~~SECRET~~

~~SECRET~~

EXEMPT FROM AUTOMATIC
DECLASSIFICATION
E.O. 12065, 1.10
DOES NOT APPLY

REPRODUCTION OF THIS
DOCUMENT IS PROHIBITED
EXCEPT BY THE ATOMIC ENERGY ACT OF 1954
UNLESS THE REPRODUCER IS SUBJECT TO
ADMINISTRATIVE AND ORIGINAL CONTROLS.

DECLASSIFIED IN FULL
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02 2013

~~SECRET~~
~~SECRET~~
~~SECRET~~
~~SECRET~~
~~SECRET~~

~~SECRET~~

~~SECRET~~

~~SECRET~~

~~SECRET~~

~~RESTRICTED DATA~~
~~RESTRICTED DATA~~
~~RESTRICTED DATA~~
~~RESTRICTED DATA~~
~~RESTRICTED DATA~~

ABSTRACT

~~This report describes~~ the electromagnetic measurements conducted by the Central Radio Propagation Laboratory during Operation UPSHOT-KNOTHOLE. ^{the pulse wave} Pulse waveforms recorded at the Nevada Proving Ground reveal the original pulse shape before being distorted by the effects of propagation. Records made at distances of one and three thousand kilometers show the changes in waveforms brought about by propagation. Attempts were made to interpret the waveforms received at distant stations in terms of active modes of propagation, and to relate the bomb yield to propagation distance, electromagnetic field strength and energy, detonation height, etc. Expressions are also given relating the attenuation of the pulse to propagation distance.

A

~~SECRET~~

~~RESTRICTED DATA~~
~~RESTRICTED DATA~~
~~RESTRICTED DATA~~
~~RESTRICTED DATA~~
~~RESTRICTED DATA~~

DECLASSIFIED IN FULL
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02 2013

SECRET

SECRET

~~_____ provides information affecting the national defense of the United States within the meaning of the espionage laws, the disclosure of which in any manner to an unauthorized person is prohibited by law.~~

JAN 02 2013

450157

The author wishes to acknowledge the work of members of the Central Radio Propagation Laboratory who have contributed to this project.

050

5 U.S.C. § 552 (b)(6)

Measurements were made at the field stations by:

Substantial additions to this report were made by [redacted] in the field of electromagnetic radiation, by [redacted] who performed mathematical analyses, and by [redacted] who generously gave technical advice to this project at critical times.

Special indebtedness must be acknowledged to [redacted] who acted as project adviser and who wrote Chapter IV of this report.

~~SECRET~~

DECLASSIFIED IN FULL
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02 2013

~~SECRET~~
~~SECRET~~
~~SECRET~~
~~SECRET~~
~~SECRET~~

~~SECRET~~

~~SECRET~~
~~SECRET~~

~~SECRET~~

CONTENTS

	Page
ILLUSTRATIONS	11
TABLES.	13
CHAPTER I INTRODUCTION	15
1.1 Objective	15
1.2 Background	16
CHAPTER II INSTRUMENTATION AND OPERATING PROCEDURE	16
2.1 Outline of the CRPL Experiments	16
2.1.1 Tests Conducted at the Nevada Proving Ground	16
2.1.2 Tests Conducted at Boulder, Colorado; Washington, D. C.; and Stanford, California	17
2.2 Description of Timing Method Used at All Stations	18
2.3 Description of Equipment Used at the Nevada Proving Ground	19
2.3.1 Antenna Systems and Cathode-Follower Units	19
2.3.2 Narrow-band Measurements	20
2.3.3 Broad-band Measurements	20
2.3.4 Vertical Incidence Ionospheric Measurements	28
2.4 Description of Instrumentation Used at Boulder, Colorado	29
2.5 Description of Instrumentation Used at Washington, D. C.	33
CHAPTER III DISCUSSION OF PHOTOGRAPHS	38
3.1 General	38
3.1.1 Discussion of Photographs from the Nevada Proving Ground	38
3.1.2 Discussion of Boulder Records	64
3.1.3 Discussion of Washington, D. C. Records	77

~~SECRET~~

JAN 02 2013

PLANTAS

917.17

[illegible]

~~SECRET~~
~~CONFIDENTIAL~~
~~CONFIDENTIAL~~
~~CONFIDENTIAL~~
~~CONFIDENTIAL~~

ILLUSTRATIONS

<u>Number</u>		<u>Page</u>
2.1	Block Diagram of Equipment Used at the Nevada Proving Ground (Main Site)	21
2.2	Cathode-follower Unit Used at the Nevada Proving Ground (Main Site) for Shot No. 2	22
2.3	Cathode-follower Unit Used at the Nevada Proving Ground (Main Site) for Shots No. 3 through 11	23
2.4	Amplitude vs Frequency Response of Broadband Equipment Used at the Nevada Proving Ground (Main Site)	25
2.5	Transient Response of the Nevada Proving Ground Equipment	26
2.6	Block Diagram of Equipment Used at Boulder, Colorado	30
2.7	Antenna Equivalent Circuit - Boulder, Colorado	32
2.8	Block Diagram of Equipment Used at Ft. Belvoir, Virginia, near Washington, D. C.	34
2.9	Antenna Equivalent Circuit - Washington, D. C.	35
3.1 - 3.59	Photographic Results and Frequency Functions for Nevada Measurements	44-63
3.60- 3.89	Photographic Results and Frequency Functions for Boulder, Colorado Measurements	65-74
3.90	Time Interval Between Propagation Modes vs Ionospheric Layer Height for a 1000 km Path	75
3.91- 3.111	Photographic Results and Frequency Functions for Washington, D. C. Measurements.	79-85
3.112	Time Interval Between Propagation Modes vs Ionospheric Layer Height for a 3400 km Path	86

~~SECRET~~

~~Information contained herein is unclassified~~
~~except where specifically noted otherwise~~
~~and is to be controlled in accordance with the~~
~~provisions of the~~
~~to an authorized person is prohibited~~

Number

<u>Number</u>		<u>Page</u>
4.1	Radiated Energy as a Function of Yield	98
4.2	Radiated Energy as a Function of Yield (Applying a Correction for Height)	99

[REDACTED]

~~SECRET~~

TABLES

<u>Number</u>		<u>Page</u>
2.1	Corrected Effective Height of Antenna at Boulder . . .	32
2.2	Corrected Effective Height of Antenna at Ft. Belvoir, near Washington, D. C.	36
4.1	Parameters for Computing Astronomical Time of Detonation	87
4.2	Detonation Times Obtained at Each Station	88
4.3	Electromagnetic Energy Radiated From Shots No. 2 - 11	93
4.4	Ground Attenuation Index and Ionospheric Reflection Coefficients for Distances of 1000 km	94
4.5	Attenuation Index and "Coupling Coefficients" for Wave-guide Model Beyond 1000 km	95

~~SECRET~~

~~_____~~
~~_____~~
~~_____~~
~~_____~~

DECLASSIFIED IN FULL
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02 2013

~~SECRET~~

JAN 02 2013

SECRET

PROPAGATION LABORATORY DURING OPERATION UPHOT-KHOTBOL

by

5 U.S.C. § 552 (b)(6)

National Bureau of Standards
Washington 25, D. C.

CHAPTER I

INTRODUCTION

1.1 OBJECTIVE

The objective of this research program is to obtain background information for the development of an automatic, continuously operating electromagnetic surveillance system capable of detecting pulses from atomic weapons detonated in certain suspect areas. A successful electromagnetic detection system would have the advantage of furnishing the earliest and the most accurate detonation time. The true detonation time is of increased importance at times when the atmosphere is already contaminated from a previous explosion. It is thought that a successful detection system can be developed using two or more stations located in low noise areas and utilizing time coincidence recognition. Successful operation would depend upon millisecond timing accuracy and an intimate knowledge of ionospheric propagation conditions along the transmission paths involved.

The Defense Research Laboratory of the University of Texas is concerned with the problems of engineering the detection system, while the Central Radio Propagation Laboratory is primarily concerned with the nature of the generated signal and its modification in form and intensity after propagation by the ionosphere.

1. [REDACTED]
2. [REDACTED]
3. [REDACTED]
4. [REDACTED]
5. [REDACTED]
6. [REDACTED]
7. [REDACTED]
8. [REDACTED]
9. [REDACTED]
10. [REDACTED]
11. [REDACTED]
12. [REDACTED]
13. [REDACTED]
14. [REDACTED]
15. [REDACTED]
16. [REDACTED]
17. [REDACTED]
18. [REDACTED]
19. [REDACTED]
20. [REDACTED]
21. [REDACTED]
22. [REDACTED]
23. [REDACTED]
24. [REDACTED]
25. [REDACTED]
26. [REDACTED]
27. [REDACTED]
28. [REDACTED]
29. [REDACTED]
30. [REDACTED]
31. [REDACTED]
32. [REDACTED]
33. [REDACTED]
34. [REDACTED]
35. [REDACTED]
36. [REDACTED]
37. [REDACTED]
38. [REDACTED]
39. [REDACTED]
40. [REDACTED]
41. [REDACTED]
42. [REDACTED]
43. [REDACTED]
44. [REDACTED]
45. [REDACTED]
46. [REDACTED]
47. [REDACTED]
48. [REDACTED]
49. [REDACTED]
50. [REDACTED]
51. [REDACTED]
52. [REDACTED]
53. [REDACTED]
54. [REDACTED]
55. [REDACTED]
56. [REDACTED]
57. [REDACTED]
58. [REDACTED]
59. [REDACTED]
60. [REDACTED]
61. [REDACTED]
62. [REDACTED]
63. [REDACTED]
64. [REDACTED]
65. [REDACTED]
66. [REDACTED]
67. [REDACTED]
68. [REDACTED]
69. [REDACTED]
70. [REDACTED]
71. [REDACTED]
72. [REDACTED]
73. [REDACTED]
74. [REDACTED]
75. [REDACTED]
76. [REDACTED]
77. [REDACTED]
78. [REDACTED]
79. [REDACTED]
80. [REDACTED]
81. [REDACTED]
82. [REDACTED]
83. [REDACTED]
84. [REDACTED]
85. [REDACTED]
86. [REDACTED]
87. [REDACTED]
88. [REDACTED]
89. [REDACTED]
90. [REDACTED]
91. [REDACTED]
92. [REDACTED]
93. [REDACTED]
94. [REDACTED]
95. [REDACTED]
96. [REDACTED]
97. [REDACTED]
98. [REDACTED]
99. [REDACTED]
100. [REDACTED]

SECRET

CHAPTER II

2.1 OUTLINE OF THE CRPL EXPERIMENTS

2.1.1 Tests Conducted at the Nevada Proving Ground

Narrow-band responses from receivers having a 3 Kc bandwidth at half-voltage points and tuned to 2.5 Mc, 10 Mc, and 15 Mc, were recorded on three channels of a four-beam oscilloscope. Timing

2013

to [REDACTED] by [REDACTED]

~~SECRET~~

marks were recorded on the fourth channel of this oscilloscope. These records provided peak field strength values, at the above mentioned frequencies and bandwidths, as well as the time of reception of the electromagnetic pulse. Detonation times were sent from the Nevada Proving Ground to the distant field stations, and after allowances for propagation delay, positive identification of the desired pulses was possible.

For each event an effort was made to record the broadband wave form on a single record, and also to record the rise time of the initial portions of the pulse on other records, using a more sensitive scale. To accomplish this, five oscilloscopes were used with different gain settings and sweep rates, since the exact relationships between the peak field strength, pulse length, yield, distance from ground zero, tower height, etc., were not known. Reliable records of waveforms were obtained for all events except No. 1, in which case the signal exceeded the dynamic range of the equipment. As experience was gained in predicting the strength of the signal, other records of interest were obtained using higher gains, faster sweep rates, and longer delay lines. By these means, the small amplitude detail that preceded the main negative pulse was revealed.

Additional experiments were conducted for Shots No. 1, 2, 3, and 4 to gain information regarding the relative strength of the horizontally and vertically polarized components of the radiation field. This was accomplished by recording the horizontally-polarized component of the downcoming sky wave after ionospheric reflection. This component is related in amplitude to the horizontally-polarized component radiated by the source.

2.1.2 Tests Conducted at Boulder, Colorado; Washington, D. C. and Stanford, California

At Boulder and Washington vertical antennas were used with cathode-follower units which were connected by coaxial cables to the broadband equipment and the narrow-band receivers. The bandwidth of the broadband equipment used at these stations was sufficient to record the waveforms with considerable fidelity. However, at Washington it was necessary to use a filter to reject station NBB for Shots No. 1 through 8.

The pulse outputs of the three narrow-band receivers, which were tuned to frequencies of 15 kc, 30 kc, and a channel near the maximum usable frequency for the path, were recorded on three channels of a four-beam oscilloscope. The fourth channel was used to record timing marks. The detonation times determined from the Nevada

~~SECRET~~

~~THIS DOCUMENT CONTAINS NEITHER RECOMMENDATIONS NOR
CONCLUSIONS OF THE NATIONAL BUREAU OF STANDARDS
AND IS NOT TO BE USED TO SUPPORT OR OPPOSE ANY
POLICY OR TO INFERENTIAL OR STATISTICAL
CONCLUSIONS OF THE NATIONAL BUREAU OF STANDARDS~~

~~SECRET~~

measurements, with allowances for propagation delay, were used to positively identify the pulses recorded at the distant stations. The use of these times was the only means of identification on occasions when the atmospheric noise level was unusually high, when the bomb was very small, or when propagation conditions were unfavorable.

Equivalent peak field strengths at frequencies of 15 and 30 kc were obtained from the narrow-band measurements.

The broadband waveforms recorded at the distant stations were used to obtain the frequency distributions of the energy of the pulses. The effect of ionospheric propagation upon the pulses can be determined by comparing the frequency functions of the waveforms recorded at the Nevada sites with those recorded at the distant field stations. The bandwidth required for faithful pulse reproduction decreases with increasing distance, since the effect produced by the ionosphere is similar to that produced by a low-pass filter. For this reason the bandwidth of the broadband equipment necessary at distances of 20 km extended from 1 kc to 2 Mc, while the bandwidth of the equipment used at 1000 and 3000 km extended from about 1 to 80 kc.

Measurements at very low frequencies were made at Stanford University by members of the University staff under a sub-contract with the Central Radio Propagation Laboratory. The loop antenna and amplifier system, which had been designed and used previously for the reception of atmospherics at low levels, were used. The gain of the system was very high, and the bandwidth extended from about 500 cps to nearly 200 kc. For most shots, the time of occurrence, the waveform of the signal, and the peak amplitude were recorded, the latter being expressed in terms of antenna voltage.

2.2 DESCRIPTION OF TIMING METHOD USED AT ALL STATIONS

The same instrumentation for obtaining the time of reception of the electromagnetic pulses was used at all stations. A 100 kc secondary frequency standard was used, together with frequency dividers, to give 25 cps output. The 25 cps output was then twice divided by five to obtain one pulse per second. A mechanical arrangement was used to permit the 59th second mark to be omitted. The timer was operated in the following manner: First the 100 kc secondary frequency standard was adjusted so that one of the harmonics was as nearly as possible synchronized with the highest frequency signal recordable from station WWV (or WWVH). The divider units were checked to be sure they were in synchronism with the 100 kc secondary frequency standard and dividing

~~SECRET~~
18

19

● 〇

2.3.2 Narrow-band Measurements

2.3.3 Broadband Measurements

Amplitude calibrations were accomplished by applying a voltage, through a dummy antenna, to the input of the cathode follower from a standard signal generator and measuring the corresponding deflections produced on the oscilloscopes. The broadband equipment had linear amplitude response up to 4 cm of oscilloscope deflection.

20

[REDACTED] b6
[REDACTED] b7C
[REDACTED]
[REDACTED], 1980, to O.S.G., 198 and 198. Its value
of [REDACTED] was [REDACTED] in any manner
to [REDACTED] is prohibited by law.

~~SECRET~~


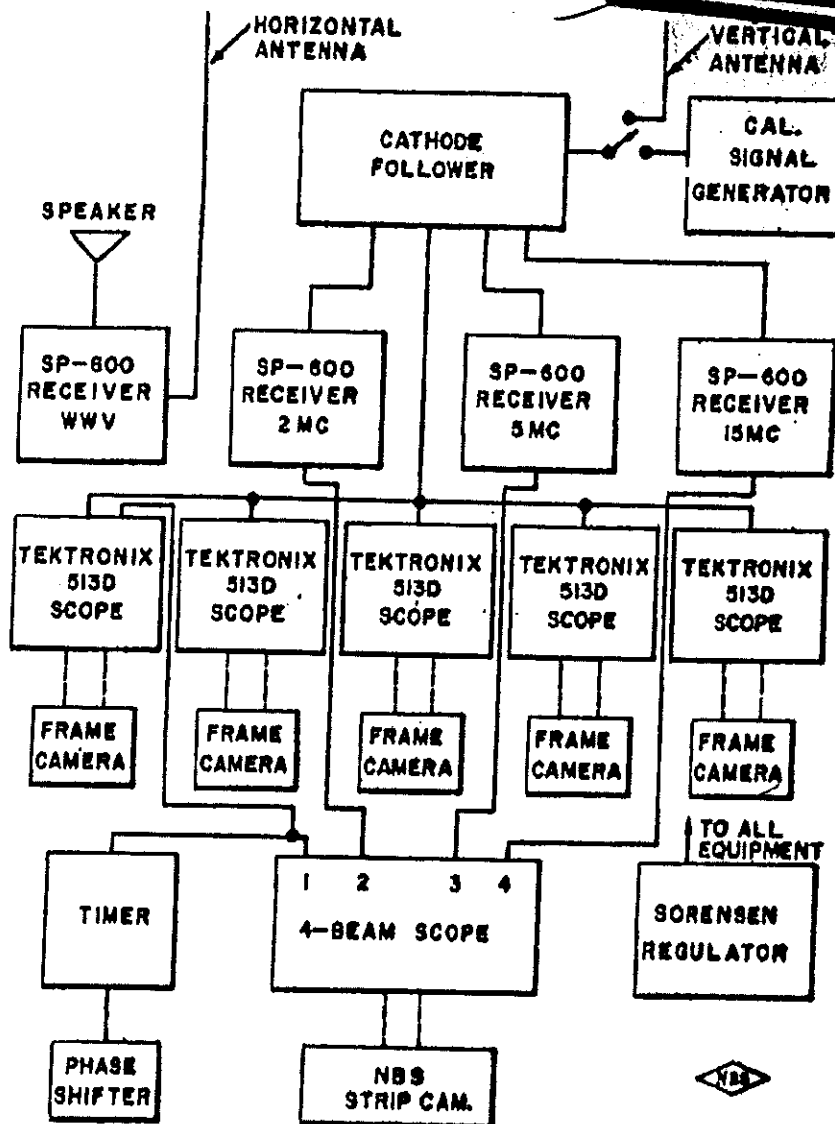


FIG. 2.1 BLOCK DIAGRAM OF EQUIPMENT USED AT THE NEVADA PROVING GROUND (MAIN SITE)

~~SECRET~~

~~SECRET~~

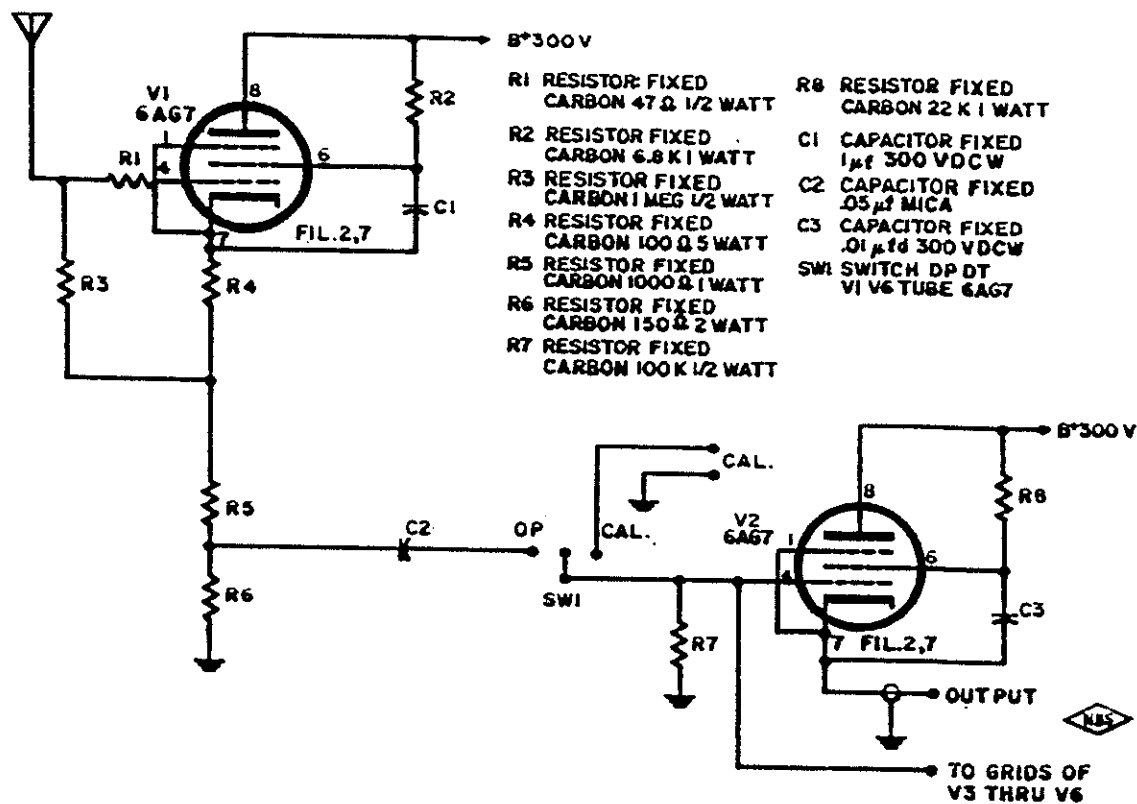


~~SECRET~~

FIG. 2.2 CATHODE FOLLOWER UNIT USED AT THE NEVADA PROVING GROUND
(MAIN SITE) FOR SHOT NO. 2

SECRET

23

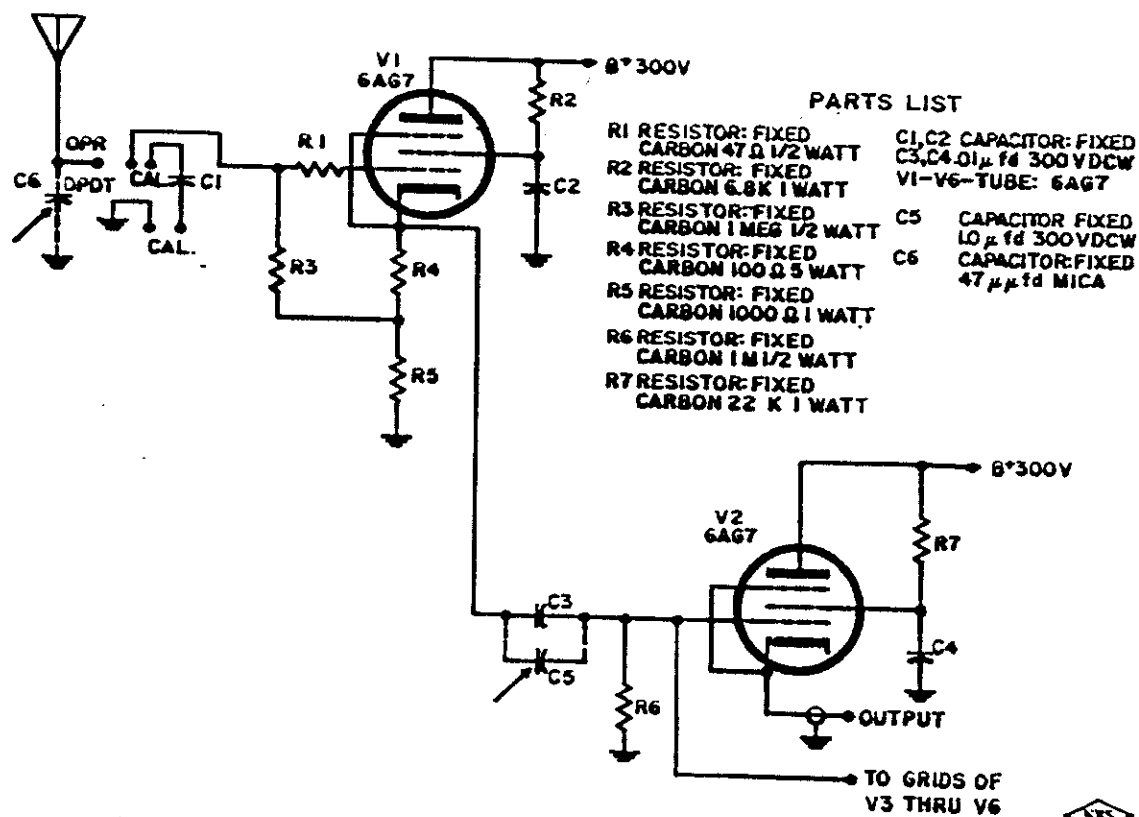

SECRET

FIG. 2.3 CATHODE FOLLOWER UNIT USED AT THE NEVADA PROVING GROUND
(MAIN SITE) FOR SHOTS NO. 3 THROUGH 11

DECLASSIFIED IN FULL
Authority: EO 13526
Chief, Records & Declass Div., WHS
Date: JAN 02 2013

~~SECRET~~

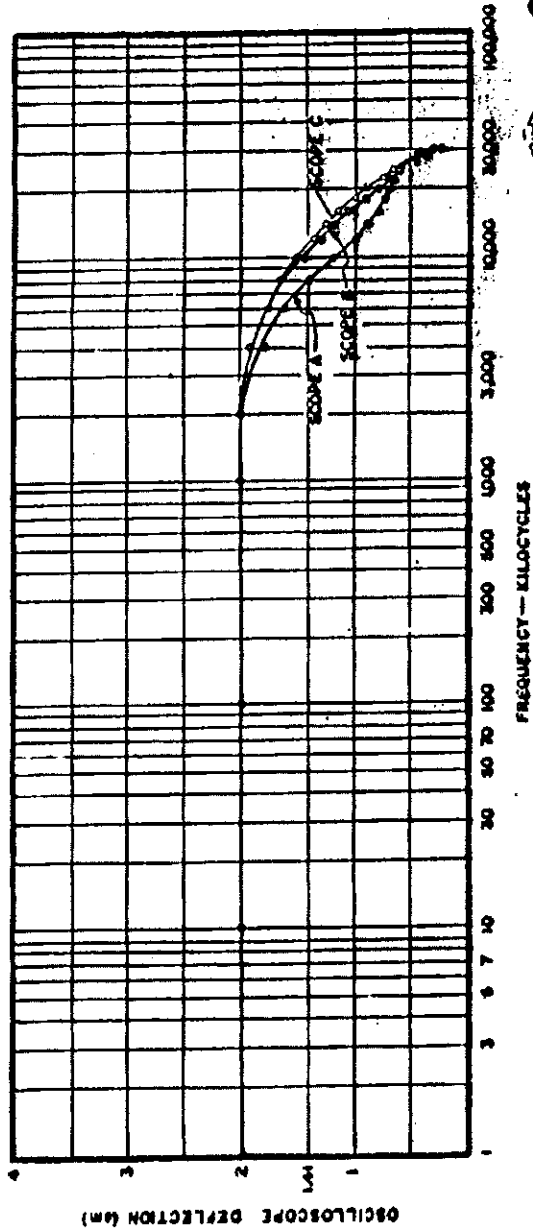


FIG 2-4 AMPLITUDE VS FREQUENCY RESPONSE OF BROADBAND EQUIPMENT
 USED AT THE NEVADA PROVING GROUND (MAIN SITE)

(WH) HQ1027420 34008071080

~~SECRET~~

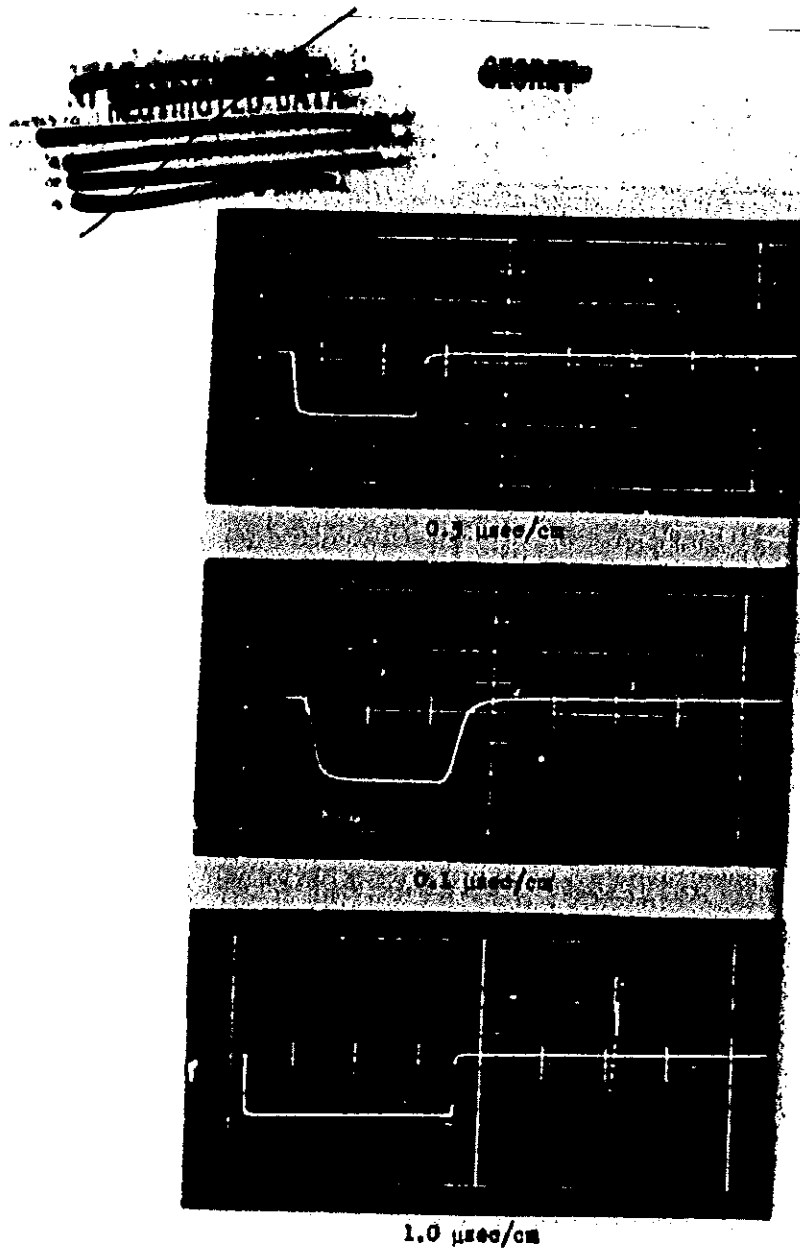


Fig. 2.3 TRANSIENT RESPONSE OF NEVADA PROVING GROUND EQUIPMENT

~~SECRET~~

The receiver output voltage and the value of field strength measured with the field-strength meter were noted. The antenna under calibration was then disconnected, and the signal generator was connected to the input of the cathode-follower unit through a capacitor representing the antenna. The peak value of signal-generator voltage necessary to match the peak receiver deflection was noted. The ratio of peak signal-generator voltage thus obtained to the value of measured peak field strength gave a value of effective height of 0.1 meters for the 0.43-meter antenna.

Using formulas by King and Blake¹, accurate values of input self-resistance and self-reactance of a symmetrical antenna, based on Hallen's analysis, were calculated. These formulas give a much better approximation than those derived, assuming a sinusoidal distribution of current. For the 0.43-meter antenna the effective height was calculated to be 0.12 meters.

The values of effective height of the short antennas used at the Nevada Proving Ground are considerably less than those obtained using one-half of the physical length of the antennas. These differences arise from the fact that the antennas employed here are not sufficiently short, in terms of their capacitance effect to ground, to justify the linear current distribution which results in the value of effective height equal to one-half the physical length.

For Shot No. 2 a .19-meter vertical antenna, top-loaded with a .38-meter diameter disk, was used. The top loading served to increase the effective height over that of a plain .19-meter vertical antenna. An effective height of 0.10 meters was calculated for this antenna, assuming a linear current distribution produced by the top loading.

For Shots No. 3 through 11 a .21-meter antenna, followed by suitable capacity voltage dividers, was used to record the waveforms. Due to the low pick-up factor of this short antenna, it was difficult to measure its effective height by receiving distant, very low frequency stations. However, the values of antenna capacity (3.13 μfd) and antenna base capacity (8.25 μfd) were determined in the field using the substitution method. Again, using formulas by King and Blake¹ the antenna capacity was calculated to be 3.60 μfd , compared to the measured value of 3.13 μfd . The effective height was calculated to be .07 meters.

~~SECRET~~

~~ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED EXCEPT WHERE SHOWN OTHERWISE~~
~~DATE 11-11-00 BY 6032 JRS/STW~~
~~TO: [REDACTED]~~

CONCLUSIONS

In calculating the values of field strength and energy for Shot No. 2 an effective height value of 0.1 meters was used; for Shots No. 3 through 11, an effective height value of 0.07 meters was used. These values are appropriate in the very low frequency region and at these short ranges where the surface wave predominates. At higher frequencies, about 1 Mc or so, where the direct and ground-reflected components predominate, the actual height above the ground of the .21-meter antenna cannot be neglected. The antenna effective height was determined at frequencies between 3 and 25 Mc, using a target transmitter furnished by the Sandia Corporation. The results of these measurements suggest a value of effective height of 0.24 meters and illustrate the dependence of antenna gain upon height at these frequencies.

2.3.4 Vertical Incidence Ionospheric Measurements

An additional experiment was arranged in an attempt to determine whether appreciable horizontally-polarized energy was radiated by the source. A loop antenna, having eleven turns and which was .78 meters in diameter, was mounted on a tripod so that its center was about 6 feet above the earth. The loop was placed in the vertical plane and oriented so that minimum energy would be received directly from the source. The oscilloscope sweep time was long to permit receiving any possible ionospheric reflections. It was reasoned that a signal recorded from the ionospheric layers must have been originally horizontally polarized. This assumes that the original polarization is preserved after ionospheric reflection. One side of the loop antenna was grounded, and it was damped with a resistance to prevent ringing. A Tektronix type 121 preamplifier was used at the terminals of the loop antenna, and a 200-foot length of coaxial cable connected the output of the preamplifier to the recording oscilloscope at the main site.

In order to calibrate the system, a low impedance signal generator was inserted in series with the loop antenna. The effective height of the antenna was calculated by using the expression:²

$$\frac{2\pi R A}{\lambda}$$

0157:11

[REDACTED]

JAN 02 2013

~~SECRET~~

where

E = resultant voltage acting around the loop
 e = field intensity of signal at the loop in volts per meter
 N = number of turns in loop = 11
 λ = wavelength of signal in meters
 A = area of loop in square meters

At a frequency of 16 kc, $\frac{E}{e} = 1.7$ meters.

2.4 DESCRIPTION OF INSTRUMENTATION USED AT BOULDER, COLORADO

This test site which was seven miles east of Boulder, Colorado, had a low noise level. The great-circle distance between the Nevada test site and the Boulder site is 1005 km.

For the broadband waveform measurements, one output of the cathode-follower unit went to the oscilloscope through a bandpass filter designed to reduce 60 cps pickup and interference from radio range and local broadcasting stations. The oscilloscope was modified to permit self-triggering with either polarity of incoming signal. The broadband pulses were recorded from the oscilloscope using a 35 mm camera with a film speed of 10 inches per second.

Other outputs of the cathode-follower unit went to the narrow-band, low-frequency receivers having bandwidths of about 422 cps. These receivers were tuned to frequencies of 15 and 30 kc. A receiver with a bandwidth of 3 kc was tuned to a channel near the maximum usable frequency for the path. The pulses from the three receivers, together with timing marks, were recorded from a four-channel oscilloscope, using a 35 mm camera, with a film speed of 17 inches per second. Trigger gate pulses from the broadband oscilloscope were mixed with the timing marks, so that the times when broadband waveforms were recorded could be determined. A four-channel oscilloscope record from Boulder is shown in Figure 3.75.

In calibrating the narrow-band equipment, the output of a Navy type LP-5 signal generator was fed through a dummy antenna to the input of the cathode-follower unit. The rms output of the signal generator necessary to match the peak deflection recorded during the

~~SECRET~~

~~SECRET~~
~~ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED~~
~~DATE 11-14-01 BY 1045~~
~~EXCEPT WHERE SHOWN OTHERWISE~~
~~THIS DOCUMENT IS IN THE PUBLIC DOMAIN~~

~~CONFIDENTIAL~~
~~SECRET~~

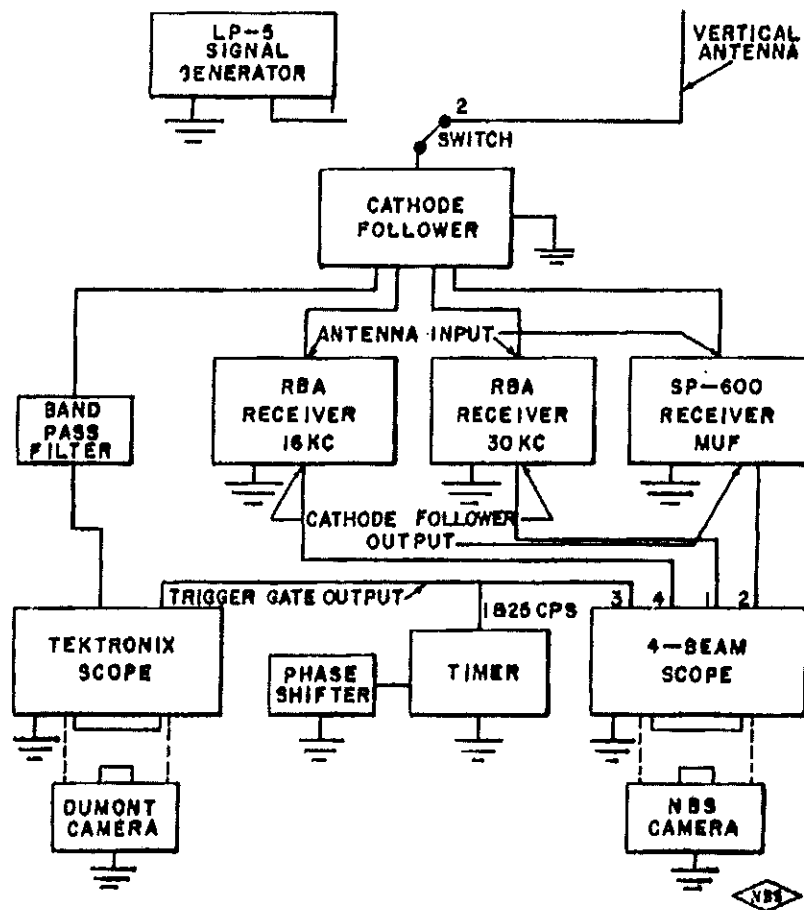


FIG. 2.6 BLOCK DIAGRAM OF EQUIPMENT USED AT BOULDER, COLO.

~~SECRET~~

~~SECRET~~

detection test was obtained. Peak voltages corresponding to the rms calibration voltages were divided by the appropriate values of antenna effective height to convert to peak values of vertically-polarized electric field.

Since the reciprocal of the receiver bandwidth (2.3 msec) is much greater than the duration of the received impulses (about 0.5 msec), the receiver output response is practically independent of the shape of the impulse and is determined by its area. Janaky³ confirmed that the peak output voltage is proportional to bandwidth, for bandwidths less than about 20 kc.

After the test series was over, it was found that the 15-kc receiver used at Boulder had previously been modified for another application. The same modifications were made on an RBA receiver in the Washington Laboratory, and the bandwidth was found to be 630 cps. Without the modifications, the bandwidth was 420 cps. Because the 15-kc measurements made at Boulder are considered to be unreliable, the data are not presented.

Amplitude calibration of the broadband equipment was made by connecting the standard signal generator to the input of the cathode-follower unit and obtaining the rms output necessary to produce one centimeter peak-to-peak deflection on the oscilloscope. This sensitivity calibration was made at only one frequency, since the equipment, from cathode follower to the output of the oscilloscope, has a flat response over the bandwidth used. However, due to the loading effect by the equipment on the antenna, at the lowest frequencies, the response of the installation was 3 db down at a frequency of 12 kc.

Two different methods were used to obtain the values of antenna effective height, and the results of these two methods are in fair agreement. It is thought that nearby overhead power lines were responsible for the inconsistent results obtained in measurements of field strengths from distant, very low frequency stations.

The antenna at Boulder was 31.5 feet long, the bottom end of which was 8 feet above the earth. A 6-foot horizontal lead-in wire, also 8 feet above the earth, was connected to the cathode-follower unit. An 8-foot wire extended from the cathode follower to a ground stake. This antenna was considered to be 40 feet (12 meters) long, with its base at the ground. Using formulas by King and Blake¹ the

~~SECRET~~

~~Information affecting the national~~
~~defense of the United States~~
~~is hereby declared to be~~
~~unclassified~~
~~on the basis of the~~
~~information contained~~
~~herein~~

~~SECRET~~

effective height of the antenna (for the open circuit case) was calculated to be 3.7 meters. Unfortunately, the equipment loaded the antenna. The equivalent circuit of the antenna and the input circuit to the cathode follower are shown in Figure 2.7. The circuit values were obtained from radio-frequency bridge measurements.

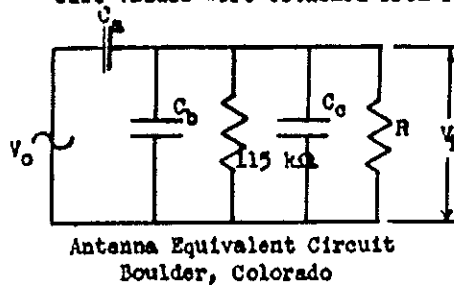


Figure 2.7

- C_a = antenna capacity, 72 μfd
- C_b = antenna base capacity, 15 μfd
- C_o = input capacity to cathode-follower unit, 30 μfd
- R = input resistance to cathode-follower unit, 780,000 ohms

The ratios of open-circuit antenna voltages to voltages supplied to the input of the cathode-follower unit, V_o/V_i , were calculated at a series of frequencies. The values of antenna effective height realized at frequencies between 5 and 30 kc are the product of the theoretical effective height of 3.7 meters and the appropriate values of V_o/V_i as shown in Table 2.1.

TABLE 2.1

CORRECTED EFFECTIVE HEIGHT OF ANTENNA AT BOULDER

$f(\text{kc})$	V_o/V_i	Effective Height (meters)
5	0.24	$3.7 \times 0.24 = 0.88$
10	0.40	$3.7 \times 0.40 = 1.5$
15	0.48	$3.7 \times 0.48 = 1.8$
30	0.57	$3.7 \times 0.57 = 2.1$

~~SECRET~~

~~SECRET~~

Since the peak in energy occurred at frequencies near 15 kc, the corresponding effective height of 1.8 meters was used in calculating the values of energy recorded at Boulder. Although this is not exact, it is a good approximation, since the effective height is less than 1.8 meters at frequencies below 16 kc and greater than 1.8 meters at frequencies above 16 kc.

The equivalent values of field strength recorded at different frequencies were calculated by dividing the peak-to-peak voltage deflections, obtained on the oscilloscope, by the proper values of antenna effective height.

2.5 DESCRIPTION OF INSTRUMENTATION USED AT WASHINGTON, D. C.

The recording site was located at the CRPL Field Station at Ft. Belvoir, Virginia, twelve miles south of Washington, D. C. This is at a great-circle distance of 3400 km from the Nevada Proving Ground.

The arrangement of the recording equipment is shown in the block diagram of Figure 2.8. The vertical antenna was 21 feet long, with the bottom end about 3 feet above the earth. It was located 30 feet from the recording building and connected to a cathode-follower unit directly at its base. Coaxial cables were run from the cathode-follower unit to the equipment inside the building.

For the broadband measurements, a Tektronix type 121 preamplifier, a filter unit, and a Tektronix 513-D oscilloscope were used. The oscilloscope was modified to trigger on either polarity of incoming signal. The waveforms were recorded from the oscilloscope using a 35 mm camera and a film speed of 10 inches per second.

U. S. Navy type RBA receivers, having a bandwidth between 3 db points of about 420 cps, were used to record pulses at frequencies of 15 and 30 kc. A high-frequency receiver, with a bandwidth of about 3 kc, was tuned to a channel near the maximum usable frequency for the path. The pulses from the three receivers, together with timing marks, were recorded from a four-channel oscilloscope using a 35 mm strip camera, and a film speed of 17 inches per second. Trigger gate pulses from the Tektronix oscilloscope were mixed with the timing marks so that it was possible to identify the exact times when broadband pulses were recorded.

~~SECRET~~

~~SECRET~~
~~1. This document contains information that is exempt from automatic~~
~~downgrading and declassification under E.O. 13526, section 1.4.~~
~~2. This document is to be controlled as a "Secret" until it is~~
~~declassified in accordance with the provisions of E.O. 13526.~~

~~SECRET~~

~~SECRET~~

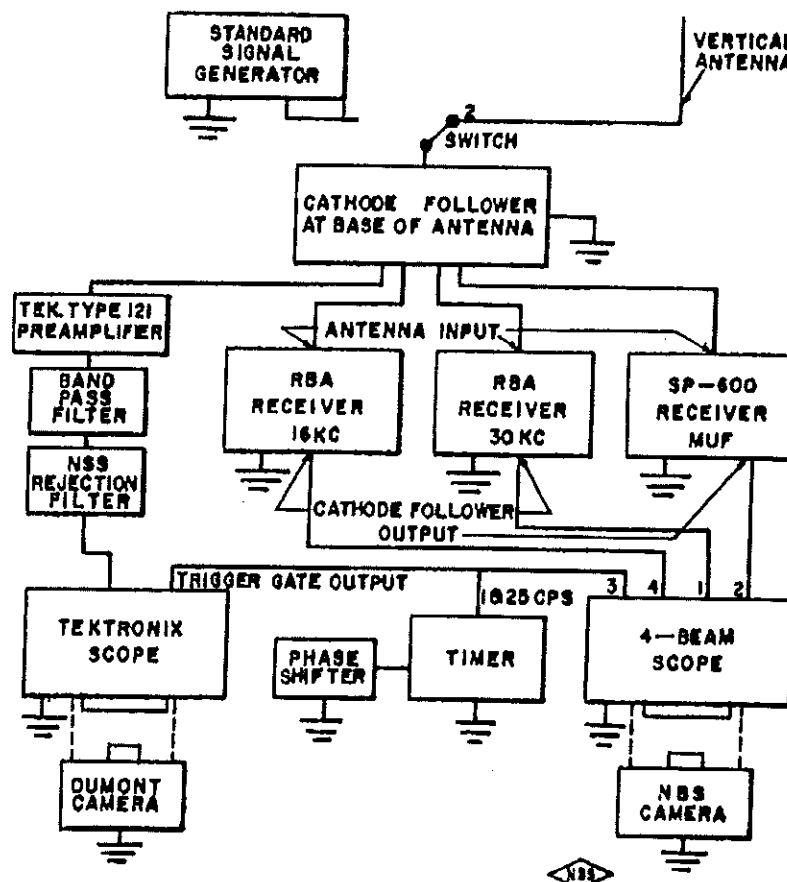


FIG. 2.0 BLOCK DIAGRAM OF EQUIPMENT USED AT
 FT. BELVOIR, VA NEAR WASHINGTON, D. C.

~~SECRET~~


~~SECRET~~

In calibrating the narrow-band equipment the signal-generator output was connected to the input of the cathode-follower unit located at the base of the antenna. The voltage outputs of the signal generator required to match the peak deflections recorded during the detection tests were used with appropriate values of antenna effective height to obtain equivalent values of vertically polarized electric field.

The filter unit which was used in the broadband equipment was designed to reduce 60 cps pickup and to provide a gradual cutoff at frequencies above 100 kc so as to reduce interference from broadcast stations. For Shots No. 1 through 8 it was necessary to use an additional filter in the broadband equipment to reject station NSS at a frequency of 18 kc. This station, which is located at Annapolis, Maryland, only 30 miles away, produced severe interference. Since the peak in energy occurred at frequencies near 15 kc, the necessity of using the NSS rejection filter was most unfortunate. An arrangement was finally made with the Navy which resulted in NSS being off the air for Shots No. 9, 10 and 11. Thus, the NSS rejection filter was not used for these events.

Two methods were used to determine the effective height of the antenna. By measurement, the effective height at a frequency of 16 kc was found to be 2.9 meters. Using formulas by King and Blakel, a value of 2.1 meters was calculated.

The equivalent circuit of the antenna and input circuit to the cathode-follower unit is shown in Figure 2.9. The circuit values were obtained from radio-frequency bridge measurements.

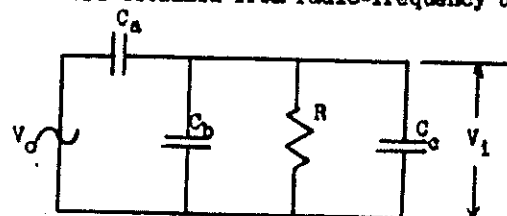

Antenna Equivalent Circuit
 Washington, D. C.

Figure 2.9

C_A = antenna capacity, 65 μfd

C_b = antenna base capacity,
 5 μfd

C_c = input capacity of cathode-
 follower unit, 30 μfd

R = input resistance to cathode-
 follower unit, 780,000 ohms

~~SECRET~~

~~RESTRICTED DATA~~

~~SECRET~~

The ratios of open circuit antenna voltage to voltage supplied to the input of the cathode-follower unit, V_o/V_i , were calculated at a series of frequencies. The value of antenna effective height used in this report, which is the product of the antenna effective height for the unloaded case and the appropriate value of V_o/V_i , is 1.4 meters.

TABLE 2.2

CORRECTED EFFECTIVE HEIGHT OF ANTENNA AT FT. BELVOIR

<u>f(kc)</u>	<u>V_o/V_i</u>	<u>Effective Height (meters)</u>
5	0.62	$0.62 \times 2.1 = 1.3$
10	0.66	$0.66 \times 2.1 = 1.4$
15	0.67	$0.67 \times 2.1 = 1.4$
30	0.67	$0.67 \times 2.1 = 1.4$
100	0.68	$0.68 \times 2.1 = 1.4$

The above results indicate that the overall response of the broadband equipment, including the antenna but without the MES filter, is flat within 1 db from 5 kc to 100 kc.

~~SECRET~~

~~Information of the United States Government is not to be released to the public without the approval of the appropriate authority. The release of this information to the public is prohibited.~~

DECLASSIFIED IN FULL
Authority: EO 13526
Chief, Records & Declass Div; WHS
Date: JAN 02 2013

~~SECRET~~

~~SECRET~~
~~SECRET~~
~~SECRET~~
~~SECRET~~
~~SECRET~~

~~SECRET~~

~~SECRET~~

~~SECRET~~

CHAPTER III

DISCUSSION OF PHOTOGRAPHS

3.1 GENERAL

The photographs recorded at the Nevada Proving Ground are not grouped according to shot sequence in this report. Photographs of some of the pulses recorded at the Nevada Proving Ground and their corresponding frequency functions have been arranged on adjacent pages so that they may be viewed at the same time. Additional records for each shot are presented on the pages following the presentation of frequency functions obtained at the Nevada Proving Ground. The frequency functions were computed by Fourier analysis from the recorded pulses and are plotted in percent of maximum amplitude as a function of frequency.

The pulses were photographed through a centimeter grid, but all of the photographs have not been reproduced to original size. When scaling values of amplitude and time from these records, the grid lines on each figure should be considered as being 1 centimeter apart.

The great-circle propagation distance from the Nevada Proving Ground to Boulder, Colorado, is 1000 km, and all of the records recorded at Boulder have the caption "1000 km from ground zero". The records made at Ft. Belvoir, Virginia, near Washington, D.C. are labeled "3400 km from ground zero".

Occasionally it will be noted that the leading edges of the pulses recorded on the four-channel records are not in alignment. This condition occurred because the spots of the four-beam oscilloscope were purposely staggered to prevent overlapping of the narrow-band responses and does not imply any lack of simultaneity in recording the different aspects of the phenomena.

3.1.1 Discussion of Photographs from the Nevada Proving Ground

Shot No. 1

In preparation for this test the value of antenna effective height was estimated, and the expected value of field strength was calculated using the following expression which was suggested by members of the Los Alamos Scientific Laboratory.

~~SECRET~~

~~SECRET~~

~~SECRET~~
~~CONFIDENTIAL~~
~~CONFIDENTIAL~~
~~CONFIDENTIAL~~

$$E = \frac{120 \sqrt{Y}}{d} = \frac{120 \sqrt{16}}{9.1} = 50 \text{ v/m}$$

where

Y = bomb yield in kilotons = 16
d = distance in miles = 9.1
E = field strength (volts/meter) = 50 v/m

This empirical relation was determined from data recorded during Operation IVY but had not been tested for bombs of smaller size. The gain of the recording equipment was adjusted to permit recording a field strength of 50 v/m, and a sweep rate of 250 $\mu\text{sec/cm}$ was used. As seen in Figure 3.9, the data is of limited use because the dynamic range of the recording equipment was exceeded, and the sweep rate was too slow.

DOE

OSD

Shot No. 2

Section 6.2(a) Section 6.2 (a)

Shot No. 2, which was a 24-kiloton weapon, was detonated on top of a 300-foot tower.

The same pulse, recorded with a 50 $\mu\text{sec/cm}$ sweep rate, is shown in Figure 3.24, and with a 1 $\mu\text{sec/cm}$ sweep rate in Figure 3.25. The latter shows the rise time of the first negative pulse. Figure 3.26 is a record of sky-wave reflections obtained using broadband equipment and a slow sweep rate. The first envelope corresponds to the energy received directly from the source. The first sky-wave reflection, which has a relatively small amplitude, occurs at about 550 μsec , corresponding to a virtual height of reflection of about 85 km. This experiment is discussed later in this report.

Shot No. 3

Figure 3.3 shows the pulse recorded from a 0.21-kiloton weapon, detonated on top of a 300-foot tower. The peak amplitude is about 125 v/m. The corresponding frequency function, Figure 3.3

~~SECRET~~

~~CONFIDENTIAL~~
~~CONFIDENTIAL~~
~~CONFIDENTIAL~~
~~CONFIDENTIAL~~

~~SECRET~~

reveals that although the energy peaks at a frequency near 35 kc, the peak is not nearly as sharp as that for Shot No. 2. A fast sweep presentation, Figure 3.27, reveals the rise time and duration of about 5.5 μ sec of the negative pulse. The same pulse, recorded at a distance of 43.6 km from ground zero, is shown in Figure 3.29. Note that the same pulse shape was recorded at this distance as at 18.6 km (Fig. 3.3).

Shot No. 4

Figure 3.6 shows a pulse recorded from an 11-kiloton weapon, detonated at a height of 6022 feet above the earth. Note that this waveform is not the same as those recorded from bombs detonated on top of a 300-foot tower. Although the first half cycle is in the negative direction, this component is of much shorter time duration than for Shots No. 2 and 3. The peak field strength of about 86 v/m seems to be low, considering the yield of the bomb. The frequency function, Figure 3.9, indicates an energy peak at a frequency near 28 kc. A record made with the gain controls set in expectation of a larger field strength is shown in Figure 3.30; Figure 3.31, which was recorded using a fast sweep rate, details the negative portion of the pulse. Figure 3.32 is a vertical incidence measurement, indicating that the original horizontally-polarized component was reflected from an ionospheric layer height of about 85 km. Figure 3.33 is a record of responses to the pulse by narrow-band receivers tuned to 2, 5 and 15 Mc. The timing marks are recorded on the bottom trace. Figure 3.34 is the same pulse recorded in the presence of noise at Site 7.1B, 43.6 km from the source. The arrow indicates the waveform which is thought to be the desired one, because it has the same shape as that shown in Figure 3.6. The positive peak value of field strength in Figure 3.34 is about 50 v/m; however, that of Figure 3.6 is about 86 v/m. The antennas used at the two sites were of the same length, but only the antenna at the main site was calibrated. The difference in field strengths may be due to the fact that the two antennas were at different heights above the earth.

Shot No. 5

Figure 3.7 is a pulse recorded from the second small bomb, which had a yield of about 0.22 kilotons, and was detonated from the top of a 100-foot tower. An automatic camera shutter closing mechanism produced the noise pulses which are seen as three horizontal lines extending across the photograph. The first half-cycle

~~SECRET~~

~~SECRET~~

is again in the negative direction and has a duration of about 7 μ sec. The frequency function, Figure 3.10, corresponding to this waveform, has a peak in energy at a frequency near 35 kc. The same pulse, shown in Figure 3.8, was recorded at a distance of 46.5 km from the source. This waveform is similar to that in Figure 3.7, indicating that it did not change materially at twice the propagation distance. It would be expected that the higher frequency components might be more highly attenuated at the greater distance, but this trend is not evident from a comparison of the two frequency functions in Figures 3.10 and 3.11. Reflections from the hills immediately behind Site 7.1B may have slightly altered the waveform in Figure 3.8 after about 5 μ sec. The rise time of the negative pulse is shown in Figures 3.36 and 3.37; the latter was recorded using a 0.3 μ sec sweep delay time.

Shot No. 6

Figure 3.12 shows the pulse recorded at a range of 27.1 km from a 24-kiloton weapon, which was detonated from a 300-foot tower. The first half-cycle is in the negative direction and has a duration of about 18 μ sec, and the frequency function, Figure 3.15, peaks at about 15 kc. The same pulse, recorded with a sweep speed of 5 μ sec/cm, is seen in Figure 3.38; the total sweep time was not of sufficient length to permit the trace to return to the zero axis. Figure 3.39 shows the rise time of the negative phase of the pulse, using a sweep rate of 1 μ sec/cm and a total sweep delay time of about 0.4 μ sec. The peak field strength recorded at 50 km (Fig. 3.42) is 1.2 times greater than that recorded at a distance of 27 km (Fig. 3.12). This inconsistency in peak field strength was also observed for Shot No. 4. Since an antenna calibration was made at the 27-km site and not at the 50-km site, the values of field strength recorded at the 27-km site are more reliable. Figure 3.40, obtained using a sweep delay of .4 μ sec and very high gain, reveals a small positive component immediately preceding the large negative phase. The cause of this positive movement is not known, but it was also recorded at another station operated by the Los Alamos Scientific Laboratory⁴. Figure 3.41 is a record showing responses to the pulse by narrow-band receiver tuned to 5 and 2 Mc. On the timing trace a seconds mark is shown on the extreme right, and a 40 msec timing mark appears immediately below the 2 Mc receiver response. Figure 3.42 is similar to Figure 3.39, except that the latter was recorded using an external delay line which gave a sweep delay of 0.2 μ sec.

~~SECRET~~

~~ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED EXCEPT WHERE SHOWN OTHERWISE~~
~~DATE 11-14-01 BY 60322 UCBAW~~
~~REASON: 25X(1) (1) (2) (3) (4) (5) (6) (7) (8) (9) (10) (11) (12) (13) (14) (15) (16) (17) (18) (19) (20) (21) (22) (23) (24) (25) (26) (27) (28) (29) (30) (31) (32) (33) (34) (35) (36) (37) (38) (39) (40) (41) (42) (43) (44) (45) (46) (47) (48) (49) (50) (51) (52) (53) (54) (55) (56) (57) (58) (59) (60) (61) (62) (63) (64) (65) (66) (67) (68) (69) (70) (71) (72) (73) (74) (75) (76) (77) (78) (79) (80) (81) (82) (83) (84) (85) (86) (87) (88) (89) (90) (91) (92) (93) (94) (95) (96) (97) (98) (99) (100) (101) (102) (103) (104) (105) (106) (107) (108) (109) (110) (111) (112) (113) (114) (115) (116) (117) (118) (119) (120) (121) (122) (123) (124) (125) (126) (127) (128) (129) (130) (131) (132) (133) (134) (135) (136) (137) (138) (139) (140) (141) (142) (143) (144) (145) (146) (147) (148) (149) (150) (151) (152) (153) (154) (155) (156) (157) (158) (159) (160) (161) (162) (163) (164) (165) (166) (167) (168) (169) (170) (171) (172) (173) (174) (175) (176) (177) (178) (179) (180) (181) (182) (183) (184) (185) (186) (187) (188) (189) (190) (191) (192) (193) (194) (195) (196) (197) (198) (199) (200) (201) (202) (203) (204) (205) (206) (207) (208) (209) (210) (211) (212) (213) (214) (215) (216) (217) (218) (219) (220) (221) (222) (223) (224) (225) (226) (227) (228) (229) (230) (231) (232) (233) (234) (235) (236) (237) (238) (239) (240) (241) (242) (243) (244) (245) (246) (247) (248) (249) (250) (251) (252) (253) (254) (255) (256) (257) (258) (259) (260) (261) (262) (263) (264) (265) (266) (267) (268) (269) (270) (271) (272) (273) (274) (275) (276) (277) (278) (279) (280) (281) (282) (283) (284) (285) (286) (287) (288) (289) (290) (291) (292) (293) (294) (295) (296) (297) (298) (299) (300) (301) (302) (303) (304) (305) (306) (307) (308) (309) (310) (311) (312) (313) (314) (315) (316) (317) (318) (319) (320) (321) (322) (323) (324) (325) (326) (327) (328) (329) (330) (331) (332) (333) (334) (335) (336) (337) (338) (339) (340) (341) (342) (343) (344) (345) (346) (347) (348) (349) (350) (351) (352) (353) (354) (355) (356) (357) (358) (359) (360) (361) (362) (363) (364) (365) (366) (367) (368) (369) (370) (371) (372) (373) (374) (375) (376) (377) (378) (379) (380) (381) (382) (383) (384) (385) (386) (387) (388) (389) (390) (391) (392) (393) (394) (395) (396) (397) (398) (399) (400) (401) (402) (403) (404) (405) (406) (407) (408) (409) (410) (411) (412) (413) (414) (415) (416) (417) (418) (419) (420) (421) (422) (423) (424) (425) (426) (427) (428) (429) (430) (431) (432) (433) (434) (435) (436) (437) (438) (439) (440) (441) (442) (443) (444) (445) (446) (447) (448) (449) (450) (451) (452) (453) (454) (455) (456) (457) (458) (459) (460) (461) (462) (463) (464) (465) (466) (467) (468) (469) (470) (471) (472) (473) (474) (475) (476) (477) (478) (479) (480) (481) (482) (483) (484) (485) (486) (487) (488) (489) (490) (491) (492) (493) (494) (495) (496) (497) (498) (499) (500) (501) (502) (503) (504) (505) (506) (507) (508) (509) (510) (511) (512) (513) (514) (515) (516) (517) (518) (519) (520) (521) (522) (523) (524) (525) (526) (527) (528) (529) (530) (531) (532) (533) (534) (535) (536) (537) (538) (539) (540) (541) (542) (543) (544) (545) (546) (547) (548) (549) (550) (551) (552) (553) (554) (555) (556) (557) (558) (559) (560) (561) (562) (563) (564) (565) (566) (567) (568) (569) (570) (571) (572) (573) (574) (575) (576) (577) (578) (579) (580) (581) (582) (583) (584) (585) (586) (587) (588) (589) (590) (591) (592) (593) (594) (595) (596) (597) (598) (599) (600) (601) (602) (603) (604) (605) (606) (607) (608) (609) (610) (611) (612) (613) (614) (615) (616) (617) (618) (619) (620) (621) (622) (623) (624) (625) (626) (627) (628) (629) (630) (631) (632) (633) (634) (635) (636) (637) (638) (639) (640) (641) (642) (643) (644) (645) (646) (647) (648) (649) (650) (651) (652) (653) (654) (655) (656) (657) (658) (659) (660) (661) (662) (663) (664) (665) (666) (667) (668) (669) (670) (671) (672) (673) (674) (675) (676) (677) (678) (679) (680) (681) (682) (683) (684) (685) (686) (687) (688) (689) (690) (691) (692) (693) (694) (695) (696) (697) (698) (699) (700) (701) (702) (703) (704) (705) (706) (707) (708) (709) (710) (711) (712) (713) (714) (715) (716) (717) (718) (719) (720) (721) (722) (723) (724) (725) (726) (727) (728) (729) (730) (731) (732) (733) (734) (735) (736) (737) (738) (739) (740) (741) (742) (743) (744) (745) (746) (747) (748) (749) (750) (751) (752) (753) (754) (755) (756) (757) (758) (759) (760) (761) (762) (763) (764) (765) (766) (767) (768) (769) (770) (771) (772) (773) (774) (775) (776) (777) (778) (779) (780) (781) (782) (783) (784) (785) (786) (787) (788) (789) (790) (791) (792) (793) (794) (795) (796) (797) (798) (799) (800) (801) (802) (803) (804) (805) (806) (807) (808) (809) (810) (811) (812) (813) (814) (815) (816) (817) (818) (819) (820) (821) (822) (823) (824) (825) (826) (827) (828) (829) (830) (831) (832) (833) (834) (835) (836) (837) (838) (839) (840) (841) (842) (843) (844) (845) (846) (847) (848) (849) (850) (851) (852) (853) (854) (855) (856) (857) (858) (859) (860) (861) (862) (863) (864) (865) (866) (867) (868) (869) (870) (871) (872) (873) (874) (875) (876) (877) (878) (879) (880) (881) (882) (883) (884) (885) (886) (887) (888) (889) (890) (891) (892) (893) (894) (895) (896) (897) (898) (899) (900) (901) (902) (903) (904) (905) (906) (907) (908) (909) (910) (911) (912) (913) (914) (915) (916) (917) (918) (919) (920) (921) (922) (923) (924) (925) (926) (927) (928) (929) (930) (931) (932) (933) (934) (935) (936) (937) (938) (939) (940) (941) (942) (943) (944) (945) (946) (947) (948) (949) (950) (951) (952) (953) (954) (955) (956) (957) (958) (959) (960) (961) (962) (963) (964) (965) (966) (967) (968) (969) (970) (971) (972) (973) (974) (975) (976) (977) (978) (979) (980) (981) (982) (983) (984) (985) (986) (987) (988) (989) (990) (991) (992) (993) (994) (995) (996) (997) (998) (999) (1000) (1001) (1002) (1003) (1004) (1005) (1006) (1007) (1008) (1009) (1010) (1011) (1012) (1013) (1014) (1015) (1016) (1017) (1018) (1019) (1020) (1021) (1022) (1023) (1024) (1025) (1026) (1027) (1028) (1029) (1030) (1031) (1032) (1033) (1034) (1035) (1036) (1037) (1038) (1039) (1040) (1041) (1042) (1043) (1044) (1045) (1046) (1047) (1048) (1049) (1050) (1051) (1052) (1053) (1054) (1055) (1056) (1057) (1058) (1059) (1060) (1061) (1062) (1063) (1064) (1065) (1066) (1067) (1068) (1069) (1070) (1071) (1072) (1073) (1074) (1075) (1076) (1077) (1078) (1079) (1080) (1081) (1082) (1083) (1084) (1085) (1086) (1087) (1088) (1089) (1090) (1091) (1092) (1093) (1094) (1095) (1096) (1097) (1098) (1099) (1100) (1101) (1102) (1103) (1104) (1105) (1106) (1107) (1108) (1109) (1110) (1111) (1112) (1113) (1114) (1115) (1116) (1117) (1118) (1119) (1120) (1121) (1122) (1123) (1124) (1125) (1126) (1127) (1128) (1129) (1130) (1131) (1132) (1133) (1134) (1135) (1136) (1137) (1138) (1139) (1140) (1141) (1142) (1143) (1144) (1145) (1146) (1147) (1148) (1149) (1150) (1151) (1152) (1153) (1154) (1155) (1156) (1157) (1158) (1159) (1160) (1161) (1162) (1163) (1164) (1165) (1166) (1167) (1168) (1169) (1170) (1171) (1172) (1173) (1174) (1175) (1176) (1177) (1178) (1179) (1180) (1181) (1182) (1183) (1184) (1185) (1186) (1187) (1188) (1189) (1190) (1191) (1192) (1193) (1194) (1195) (1196) (1197) (1198) (1199) (1200) (1201) (1202) (1203) (1204) (1205) (1206) (1207) (1208) (1209) (1210) (1211) (1212) (1213) (1214) (1215) (1216) (1217) (1218) (1219) (1220) (1221) (1222) (1223) (1224) (1225) (1226) (1227) (1228) (1229) (1230) (1231) (1232) (1233) (1234) (1235) (1236) (1237) (1238) (1239) (1240) (1241) (1242) (1243) (1244) (1245) (1246) (1247) (1248) (1249) (1250) (1251) (1252) (1253) (1254) (1255) (1256) (1257) (1258) (1259) (1260) (1261) (1262) (1263) (1264) (1265) (1266) (1267) (1268) (1269) (1270) (1271) (1272) (1273) (1274) (1275) (1276) (1277) (1278) (1279) (1280) (1281) (1282) (1283) (1284) (1285) (1286) (1287) (1288) (1289) (1290) (1291) (1292) (1293) (1294) (1295) (1296) (1297) (1298) (1299) (1300) (1301) (1302) (1303) (1304) (1305) (1306) (1307) (1308) (1309) (1310) (1311) (1312) (1313) (1314) (1315) (1316) (1317) (1318) (1319) (1320) (1321) (1322) (1323) (1324) (1325) (1326) (1327) (1328) (1329) (1330) (1331) (1332) (1333) (1334) (1335) (1336) (1337) (1338) (1339) (1340) (1341) (1342) (1343) (1344) (1345) (1346) (1347) (1348) (1349) (1350) (1351) (1352) (1353) (1354) (1355) (1356) (1357) (1358) (1359) (1360) (1361) (1362) (1363) (1364) (1365) (1366) (1367) (1368) (1369) (1370) (1371) (1372) (1373) (1374) (1375) (1376) (1377) (1378) (1379) (1380) (1381) (1382) (1383) (1384) (1385) (1386) (1387) (1388) (1389) (1390) (1391) (1392) (1393) (1394) (1395) (1396) (1397) (1398) (1399) (1400) (1401) (1402) (1403) (1404) (1405) (1406) (1407) (1408) (1409) (1410) (1411) (1412) (1413) (1414) (1415) (1416) (1417) (1418) (1419) (1420) (1421) (1422) (1423) (1424) (1425) (1426) (1427) (1428) (1429) (1430) (1431) (1432) (1433) (1434) (1435) (1436) (1437) (1438) (1439) (1440) (1441) (1442) (1443) (1444) (1445) (1446) (1447) (1448) (1449) (1450) (1451) (1452) (1453) (1454) (1455) (1456) (1457) (1458) (1459) (1460) (1461) (1462) (1463) (1464) (1465) (1466) (1467) (1468) (1469) (1470) (1471) (1472) (1473) (1474) (1475) (1476) (1477) (1478) (1479) (1480) (1481) (1482) (1483) (1484) (1485) (1486) (1487) (1488) (1489) (1490) (1491) (1492) (1493) (1494) (1495) (1496) (1497) (1498) (1499) (1500) (1501) (1502) (1503) (1504) (1505) (1506) (1507) (1508) (1509) (1510) (1511) (1512) (1513) (1514) (1515) (1516) (1517) (1518) (1519) (1520) (1521) (1522) (1523) (1524) (1525) (1526) (1527) (1528) (1529) (1530) (1531) (1532) (1533) (1534) (1535) (1536) (1537) (1538) (1539) (1540) (1541) (1542) (1543) (1544) (1545) (1546) (1547) (1548) (1549) (1550) (1551) (1552) (1553) (1554) (1555) (1556) (1557) (1558) (1559) (1560) (1561) (1562) (1563) (1564) (1565) (1566) (1567) (1568) (1569) (1570) (1571) (1572) (1573) (1574) (1575) (1576) (1577) (1578) (1579) (1580) (1581) (1582) (1583) (1584) (1585) (1586) (1587) (1588) (1589) (1590) (1591) (1592) (1593) (1594) (1595) (1596) (1597) (1598) (1599) (1600) (1601) (1602) (1603) (1604) (1605) (1606) (1607) (1608) (1609) (1610) (1611) (1612) (1613) (1614) (1615) (1616) (1617) (1618) (1619) (1620) (1621) (1622) (1623) (1624) (1625) (1626) (1627) (1628) (1629) (1630) (1631) (1632) (1633) (1634) (1635) (1636) (1637) (1638) (1639) (1640) (1641) (1642) (1643) (1644) (1645) (1646) (1647) (1648) (1649) (1650) (1651) (1652) (1653) (1654) (1655) (1656) (1657) (1658) (1659) (1660) (1661) (1662) (1663) (1664) (1665) (1666) (1667) (1668) (1669) (1670) (1671) (1672) (1673) (1674) (1675) (1676) (1677) (1678) (1679) (1680) (1681) (1682) (1683) (1684) (1685) (1686) (1687) (1688) (1689) (1690) (1691) (1692) (1693) (1694) (1695) (1696) (1697) (1698) (1699) (1700) (1701) (1702) (1703) (1704) (1705) (1706) (1707) (1708) (1709) (1710) (1711) (1712) (1713) (1714) (1715) (1716) (1717) (1718) (1719) (1720) (1721) (1722) (1723) (1724) (1725) (1726) (1727) (1728) (1729) (1730) (1731) (1732) (1733) (1734) (1735) (1736) (1737) (1738) (1739) (1740) (1741) (1742) (1743) (1744) (1745) (1746) (1747) (1748) (1749) (1750) (1751) (1752) (1753) (1754) (1755) (1756) (1757) (1758) (1759) (1760) (1761) (1762) (1763) (1764) (1765) (1766) (1767) (1768) (1769) (1770) (1771) (1772) (1773) (1774) (1775) (1776) (1777) (1778) (1779) (1780) (1781) (1782) (1783) (1784) (1785) (1786) (1787) (1788) (1789) (1790) (1791) (1792) (1793) (1794) (1795) (1796) (1797) (1798) (1799) (1800) (1801) (1802) (1803) (1804) (1805) (1806) (1807) (1808) (1809) (1810) (1811) (1812) (1813) (1814) (1815) (1816) (1817) (1818) (1819) (1820) (1821) (1822) (1823) (1824) (1825) (1826) (1827) (1828) (1829) (1830) (1831) (1832) (1833) (1834) (1835) (1836) (1837) (1838) (1839) (1840) (1841) (1842) (1843) (1844) (1845) (1846) (1847) (1848) (1849) (1850) (1851) (1852) (1853) (1854) (1855) (1856) (1857) (1858) (1859) (1860) (1861) (1862) (1863) (1864) (1865) (1866) (1867) (1868) (1869) (1870) (1871) (1872) (1873) (1874) (1875) (1876) (1877) (1878) (1879) (1880) (1881) (1882) (1883) (1884) (1885) (1886) (1887) (1888) (1889) (1890) (1891) (1892) (1893) (1894) (1895) (1896) (1897) (1898) (1899) (1900) (1901) (1902) (1903) (1904) (1905) (1906) (1907) (1908) (1909) (1910) (1911) (1912) (1913) (1914) (1915) (1916) (1917) (1918) (1919) (1920) (1921) (1922) (1923) (1924) (1925) (1926) (1927) (1928) (1929) (1930) (1931) (1932) (1933) (1934) (1935) (1936) (1937) (1938) (1939) (1940) (1941) (1942) (1943) (1944) (1945) (1946) (1947) (1948) (1949) (1950) (1951) (1952) (1953) (1954) (1955) (1956) (1957) (1958) (1959) (1960) (1961) (1962) (1963) (1964) (1965) (1966) (1967) (1968) (1969) (1970) (1971) (1972) (1973) (1974) (1975) (1976) (1977) (1978) (1979) (1980) (1981) (1982) (1983) (1984) (1985) (1986) (1987) (1988) (1989) (1990) (1991) (1992) (1993) (1994) (1995) (1996) (1997) (1998) (1999) (2000) (2001) (2002) (2003) (2004) (2005) (2006) (2007) (2008) (2009) (2010) (2011) (2012) (2013) (2014) (2015) (2016) (2017) (2018) (2019) (2020) (2021) (2022) (2023) (2024) (2025) (2026) (2027) (2028) (2029) (2030) (2031) (2032) (2033) (2034) (2035) (2036) (2037) (2038) (2039) (2040) (2041) (2042) (2043) (2044) (2045) (2046) (2047) (2048) (2049) (2050) (2051) (2052) (2053) (2054) (2055) (2056) (2057) (2058) (2059) (2060) (2061) (2062) (2063) (2064~~

~~SECRET~~

~~SECRET~~

Shot No. 7

OSD
Section 6.2 (a) DOE
Section 6.2(a)

This weapon, having a yield of about 43 kilotons, was detonated atop a 300-foot tower.

The record in Figure 3.45 was obtained with an overall sweep delay time of 0.4 μ sec; a very high gain was used so that the main negative phase saturated the equipment. The early detail consisted of an initial negative pulse, followed by a small positive pulse, and finally by the main negative one. This detail was also observed by the Los Alamos Scientific Laboratory group at a separate site. Figure 3.46 shows the response to the pulse recorded from the narrow-band receivers, tuned to frequencies of 5 and 2 Mc and also shows the time reception of these pulses as determined from the timing marks on the bottom trace.

Shot No. 8

Shot No. 8 was a 26-kiloton weapon detonated at a height of 2423 feet above the earth.

A Tektronix 517 oscilloscope, on loan from the Los Alamos Scientific Laboratory for only Shot No. 8, was used to record the rise time of this pulse. Since the 517 oscilloscope is capable of reproducing pulses with faster rise times than the 513-D oscilloscope, an attempt was made to compare the rise times recorded by the two sets of equipment. Unfortunately, this comparison was not successful because ringing occurred in an antenna lead common to all 513-D oscilloscopes, see Figures 3.47 and 3.48, and too much gain was used in the 517 oscilloscope, which was driven near the point of saturation at the 37 v/m level. The peak amplitude of this pulse was about 300 v/m (Fig. 3.14).

Shot No. 9

The pulse recorded at a distance of 14 km from this 27-kiloton weapon, which was detonated from a 300-foot tower, is shown in Figure 3.18. The peak of the frequency function of this pulse (Fig. 3.21) occurs at about 17 kc. The pulse, recorded at the same distance but

~~SECRET~~
42

~~SECRET~~
The information in this document is classified as follows:

~~SECRET~~

at a different site, is seen in Figure 3.52. The waveforms of both are very similar, and the peak value of field strength is about 648 v/m in both cases. High-frequency responses recorded at frequencies of 5 and 2 Mc, and the timing trace, are shown in Figure 3.51.

Shot No. 10

Figure 3.19 shows the pulse recorded at 18.5 km from the 15-kiloton cannon shot, which was detonated at a height of about 300 feet above the earth. The negative half cycle is seen to have a sharp spike which was not usual with the 300-foot tower shots. This same spike is also evident in Figure 3.53, which was recorded at a distance of 14.4 km. The waveforms of both pulses are similar; each has a negative peak amplitude of about 580 v/m. The peak of the frequency function, Figure 3.22, for the pulse shown in Figure 3.19, occurs at about 24 kc. Figure 3.54 shows the rise time of the negative phase, using a sweep delay time of 0.4 μ sec. The same pulse, recorded at a different site, is shown in Figure 3.56. The peak amplitudes of both negative pulses are about 590 v/m. Figure 3.55 is the narrow-band record, showing high-frequency responses at 5 and 2 Mc. Figure 3.57 is a record of early rise rate, using high gain and a 0.4 μ sec sweep delay time. No positive or negative precursors were recorded in advance of the main negative pulse. This result was confirmed by members of the Los Alamos Scientific Laboratory.

Shot No. 11

Shot No. 11, having a yield of about 61 kilotons, was an air drop detonated at a height of 1350 feet above the earth. The recorded pulse is shown in Figure 3.20, and its frequency function is shown in Figure 3.23, with a peak at about 18 kc. A comparison of this record with that of Shot No. 4, another air drop (Fig. 3.6), reveals some significant differences. The radiation pattern from a high air drop might be different from that of a low air drop, and due to different angles of reflection from the ground, differences in the waveforms of received pulses would be produced. The record shown in Figure 3.58 reveals the rise time of the negative phase of the pulse. This record was made using a 0.4 μ sec sweep delay time. Figure 3.59 shows the positive detail recorded in advance of the main negative phase. This record was made using a 0.4 μ sec sweep delay time, and it was necessary to use a very high gain in order to see these small positive precursors.

~~SECRET~~


~~SECRET~~
~~SECRET~~
~~SECRET~~
~~SECRET~~
~~SECRET~~

DECLASSIFIED IN PART
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date:

JAN 02 2013

~~SECRET~~

OSD
Section 6.2 (a)

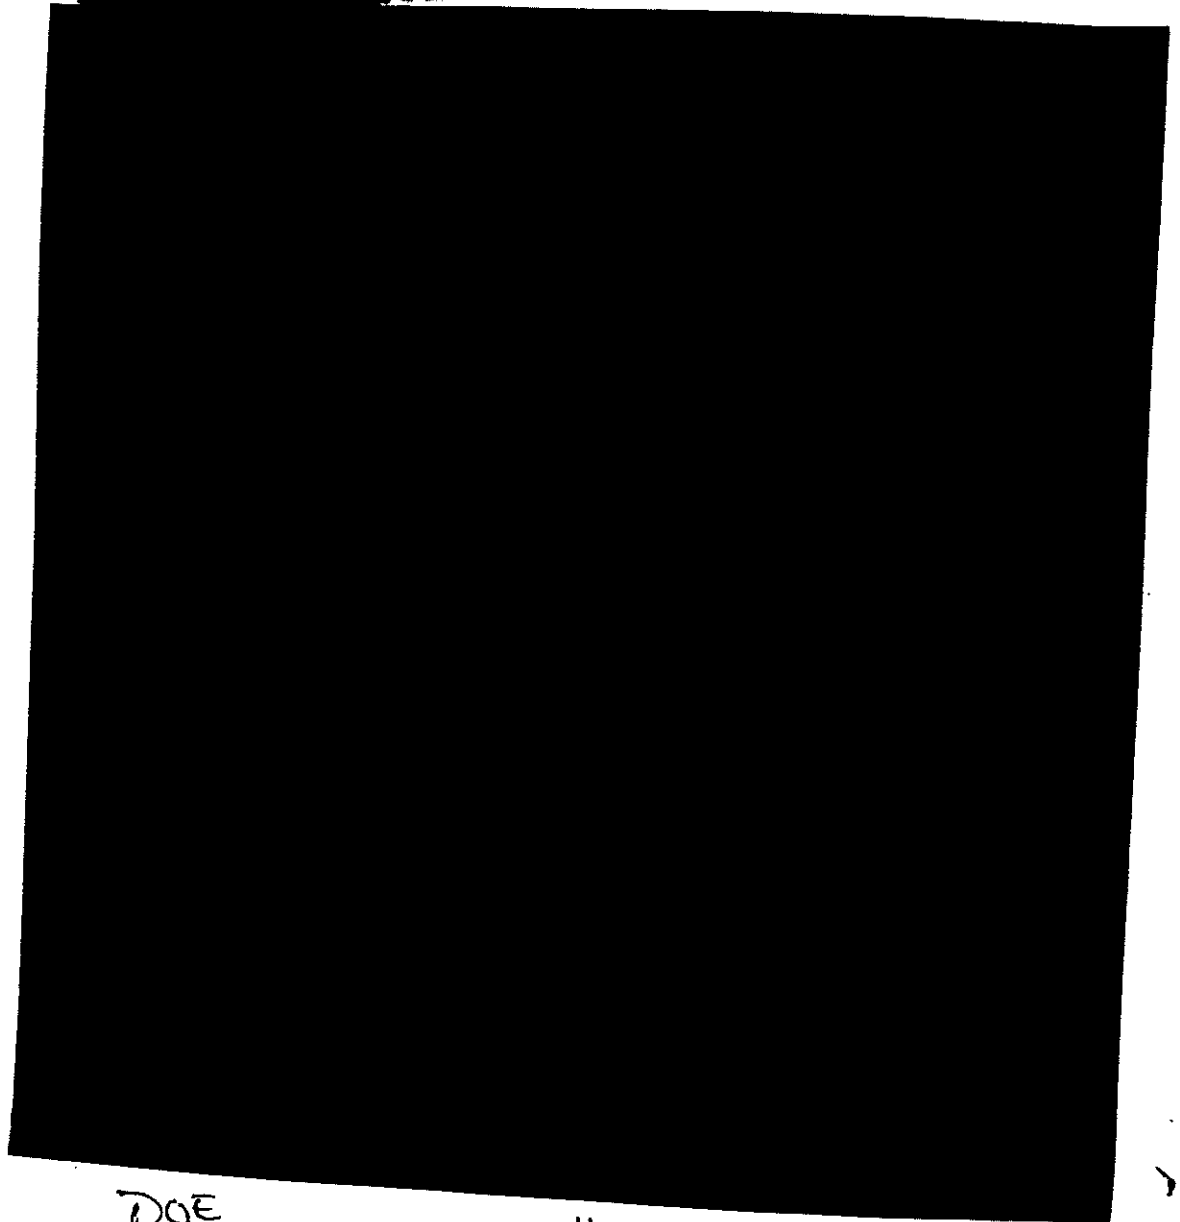

DOE
Section 6.2(a)

44



~~SECRET~~

THIS DOCUMENT IS UNCLASSIFIED EXCEPT WHERE SHOWN OTHERWISE BY A CONTROLLING AUTHORITY

~~SECRET~~

FREQUENCY FUNCTIONS OF BROADBAND PULSES ON PREVIOUS PAGE


No frequency function available
Shot No. 1

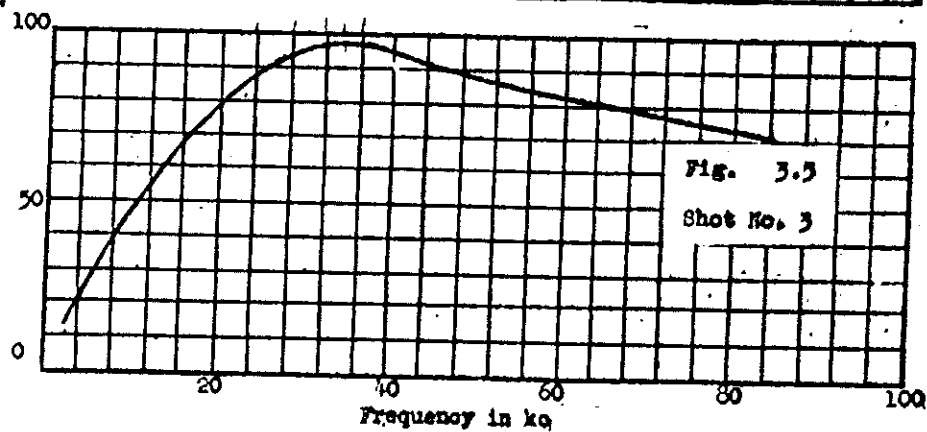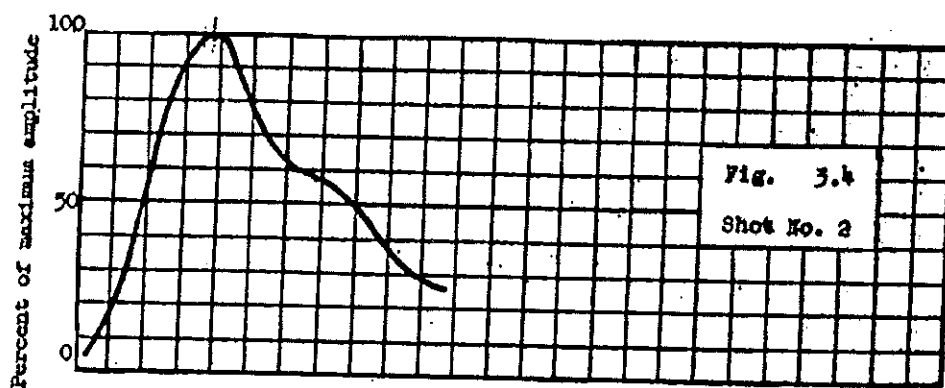

~~SECRET~~

DECLASSIFIED IN PART
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02 2013

OSD
Section 6.2 (a)

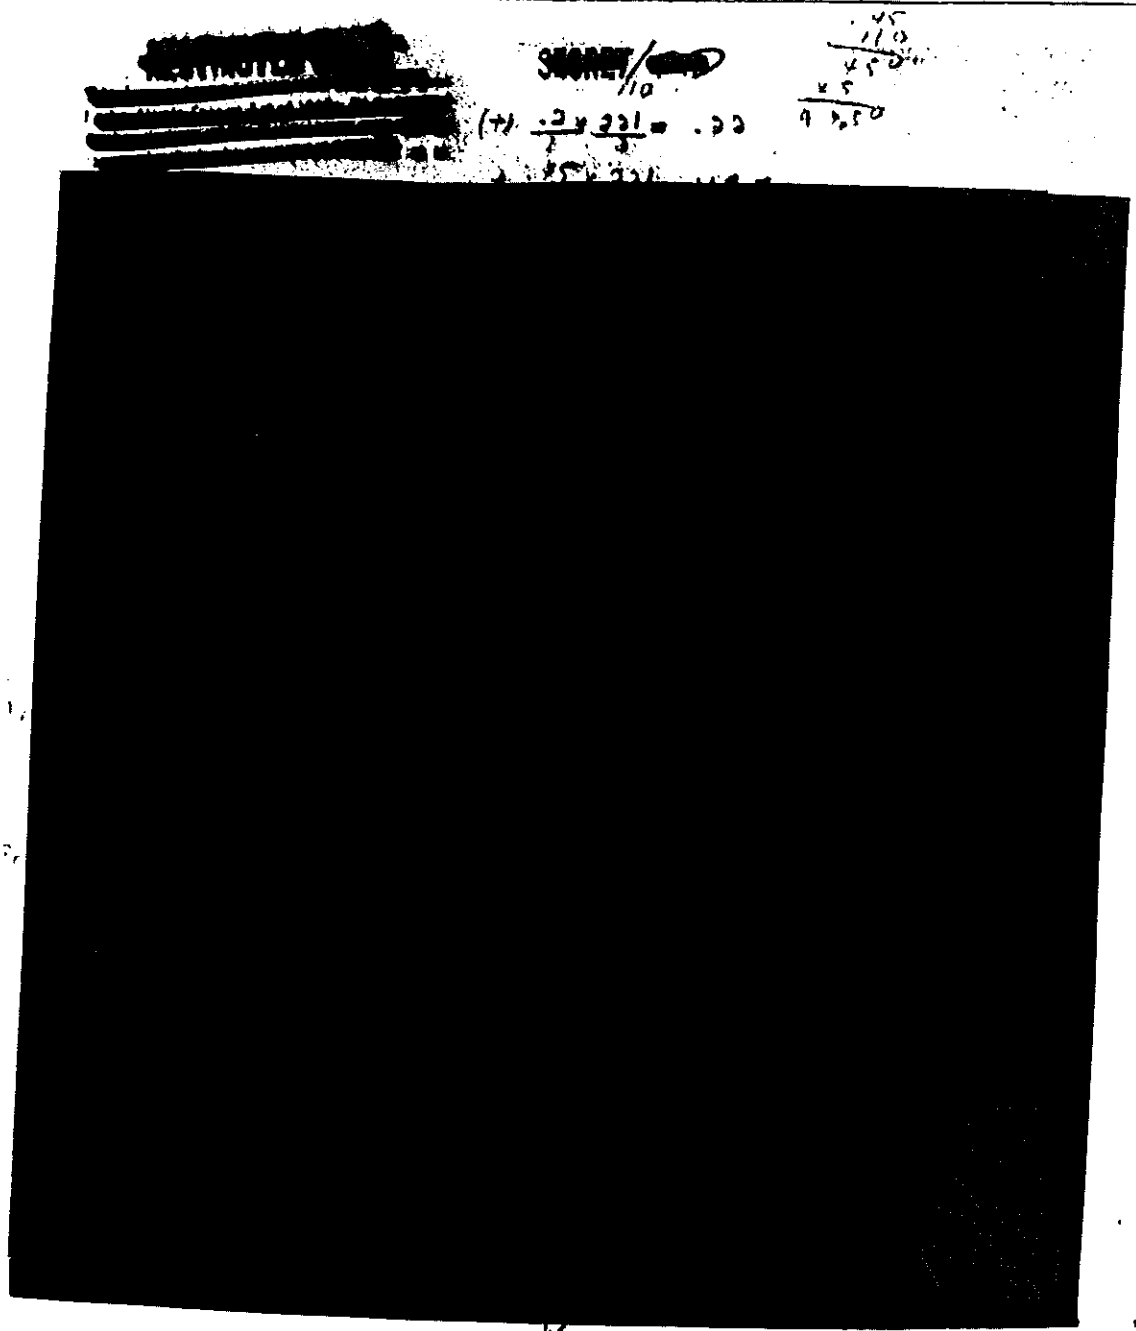




DOE
Section 6.2(a)

~~SECRET~~

ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED EXCEPT WHERE SHOWN OTHERWISE

~~SECRET~~

FREQUENCY FUNCTIONS OF BROADBAND PULSES ON PREVIOUS PAGE

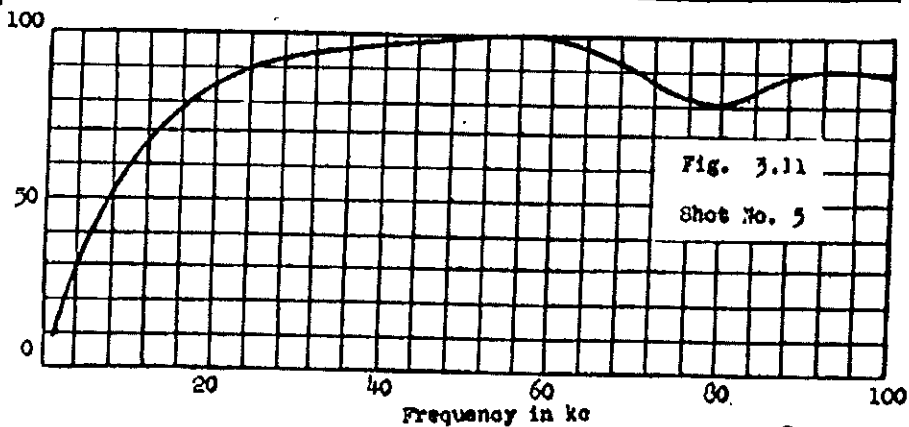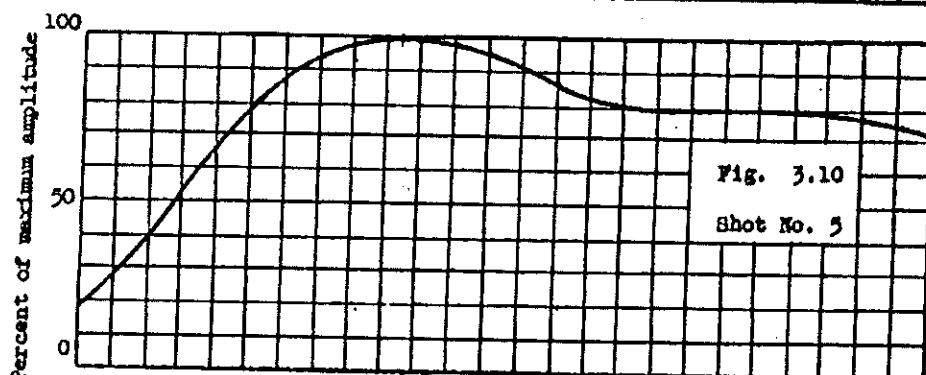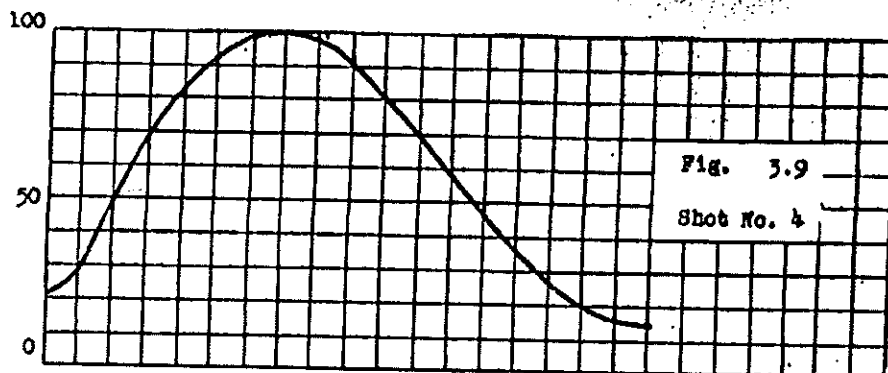

~~SECRET~~

OSD
Section 6.2 (a)

~~SECRET~~




DOE
Section 6.2(a)

48

~~SECRET~~ / ~~(S)~~

~~SECRET~~

FREQUENCY FUNCTIONS OF BROADBAND PULSES ON TEST COORDINATES

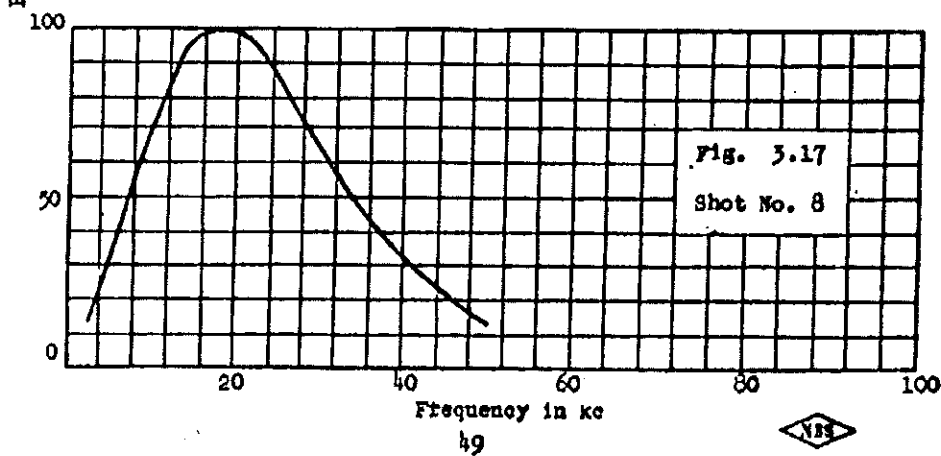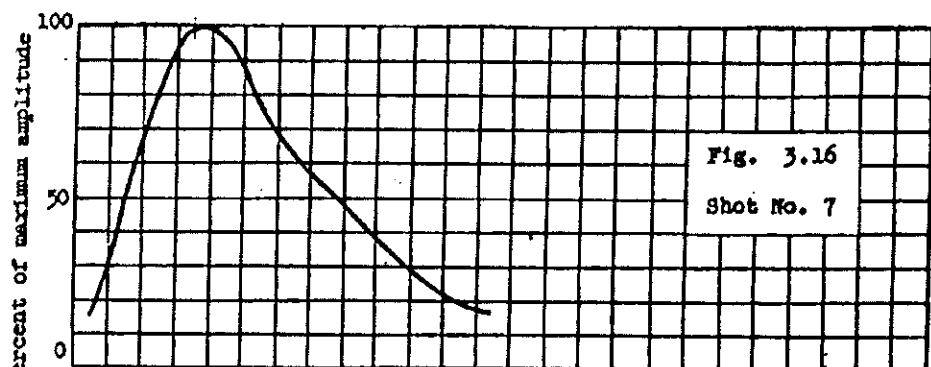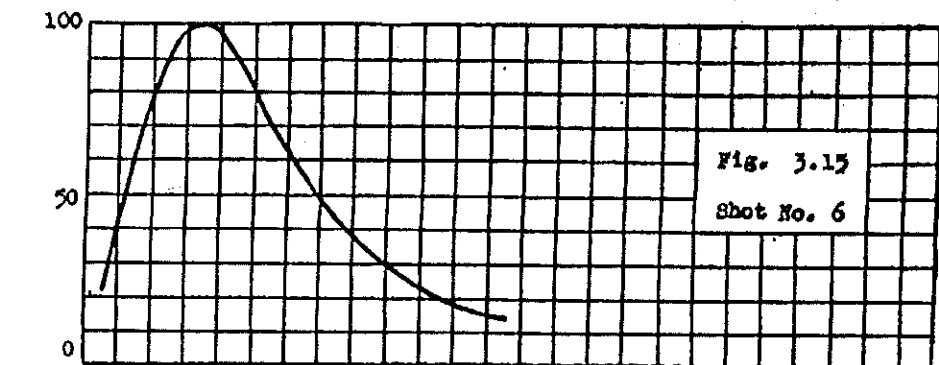


~~SECRET~~

DECLASSIFIED IN PART
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02 2013

OSD
Section 6.2 (a)

~~SECRET~~
~~SECRET~~
~~SECRET~~
~~SECRET~~

~~SECRET~~

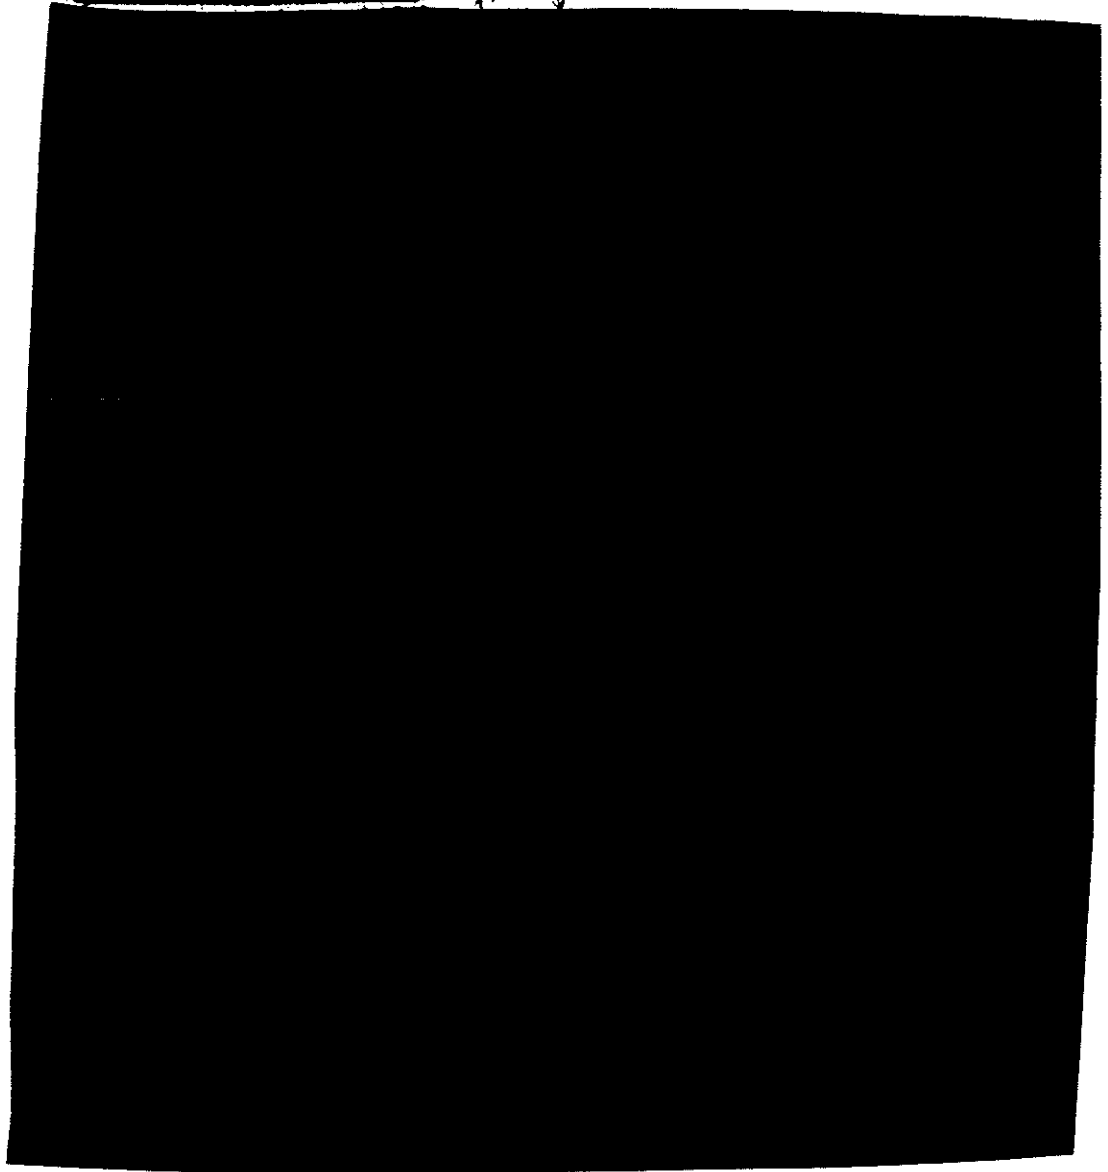


DOE
Section 6.2(a)

~~SECRET~~

~~SECRET~~

FREQUENCY FUNCTIONS OF BROADBAND PULSES ON PREVIOUS PAGE

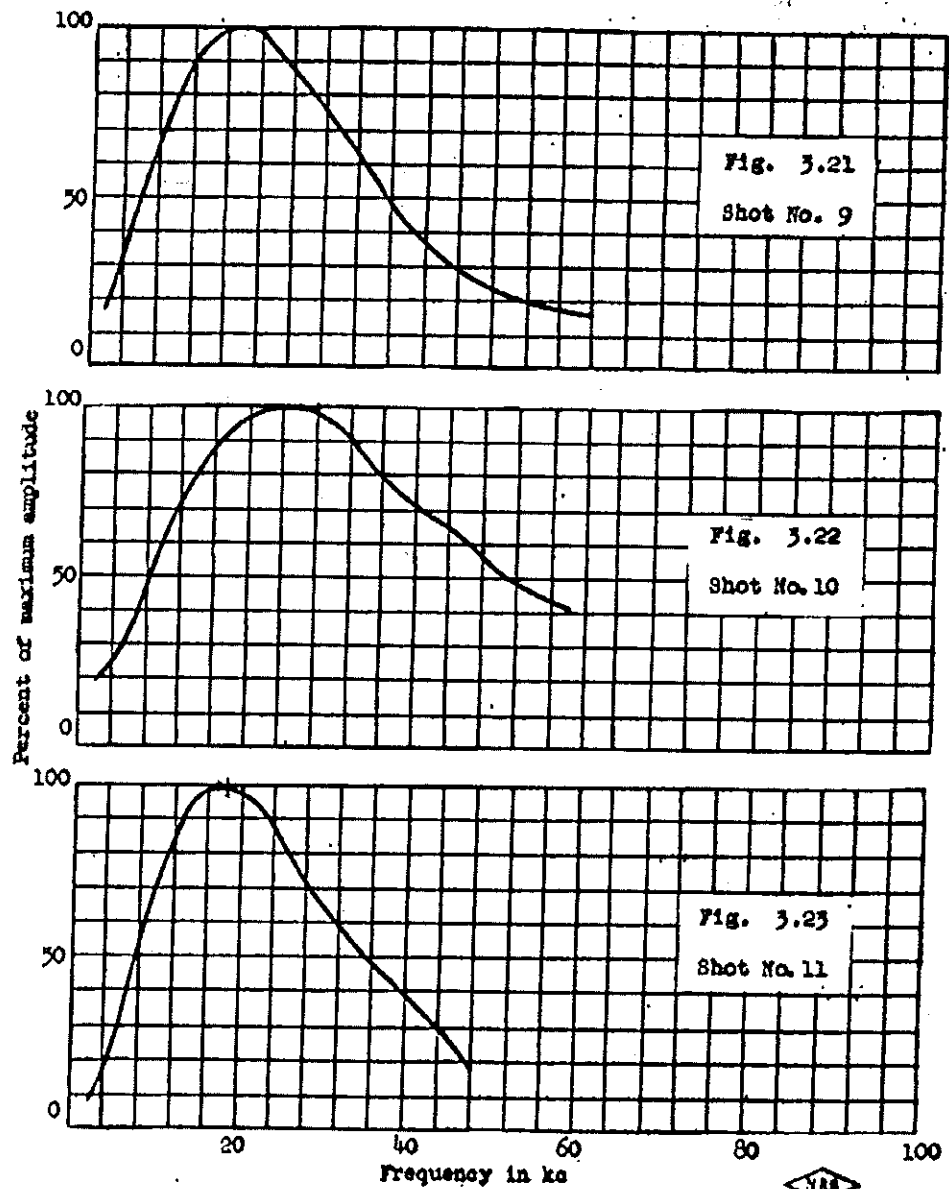

~~SECRET~~

DECLASSIFIED IN PART
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02 2013

OSD
Section 6.2 (a)

~~SECRET~~
~~SECRET~~
~~SECRET~~
~~SECRET~~
~~SECRET~~

~~SECRET~~

[REDACTED]

DOE
Section 6.2(a)

32
~~SECRET~~


~~SECRET~~

DECLASSIFIED IN PART
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02 2013

OSD
Section 6.2 (a)

~~SECRET~~

~~SECRET~~
~~SECRET~~
~~SECRET~~

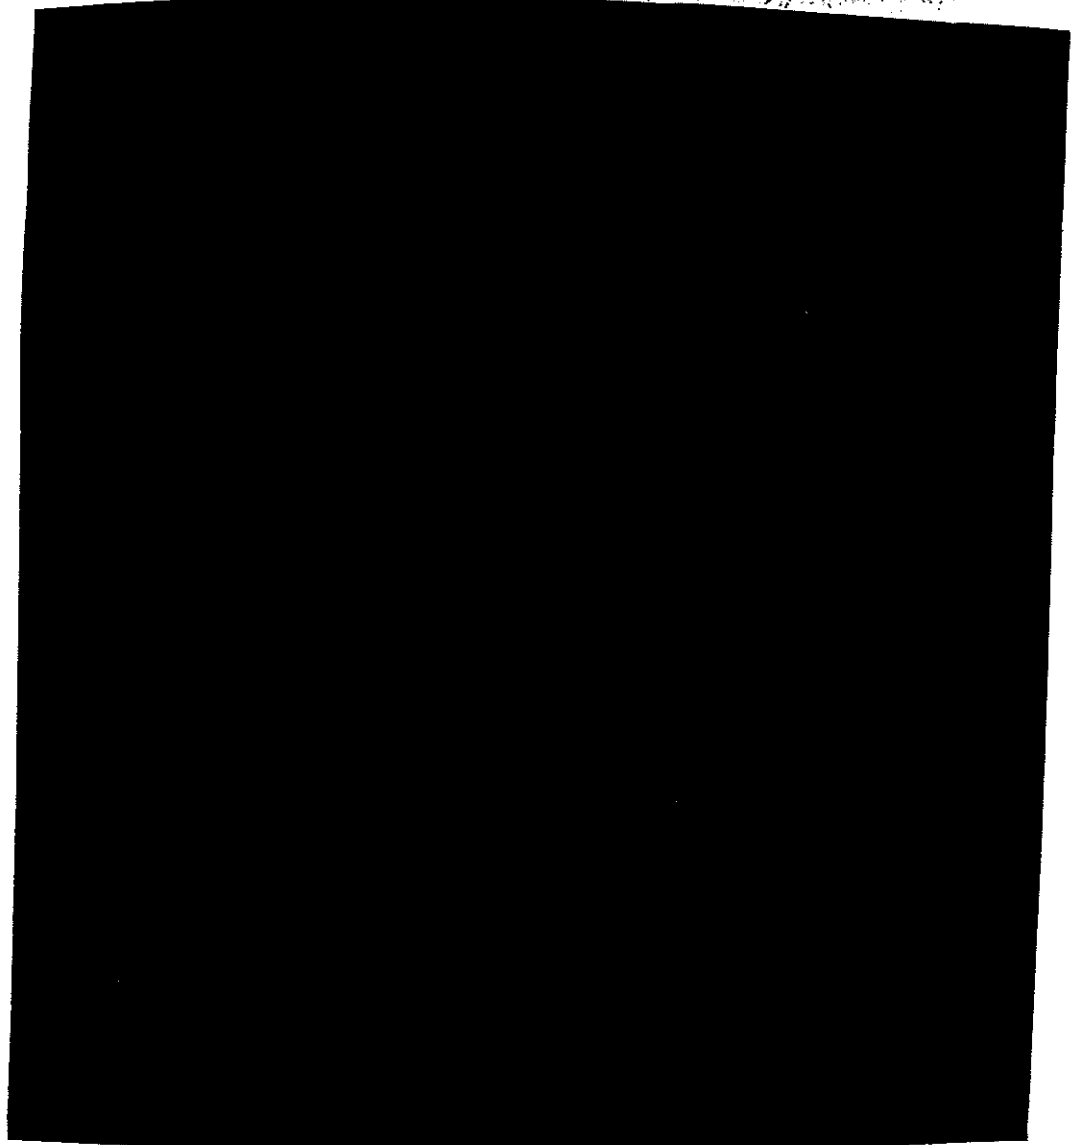

DOE
Section 6.2(g)

33

~~SECRET~~


~~SECRET~~

DECLASSIFIED IN PART
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02-2013

OSD
Section 6.2 (a)

~~SECRET~~
~~SECRET~~
~~SECRET~~

~~SECRET~~

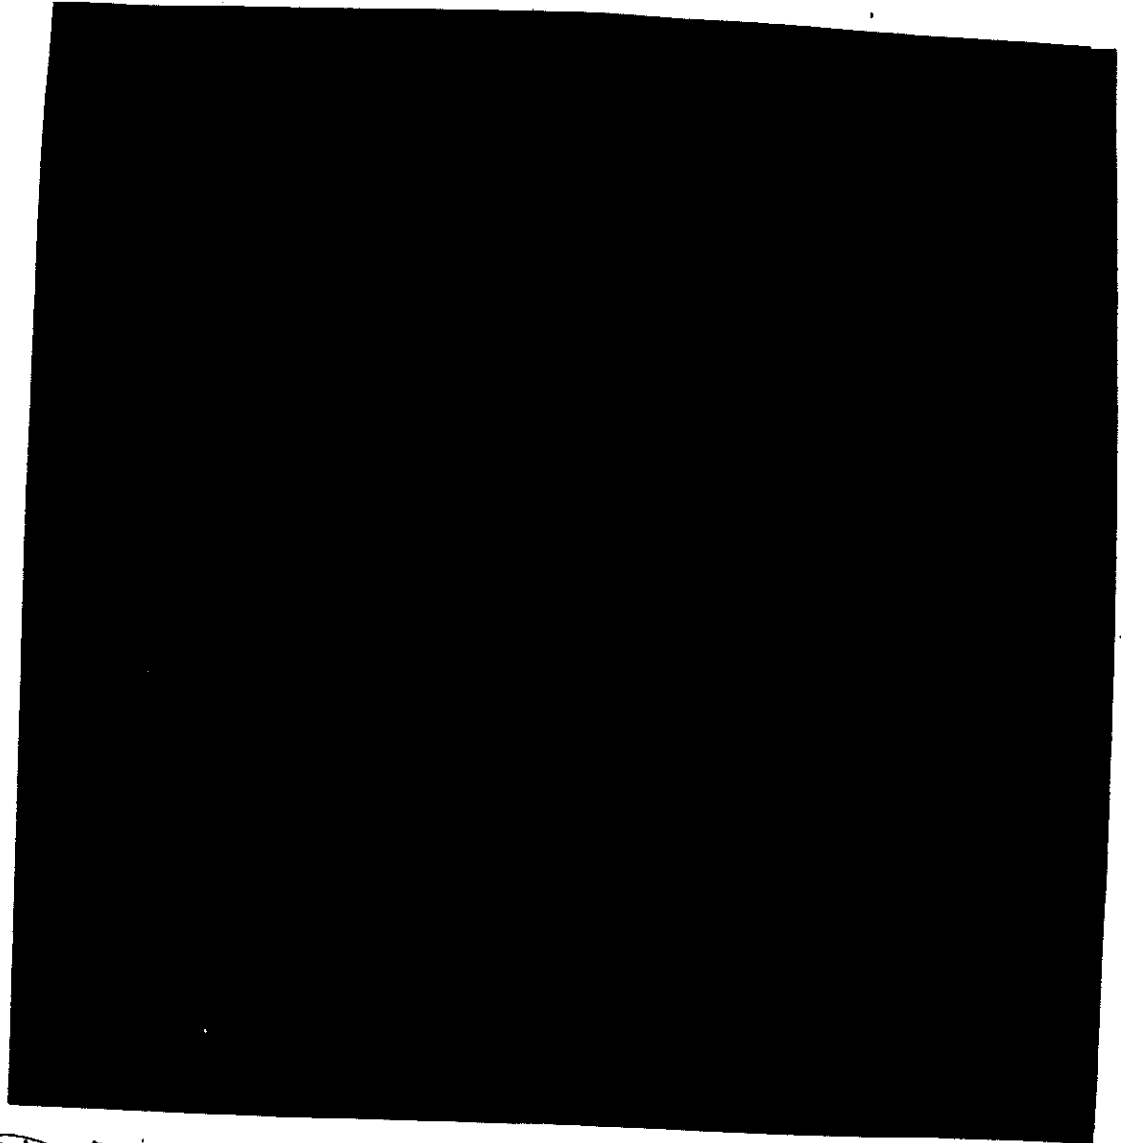

DOE
Section 6.2(a)

~~SECRET~~

~~SECRET~~

OSD
Section 6.2 (a)

SECRET


DOE
Section 6.2(a)

39

~~SECRET~~

DECLASSIFIED IN PART
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02 2013

OSD
Section 6.2 (a)

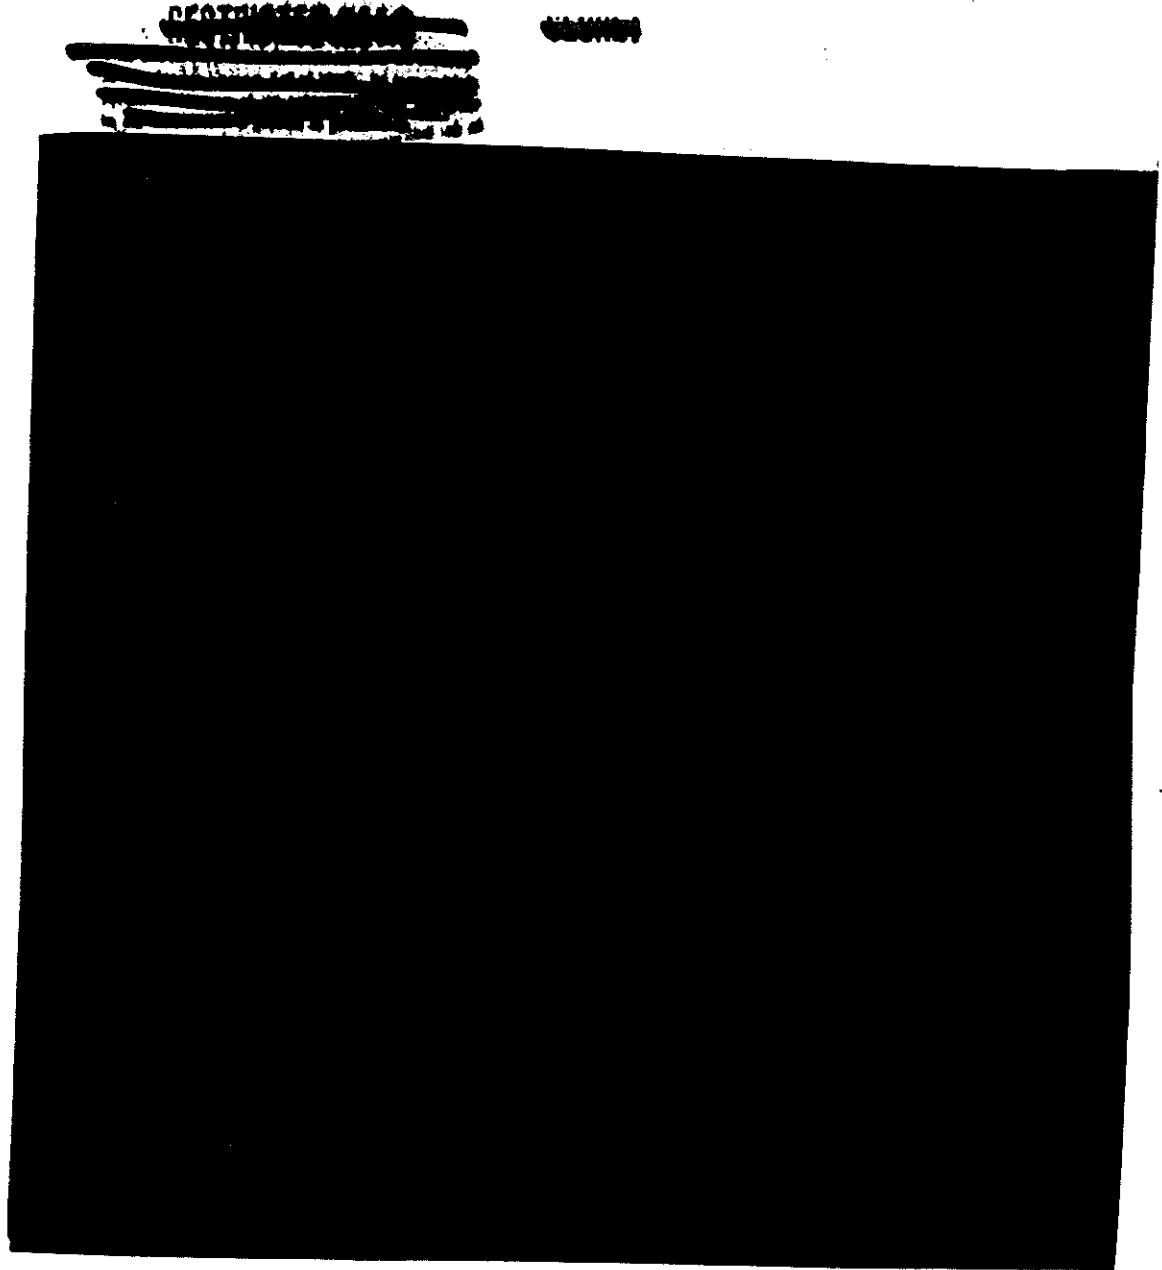


DOE
Section 6.2(s)

DECLASSIFIED IN PART
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02 2013

OSD
Section 6.2 (a)

~~SECRET~~

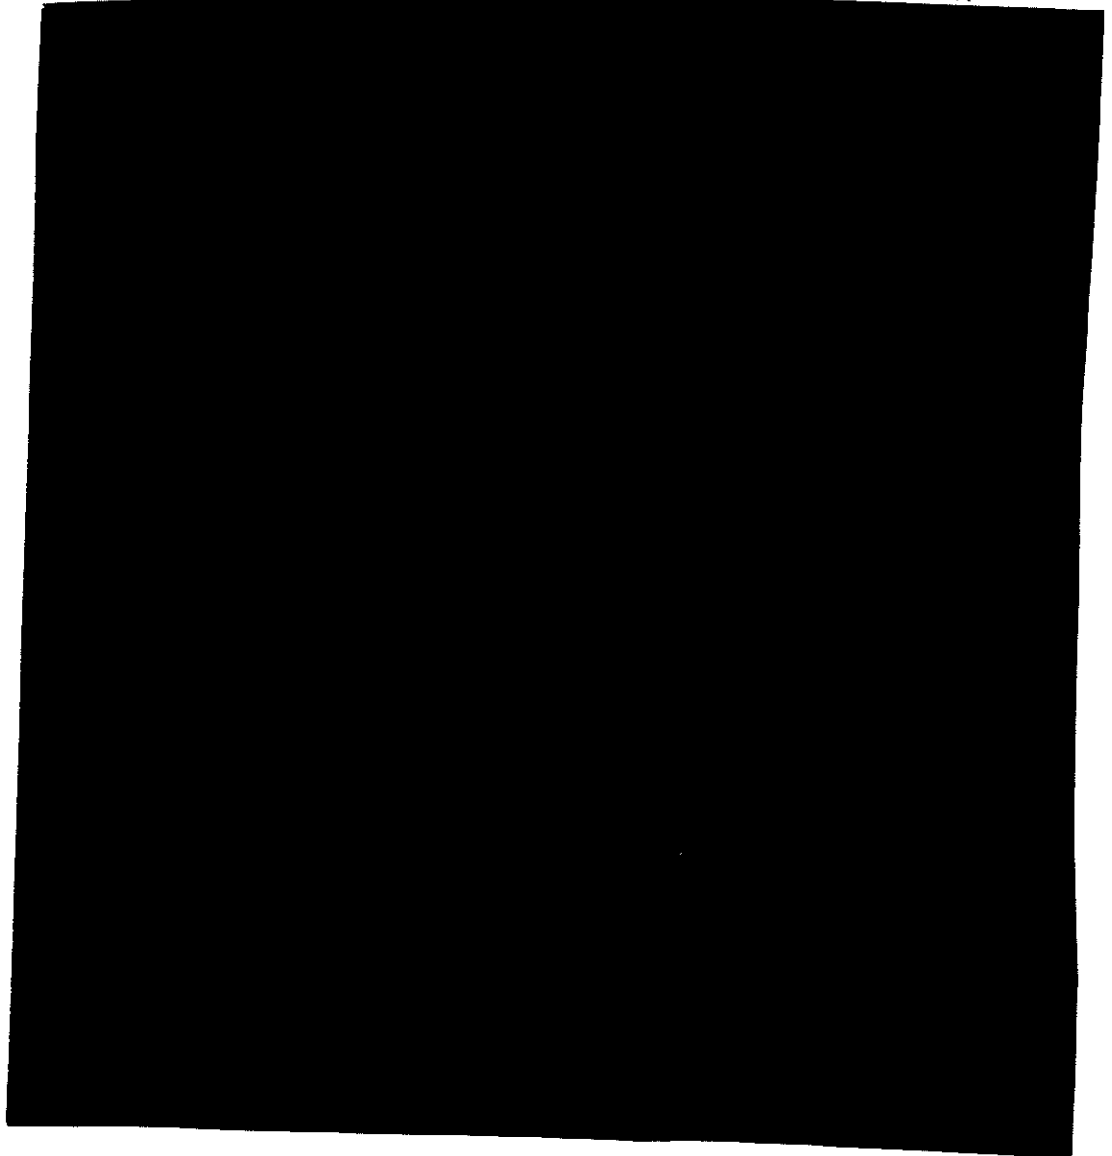

DOE
Section 6.2(a)

37

~~SECRET~~


~~ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED EXCEPT WHERE SHOWN OTHERWISE~~

DECLASSIFIED IN PART
Authority: EO 13526
Chief, Records & Declass. Div, WHS
Date: JAN 02 2013

OSD
Section 6.2 (a)

~~SECRET~~
~~SECRET~~
~~SECRET~~
~~SECRET~~
~~SECRET~~

~~SECRET~~




DOE
Section 6.2(g)

~~SECRET~~

DECLASSIFIED IN PART
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02 2013

OSD
Section 6.2 (a)

~~SECRET~~

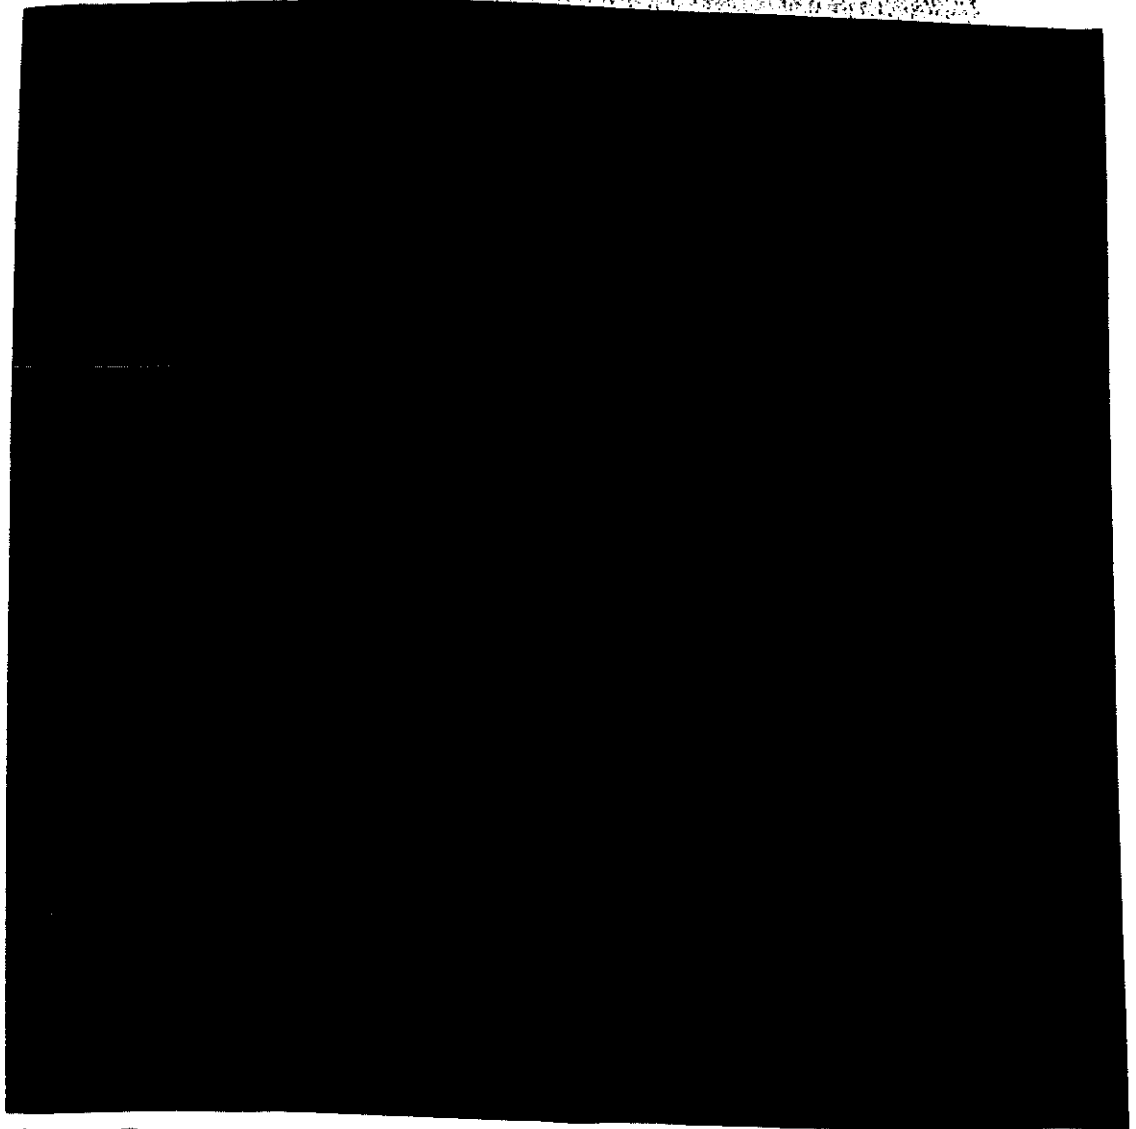

DOE
Section 6.2(a)

59


~~SECRET~~

ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED EXCEPT WHERE SHOWN OTHERWISE

DECLASSIFIED IN PART
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02 2013

~~SECRET~~/SD

OSD
Section 6.2 (a)

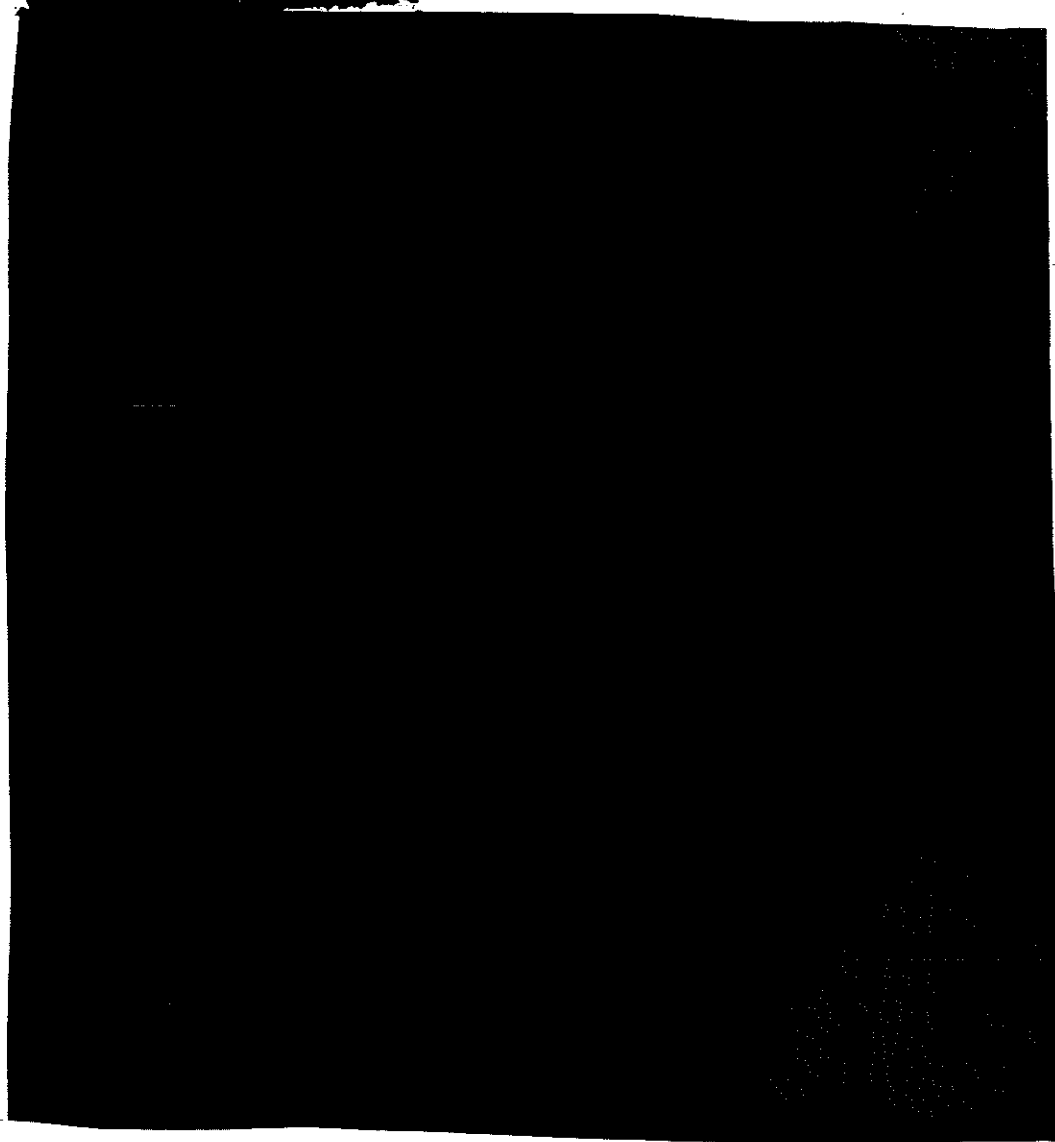

DOE
Section 6.2(a)


60
~~SECRET~~/SD

DECLASSIFIED IN PART
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02 2013

OSD
Section 6.2 (a)

~~SECRET~~

SECRET



DOE
Section 6.2(a)

61

~~SECRET~~ / ~~SECRET~~

~~ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED EXCEPT WHERE SHOWN OTHERWISE~~

~~CONFIDENTIAL~~

~~SECRET~~ / ~~SECRET~~

OSD
Section 6.2 (a)

DOE
Section 6.2(a)

62

~~SECRET~~ / ~~END~~

DECLASSIFIED IN PART
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02 2013

OSD
Section 6.2 (a)

~~SECRET~~

[REDACTED]

[REDACTED]

DOE
Section 6.2(a)

3
~~SECRET~~

[REDACTED]

~~SECRET~~
~~TOP SECRET~~
~~CONFIDENTIAL~~

~~SECRET~~

DECLASSIFIED IN FULL
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 0 2 2013

3.1.2 Discussion of Boulder Records

All of the narrow-band records recorded at Boulder are similar in appearance. The very-low-frequency receivers were tuned to 15 and 30 kc throughout the test series, whereas the high-frequency receiver was tuned to a channel near the maximum usable frequency. Figure 3.73 is a typical record of narrow-band receiver responses. The responses recorded at 15 and 30 kc have a steep front and a slow decay time, due to ringing produced in the receivers. The receiver output response is independent of the shape of the received pulse; however, the peak amplitude of the receiver response is related to the energy of the received pulse. Oscilloscope grid lines were photographed with the pulses and appear in the illustrations as equally spaced horizontal lines. The response recorded at a frequency of 2.99 Mc is composed of a number of individual pulses which arrived at different intervals of time, depending upon the number of modes reflected from the ionosphere, and the propagation delay for each. The film speed of 17 in/sec is too slow to clearly separate these individual pulses since the time intervals are of the order of 100 μ sec. A 40 msec time interval is shown, and it is terminated by a one second mark. The smaller square pulse on the time trace is the pulse gate output mark from the Tektronix oscilloscope and indicates that the broadband receiver recorded a pulse at that time.

Figure 3.73 shows a time comparison made between a WWV seconds mark (consisting of 3 cycles of 1000 cps) and a seconds pulse from the timing unit. Note that the pulse from the timer lags the beginning of the WWV seconds pulse by about 1.6 milliseconds. This lag was corrected by adjusting a phase shifting control on the frequency divider unit. A better agreement is shown in Figure 3.77. In Figure 3.70 a seconds pulse from station WWV is followed by a seconds pulse received from WWVH about 10.6 milliseconds later. The timer unit was not in operation for Shot No. 8 at Boulder. It was necessary to record station WWV directly on the timing trace as seen in Figure 3.83. Note that the 440 cps steady tone ends just before the pulses from the detonation were recorded. The large pulse on the timing trace was also received from the detonation at a frequency of 3 Mc.

Details of the shape of the pulse for Shot No. 6, as recorded by the broadband equipment, are shown in Figure 3.74. Note that the first half cycle is negative. The duration of the main part of the waveform is about 262 μ sec, but a half cycle of small amplitude is seen to occur at about 450 μ sec. The second half

~~SECRET~~

~~TOP SECRET~~
~~CONFIDENTIAL~~
~~SECRET~~

~~SECRET~~

~~SECRET~~
~~SECRET~~
~~SECRET~~

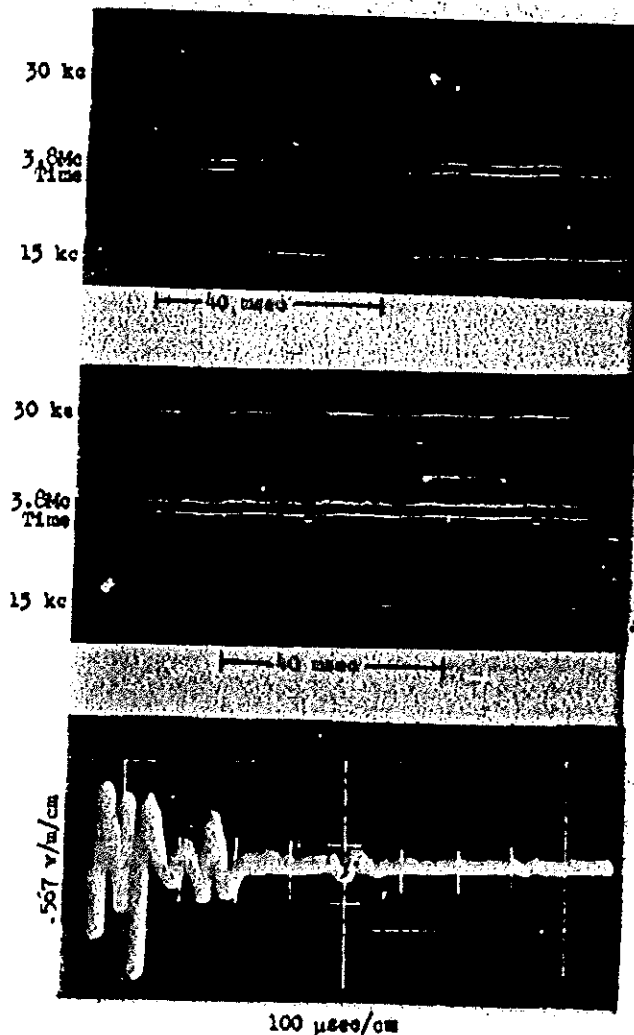


Fig. 3.60

Narrow-band responses

Shot No. 1

1000 km from ground zero

Fig. 3.61

Narrow-band responses

Shot No. 2

1000 km from ground zero

Fig. 3.62

Broadband pulse

Shot No. 2

1000 km from ground zero

~~SECRET~~

~~SECRET~~

~~SECRET~~

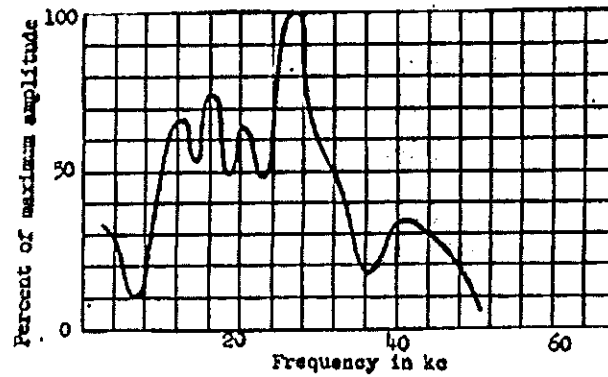


Fig. 3.63
 Frequency function of
 broadband pulse
 Shot No. 2
 1000 km from ground zero

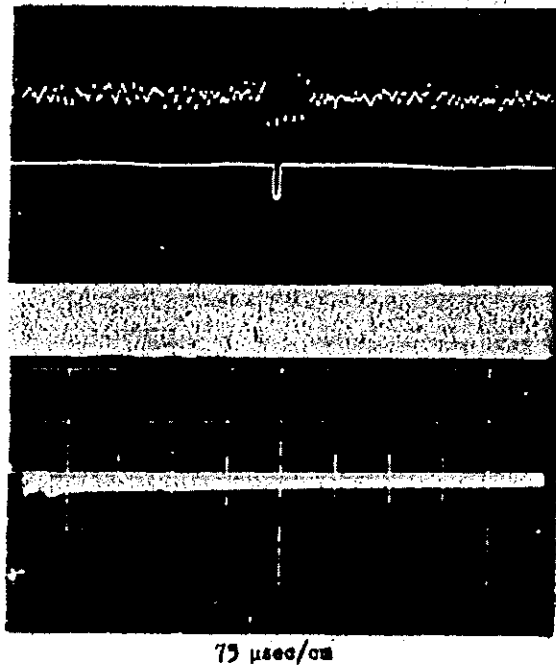


Fig. 3.64
 Time comparison of second
 marks from WWV (top)
 and times unit
 Shot No. 2
 1000 km from ground zero

.567 v/m/cm

Fig. 3.65
 Broadband pulse
 Shot No. 3
 1000 km from ground zero

75 μ sec/cm

V84

~~SECRET~~

~~SECRET~~

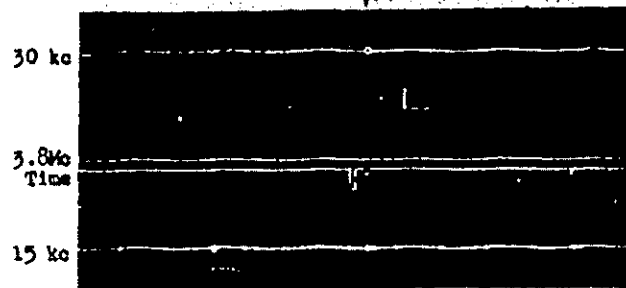


Fig. 3.66

Narrow-band responses

Shot No. 3

1000 km from ground zero

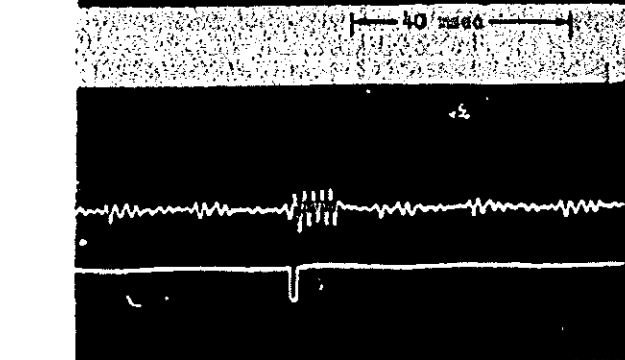


Fig. 3.67

Time comparison of second
marks from WWV (top)
and timer unit

Shot No. 3

1000 km from ground zero

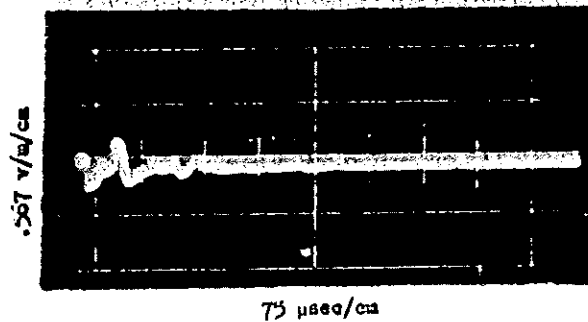


Fig. 3.68

Broadband pulse

Shot No. 4

1000 km from ground zero



~~SECRET~~

~~SECRET~~

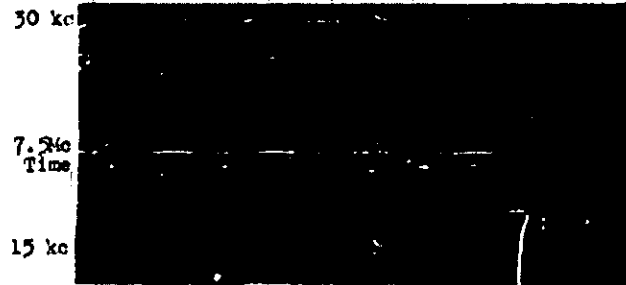


Fig. 3.69

Narrow-band responses

Shot No. 4

1000 km from ground zero

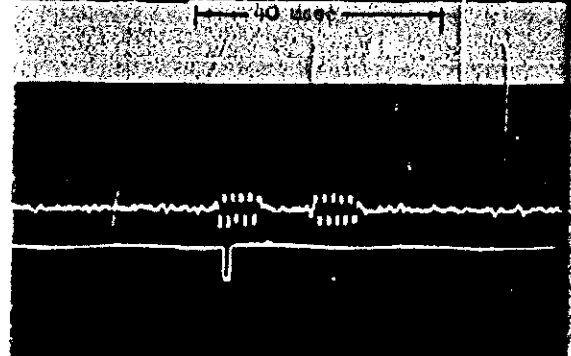


Fig. 3.70

Time comparison of second marks from 15V (top) and timer unit

Shot No. 4

1000 km from ground zero

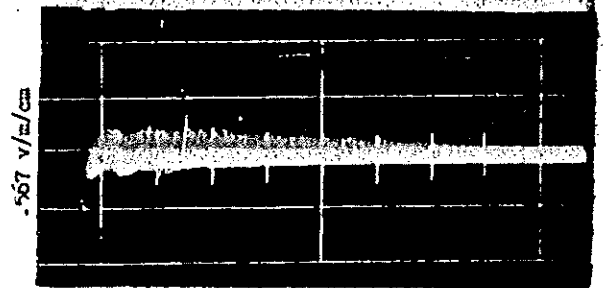


Fig. 3.71

Broadband pulse

Shot No. 5

1000 km from ground zero

NSA

~~SECRET~~

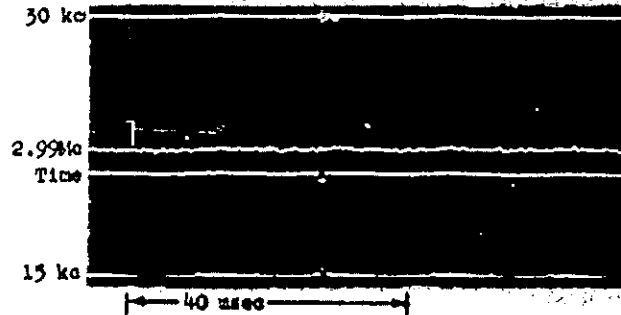


Fig. 3.72

Narrow-band responses

Shot No. 5

1000 km from ground zero

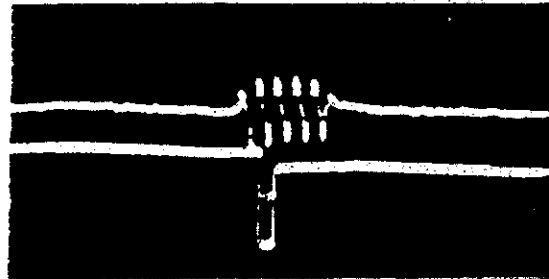


Fig. 3.73

Time comparison of second marks from WWV (top) and timer unit

Shot No. 5

1000 km from ground zero

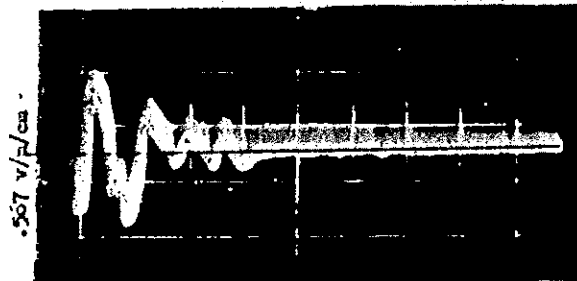


Fig. 3.74

Broadband pulse

Shot No. 6

1000 km from ground zero

~~SECRET~~

75 usec/cm

41 mV at 13 Kc (200n=8)

~~SECRET~~

~~RESTRICTED DATA~~
~~ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED~~
~~DATE 10-10-80 BY 1045/UC/STP~~
~~EXCEPT WHERE SHOWN OTHERWISE~~

~~SECRET~~

DECLASSIFIED IN FULL
 Authority: EO 13526
 Chief, Records & Declass Div, WHS
 Date: JAN 02 2013

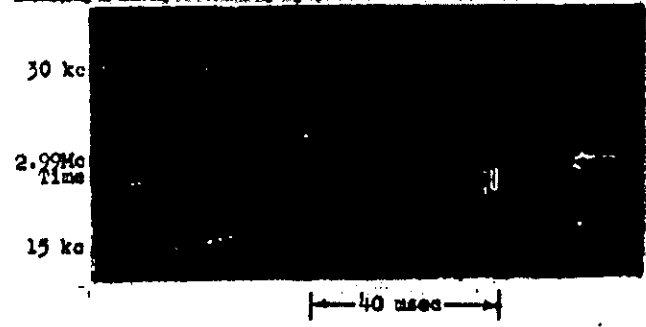


Fig. 3.75
 Narrow-band responses
 Shot No. 6
 1000 km from ground zero

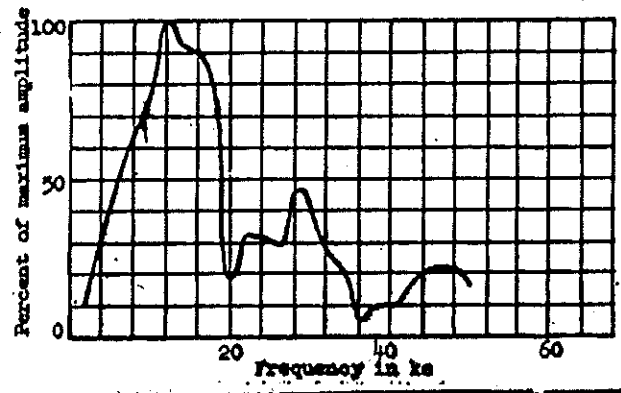


Fig. 3.76
 Frequency function of
 broadband pulse
 Shot No. 6
 1000 km from ground zero

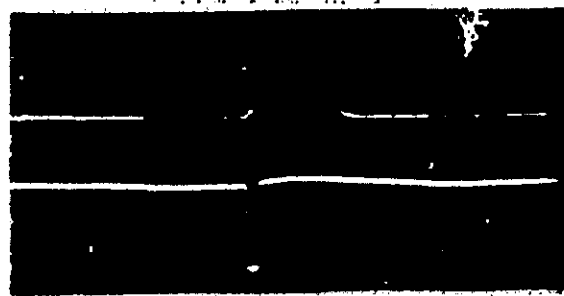


Fig. 3.77
 Time comparison of second,
 marks from WWV (top)
 and timer unit
 Shot No. 6
 1000 km from ground zero

NEB

~~SECRET~~

~~RESTRICTED DATA~~
~~ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED~~
~~DATE 10-10-80 BY 1045/UC/STP~~
~~EXCEPT WHERE SHOWN OTHERWISE~~

Supplement

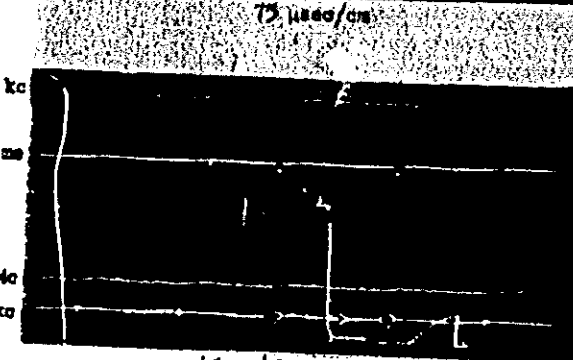


Fig. 3.79

Shot No. 7

1000 km from ground zero

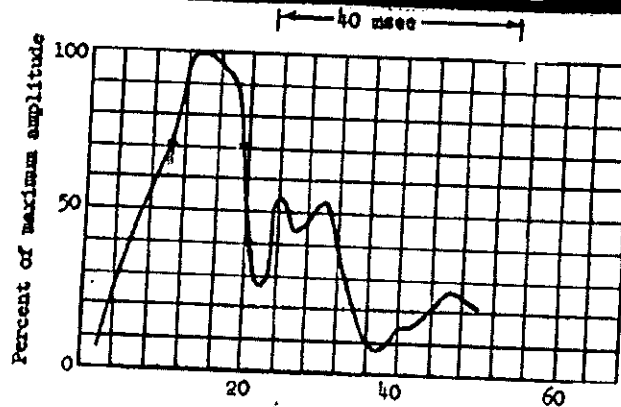


Fig. 3.80

Shot No. 7


1000 km from ground zero

Abstract

.567 v/cm

75 μ sec/cm


Broadband pulse
Shot No. 8
1000 km from ground zero

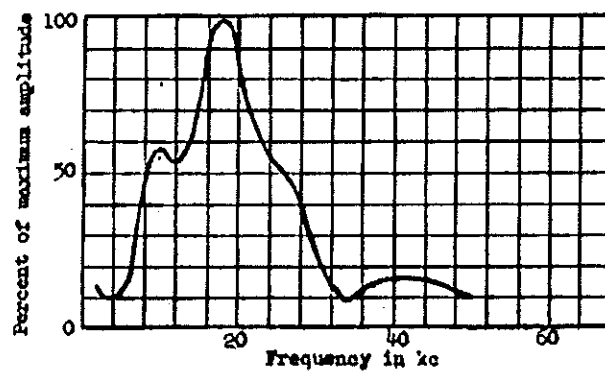

Frequency function of
broadband pulse

Shot No. 8

1000 km from ground zero

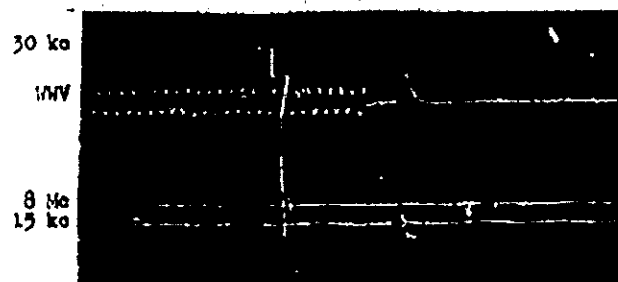

Narrow-band responses
Shot No. 8
1000 km from ground zero

SECRET

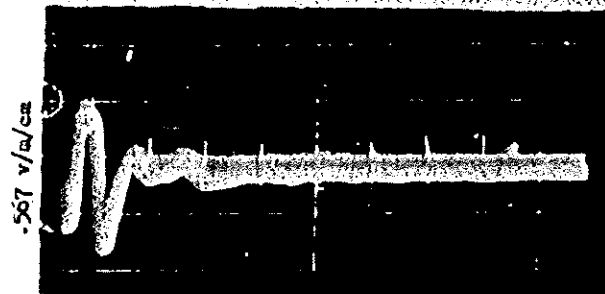


Fig. 3.84

Broadband pulse

Shot No. 9

1000 km from ground zero

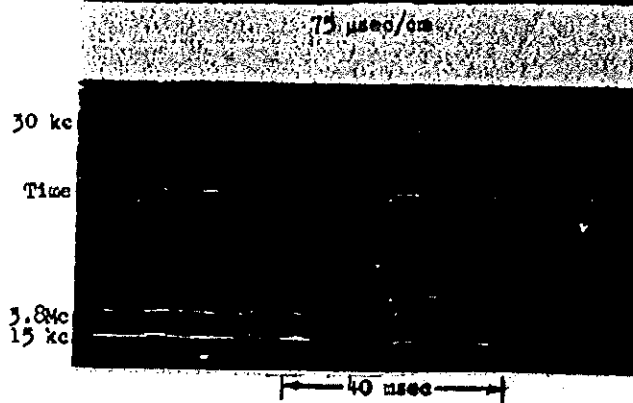


Fig. 3.85

Narrow-band responses

Shot No. 9

1000 km from ground zero

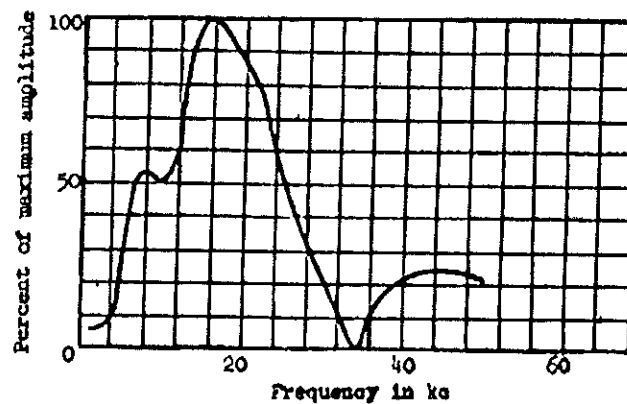


Fig. 3.86

Frequency function of
broadband pulse

Shot No. 9

1000 km from ground zero



SECRET

~~SECRET~~
~~SECRET~~
~~SECRET~~
~~SECRET~~
~~SECRET~~

~~SECRET~~

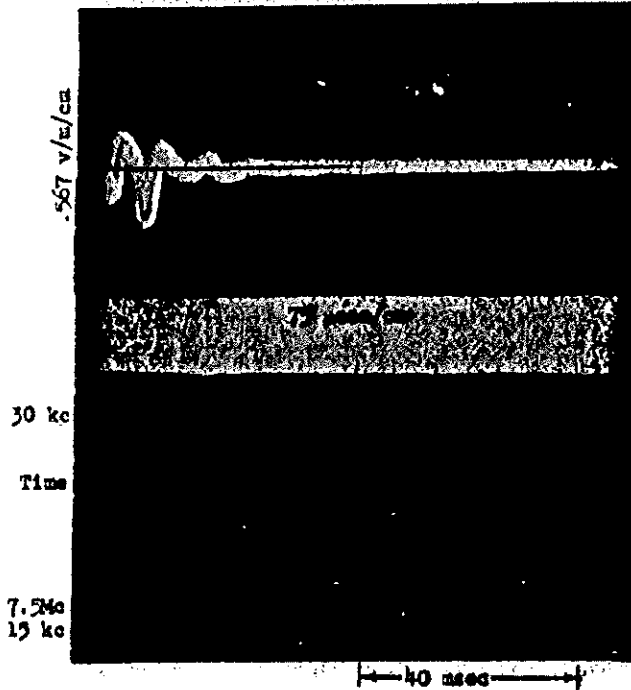


Fig. 3.87

Broadband pulse
 Shot No. 10
 1000 km from ground zero

30 kc
 Time
 7.5 Mc
 15 kc

Fig. 3.88

Narrow-band responses
 Shot No. 10
 1000 km from ground zero

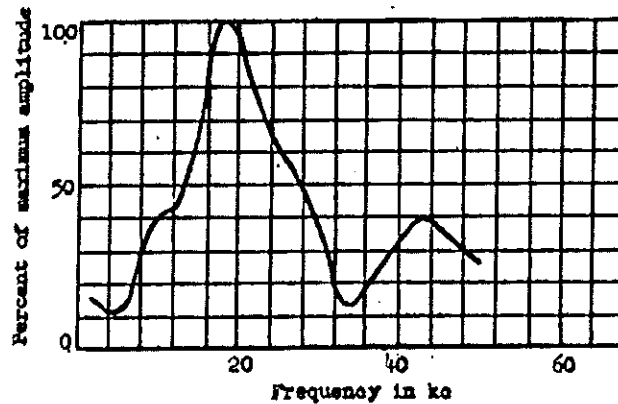


Fig. 3.89

Frequency function of
 broadband pulse
 Shot No. 10
 1000 km from ground zero

NSA

~~SECRET~~

~~SECRET~~

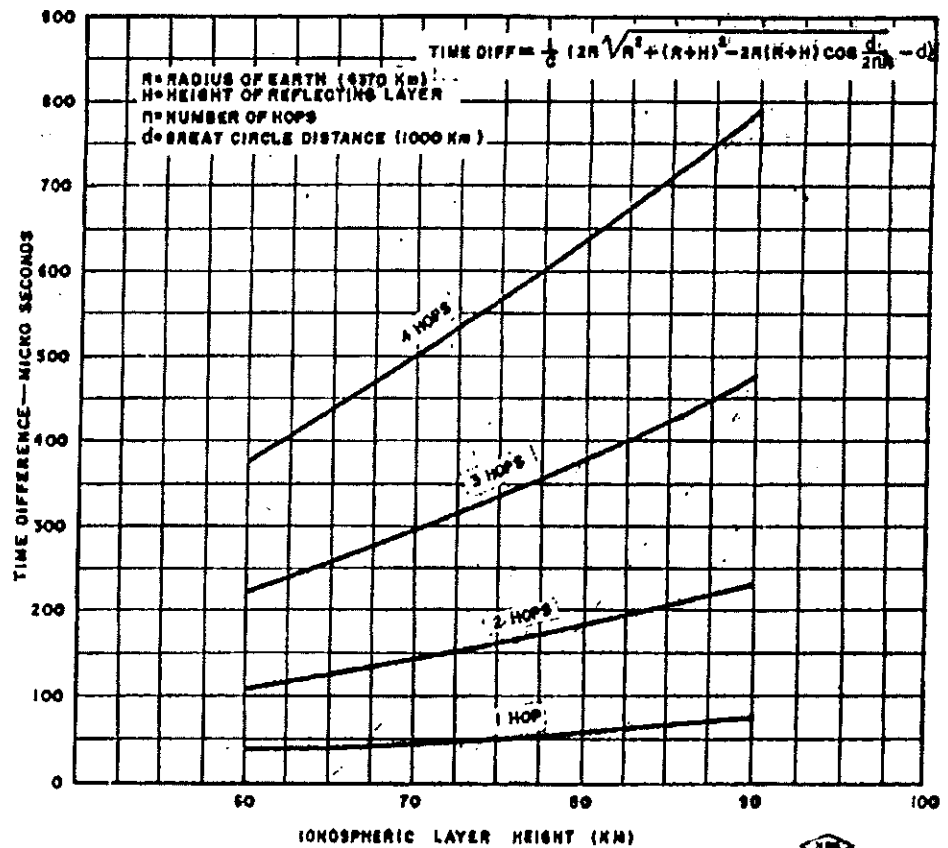


FIG.3.90 TIME INTERVAL BETWEEN PROPAGATION MODES VS
 IONOSPHERIC LAYER HEIGHT FOR A 1,000 KM PATH

~~SECRET~~

signal has a peak amplitude of about 0.67 v/m. In Figure 3.76, which is the frequency function for this pulse, it is seen that the peak of the frequency function is near 12 kc. Comparison of the waveform of this pulse with that recorded at a distance of 27 km, at the Nevada Proving Ground (Fig. 3.12), shows that the one recorded at 1000 km is about 4 times as long, and appears to be composed of a series of pulses of the type recorded at 27 km. By comparing the frequency functions of these pulses recorded at the Nevada Proving Ground with those recorded at Boulder, Colorado, the effects of propagation can be seen. The peak frequency is shifted by propagation from about 15 kc to about 12 kc, and the frequency components above 16 kc are strongly attenuated. By comparison, the amplitude of the frequency components below 12 kc are not attenuated nearly as much as those above 16 kc. Thus, the effect on the waveform produced by propagation is similar to that produced by a low pass filter.

049615

[illegible]

1. The first step is to identify the problem or question that needs to be answered. This involves understanding the context and the specific information required.

Discussion of Washington, D. C. Records

Figure 3.98 is typical of the narrow-band receiver re-

The pulses recorded by the broadband receivers at Ft.

77

12-11-80 769 and 788

~~SECRET~~

~~SECRET~~
ripples on the traces, Figures No. 3.101, 3.103, 3.106, are due to interference and are not a part of the desired signal.

The ground wave attenuation (referred to the value at 1.6 km) for a 3400 km path is about 60 db over good earth. Therefore, the ground-wave pulse was not received at Ft. Belvoir. Using ray theory, the angle of arrival for the first-hop sky wave is a negative one, and there is no evidence that the first-hop sky wave was received at Ft. Belvoir. Assuming an ionospheric layer height of 80 km, there will be approximately a 50 μ sec delay (see Fig. 3.112) between the arrival of the third- and fourth-hop sky wave and about 120 μ sec delay between the fourth- and fifth-hop sky wave. Referring to Figure 3.106 it is assumed that the first two half-cycles correspond to the second-hop sky wave. The third half-cycle is seen to arrive about 50 μ sec after the beginning of the first half-cycle, and the third and fourth half-cycles are taken to be the third-hop sky-wave reflections. Similarly, the fifth and sixth half-cycles correspond to the arrival time of the fourth-hop sky wave.

Reproductions of additional records obtained at Ft. Belvoir appear in Figures 3.91 to 3.111.

~~SECRET~~

~~SECRET~~
This document contains information affecting the national defense of the United States within the meaning of the espionage laws, Title 18, U.S.C., Sec. 793 and 794, and the transmission or revelation of its contents in any manner to an unauthorized person is prohibited by law.

SECRET

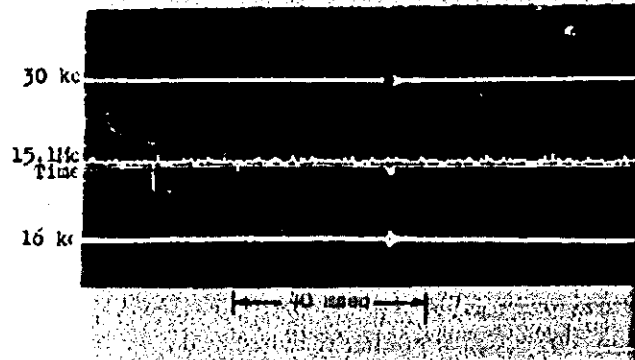


Fig. 3.91

Narrow-band responses

Shot No. 1

3400 km from ground zero

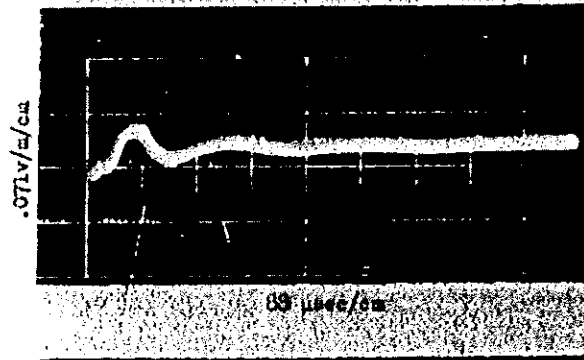


Fig. 3.92

Broadband pulse

Shot No. 2

3400 km from ground zero



Fig. 3.93

Narrow-band responses

Shot No. 2

3400 km from ground zero

SECRET

SECRET

~~SECRET~~

~~SECRET~~

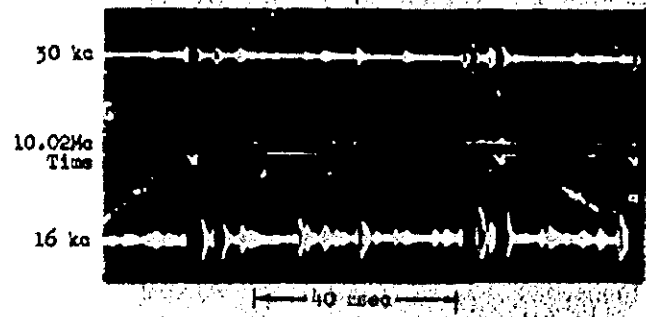


Fig. 3.94
 Narrow-band responses
 Shot No. 3
 3400 km from ground zero

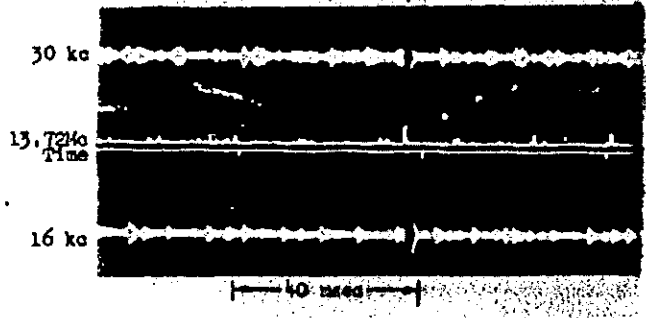


Fig. 3.95
 Narrow-band responses
 Shot No. 4
 3400 km from ground zero

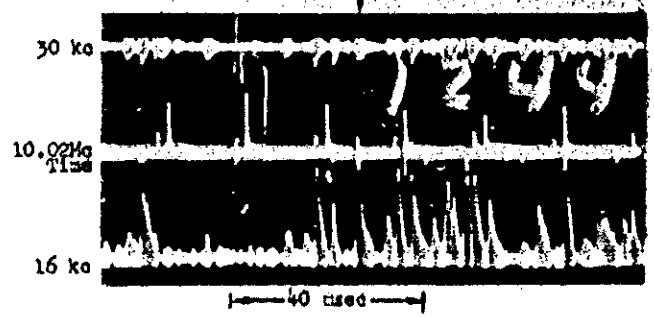


Fig. 3.96
 Narrow-band responses
 Shot No. 5
 3400 km from ground zero

NSA

~~SECRET~~

~~SECRET~~

~~SECRET~~

~~SECRET~~
~~SECRET~~
~~SECRET~~
~~SECRET~~
~~SECRET~~

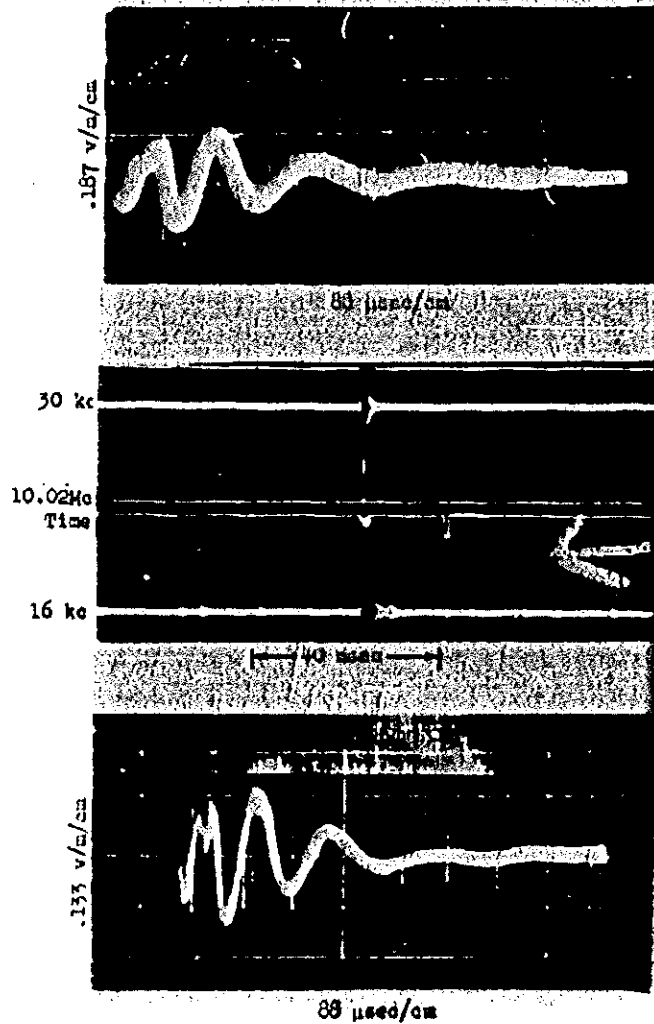


Fig. 3.97

Broadband pulse
 Shot No. 6
 3400 km from ground zero

Fig. 3.98

Narrow-band responses
 Shot No. 6
 3400 km from ground zero

Fig. 3.99

Broadband pulse
 Shot No. 7
 3400 km from ground zero

NSA

~~SECRET~~

0150114



Fig. 3.100

Shot No. 7

3400 km from ground zero



Fig. 3.101

Shot No. 8

3400 km from ground zero



Fig. 3.102

Shot No. 8

3400 km from ground zero

0.1/2

~~SECRET~~

~~SECRET~~
~~SECRET~~
~~SECRET~~

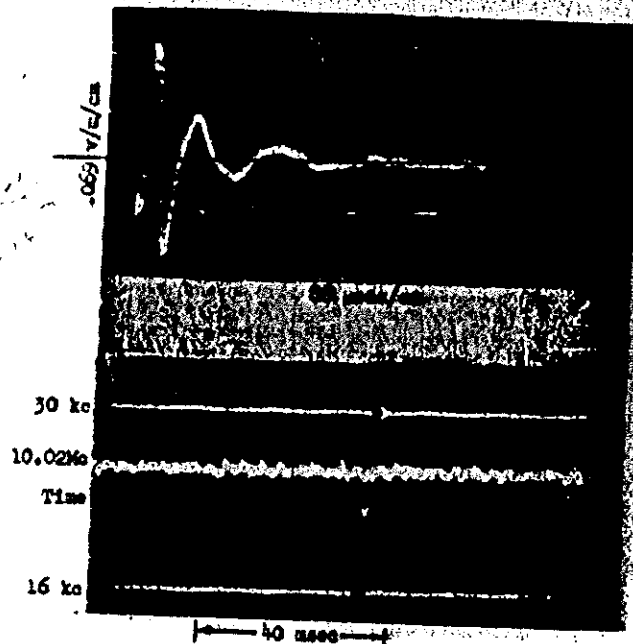


Fig. 3.108

Broadband pulse
 Shot No. 9
 3400 km from ground zero

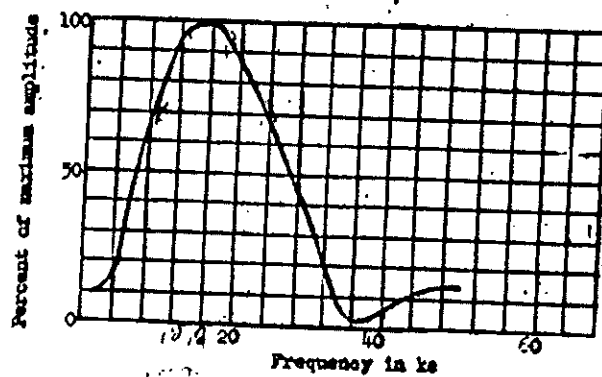


Fig. 3.109

Frequency function of broad-
 band pulse
 Shot No. 9
 3400 km from ground zero

100

~~SECRET~~

~~SECRET~~

~~SECRET~~

~~SECRET~~

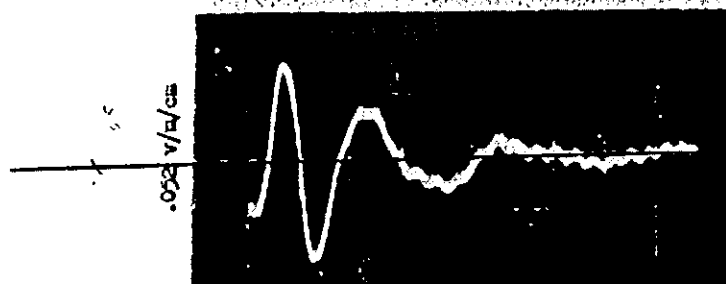


Fig. 3.106

Broadband pulse

Shot No. 10

3400 km from ground zero

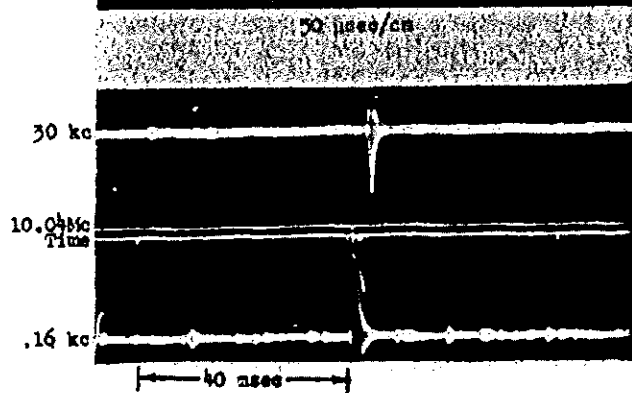


Fig. 3.107

Narrow-band responses

Shot No. 10

3400 km from ground zero

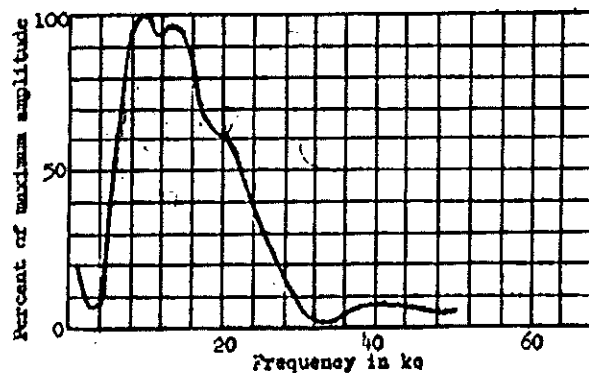


Fig. 3.108

Frequency function of
broadband pulse

Shot No. 10

3400 km from ground zero

~~SECRET~~

54

~~SECRET~~

SECRET

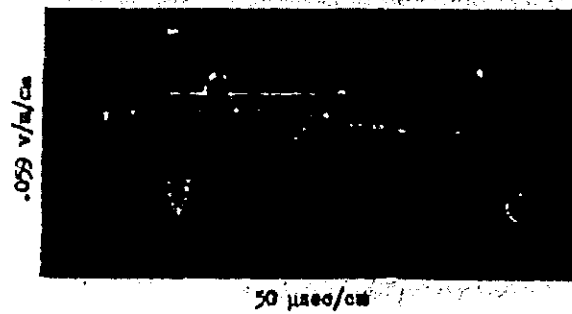


Fig. 3.109

Broadband pulse

Shot No. 11

3400 km from ground zero

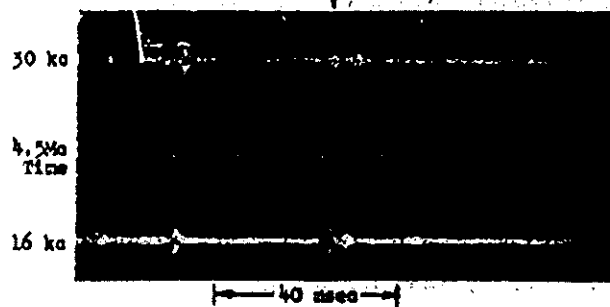


Fig. 3.110

Narrow-band responses

Shot No. 11

3400 km from ground zero

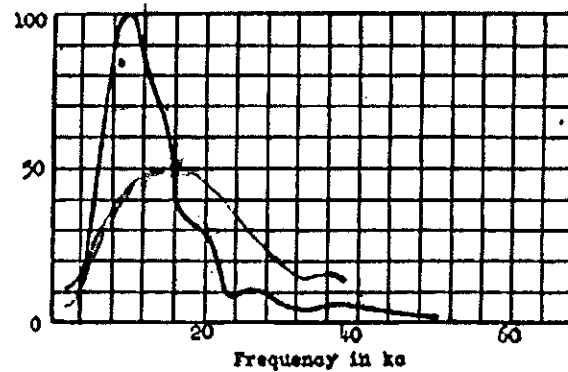


Fig. 3.111

Frequency function of broad-band pulse

Shot No. 11

3400 km from ground zero



SECRET

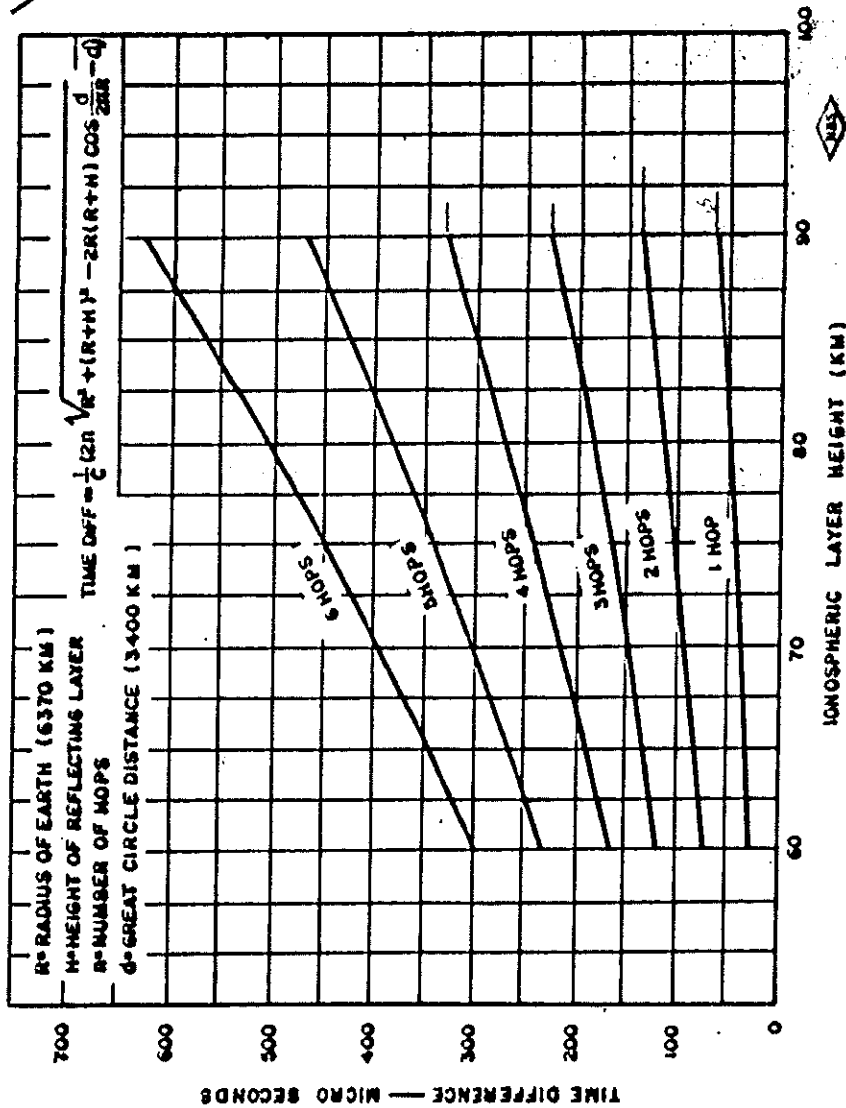


FIG. 3.112 TIME INTERVAL BETWEEN PROPAGATION MODES VS
 IONOSPHERIC LAYER HEIGHT FOR A 3400 KM PATH

SECRET

~~SECRET~~

CHAPTER IV

DISCUSSION OF RESULTS

4.1 ACCURACY OF TIMING AT ALL STATIONS

Measurements of virtual time of detonations were made at all sites, including Stanford. (No discussion of other measurements made at Stanford are given in this report.) Detonation times were computed from the observations at each recording site in accordance with the following

- T_0 = time of reception of pulse at recording site, using WWV (or WWVH) time as received, uncorrected for propagation delay.
 T_s = time of propagation of standard WWV (or WWVH) time signal to recording site.
 T_p = time of propagation of pulse signal to recording site.
 $T_d = T_0 + T_s - T_p$ = astronomical time of detonation.

TABLE 4.1

PARAMETERS FOR COMPUTING ASTRONOMICAL TIME OF DETONATION
(in seconds)

<u>Station</u>	<u>T_s</u>	<u>T_p</u>	<u>$T_s - T_p$</u>
Nevada Proving Ground	0.0115	0.000	0.0115
Boulder	0.008	0.004	0.004
Ft. Belvoir	0.000	0.0115	-0.0115
Stanford	0.014	0.002	0.012

After the approximate detonation times were known, factors such as the relative amplitude of the 15 and 30 kc signals, the time coincidence of pulses recorded on the three narrow-band channels, and the appearance of the broadband waveforms made possible, in most cases, the selection of the correct pulse of each station. When more

~~SECRET~~

~~CONFIDENTIAL~~
~~CONFIDENTIAL~~
~~CONFIDENTIAL~~
~~CONFIDENTIAL~~
~~CONFIDENTIAL~~

accurate propagation times had been determined, i.e. the delay in arrival of signals from HWV and the actual delay time of the pulse traveling over a known distance, the exact detonation time at Nevada Proving Ground was calculated. The results of such calculations are tabulated in Table 4.2, which shows that all of the detonation times agree to within 3 milliseconds, with one exception.

DETONATION TIMES OBTAINED AT EACH STATION

<u>Shot</u> <u>No.</u>	<u>Date</u>	<u>Nevada</u>	<u>Boulder</u>	<u>Washington</u>	<u>Stanford</u>
1	Mar. 17	1320:00.340	1320:00.329	1320:00.341	1320:00.339
2	Mar. 24	1310:00.099	1310:00.099	1310:00.100	1310:00.100
3	Mar. 31	1300:00.007	1300:00.006	1300:00.009	1300:00.006
4	Apr. 6	1529:38.424	1529:38.424	1529:38.425	1529:38.423
5	Apr. 11	1244:59.795	1244:59.791	1244:59.794	1244:59.794
6	Apr. 18	1234:59.972	1234:59.970	1234:59.971	1234:59.972
7	Apr. 25	1229:59.772	1229:59.773	1229:59.773	1229:59.773
8	May 8	1529:55.374	1529:55.373	1529:55.377	1529:55.373
9	May 19	1204:59.542	1204:59.542	1204:59.543	1204:59.541
10	May 24	1530:00.351	1530:00.348	1530:00.351	1530:00.350
11	June 4	1114:56.692	No record	1114:56.692	1114:56.691

It is clear from the foregoing that the explosion of an A-bomb gives rise to a pulse of electromagnetic radiation, the principle energy of which lies in the very low frequency part of the radio spectrum with its maximum lying between 15 and 60 kc, for weapons of the sizes used in the UPSHOT-KNOXHOLE tests. It is also clear that the radiation is predominantly plane-polarized with its electric vector perpendicular.

Until a satisfactory model or process has been developed it may be assumed that the radiation is substantially the same as that radiated by shock-exciting a low-frequency, highly-damped antenna. We will assume that this antenna is short as compared with the wavelength at which the energy has a maximum, and that one end is at or close to the surface of the earth.

88

[REDACTED] [REDACTED] [REDACTED]
[REDACTED] [REDACTED] [REDACTED]
[REDACTED] [REDACTED] [REDACTED]
[REDACTED] [REDACTED] [REDACTED]
to [REDACTED] [REDACTED] [REDACTED]

~~SECRET~~

Vertical antennas located at other points on, or close to the surface of the earth, will receive energy from this source by several modes of propagation, each of which has different propagation characteristics. These modes are the surface wave and the several sky waves reflected by the ionosphere. At very great distances, where propagation is achieved by multiple reflections from the ionosphere, the situation is similar to that experienced in wave guides.

4.2.1 Ground-wave Propagation

Energy propagated in the ground wave is attenuated by three principal factors, namely, spreading out of the wave, absorption of the energy by the ground, and diffraction around the earth. This latter factor becomes important at great distances. Over a plane earth the density of energy is given by

$$E = (E_0/d^2) e^{-\alpha d} \quad (1)$$

where E_0 is the energy at unit distance, d , the distance at which the energy is observed, and α , an attenuation index dependent on the electric conductivity and dielectric constant of the ground. Thus at distances close to the source, the inverse distance effect is greater, while at greater distances absorption becomes more important. At distances much over 1000 km the effect of the curvature of the earth becomes important and losses due to diffraction around the earth must be taken into account in addition to the losses mentioned above.

4.2.2 Sky-wave Propagation

Most of the energy radiated from our assumed model is propagated upward through the atmosphere and does not go into the surface wave. Some of this energy is reflected by the ionosphere and returned to the surface of the earth. This is known as one-hop sky-wave propagation. The returned energy may be partially reflected by the earth back to the ionosphere where it may be again reflected and the process repeated any number of times. This is known as multiple-hop sky-wave propagation. Attenuation of the sky-wave modes is determined by the spreading out of the wave and by losses through reflection at the ionosphere and at the earth. The energy density at some distance d , due to each mode is given by

~~SECRET~~

~~SECRET~~

$$E = (E_0/4^n) R_1^n R_e^{n-1} \quad (2)$$

in which E_0 is the energy density at unit distance from the source in the direction of the central ray for that particular mode, R_1 and R_e , the reflection coefficients of the ionosphere and the earth, and n , the number of hops in the mode. In most cases R_e is considerably greater than R_1 and may be considered unity.

The value which R_1 may assume covers a wide range. It depends on geographic location, time of day, season of year, azimuth of propagation, and angle of incidence on the ionosphere. For small angles of incidence, i.e. when the energy is propagated nearly normal to the ionosphere, R_1 is small, 0.01 or less, but at larger angles, particularly at night, it may approach unity. Because of the smallness of R_1 for small angles of incidence, only the modes having a few reflections at rather large angles deliver much energy at a distant point, and sky-wave modes are of little importance at short distances for low-frequency propagation. The angles of incidence are calculated on the basis of classical geometric optics, regarding the ionosphere and the earth as two concentric spherical mirrors, concave and convex, separated by a distance of 70 to 90 km for low-frequency waves.

Because of differences in length of path traversed by the ground wave and the several sky-wave modes from the source to a receiving point, the waves arriving by one mode may be in or out of phase with respect to another at certain frequencies. This gives rise to regions where the signal is enhanced or diminished with respect to what it would be if only one mode were active. However, if a transmitted signal consists of a pulse representable by a band of frequencies, and the difference in travel time by different modes is such that the signals from two or more modes merge, an alteration in the form of the received pulse occurs. This results in a change in the spectral representation of the pulse, some frequency regions being enhanced and other diminished. It is not possible that enhancement or diminution can occur throughout the spectral range of the pulse.

~~SECRET~~

~~SECRET~~

4.2.3 Wave-guide Concepts

At distances from the source sufficiently great that a number of independent, large angle, sky-wave modes can be active, the energy radiated at low angles from the source may be regarded as trapped between the earth and the ionosphere. In this case it is convenient to consider propagation as a wave-guide phenomenon. The energy is attenuated by spreading out of the wave, but in this case, since the energy does not spread out in three dimensions, it is attenuated proportionately, approximately to the inverse first power of the distance instead of the inverse square. Additional attenuation results from absorption in the wave guide. The energy density at any point at distance d may be given by

$$E = E_1(d_1/d) \left(\frac{\sin \theta_1}{\theta_1} \right) \left(\frac{\theta}{\sin \theta} \right) e^{-\alpha(d-d_1)} \quad (3)$$

in which E_1 is the energy density at distance d_1 where one may begin to apply the wave guide concept, and θ and θ_1 are the angular measures of d and d_1 to correct for the finite curvature of the earth. The index, α , is the absorption coefficient of the wave guide. The equation may be expressed in more usable form

$$E = K(E_0/d) \left(\frac{\theta}{\sin \theta} \right) e^{-\alpha d} \quad (4)$$

in which K is a coefficient of coupling in launching the wave-guide mode and E_0 has the same significance as in Equation (1), but α does not have the same value as in Equation (1).

4.2.4 Applications to Observations Reported

We may now consider the application of these principles to the measurements described in this report. The Nevada Proving Ground sites are well within the region where practically all the energy received is transmitted from the source by the ground-wave mode. Because of the closeness of the receiving site to the source, in all cases, and the low attenuation by ground absorption for the spectrum range of the pulse, the shape of the pulse, as received at these sites, is but little altered by propagation effects.

~~SECRET~~

~~SECRET~~

~~SECRET~~

Ft. Belvoir is well within the region where the waveguide model may be considered applicable. At this distance the ground wave is so strongly attenuated by ground absorption and losses due to diffraction around the earth that it may be considered completely absent. The one-hop sky-wave mode delivers no appreciable energy because a direct one-hop path is not geometrically possible, so that energy to excite this mode must be diffracted around the earth with attendant heavy losses. Two-, three-, four- and higher-hop modes are permissible, and the angles of incidence are so great that the reflection coefficients are large.

The site at Boulder lies in a transition region. The ground wave and the one-hop sky wave deliver nearly all the energy. Higher order modes are also active, but except for the two-hop mode, little energy is delivered by them because of the low reflection coefficients for the small angles of incidence involved. It is convenient to assume that Boulder is at a sufficient distance from the Nevada Proving Ground that wave-guide approximations may be considered from that point outward.

4.3 EVALUATION OF PROPAGATION CONSTANTS

Various constants used for calculation of field strengths at low frequencies appear in the literature. However, because of the very special nature of these observations, it was considered desirable to derive new constants from the data themselves.

The first step was to calculate the total energy density recorded at each of the sites. This was done by measuring the deflections of the oscilloscopes caused by the pulse at regular intervals of time, Δt . The ordinates so obtained were squared and multiplied by the square of the reduction factor for conversion of oscilloscope deflection to volts per meter and by the length of the time interval involved. The quantities so obtained were summed and divided by 377 ohms to give the results in joules per square meter. The procedure is represented in the following equation.

$$E = h^2 v^2 \Delta t / 377 \text{ ohms} \quad (5)$$

in which h^2 is the ordinate in centimeters on the oscilloscope, v the reduction factor, and Δt the time interval between ordinates.

SECRET

~~SECRET~~

In addition the energy values obtained from the observations at the Nevada Proving Ground were normalized to a distance of 1 km from the source in accordance with Equation (1). This was done so that energy from the various shots could be compared since the distances of the recording sites from the source were different for the various shots. In making this normalization it was assumed that ground-wave absorption over such short distances was negligible.

The energy densities calculated for the various shots are presented in Table 4.3. In cases where data are lacking in the table, suitable records for calculating the energy were not obtained. Also the energy values for Shots No. 6, 7, and 8 at Ft. Belvoir are a little too low, due to the filter which was connected in the receiving circuit to eliminate interference from NSS.

TABLE 4.3

ELECTROMAGNETIC ENERGY RADIATED FROM SHOTS NO. 2 - 11

Shot No.	Total Energy E_T (joules)	Energy Density E_0 Observed at NPG Normalized to 1 km (J/m^2)	Energy Density E_1 Observed at Boulder (J/m^2)	Energy Density E_2 Observed at Ft. Belvoir (J/m^2)
2	8.1×10^6	1930×10^{-3}	$.299 \times 10^{-6}$	
3	0.22×10^6	53×10^{-3}		
4	0.51×10^6	121×10^{-3}		
5	0.12×10^6	28×10^{-3}		
6	10.4×10^6	2490×10^{-3}	1.075×10^{-1} 175×10^{-6}	$.018 \times 10^{-6}$
7	15.9×10^6	3800×10^{-3}	3.157×10^{-1} 183×10^{-6}	$.023 \times 10^{-6}$
8	5.7×10^6	1360×10^{-3}	1.13×10^{-1} 107×10^{-6}	$.009 \times 10^{-6}$
9	10.4×10^6	2480×10^{-3}	2.05×10^{-1} 158×10^{-6}	$.007 \times 10^{-6}$
10	2.8×10^6	680×10^{-3}	5.0×10^{-2} 41×10^{-6}	$.004 \times 10^{-6}$
11	9.2×10^6	2200×10^{-3}	1.83×10^{-1}	$.009 \times 10^{-6}$

~~SECRET~~

~~ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED EXCEPT WHERE SHOWN OTHERWISE~~
~~DATE 10-10-2013 BY 60322 UCBAW~~
~~10-10-2013~~

~~SECRET~~

Examination of the pulses recorded at Boulder suggests that the first part of the pulse is due to arrival of the surface wave and that the one-hop sky wave arrives just as the surface wave has almost completely passed. If this is true about half the energy is delivered by the surface wave and half by the one-hop sky wave. We may then calculate the ground-wave attenuation from data in Table 4.3. For convenience we may express Equation (1) in logarithms to the base 10.

$$\log E = \log E_0 - 2 \log d - k_g d \quad (6)$$

Values of $k_g d$ and of k_g , expressed in decibels per 1000 km, are given in Table 4.4. The value of k_g is relatively great, corresponding to ground of very poor conductivity, $\sigma \sim 10^{-15}$ emu. It also includes effects due to diffraction losses. The reflection coefficient for the ionosphere, for the time of day at which each observation was made, at the angle of incidence involved in the one-hop mode may be calculated from Equation (2). These results are also shown in Table 4.4. E_0 was taken to be equivalent to E_0 of the surface wave. The reflection coefficients in the table are ratios of energy in the incident and reflected waves, not field strengths. If they represented field strengths the values would range from 0.16 to 0.20 which are not inconsistent with values commonly given in the literature.

TABLE 4.4

GROUND ATTENUATION INDEX AND IONOSPHERIC REFLECTION
 COEFFICIENTS FOR DISTANCE OF 1000 KM

Shot No.	$k_g d$ (log ₁₀)	k_g (db/100 km)	R_1
6	1.64	16	0.023
7	1.62	16	0.024
8	1.40	14	0.040
9	1.50	15	0.032
10	1.52	15	0.030
Average	1.50	15	0.030

~~SECRET~~

~~SECRET~~
 This document contains information which is exempt from public release under the provisions of the Freedom of Information Act, 5 U.S.C. 552, and is not to be released to the public without prior approval of the appropriate authority.
 Release of this document to the public is prohibited by law.

~~SECRET~~

TABLE 4.3

ATTENUATION INDEX AND "COUPLING COEFFICIENTS"
 FOR WAVE GUIDE MODEL BEYOND 1000 KM

Shot No.	K		k_g (db/1000 km)
	(log ₁₀)	antilog	
6	6.02 - 10	10.5×10^{-5}	1.9
7	5.83 - 10	6.8×10^{-5}	1.5
8	6.13 - 10	13.5×10^{-5}	2.3
9	6.13 - 10	13.5×10^{-5}	3.3
10	5.98 - 10	9.6×10^{-5}	2.0
Average	6.02 - 10	10.8×10^{-5}	2.2

The constants for the wave-guide model of propagation to great distances may be derived from the values of energy densities given in Table 4.3. Expressing Equation (4) in logarithms to the base 10 and neglecting the term $0/\sin \theta$, which is substantially unity, we have

$$\log E = \log K + \log E_0 - \log d - k_g d \quad (7)$$

There are two parameters to be determined, K and k_g . Using the data from Nevada Proving Ground, Boulder, and Ft. Belvoir, the calculated parameters are as given in Table 4.3. It is interesting to calculate from these parameters the energy to be expected at Ft. Belvoir for Shot No. 11, for which no observations are available at Boulder. The calculated value is 0.0120×10^{-6} joules per square meter, and the observed value was 0.00947×10^{-6} joules per square meter.

In spite of the relatively good agreement of the constants determined from the individual shots, some reservations must be made in applying them for propagation calculations under other conditions. The ground attenuation index k_g is accurately determined for the particular terrain involved, but over regions of good conductivity it would be considerably less. For propagation over sea water,

~~SECRET~~

~~SECRET~~

$$E_T = E_0 \int_0^{2\pi} \int_0^{2\pi} \cos^2 \theta \, d\theta \, d\phi = 4\pi E_0 d^2 / 3 \quad (8)$$

in which E_0 is the energy density at a point at the earth's surface distance d from the source, and θ is the azimuth of the observing point from the source. Values of E_T in joules are given in Table 4.3.

The energy values range from 0.119×10^6 to 15.9×10^6 joules. By comparison, the electromagnetic energy in the frequency range from 7.5 kc to 10 kc radiated from lightning flashes averages around 0.2×10^6 joules. Since the pulse emitted has a duration of only about 50 microseconds, these values correspond to an average radiated power for the duration of the pulse of from 2,400 to 300,000 megawatts.

For the sizes of the weapons fired during the tests under discussion, a fairly good linear relationship between the total electromagnetic energy radiated and the bomb yield obtains. A plot of this relationship appears in Figure 4.1, where total energy is plotted against yield in kilotons. For convenience the energy density, normalized to one kilometer from ground zero, is shown as an additional abscissa scale. In drawing the line on the graph Shots No. 4, 8, 10 and 11 were ignored since they were not tower shots.

All of the air-dropped bombs and the cannon-launched bomb showed conspicuously less electromagnetic radiation for the same yield than those fired on the towers. An empirical relationship to correct for the effect of height was derived and applied to the values for the non-tower shots to give the equivalent radiated energy to be expected if the shots had been fired on towers. A new plot, with the correction applied to the non-tower shots, is shown in Figure 4.2. All except Shot No. 8 show close agreement in the relationship between yield and radiated energy. The equation relating energy to yield is

$$E_T = 0.362 Y / (1+h) \quad (9)$$

where E_T is the electromagnetic energy radiated in megajoules, Y the yield in kilotons, and h the height of detonation in thousands of feet above ground, a correction to be applied only for non-tower shots. The energy density at a distance of one kilometer is given by

~~SECRET~~
97

~~Information of this document is to be controlled in accordance with the provisions of the Atomic Energy Act of 1954, as amended, and the regulations promulgated thereunder, and is to be released only to those persons authorized to receive it.~~

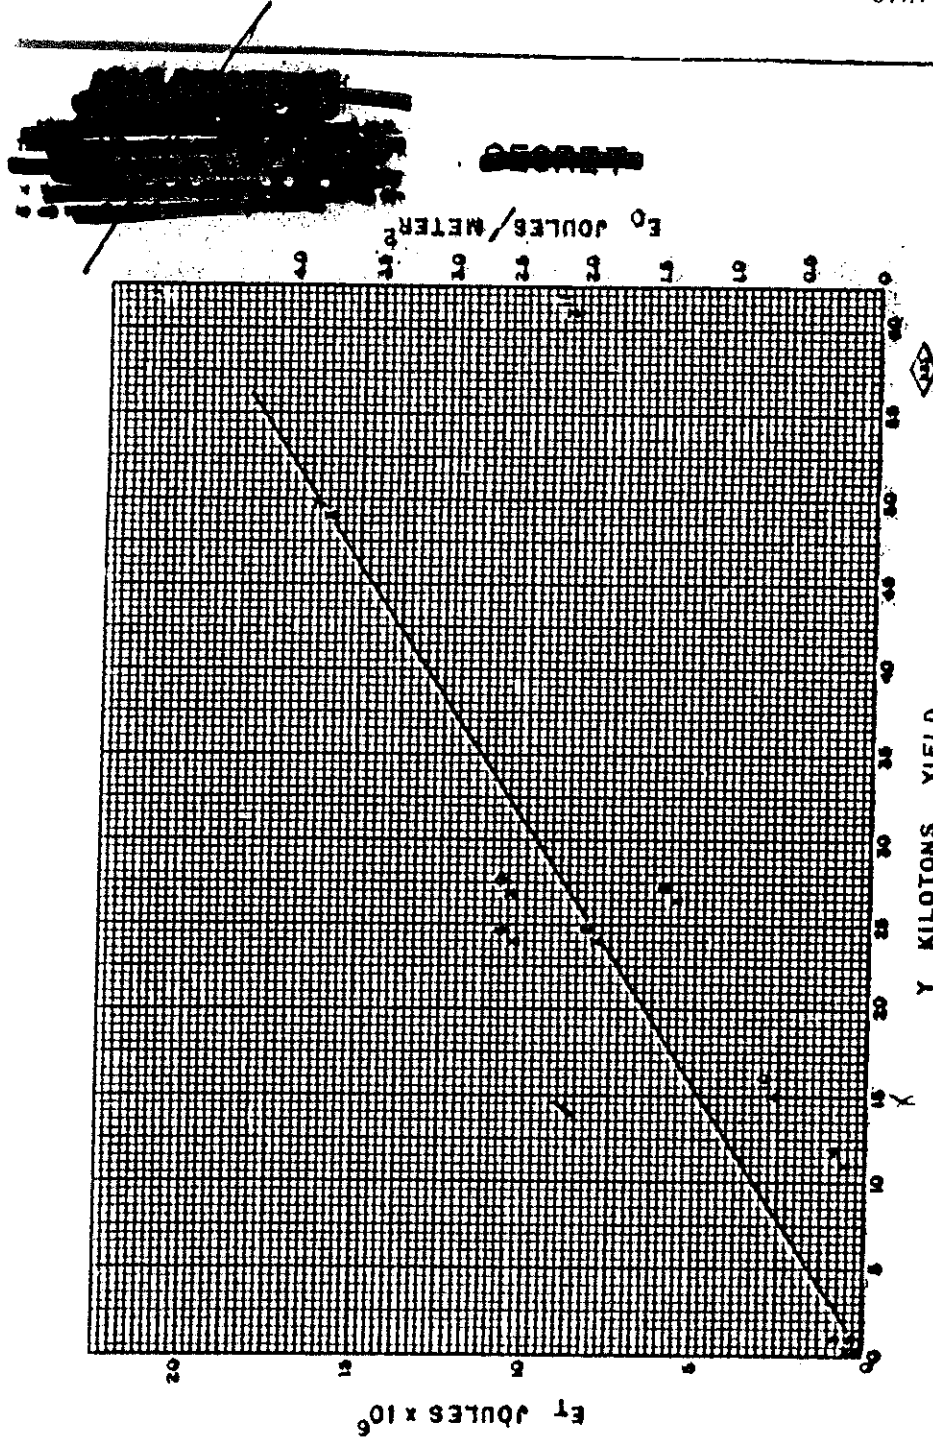


FIG. 4-1 RADIATED ENERGY AS A FUNCTION OF YIELD

~~SECRET~~

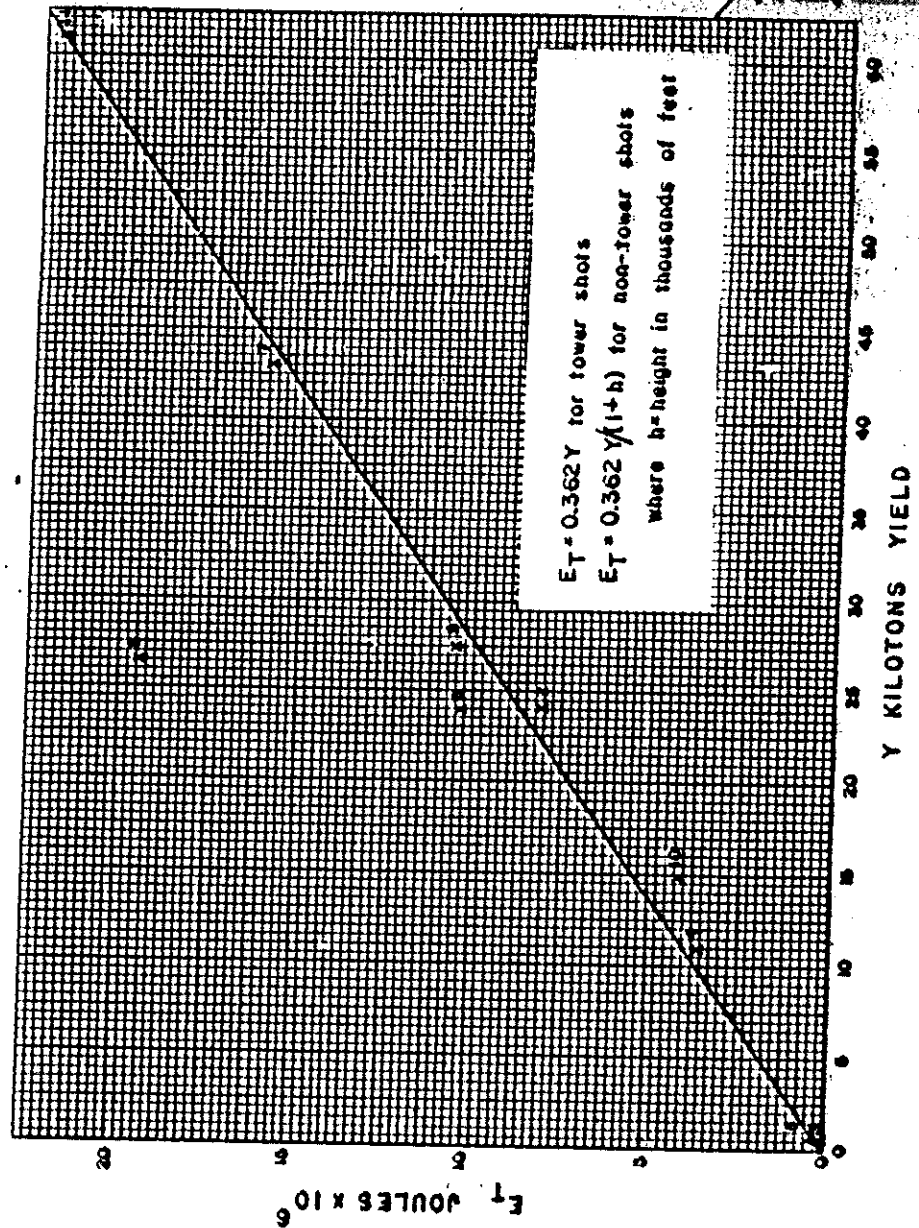


FIG. 4.2 RADIATED ENERGY AS A FUNCTION OF YIELD
 (APPLYING CORRECTION FOR HEIGHT)

~~SECRET~~

JAN 0 2 2013

~~SECRET~~

$$E_0 = 0.086 Y / (1+h) \quad (10)$$

E_0 , in this case being in joules per square meter.

Some reservations must be held regarding the reliability of the absolute values of the energies calculated from the data obtained at the Nevada Proving Ground, although the relative values are undoubtedly reliable. The small value for the coupling coefficient and the high value for absorption of the ground wave as received at Boulder, calculated previously, suggest that the energies may be too large.

The linear relationship between yield and total radiated energy, when the height corrections are applied, may be fortuitous. Nothing can be concluded regarding their applicability to weapons having yields far outside the ranges of those involved here, or to other types such as thermonuclear weapons.

4.5 DIRECTION OF THE ELECTRIC VECTOR OF THE RADIATED FIELD

Considerable interest is attached to the direction of the electric vector radiated from the source and recorded at the near receiving sites. The direction of this vector for the main initial phase of the pulse was the same in all cases.

To obtain the relation between the direction of current flow in the source, and the direction of deflection of the oscilloscope, we express the radiation electromagnetic field in terms of the vector potential $\underline{A}$, and then relate the latter to the source current $\underline{i}$:

$$\underline{E} = -\frac{\partial \underline{A}}{\partial t}, \quad \underline{H} = \nabla \times \underline{A}$$

$$\underline{A}(\underline{r}', t) = \int_V \frac{\underline{i}(\underline{r}, t - \frac{r}{c})}{|\underline{r} - \underline{r}'|} dv$$

Thus a current which is increasing in the downward direction gives rise to an electric field positive in the upward direction. This conclusion may be checked through $\underline{H}$, using the fact that the Poynting vector $\underline{E} \times \underline{H}$ is positive in the direction of energy flow.

~~SECRET~~

~~SECRET~~

The antenna-oscilloscope connections were such that a negative deflection corresponded to an electric field positive upward at the receiving site. We therefore conclude that the main current in the source was increasing downward initially for all cases. This does not apply to the small positive-going precursors observed in some cases.

REFERENCES

1. Ronald King and F. G. Blake, Jr., "The Self-Impedance of a Symmetrical Antenna", Proc. IRE, July, 1942, Vol. 30, p. 339
2. Frederick Emmons Terman, Radio Engineers Handbook (McGraw-Hill Book Company, 1943), First Edition, p. 813
3. K. G. Jansky, "An Experimental Investigation of the Characteristics of Certain Types of Noise", Proc. IRE, 1939, Vol. 27, pp. 763-768.
4. R. D. England and R. E. Partridge, Jr., "Investigation of Early Electromagnetic Signals", Los Alamos Scientific Laboratory, University of California, Nov. 1953.
5. T. H. Laby, J. J. McNeill, F. G. Nicholls and A. F. B. Nickson, "Waveform Energy and Reflection by the Ionosphere of Atmospherics", Proc. Roy. Soc., 1940, 174, pp. 143-163.
6. J. D. Best, J. A. Ratcliffe, and M. V. Wilkes, "Experimental Investigations with Very Long Waves Reflected from the Ionosphere", Proc. Roy. Soc., Sept. 1936, 156, p. 614.

~~SECRET~~

DECLASSIFIED IN FULL
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02 2013

~~SECRET~~

~~SECRET~~

~~SECRET~~

This document contains information the disclosure of which in any manner to an unauthorized person is prohibited by law.

Information on the Bureau's publications can be found in NBS Circular 660, Publications of the National Bureau of Standards (\$1.25) and its Supplement (\$0.75), available from the Superintendent of Documents, Government Printing Office. Inquiries regarding the Bureau's reports and publications should be addressed to the Office of Scientific Publications, National Bureau of Standards, Washington 25, D. C.

DECLASSIFIED IN FULL
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 02 2013

~~SECRET~~

~~RESTRICTED DATA~~

~~RESTRICTED DATA~~

NBS

~~RESTRICTED DATA~~

~~RESTRICTED DATA~~

~~SECRET~~



DEPARTMENT OF DEFENSE
WASHINGTON HEADQUARTERS SERVICES
1155 DEFENSE PENTAGON
WASHINGTON, DC 20301-1155



12 JAN 2013

[REDACTED]
[REDACTED]
Subject: OSD MDR Case 12-M-1573

Dear [REDACTED],

We have reviewed the enclosed document in consultation with the Department of Energy (DOE) and have declassified it in part. OSD excised information is exempt from declassification under Executive Order 13526, section 6.2(a) and is also protected under the Freedom of Information Act (FOIA), 5 U.S.C. § 552(b)(6). DOE excised information is exempt from declassification under section 6.2(a). Section 6.2(a) protects "Restricted Data" and "Formerly Restricted Data" information in conformity with the provisions of the Atomic Energy Act of 1954, as amended, and regulations issued under that Act. FOIA, 5 U.S.C. § 552(b)(6) protects information which would constitute a clearly unwarranted invasion of the personal privacy of certain individuals.

OSD stands as the appellate authority and will coordinate any appeals regarding this case. A written appeal must be filed within 60 days explaining the rationale for reversal of the decision. Reference should be made to OSD MDR Case 12-M-1573. Letters of appeal should be sent to the following address:

WHS/ESD Records and Declassification Division
Attention: Robert Storer
4800 Mark Center Drive
Suite 02F09-02
Alexandria, VA 22350-3100

If you have any questions, contact me by e-mail at Records.Declassification@whs.mil or by phone at 571-372-0483.

Sincerely,

Robert Storer
Chief, Records and Declassification Division

Enclosures:

1. MDR request
2. Document 1





DEPARTMENT OF DEFENSE
WASHINGTON HEADQUARTERS SERVICES
1155 DEFENSE PENTAGON
WASHINGTON, DC 20301-1155



MEMORANDUM FOR DEFENSE TECHNICAL INFORMATION CENTER
(ATTN: DTIC-OQ INFORMATION SECURITY)
8725 JOHN J. KINGMAN ROAD, STE 0944
FT. BELVIER, VA 22060-6218

FEB 14 2013

SUBJECT: OSD MDR Cases 12-M-1572 and 12-M-1573

At the request of [REDACTED], we have conducted a Mandatory Declassification Review of the attached documents under the provisions of Executive Order 13526, section 3.5, for public release. We have declassified the documents in part. We have attached a copy of our response to the requester on the attached Compact Disc (CD). If you have any questions, contact me by e-mail at storer.robert@whs.mil, robert.storer@whs.smil.mil, or robert.storer@osdj.ic.gov or by phone at 571-372-0483.

Robert Storer
Chief, Records and Declassification Division

Attachment:
CD

