




Coastal Engineering Technical Note



BROKEN WAVE FORCES

PURPOSE: To provide revised guidance on broken wave forces.

GENERAL: A determination of broken wave forces on structures is necessary for structure design, and also for determining economic benefits of hurricane protection projects. The Shore Protection Manual (SPM 1984), Section 7.III.4.a, presents an older method of determining broken wave forces on a structure seaward of the still-water shoreline. A need was recognized to update the method to incorporate the present state of knowledge on broken wave decay. The method presented herein uses the information found in Camfield (1991) on broken wave decay. A definition sketch is shown in Figure 1. This corrects Figure 7-104 in the SPM.

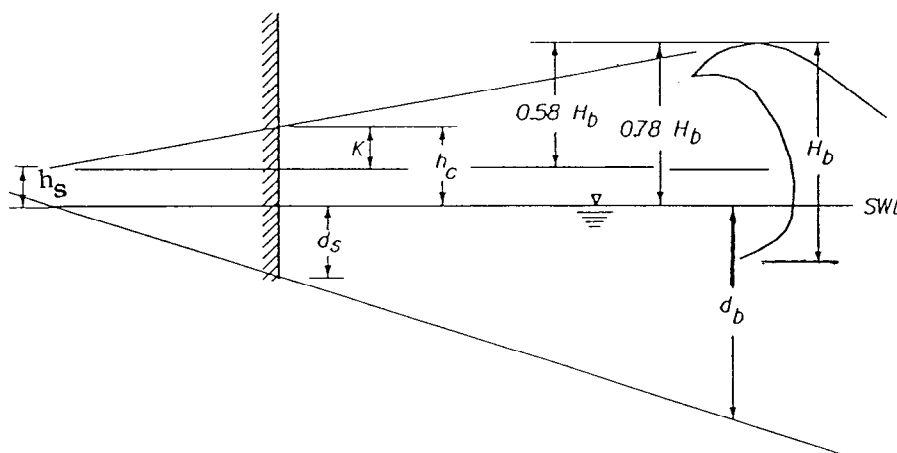


Figure 1. Broken wave decay.

DETERMINATION OF WAVE FORCE: Camfield (1990, 1991) shows that the broken wave height at the shoreline, h_s , can be approximated by

$$h_s = 0.2 H_b$$

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE DEC 1991		2. REPORT TYPE		3. DATES COVERED 00-00-1991 to 00-00-1991	
4. TITLE AND SUBTITLE Broken Wave Forces				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) US Army Engineer Waterways Experiment Station, Coastal Engineering Research Center, 3909 Halls Ferry Road, Vicksburg, MS, 39180				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) US Army Engineer Waterways Experiment Station, Coastal Engineering Research Center, 3909 Halls Ferry Road, Vicksburg, MS, 39180				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 3	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

where H_b is the breaking wave height. The broken wave height in any given water depth can be found by assuming a linear decay of the broken wave and a linear decrease in water depth. This will be slightly conservative. From Figure 1, the broken wave crest above SWL at the wall, h_c , is given by

$$h_c = K + 0.2 H_b$$

where K is a height to be determined. By similar triangles

$$\frac{d_s}{d_b} = \frac{K}{0.58H_b}$$

$$K = 0.58H_b \frac{d_s}{d_b}$$

$$h_c = \left(0.2 + 0.58 \frac{d_s}{d_b}\right) H_b$$

where d_s is the water depth at the structure and d_b is the water depth where the wave breaks. This corrects Equation 7-95 in the SPM.

The wave force then is determined by the method shown in the SPM. The dynamic component of the wave force, R_m , is given as

$$R_m = p_m h_c = \frac{w d_b h_c}{2}$$

where w is the specific weight of water (approximately 64 lb/ft^3) and the overturning moment, M_m , caused by the dynamic force is

$$M_m = R_m \left(d_s + \frac{h_c}{2} \right)$$

The hydrostatic force component, R_s , is

$$R_s = \frac{w (d_s + h_c)^2}{2}$$

and the overturning moment from the hydrostatic force, R_s , will be

$$M_s = R_s \frac{(d_s + h_c)}{3} = \frac{w (d_s + h_c)^3}{6}$$

The total force on the wall, R_t , and the total overturning moment, M_t , are given by

$$R_t = R_m + R_s$$

and

$$M_t = M_m + M_s$$

ADDITIONAL INFORMATION: If further information is needed relative to the information contained herein, please contact Dr. Fred E. Camfield, CEWES-CW (commercial 601-634-2012, FTS 542-2012, or FAX 601-634-2055).

REFERENCES:

Camfield, F. E. 1990. "Wave Forces on a Wall Shoreward of the Still-Water Line," Coastal Engineering Technical Note III-29, U.S. Army Engineer Waterways Experiment Station, Vicksburg, MS.

Camfield, F. E. 1991. "Wave Force on Wall," Journal of Waterway, Port, Coastal, and Ocean Engineering, American Society of Civil Engineers, Vol. 117, No. 1.

Shore Protection Manual. 1984. 4th Ed. 2 vols., U.S. Army Engineer Waterways Experiment Station, Coastal Engineering Research Center, U.S. Government Printing Office, Washington, DC.