

AD

AD-E403 429

Technical Report ARMET-TR-12017

FINITE ELEMENT METHOD MESH STUDY FOR EFFICIENT MODELING OF PIEZOELECTRIC MATERIAL

L. Reinhardt
Dr. Aisha Haynes
Dr. J. Cordes

January 2013



**U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND
ENGINEERING CENTER**

Munitions Engineering Technology Center

Picatinny Arsenal, New Jersey

Approved for public release; distribution is unlimited.

The views, opinions, and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy, or decision, unless so designated by other documentation.

The citation in this report of the names of commercial firms or commercially available products or services does not constitute official endorsement by or approval of the U.S. Government.

Destroy this report when no longer needed by any method that will prevent disclosure of its contents or reconstruction of the document. Do not return to the originator.

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-01-0188	
The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden to Department of Defense, Washington Headquarters Services Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) January 2013		2. REPORT TYPE		3. DATES COVERED (From - To) November 2010 to November 2011	
4. TITLE AND SUBTITLE FINITE ELEMENT METHOD MESH STUDY FOR EFFICIENT MODELING OF PIEZOELECTRIC MATERIAL			5a. CONTRACT NUMBER		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHORS L. Reinhardt, Dr. Aisha Haynes, and Dr. J. Cordes			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army ARDEC, METC Fuze and Precision Armaments Technology Directorate (RDAR-MEF-E) Picatinny Arsenal, NJ 07806-5000.			8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army ARDEC, ESIC Knowledge & Process Management (RDAR-EIK) Picatinny Arsenal, NJ 07806-5000			10. SPONSOR/MONITOR'S ACRONYM(S)		
			11. SPONSOR/MONITOR'S REPORT NUMBER(S) ARMET-TR-12017		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT The purpose of this study is to evaluate modeling of piezoceramic materials with maximum efficiency; that is high fidelity with shortest computer run time. To do this, the modeler varied the number of element layers and element types in each part to find the most efficient combination that would produce accurate bending in an activated piezoelectric material with less than 1% displacement error. A cantilever beam model, based on an example in the ABAQUS manual, was developed. The number of element layers varied from one to 10 per part. Low order, high order, and shell and brick elements with various hourglass controls were employed. Results show that the best combination of high accuracy and short run time was a model with a single layer of high order bricks for the piezoelectric layers and a single layer of low order bricks with enhanced hourglass control for the beam layer.					
15. SUBJECT TERMS Piezoelectric Piezoceramic Mesh convergence Elements Modeling Simulation Abaqus Finite element analysis (FEA) Finite Element Method (FEM)					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 13	19a. NAME OF RESPONSIBLE PERSON L. Reinhardt
a. REPORT U	b. ABSTRACT U	c. THIS PAGE U			19b. TELEPHONE NUMBER (Include area code) (973)724-5850

CONTENTS

	Page
Introduction	1
Model Description	1
Results	3
Conclusions	6
References	7
Distribution List	9

FIGURES

1	Model of optimize run time with high fidelity	1
2	Boundary conditions	2
3	Loading	2
4	Beam displacement after voltage applied	3
5	Error versus number of element layers in each part	3
6	Models with less than 1% error	5
7	Five best models	5

INTRODUCTION

Piezoelectric materials such as piezoceramics are used widely in actuating devices, mainly due to ease of control of the piezoelectric through potential changes. These materials can provide simple, robust and light weight actuating mechanisms for a wide range of applications. They are particularly useful for canard actuation mechanisms, because they can improve reliability and decrease complexity of the canard actuating assembly (CAS) inside the projectile. For this application, the material exhibits a dimensional change or strains under an applied electric field. Alternatively, a piezoelectric material can also provide an electrical response to a mechanical stress (ref. 1).

Finite element analyses [FEA (ref. 2)] of piezoelectric materials can be employed to predict the electromechanical coupling response of these materials under varying conditions. In an effort to model these devices in an efficient manner, comprehension of the impact of element type and number of element layers on computer run time is necessary to optimize the parameters for high fidelity and small error. This is crucial for modeling these materials for highly dynamic events such as gun launch and projectile flight.

MODEL DESCRIPTION

A beam with piezoelectric materials bonded on both sides (fig.1) was modeled in ABAQUS/Standard, version 6.11. The model originated from the example problem “Transient Dynamic Non-linear Response of a Piezoelectric Transducer” in chapter 7.1.2 of the ABAQUS Example problems manual. The piezoelectric material employed in the example is the piezoceramic PZT-5H. The material is modeled using the elastic, dielectric, and piezoelectric material models, which are outlined in the example problems manual. The elastic model employed uses engineering constants to model the anisotropic behavior of the material. Dielectric describes the electrical permittivity of the material, which in ABAQUS can be isotropic, orthotropic, or anisotropic. For this model, orthotropic is employed. Piezoelectric defines the electromechanical coupling coefficients for the piezoceramic using stress or strain coefficients that cause electrical displacement in the 1, 2, and 3 directions (ref. 3). For this analysis, strain coefficients were used. Dielectric and Piezoelectric can be defined in the material editor in the material property module under Other → Electrical.

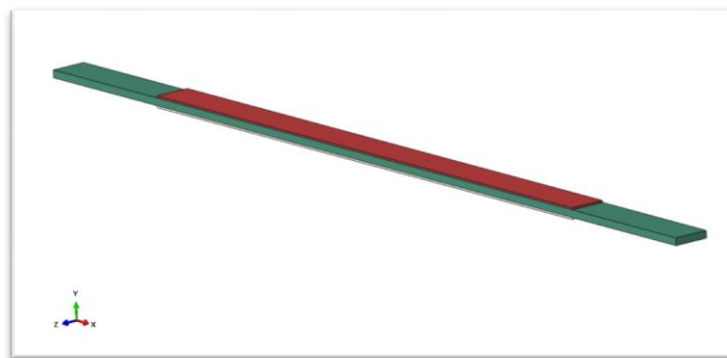


Figure 1
Model of optimize run time with high fidelity

The cantilever beam is modeled as linear elastic. The material properties are also outlined in the example problem in the ABAQUS Example Problems Manual. For piezoelectric materials, ABAQUS requires the use of piezoelectric elements that have electric potential and displacement degrees of freedom (ref. 3). For this analysis, solid continuum piezoelectric elements were

employed. The beam is modeled using a combination of high and low order brick elements with varying numbers of elements through the layers.

The boundary conditions are shown in figure 2. The displacement was measured at the points shown. A tie constraint was used to model the bond between the piezoceramics and the beam. Figure 3 displays the loads applied; a voltage potential was applied across the thickness of the piezoelectric material to drive the displacement of the beam. The voltage on the side of the piezoceramic at the interface between the beam and the piezoceramic was 0V, while the voltage on the opposite/top side was set to 100V. The total potential gradient was 100V.

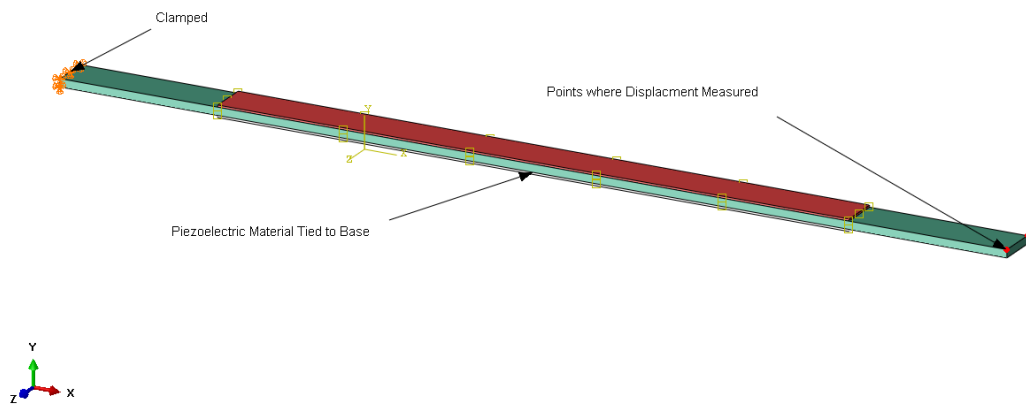


Figure 2
Boundary conditions

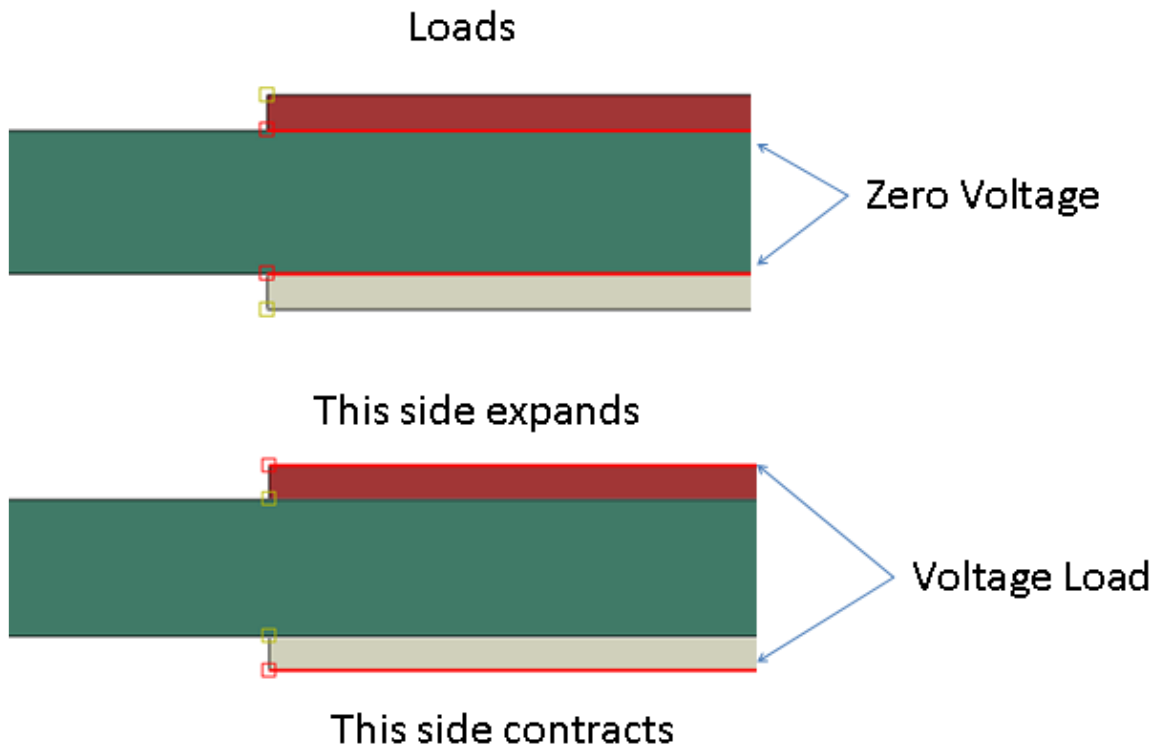


Figure 3
Loading

RESULTS

Since the actual bending value is not known, a mesh convergence study was done. For this, the beam was modeled using one to 10 layers of C3D8R elements in each part and the displacement was measured at the points shown in figure 2. Figure 4 displays the displacement of the beam once the voltage gradient is applied. Figure 5 displays the results of the mesh convergence study. The percent error is relative to the 10 layer model (10 elements through the thickness of each part). All future results were compared to the 10 layer model.

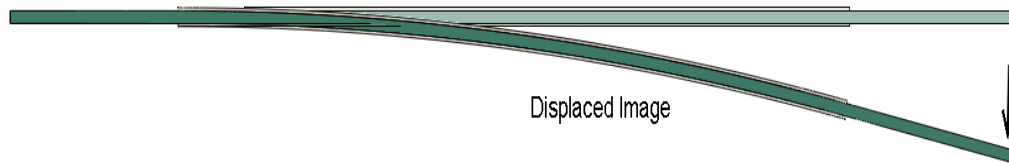


Figure 4
Beam displacement after voltage applied

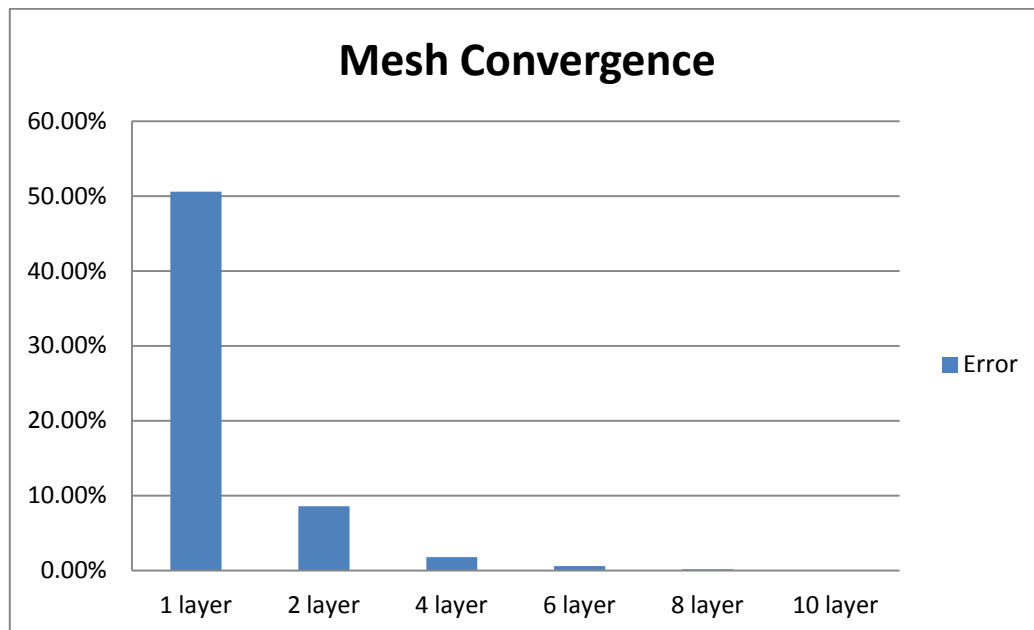


Figure 5
% Error versus number of element layers in each part

Results of the Mesh Refinement and Element Type Study are displayed in table 1.

Table 1
Mesh refinement and element type study results

Base (layer no., element type, hourglass control) Piezo (layer no., element type, hourglass control)	Displacement (mm)	Run time (s)	% error
1, C3D8R, default	8.28699	367	50.6
1, C3D8E, default			
2, C3D8R, default	5.97927	722	8.6
2, C3D8E, default			
4, C3D8R, default	5.67927	2,457	1.8
4, C3D8E, default			
6, C3D8R, default	5.53749	6,758	0.6
6, C3D8E, default			
8, C3D8R, default	5.51482	11,625	0.19
8, C3D8E, default			
10, C3D8R, default	5.50434	18,979	0.0
10, C3D8E, default			
6, C3D8R, default	5.72338	946	4.0
1, C3D8E, default			
6, C3D8R, default	5.53814	2,807	0.39
1, C3D20RE, default			
1, C3D20R, default	5.49629	5,516	0.15
1, C3D20RE, default			
2, C3D20R, default	5.49712	15,821	0.13
2, C3D20RE, default			
4, C3D20R, default	5.49626	63,757	0.15
4, C3D20RE, default			
1, C3D8I, default	5.49344	1,193	0.20
1, C3D20RE, default			
1, SC8R, enhanced	5.47774	2,491	0.48
1, C3D20RE, default			
1, C3D8R, enhanced	5.49397	1,098	0.19
1, C3D20RE, default			
2, C3D8R, enhanced	5.4944	1,421	0.18
1, C3D20RE, default			
4, C3D8R, enhanced	5.49429	2,207	0.18
1, C3D20RE, default			
1, C3D8R, enhanced	5.677	332	3.1
1, C3D8E, default			

All the models with less than 1% error are shown in figure 6. Though all of these models have errors less than 1%, the run time varies from about 1,000 to 63,000 sec. From this group, the top five models with high accuracy and short run times are shown in figure 7. Table 2 is the key describing the points in figure 7.

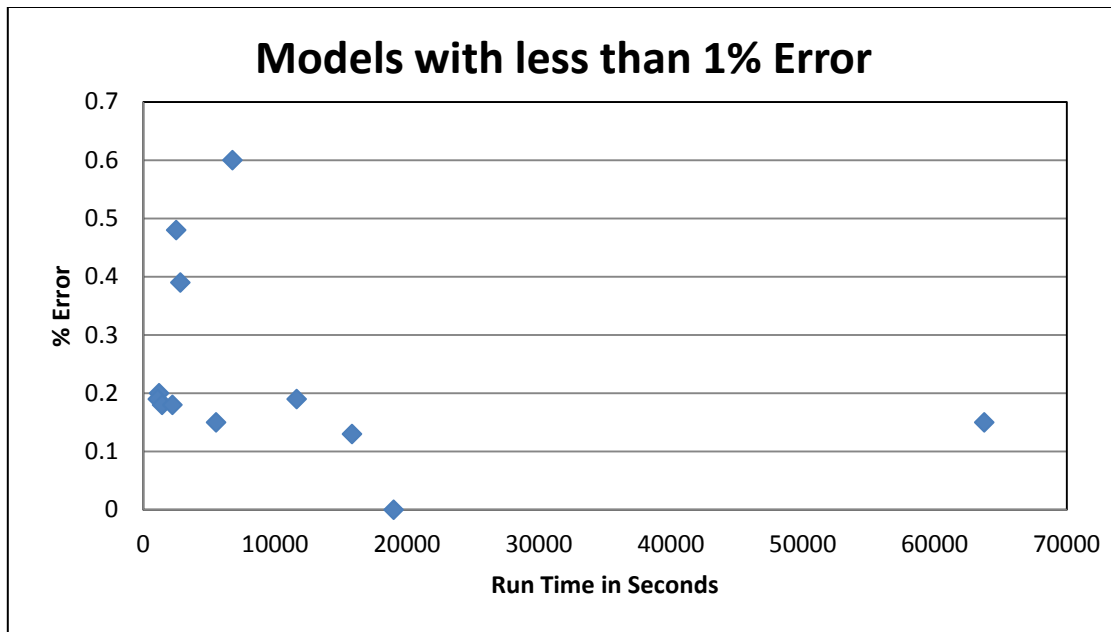


Figure 6
Models with less than 1% error

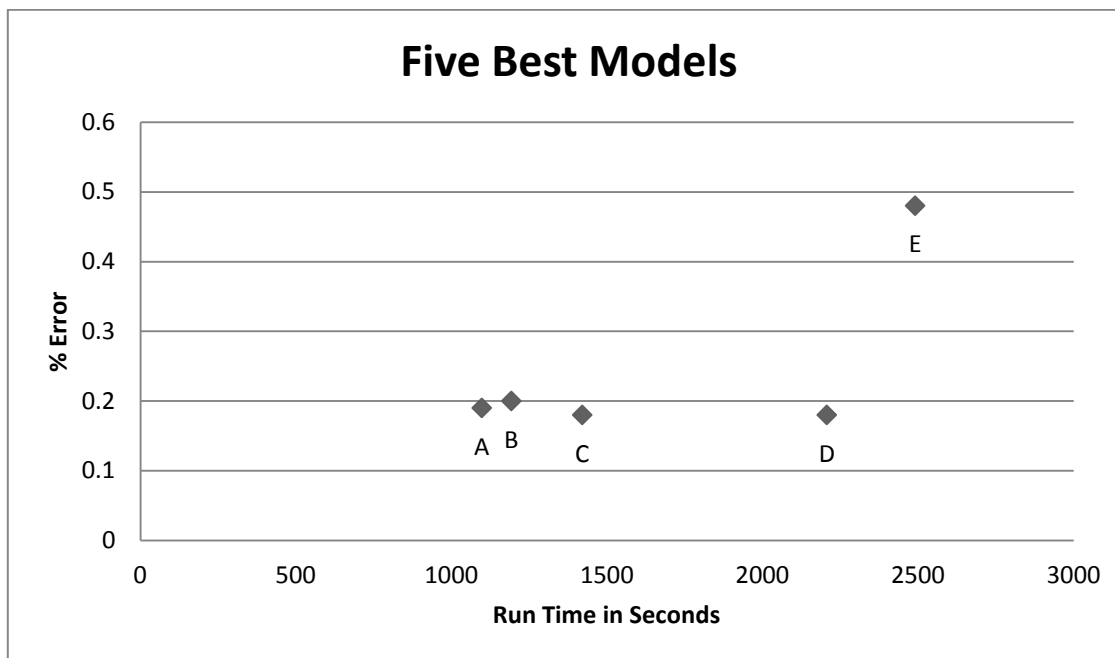


Figure 7
Five Best models

Table 2
Top five plot key

	Base layer	Piezo Layer
	No. layers, Element, Hourglass	No. layers, Element, Hourglass
A	1, C3D8R, Enhanced	1, C3D20RE, default
B	1, C3D8I, Default	1, C3D20RE, default
C	2, C3D8R, Enhanced	1, C3D20RE, default
D	4, C3D8R, Enhanced	1, C3D20RE, default
E	1, SC8R, Enhanced	1, C3D20RE, default

CONCLUSIONS

The combination of single layer of high order bricks for the piezoelectric material and a single layer of low order bricks with enhanced hourglass control for the beam material was the most efficient combination. This combination was accurate to 0.19% and ran 17 times faster than the 10 layer model. If other element types are required for the beam material, changing the beam material element type to incompatible mode brick gave accuracy to 0.2% and was 16 times faster. If continuum shells are used for the beam material the accuracy drops to 0.48% though the run time was still 7.5 times faster than the 10 layer model. This gives the choice of using varying element types for the beam material and still getting less than 1% error. It was observed that it was most efficient to keep the piezoelectric material as one layer of high order elements.

REFERENCES

1. Hooker, M. "Properties of PZT-Based Piezoelectric Ceramics Between -150 and 250C," NASA Contractor Report CR-1998-208708, 1998.
2. Lin, M., Abatan, A., and Rogers, C., "Application of Commercial Finite Element Codes for the Analysis of Induced Strain-Actuated Structures," J. of Intelligent Material Systems and Structures, vol. 5, no. 6, pp. 869-875, 1994.
3. ABAQUS Analysis Users Manual, Version. 6.11.

DISTRIBUTION LIST

U.S. Army ARDEC
ATTN: RDAR-EIK
RDAR-GC
RDAR-DSM, D. Carlucci
RDAR-MEF-E, L. Reinhardt
A. Haynes
J. Cordes
D. Troast
RDAR-MEF-S, C. Pereira
D. Panhorst
RDAR-MEF, W. Smith
RDAR-ME, J. Hedderich III
Picatinny Arsenal, NJ 07806-5000

Defense Technical Information Center (DTIC)
ATTN: Accessions Division
8725 John J. Kingman Road, Ste 0944
Fort Belvoir, VA 22060-6218

Commander
Soldier and Biological/Chemical Command
ATTN: AMSSB-CII, Library
Aberdeen Proving Ground, MD 21010-5423

Director
U.S. Army Research Laboratory
ATTN: AMSRL-CI-LP, Technical Library
Bldg. 4600
Aberdeen Proving Ground, MD 21005-5066

Chief
Benet Weapons Laboratory, WSEC
U.S. Army Research, Development and Engineering Command
Armament Research, Development and Engineering Center
ATTN: RDAR-WSB
Watervliet, NY 12189-5000

Director
U.S. Army TRADOC Analysis Center-WSMR
ATTN: ATRC-WSS-R
White Sands Missile Range, NM 88002

Chemical Propulsion Information Agency
ATTN: Accessions
10630 Little Patuxent Parkway, Suite 202
Columbia, MD 21044-3204

GIDEP Operations Center
P.O. Box 8000
Corona, CA 91718-8000

REVIEW AND APPROVAL OF ARDEC TECHNICAL REPORTS

Finite Element Method Mesh Study

Title for Efficient Modeling of Piezoelectric Material

2/14/12
Date received by LCSD

Lyonel Reinhardt
Author/Project Engineer

ARMEI-TR-1207
Report number (to be assigned by LCSD)

5850
Extension

94
Building

RDAR-MEF-E
Author's/Project Engineers Office
(Division, Laboratory, Symbol)

PART 1. Must be signed before the report can be edited.

- a. The draft copy of this report has been reviewed for technical accuracy and is approved for editing.
- b. Use Distribution Statement A X, B , C , D , E , F or X for the reason checked on the continuation of this form.
 1. If Statement A is selected, the report will be released to the National Technical Information Service (NTIS) for sale to the general public. Only unclassified reports whose distribution is not limited or controlled in any way are released to NTIS.
 2. If Statement B, C, D, E, F, or X is selected, the report will be released to the Defense Technical Information Center (DTIC) which will limit distribution according to the conditions indicated in the statement.
- c. The distribution list for this report has been reviewed for accuracy and completeness.

Douglas C. Troast

[Signature]
Division Chief

7 Feb 12
(Date)

PART 2. To be signed either when draft report is submitted or after review of reproduction copy.

This report is approved for publication.

Douglas C. Troast

[Signature]
Division Chief

3 Jan 13
(Date)

SMCAR Form 49, 20 Dec 06 supersedes SMCAR Form 49, 1 Andrew Pskowski

RDAR-CES

1/9/13
(Date)