

Shallow-Water Acoustic Reverberation

J. X. Zhou

School of Mechanical Engineering
Georgia Institute of Technology
Atlanta, Georgia 30332-0405

Tel: (404) 894-6793 Fax: (404) 894-7790 Email: jixun.zhou@me.gatech.edu

Award #: N00014-97-1-0170

LONG-TERM GOALS

The long-term goals are: to develop a theoretical model for predicting the reverberation in shallow water, to derive both small-angle seabed reflectivity and scattering strength from reverberation data at low frequency, and to understand the physical mechanism of sea bottom scattering.

OBJECTIVES

The scientific objective of this research is to investigate the effects of sea bottom on sound propagation, reverberation and signal coherence. Our objectives are (I) to analyze the range/ depth dependence of reverberation intensity and its spatial coherence for frequencies of 200-3000 Hz. (II) To compare the theoretical predictions on reverberation with at-sea experimental data. (III) To derive seabottom acoustic parameters from reverberation data, such as bottom reflectivity and scattering as a function of frequency and angle.

BACKGROUND

“The seabed is the king of the shallow water acoustics problem.” Grazing angles of incidence of primary importance to shallow-water long-range propagation/reverberation are from about 15 degrees to near 0 degree with the smaller angles being more important. The bottom scattering strength at small grazing angles is generally derived from reverberation measurements. Up to now, there are few publications on shallow-water reverberation-derived bottom scattering data at low frequency and low grazing angles. Bottom scattering mechanisms and related parameters are also poorly known. Thus, reverberation models for shallow-water are not as well developed as propagation loss models “Today, the poor engineer working on an active sonar system is still without easily applied methods or models for predicting the echo--reverberation ratio to be expected in his system.” Several theoretical models for seabed scattering have been developed. These models need be evaluated and tested by both at-sea reverberation data and low-frequency bottom scattering data.

APPROACH

A comparison is made between theoretical predictions and at-sea experimental data. The predictions include the average reverberation level (RL) and the reverberation vertical/horizontal coherence, derived from the R-mode theory. The experimental data are obtained from different sites with different sediments, including the U.S.-China joint Yellow Sea’ 96 experimental area. The reverberation data and the theoretical results are also used to derive seabed acoustic parameters.

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE 1998		2. REPORT TYPE		3. DATES COVERED 00-00-1998 to 00-00-1998	
4. TITLE AND SUBTITLE Shallow-Water Acoustic Reverberation				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Georgia Institute of Technology, School of Mechanical Engineering, Atlanta, GA, 30332-0405				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES See also ADM002252.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 3	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

RESULTS

(1) The range/depth dependence of reverberation intensity has been analyzed for several sites in frequencies of 200-3000 Hz. Fig 1 shows that in the Yellow Sea with a strong thermocline both sound transmission loss (TL) and RL exhibit strong depth dependence. (Curve a: both source and receiver are located below the thermocline; curve b: the source and receiver are located separately above and below the thermocline.) (II) The vertical cross-correlation coefficient of reverberation as a function of time, frequency and hydrophone separation has been analyzed. (III) The bottom reflectivity and scattering strength at low frequencies and low grazing angles have been simultaneously derived from reverberation data (vertical coherence and intensity range dependence). Fig. 2 shows that the bottom scattering strength at small grazing angles is heavily frequency dependent. (the RL itself used for the inversion has rather weak frequency dependence). (IV) Scale model experiments have been conducted to study the diffraction of sound by an underwater convex surface with a very soft boundary. The data analysis is in progress.

IMPACT/APPLICATION

The results will be helpful for developing an easily applied model for predicting the echo--reverberation ratio in shallow water. The experimental data on reverberation intensity and bottom scattering strength will contribute to a database for testing reverberation/seabed scattering models.

RELATED PROJECTS

A joint NICOP program between Georgia Institute of Technology and the Institute of Acoustics in Beijing, supported by both the ONR Asian office and Ocean Acoustics Program, is ongoing at Georgia Tech.

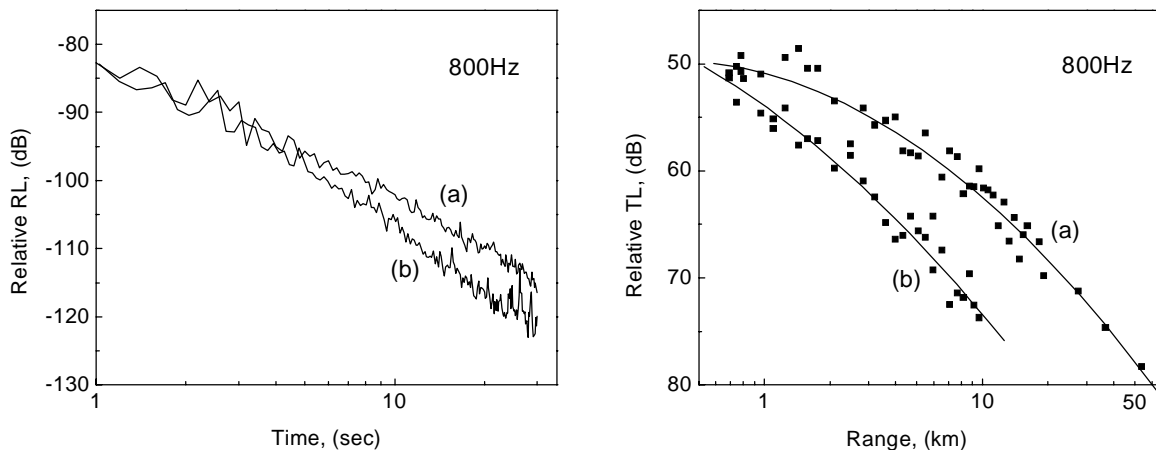


FIG. 1 Range/depth dependence of RL and TL in the Yellow Sea

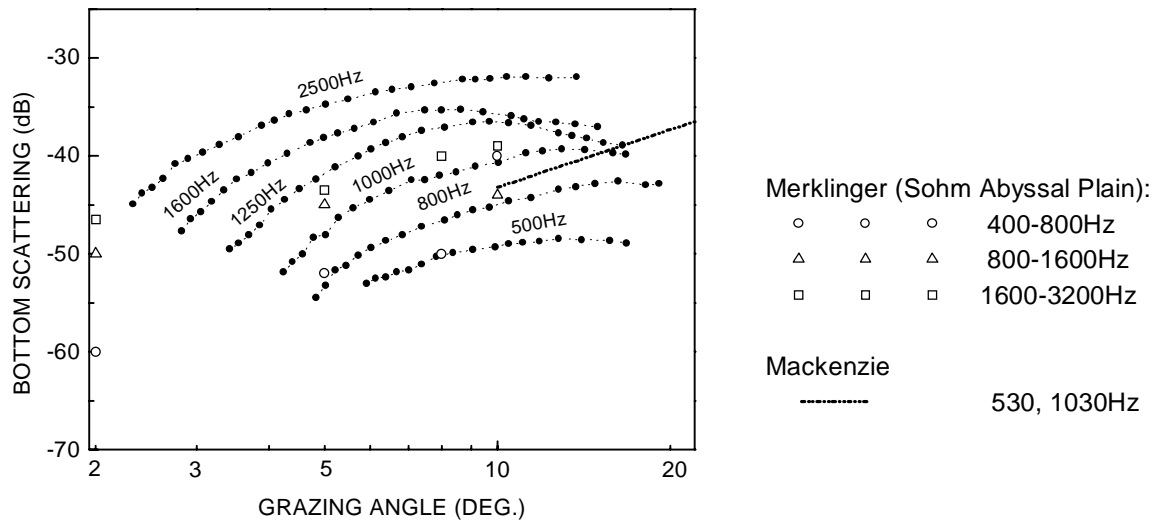


FIG. 2 Reverberation-derived bottom backscattering strength at small grazing angles