

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE 2012		2. REPORT TYPE		3. DATES COVERED 00-00-2012 to 00-00-2012	
4. TITLE AND SUBTITLE How traffic engineering can solve the problem of circuit saturation				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Signal Center of Excellence, Army Communicator, Signal Towers (Building 29808), Room 713, Fort Gordon, GA, 30905-5301				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

How traffic engineering can solve the problem of circuit saturation

By CPT Felix Torres

The dynamics of U.S. military communications in the Afghanistan Theater has changed dramatically over the last few years.

There have been significant upgrades in bandwidth from the typical 8 Mbps satellite circuits to 10 Gbps fiber optic metropolitan area network solutions. The capability to support increased customer requirements and efficiency provided by Internet Protocol based transport were the initial drivers to facilitate a migration from legacy Time Division Multiplexers (e.g. Promina) to the IP based infrastructure found in the Afghanistan Black Core Network today.

An additional advantage of leveraging IP transport is the ability to dynamically provision bandwidth to all traffic traversing the network as their bandwidth requirements fluctuate.

The Black Core Network was introduced into production in early 2010 and modeled after the Defense Information System Agency backbone infrastructure. The BCN in Afghanistan continues to grow and mature as the primary method of transporting secure communications. The introduc-

tion of Multiprotocol Label Switching to the BCN allowed for each customer's traffic to be isolated into its own virtual circuit. Separation of customer traffic is made possible by maintaining a separate routing table on the BCN for each virtual circuit. Improvements in hardware and routing protocols have enabled multiple concurrent means of transport on the battlefield that previously were limited to large strategic entities such as DISA.


In certain parts of Afghanistan, mission critical traffic has to compete for bandwidth on congested links. In the aggregate, throughput requirements exceeded allocated bandwidth.

Even though there are other paths available on the BCN, standard routing techniques required all traffic, including Secure Internet Protocol Routing, Non-Secure Internet Protocol Routing, and coalition partner networks to transit through a single primary path. As the BCN transport system grew to include additional customers outside of NIPR, SIPR & CX-I, the need to prioritize traffic based upon operational impact began to emerge.

Despite the fact that Black Core routing allowed for the dynamic provisioning of bandwidth for SIPR/NIPR/CX-I based on need, this may not be enough as traffic separation becomes a priority as well.

To overcome the limitations imposed by standard IP routing techniques, network engineers in Afghanistan began employing Multi Protocol Label Switching "Traffic Engineering."

Traffic Engineering allows for the routing of data across multiple transmission media concurrently. Where previously, standard routing protocol may only allow the

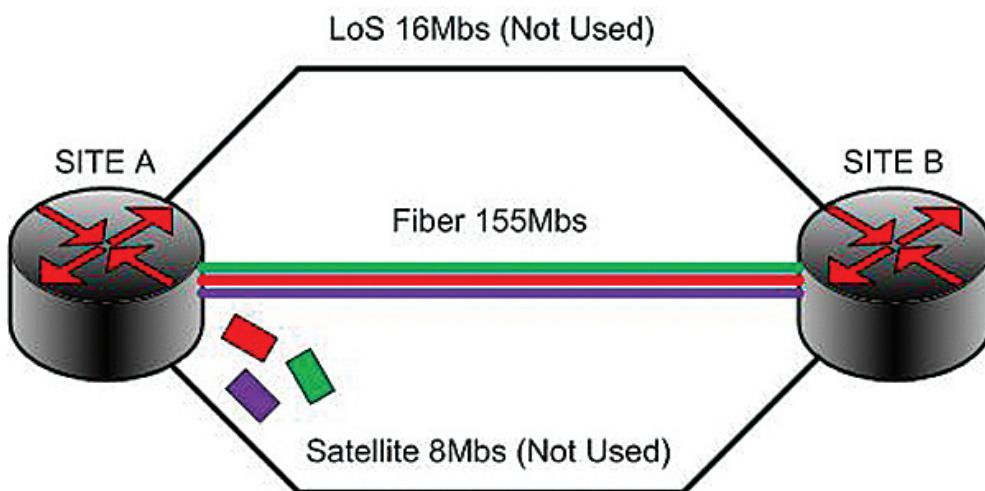

Requirement: 160Mbs
Available Throughput: 155Mbs
Deficit: 5Mbs

(Continued on page 18)


(Continued from page 17)

transmission of data over a single fiber path, Traffic Engineering can enable the transmission of data across fiber and satellite links at the same time. For example, by using Traffic Engineering, if it became necessary, network engineers can provision mission critical SIPR/CX-I over low-latency fiber paths between sites, while directing non-critical NIPR over high-latency satellite links.

The BCN uses many different modes of transmission including fiber optic, commercial and military Line of Sight radios and different bands of satellite terminals. Figure 1 shows how normal routing would occur for NIPR, SIPR and CX-I traffic.

MPLS-TE enables the use of all links between a Forward Operating Base or Combat Outpost and its hub. For example, MPLS-TE makes it possible to concurrently use a 155Mbps fiber path, an 8Mbps satellite link and a 16Mbps Line of Sight shot between Site A to the regional hub at Site B. This is accomplished by routing traffic for one enclave (e.g. SIPR) over a commercial LoS link, traffic for another enclave (e.g. CX-I) over a fiber optic link and traffic for another enclave (e.g. NIPR) over a commercial satellite link, as illustrated in Figure 2.

This results in a substantial return on investment by allowing operational forces to take advantage of multiple links and providing failover in outage situations. It also allows mission critical

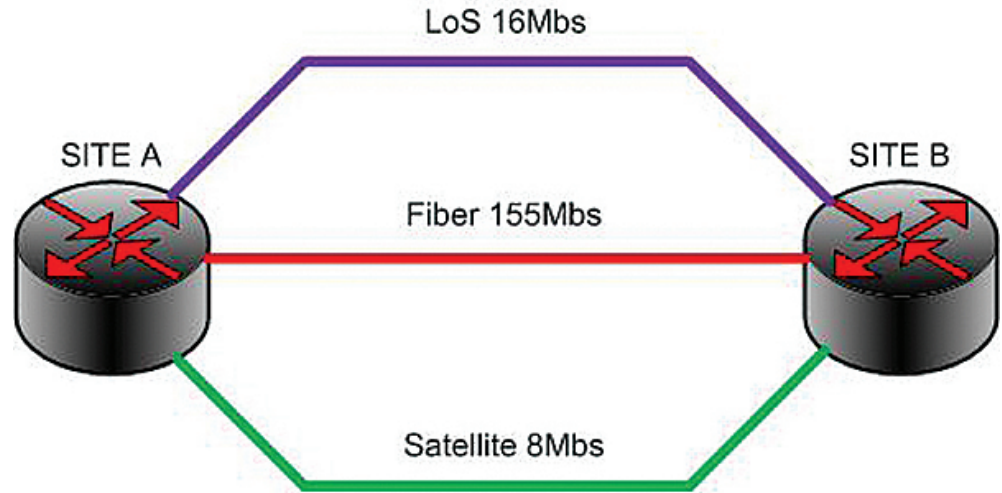

Requirement: 160Mbps
Available Throughput: 179Mbps
Deficit: 0

traffic to be routed over higher speed links, as in the example above.

The Afghan BCN continues to evolve in its development and now exists at over 70 sites within the Combined Joint Operation Area -Afghanistan. An argument could be made that the ingenuity of the BCN engineering team in leveraging technology such as MPLS-TE has saved the Department of Defense countless dollars in recurring monthly service provider charges and capital equipment expenditures while exemplifying the intelligent application of technology to solve problems on the battle field.

CPT (P) Felix Torres is the Principal Network Engineer / Task Force 236 - Afghanistan Officer in Charge for the 335TH Signal Command (Theater) (Provisional) stationed in Kabul, Afghanistan.

ACRONYM QuickScan

BCN - Black Core Network
CENTRIXS-ISAF, CX-I - Combined Enterprise Regional Information Exchange System - International Security Assistance Force
COP - Combat Outpost

DISA - Defense Information System Agency
FOB - Forward Operating Base
Gbps - Gig bits per second
IP - Internet Protocol
LoS - Line of Sight
Mbps - Mega bits per second

MPLS - Multiprotocol Label Switching
MPLS-TE - Multi Protocol Label Switching Traffic Engineering
NIPR - Non-Secure Internet Protocol Routing
SIPR - Secure Internet Protocol Routing