

An Update on the 1/12° Global HYCOM Effort

E.J. Metzger¹, O.M. Smedstad², A.J. Wallcraft¹,
P.G. Posey¹, and D.S. Franklin²

¹ Naval Research Laboratory

² Qinetiq North America

2013 Layered Ocean Model Workshop
Ann Arbor, MI
21-23 May 2013

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE MAY 2013		2. REPORT TYPE		3. DATES COVERED 00-00-2013 to 00-00-2013	
4. TITLE AND SUBTITLE An Update on the 1/12degree Global HYCOM Effort				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Research Laboratory,1 Stennis Space Ctr,Stennis Space Center ,MS,39529				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 20	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Global Ocean Forecast System (GOFS)

GOFS 3.0: 1/12° 32 layer HYCOM/NCODA-MVOI /MODAS synthetics/e-loan ice

- Pre-operational system that ran on Navy DSRC Cray XT5
- First ran in Navy operational queues December 2006

GOFS 3.01: 1/12° 32 layer HYCOM/NCODA-3DVAR/MODAS synthetics/e-loan ice

- Declared operational on 20 March 2013 and running on Navy DSRC IBM iDataPlex unclassified and classified computers
- Unscheduled switch from NCODA-MVOI to NCODA-3DVAR

GOFS 3.02: as GOFS 3.01 but with NAVGEM replacing NOGAPS

- Complete by 31 August 2013

GOFS 3.1: 1/12° 41 layer HYCOM/NCODA-3DVAR/ISOP synthetics/CICE

- Add nine near surface layers
- Replace MODAS synthetics with Improved Synthetic Ocean Profiles (ISOP)
- Two-way coupled HYCOM with Los Alamos CICE model
- Expect validation completed in 2QFY14

GOFS 3.5: 1/25° 41 layer HYCOM/NCODA-3DVAR/ISOP synthetics/CICE/tides

- Increase equatorial (mid-latitude) horizontal resolution to 4.4 (3.5) km
- Tidal forcing
- Expect validation completed in 4QFY15

NAVOCEANO OPTEST Results

- 26 month evaluation of real-time GOFS 3.0 (Jan 2011 – Feb 2013)
- Evaluated sonic layer depth (SLD), temperature, salinity, sound speed at various depths:
 - 0, 10, 50, 100, 150, 250, 500m
- Skill standards:
 - SLD = ± 5.0 m
 - temperature = ± 0.5 °C
 - salinity = ± 0.2 psu
 - sound speed = ± 2.0 m/s
- Used **Autometrics** for computation of all statistics


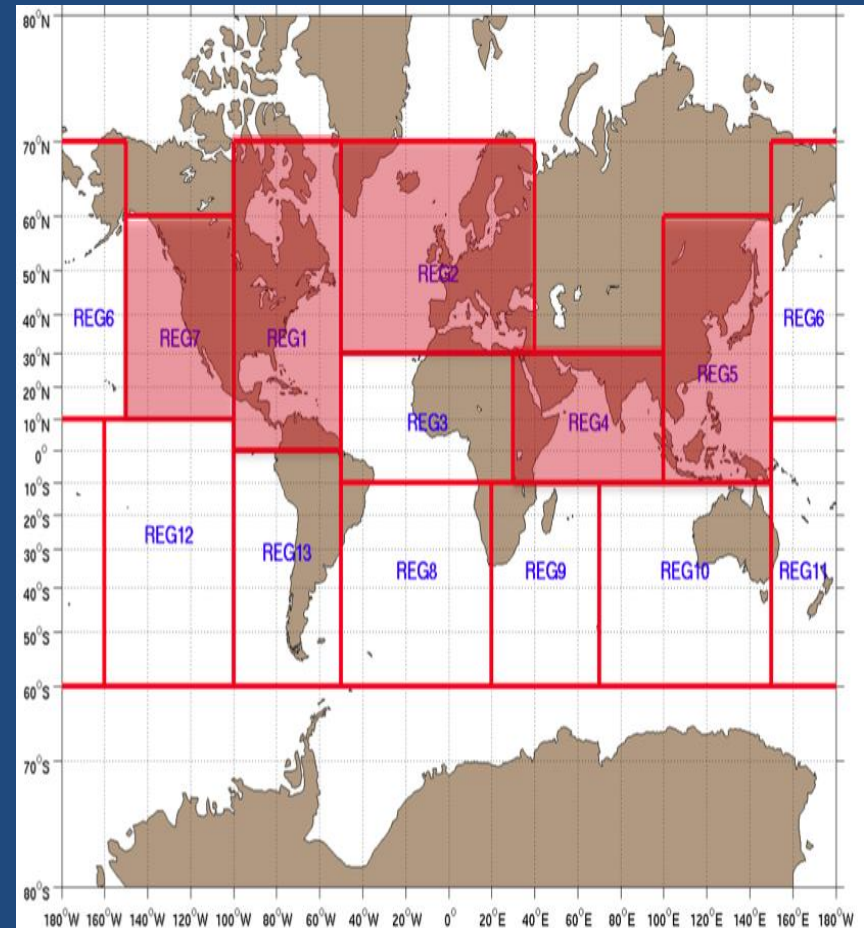


Figure 7.1.b. Region 01 – Western Atlantic 10m Sound Speed, Temperature, Salinity

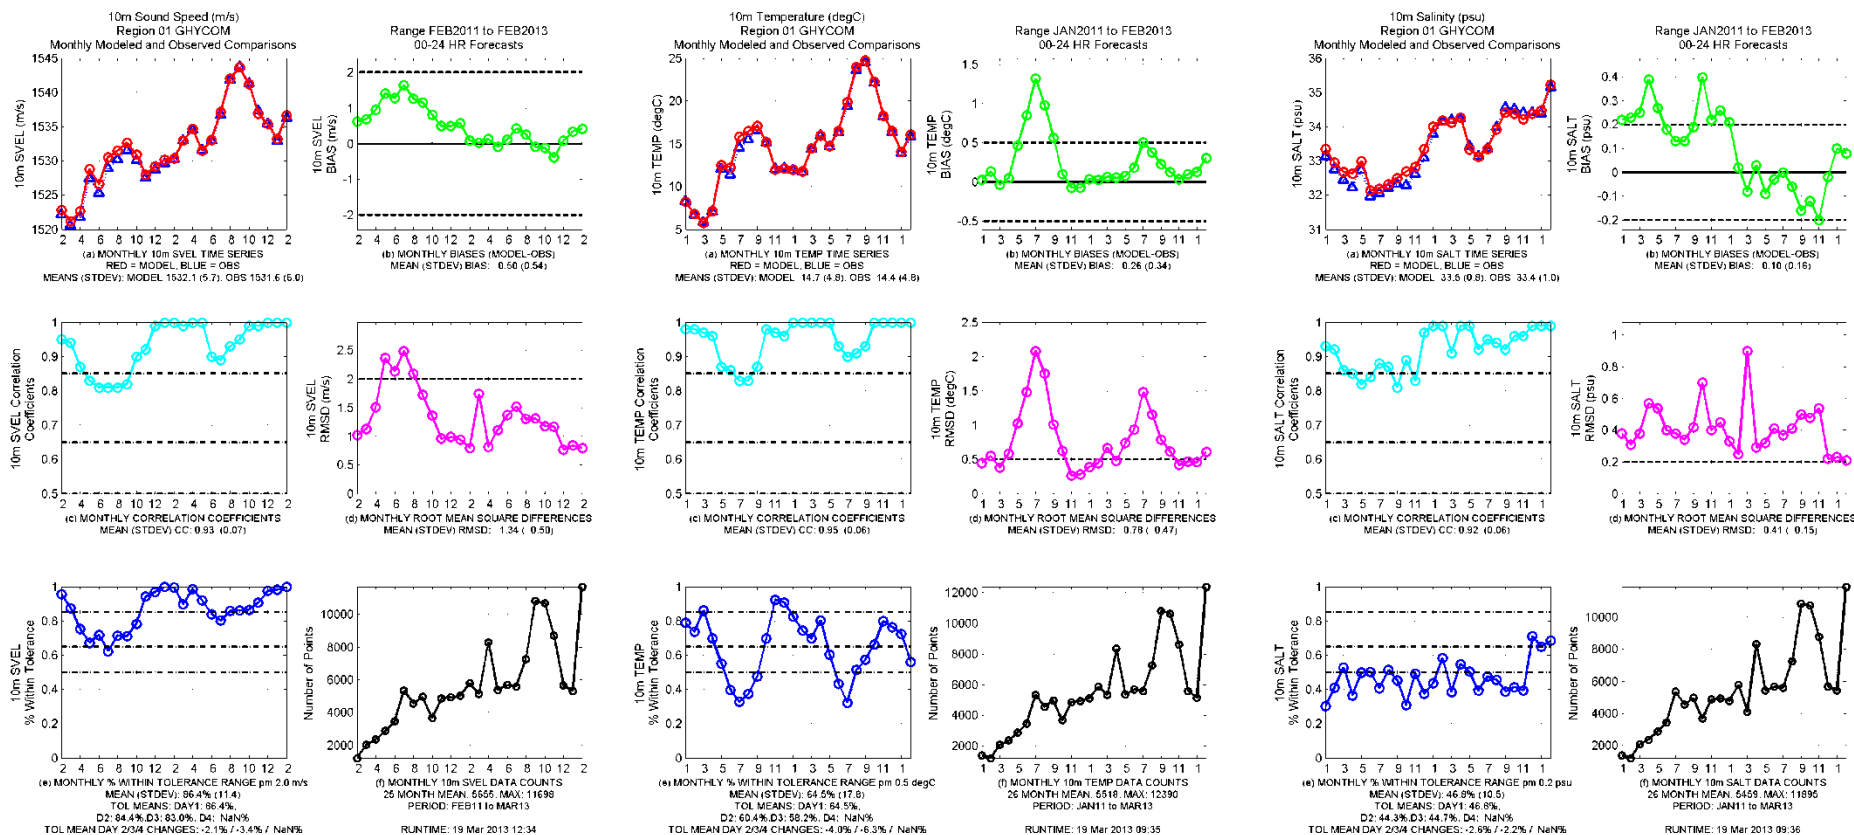

10m Sound Speed

Bias: +0.5 m/s
CC: 0.93
RMSD: 1.7 m/s
Tolerance: 66% (± 2.0 m/s)

10m Temperature

Bias: +0.10°C
CC: 0.92
RMSD: 0.41°C
Tolerance: 47% (± 0.50 °C)

10m Salinity

Bias: +0.26 psu
CC: 0.95
RMSD: 0.78 psu
Tolerance: 64% (± 0.20 psu)

NAVOCEANO OPTEST Results

- An “excellent – good – fair – poor” scoring system was devised, Table 1. Overall, HYCOM scored “Excellent” two-thirds of the time.
- Table 2 helps us understand why the surface scores are low – HYCOM is not doing well with its SLD forecasts, with 60% of the scores at poor.
- The 90%, or excellent, result for sound speed might indicate that the 2 m/s standard could be tightened. Having 85-90% of the temperature and salinity scores in the good to excellent range suggests that HYCOM does well forecasting basic ocean properties.
- HYCOM’s forecast skill is good for operational use throughout its forecast period.

Table 1. Summary of scores by level (all properties, all regions).

Scores:	Excellent	Good	Fair	Poor
Surface Totals:	29	13	5	13
10m Totals:	47	9	3	1
100m Totals:	45	9	2	4
Sums:	121	31	10	18
Percent of the total:	67%	18%	5%	10%

Table 2. Summary of scores by property (all levels).

Scores:	Excellent	Good	Fair	Poor
SLD:	10%	20%	10%	60%
Sound Speed:	90%	10%	0%	0%
Temperature:	68%	23%	2%	7%
Salinity:	70%	15%	12%	3%

Global Ocean Forecast System (GOFS)

GOFS 3.0: 1/12° 32 layer HYCOM/NCODA-MVOI /MODAS synthetics/e-loan ice

- Pre-operational system that ran on Navy DSRC Cray XT5
- First ran in Navy operational queues December 2006

GOFS 3.01: 1/12° 32 layer HYCOM/NCODA-3DVAR/MODAS synthetics/e-loan ice

- Declared operational on 20 March 2013 and running on Navy DSRC IBM iDataPlex unclassified and classified computers
- Unscheduled switch from NCODA-MVOI to NCODA-3DVAR

GOFS 3.02: as GOFS 3.01 but with NAVGEM replacing NOGAPS

- Complete by 31 August 2013

GOFS 3.1: 1/12° 41 layer HYCOM/NCODA-3DVAR/ISOP synthetics/CICE


- Add nine near surface layers
- Replace MODAS synthetics with Improved Synthetic Ocean Profiles (ISOP)
- Two-way coupled HYCOM with Los Alamos CICE model
- Expect validation completed in 2QFY14

GOFS 3.5: 1/25° 41 layer HYCOM/NCODA-3DVAR/ISOP synthetics/CICE/tides

- Increase equatorial (mid-latitude) horizontal resolution to 4.4 (3.5) km
- Tidal forcing
- Expect validation completed in 4QFY15

NCODA-MVOI vs. 3DVAR Testing

Hindcast using NCODA-MVOI is compared against hindcast using NCODA-3DVAR, both use MODAS synthetics for downward projection of surface data. **Error analysis examining temperature as a function of depth** over June - August 2010 for several geographic regions.

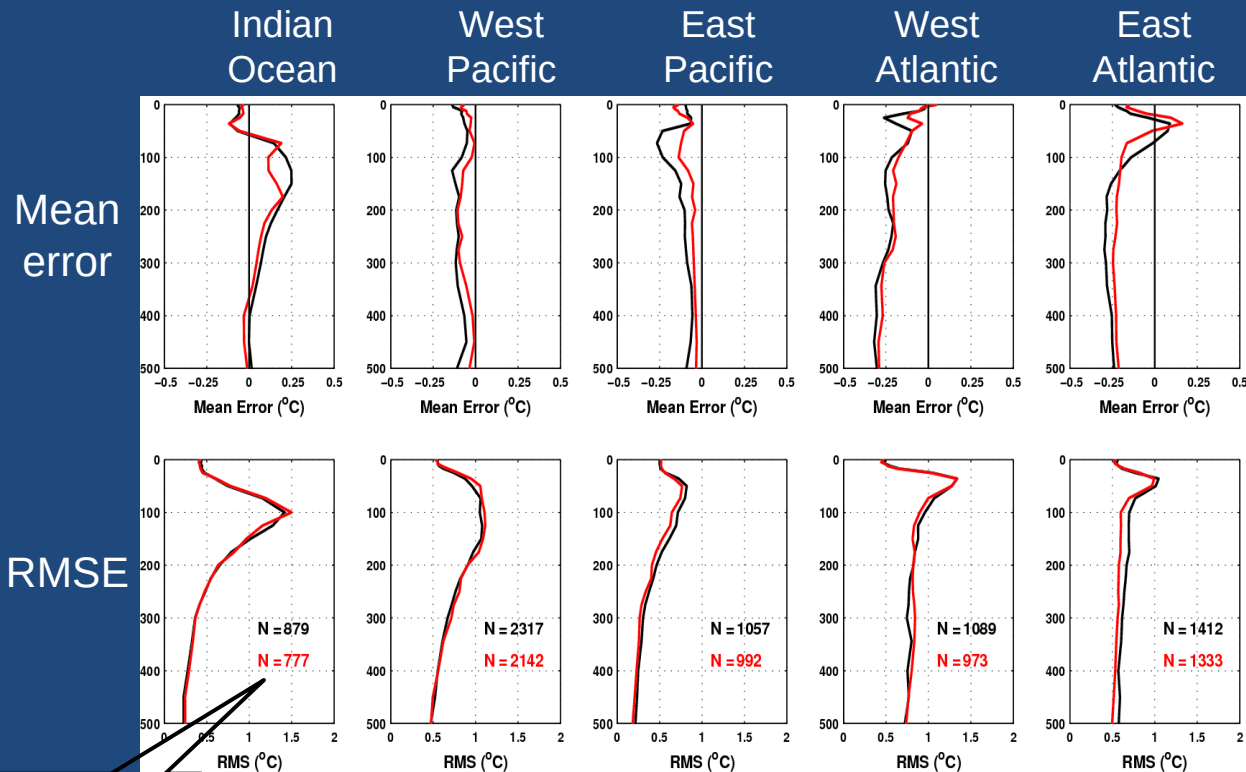

Black curves: NCODA-3DVAR
Red curves: NCODA-MVOI

99% confidence interval

As expected, there are not large differences depending upon the NCODA scheme used.


N = number of unassimilated profiles used in the analysis

NCODA analysis using 3DVAR ran ~35% faster than MVOI


NCODA-MVOI vs. 3DVAR Testing

Hindcast using NCODA-MVOI is compared against hindcast using NCODA-3DVAR, both use MODAS synthetics for downward projection of surface data. **Error analysis examining sonic layer depth** over June - August 2010 for several geographic regions.

Mean Error

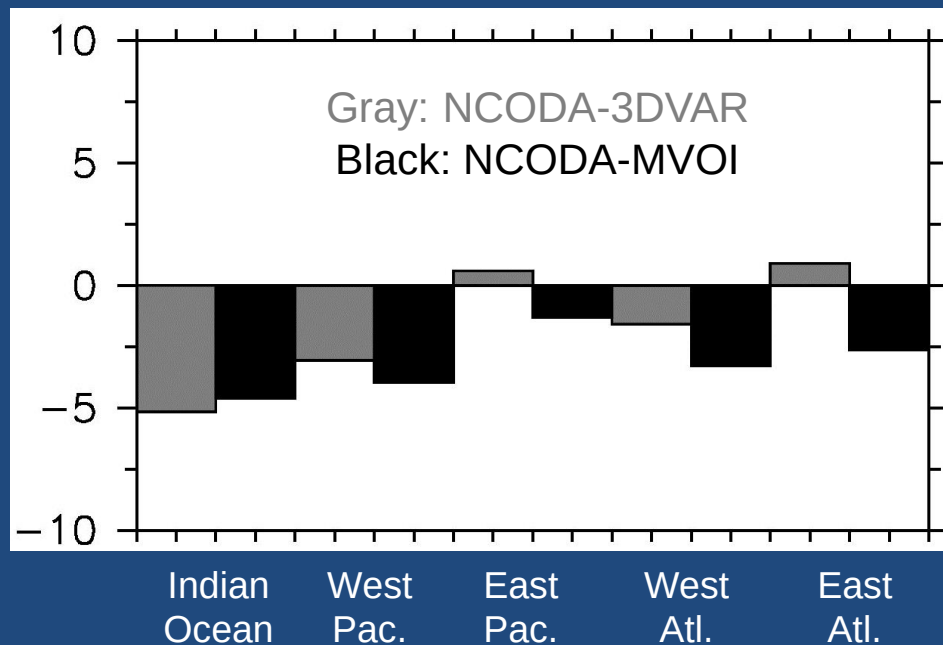

RMSE

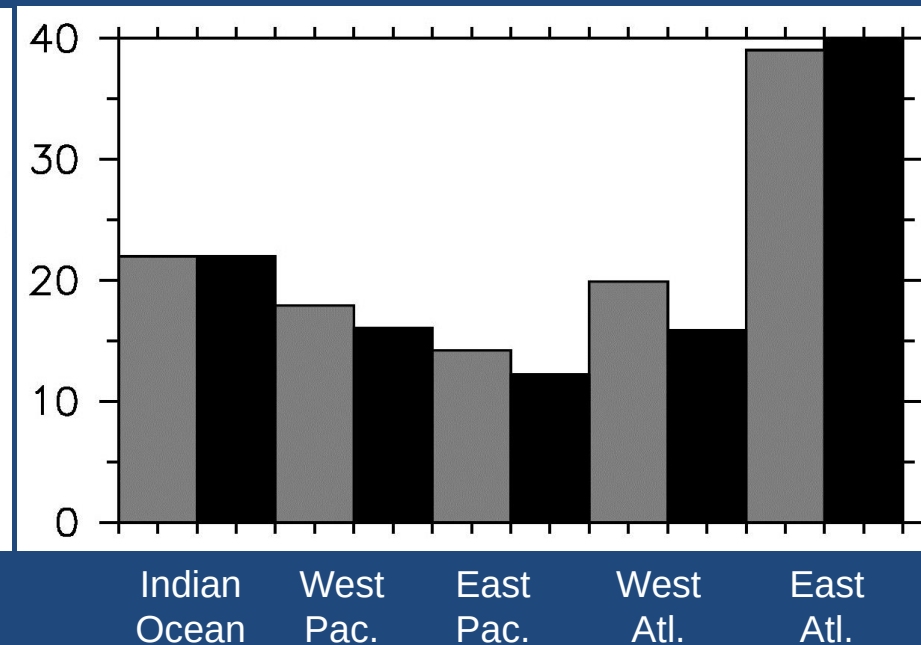

Global Ocean Forecast System (GOFS)

GOFS 3.0: 1/12° 32 layer HYCOM/NCODA-MVOI /MODAS synthetics/e-loan ice

- Pre-operational system that ran on Navy DSRC Cray XT5
- First ran in Navy operational queues December 2006

GOFS 3.01: 1/12° 32 layer HYCOM/NCODA-3DVAR/MODAS synthetics/e-loan ice

- Declared operational on 20 March 2013 and running on Navy DSRC IBM iDataPlex unclassified and classified computers
- Unscheduled switch from NCODA-MVOI to NCODA-3DVAR

GOFS 3.02: as GOFS 3.01 but with NAVGEM replacing NOGAPS

- Complete by 31 August 2013

GOFS 3.1: 1/12° 41 layer HYCOM/NCODA-3DVAR/ISOP synthetics/CICE

- Add nine near surface layers
- Replace MODAS synthetics with Improved Synthetic Ocean Profiles (ISOP)
- Two-way coupled HYCOM with Los Alamos CICE model
- Expect validation completed in 2QFY14

GOFS 3.5: 1/25° 41 layer HYCOM/NCODA-3DVAR/ISOP synthetics/CICE/tides

- Increase equatorial (mid-latitude) horizontal resolution to 4.4 (3.5) km
- Tidal forcing
- Expect validation completed in 4QFY15


NAVGEM to replace NOGAPS in GOFS

- NAVGEM = NAVy Global Environmental Model
 - declared operational on 13 Mar 2013
- NOGAPS decommission date: 31 Aug 2013
 - output still being sent to NAVOCEANO and hycom.org
- Analysis shows the two atmospheric models are different enough to cause different upper ocean model response
- Two calibrations must be performed on NAVGEM output to assure the underlying ocean model response will be consistent across the decommission time boundary
 1. Calibrate NAVGEM winds to scatterometer winds
 2. Calibrate heat flux relative to forecast SST error


NAVGEN minus NOGAPS

Mean over 8-31 Dec 2012


Air temperature at 2m ($^{\circ}\text{C}$)

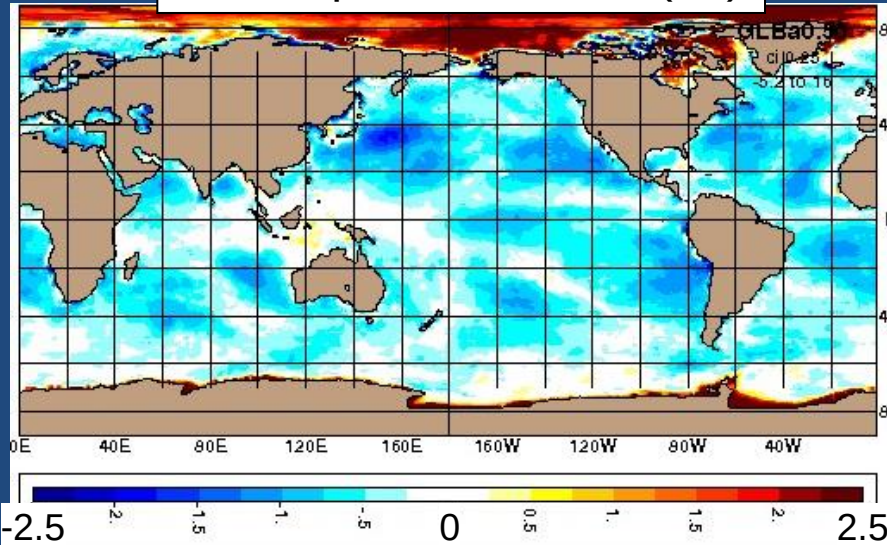


Specific humidity at 2m ($\times 10^3 \text{ kg/kg}$)

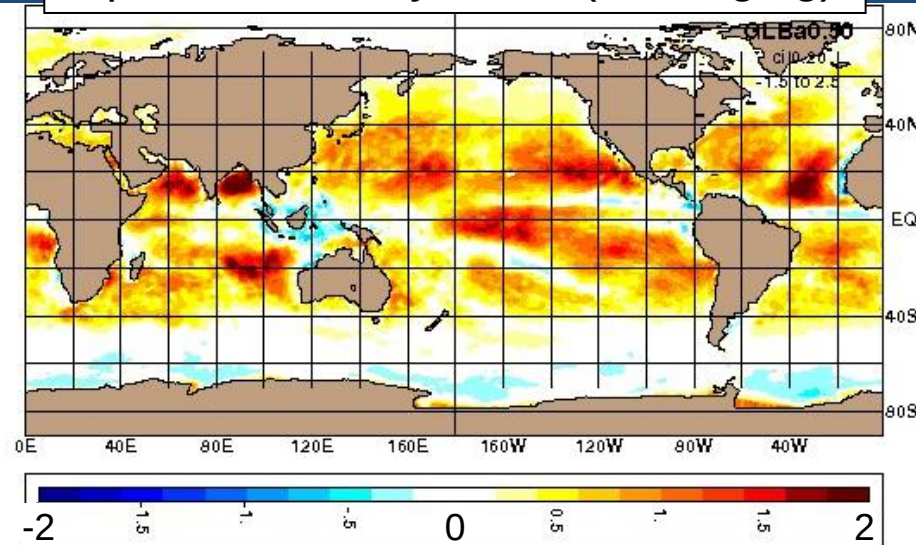

Surface shortwave radiation (W/m^2)

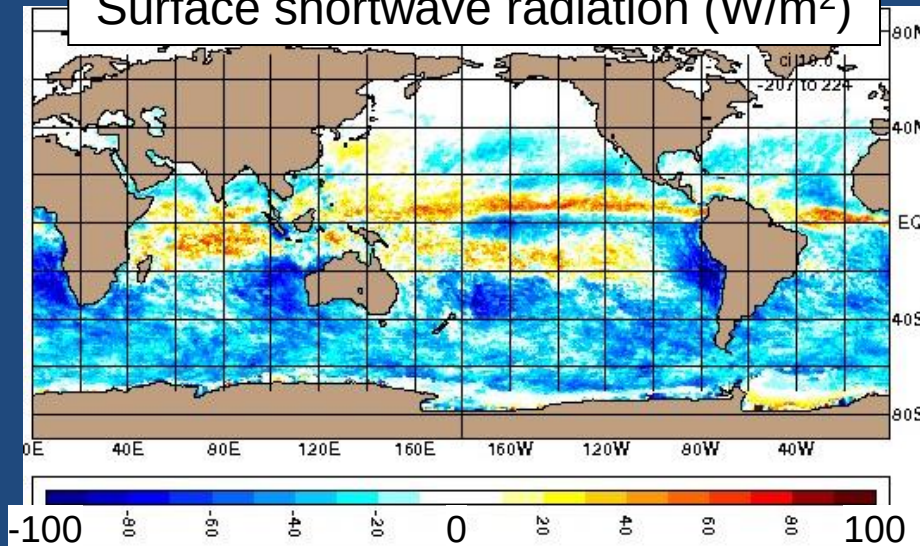


Wind speed (m/s)

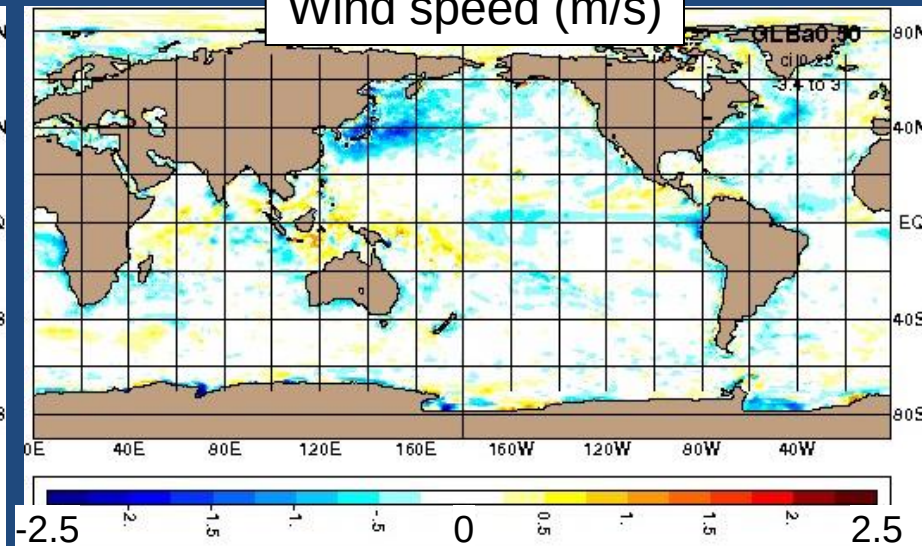

NAVGEN Wind Calibration

- NWP products are generally weaker than scatterometer winds

NOGAPS minus QuikSCAT-scaled NOGAPS – 2012 mean

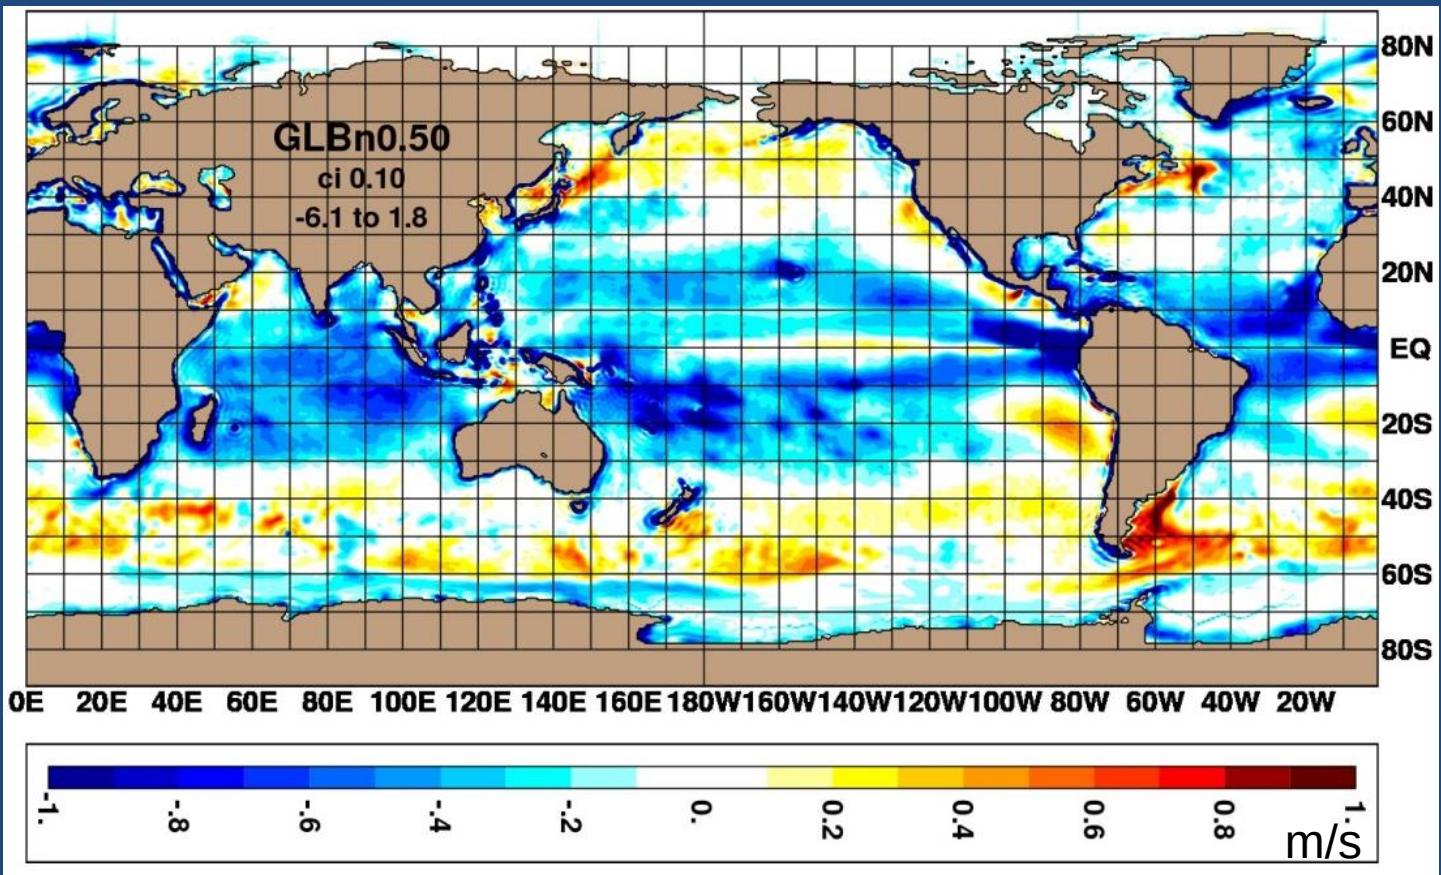


NAVGEM Wind Calibration

- Obtaining one year of NAVGEM output: Jun 2012 through May 2013
 - Hindcast output (Jun 2012 → Jan 2013) processed and in HYCOM-ready format
 - Pre-OPS/OPS output (Dec 2012 → present) processed daily and in HYCOM-ready format
- Regression analysis vs. contemporaneous scatterometer data (SSM/I/S and WindSAT)
- Calibrate NAVGEM wind speed


NAVGEN Heat Flux Calibration

- Attribute SST bias to inaccuracies in NWP heat fluxes

Heat flux offset currently
used in GOFS 3.01

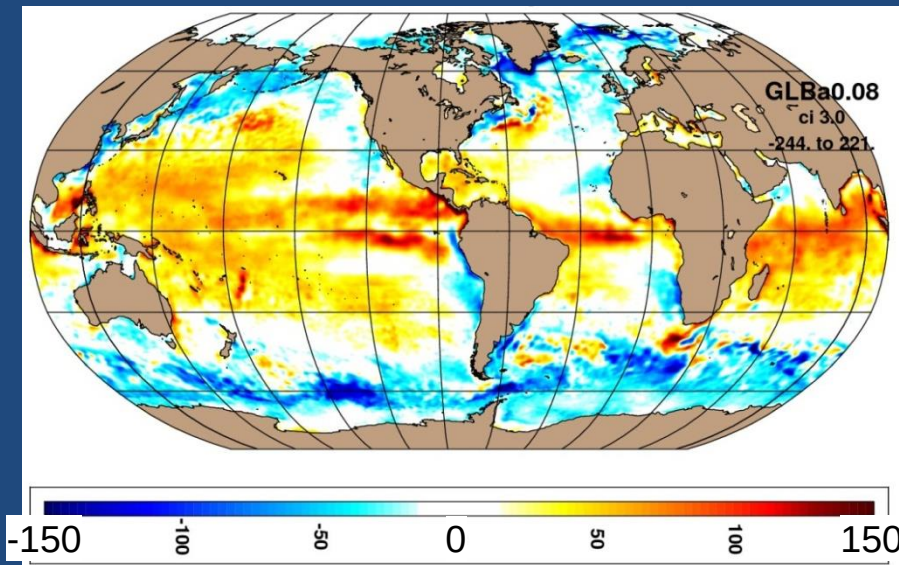

FLASHFlux minus NAVGEM
surface shortwave radiation (W/m^2)
averaged over 8-31 Dec 2012

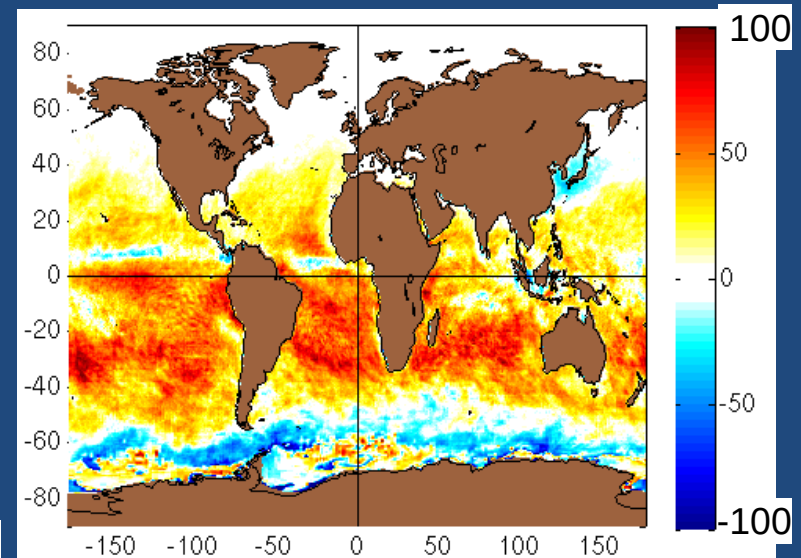

FLASHFlux - NAVGEM differences in shortwave radiation of
comparable magnitude to existing heat flux offset used in GOFS

NAVGEM Heat Flux Calibration

- Using calibrated NAVGEM winds, integrate a year-long GOFS hindcast
- From this hindcast, integrate a series of 5-day forecasts and compare against the 5 day later nowcast as the truth
- 5 day forecast SST error is used to compute heat flux offset, where 1°C error = 250 W/m^2 heat loss or gain
- Create a monthly varying heat flux offset
 - GOFS currently uses an annual offset

Implications of Switching Atmospheric Forcing

- With NAVGEM wind and heat flux calibration in place, re-integrate the GOFS hindcast bringing it up to real-time (under NRL control)
 - Perform a subset of validation metrics and compare against NOGAPS-forced GOFS
 - Hand off NAVGEM-forced GOFS to NAVOCEANO
 - Will be a short time period of dual ops
 - Tight time frame to get this done before NOGAPS decommissioning on 31 Aug 2013

Implications of Switching Atmospheric Forcing

- Because of the short time period for calibrating NAVGEM winds against scatterometer data and computing the heat flux offset, this static recalibration should be performed with each additional year of NAVGEM output
- Additionally, a static recalibration may be needed with every new NAVGEM delivery (T379L50 → T425L60 → T639L70)

Global Ocean Forecast System (GOFS)

GOFS 3.0: 1/12° 32 layer HYCOM/NCODA-MVOI /MODAS synthetics/e-loan ice

- Pre-operational system that ran on Navy DSRC Cray XT5
- First ran in Navy operational queues December 2006

GOFS 3.01: 1/12° 32 layer HYCOM/NCODA-3DVAR/MODAS synthetics/e-loan ice

- Declared operational on 20 March 2013 and running on Navy DSRC IBM iDataPlex unclassified and classified computers
- Unscheduled switch from NCODA-MVOI to NCODA-3DVAR

GOFS 3.02: as GOFS 3.01 but with NAVGEM replacing NOGAPS

- Complete by 31 August 2013

GOFS 3.1: 1/12° 41 layer HYCOM/NCODA-3DVAR/ISOP synthetics/CICE

- Add nine near surface layers
- Replace MODAS synthetics with Improved Synthetic Ocean Profiles (ISOP)
- Two-way coupled HYCOM with Los Alamos CICE model
- Expect validation completed in 2QFY14

GOFS 3.5: 1/25° 41 layer HYCOM/NCODA-3DVAR/ISOP synthetics/CICE/tides


- Increase equatorial (mid-latitude) horizontal resolution to 4.4 (3.5) km
- Tidal forcing
- Expect validation completed in 4QFY15

HYCOM/CICE Coupling


Two-way ocean/ice coupling between HYCOM and CICE
with 1 hour coupling frequency

2012 ice thickness (m) from non-assimilative spin-up

GLBb0.08-23.2 Ice Thickness: 2012 001

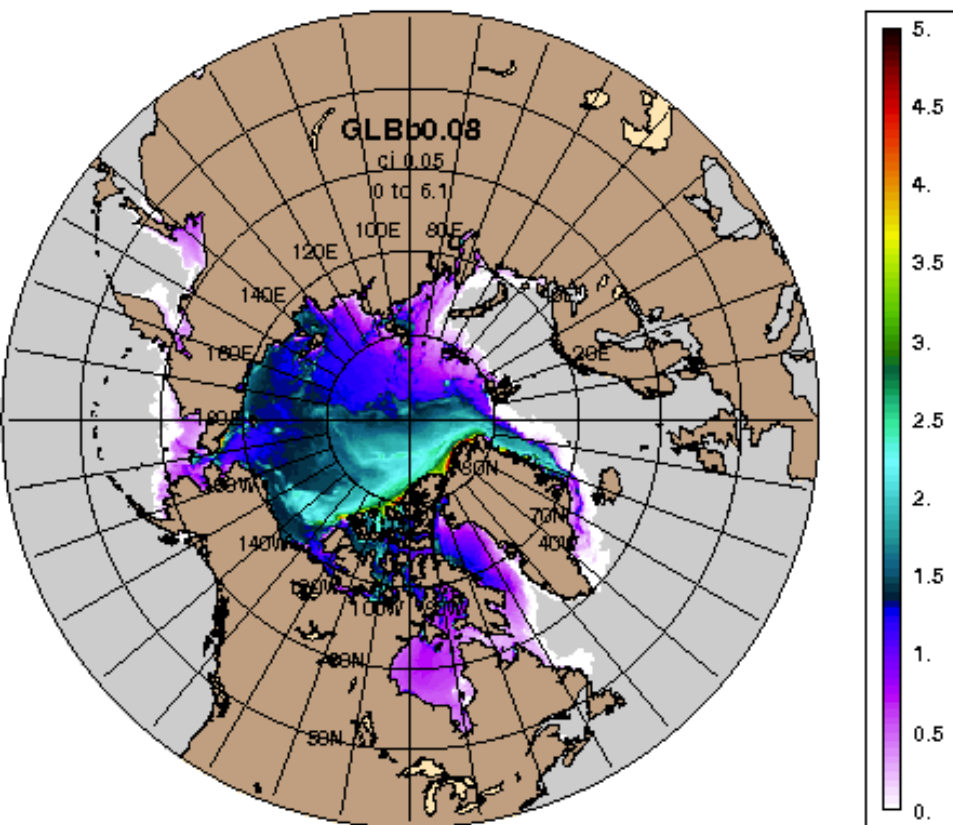

GLBb0.08-23.2 Ice Thickness: 2012 001

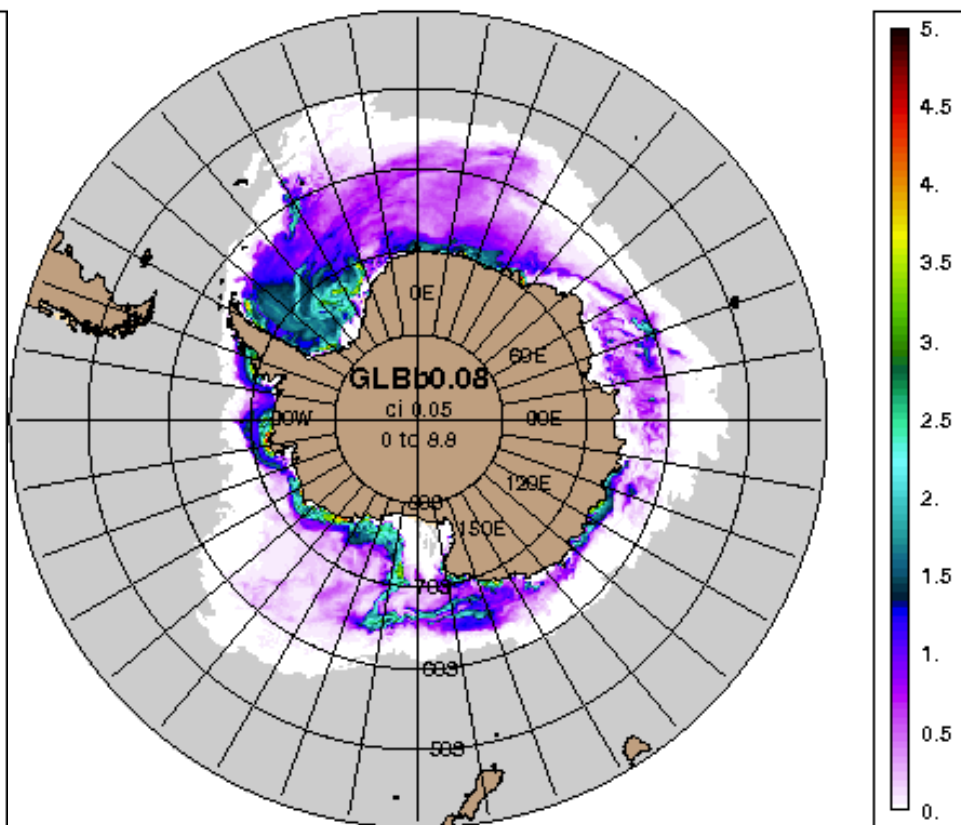

Global Ocean Forecast System (GOFS)

GOFS 3.0: 1/12° 32 layer HYCOM/NCODA-MVOI /MODAS synthetics/e-loan ice

- Pre-operational system that ran on Navy DSRC Cray XT5
- First ran in Navy operational queues December 2006

GOFS 3.01: 1/12° 32 layer HYCOM/NCODA-3DVAR/MODAS synthetics/e-loan ice

- Declared operational on 20 March 2013 and running on Navy DSRC IBM iDataPlex unclassified and classified computers
- Unscheduled switch from NCODA-MVOI to NCODA-3DVAR

GOFS 3.02: as GOFS 3.01 but with NAVGEM replacing NOGAPS

- Complete by 31 August 2013

GOFS 3.1: 1/12° 41 layer HYCOM/NCODA-3DVAR/ISOP synthetics/CICE

- Add nine near surface layers
- Replace MODAS synthetics with Improved Synthetic Ocean Profiles (ISOP)
- Two-way coupled HYCOM with Los Alamos CICE model
- Expect validation completed in 2QFY14

GOFS 3.5: 1/25° 41 layer HYCOM/NCODA-3DVAR/ISOP synthetics/CICE/tides

- Increase equatorial (mid-latitude) horizontal resolution to 4.4 (3.5) km
- Tidal forcing
- Expect validation completed in 4QFY15