



AFRL-SA-WP-SR-2013-0013

Proof-of-Concept of a Revolutionary Cooling Shirt with a Thermal Manikin



**Reginald B. O'Hara, Ph.D.
Jennifer Serres, Ph.D**



September 2013

**Distribution A: Approved for public
release; distribution is unlimited.
Case Number: 88ABW-2013-5296,
13 Dec 2013**

**Air Force Research Laboratory
711th Human Performance Wing
School of Aerospace Medicine
Aeromedical Research Department
2510 Fifth St.
Wright-Patterson AFB, OH 45433-7913**

NOTICE AND SIGNATURE PAGE

Using Government drawings, specifications, or other data included in this document for any purpose other than Government procurement does not in any way obligate the U.S. Government. The fact that the Government formulated or supplied the drawings, specifications, or other data does not license the holder or any other person or corporation or convey any rights or permission to manufacture, use, or sell any patented invention that may relate to them.

Qualified requestors may obtain copies of this report from the Defense Technical Information Center (DTIC) (<http://www.dtic.mil>).

AFRL-SA-WP-SR-2013-0013 HAS BEEN REVIEWED AND IS APPROVED FOR PUBLICATION IN ACCORDANCE WITH ASSIGNED DISTRIBUTION STATEMENT.

//SIGNATURE//

DR. WILLIAM W. DODSON
Chief, Aircrew Selection & Performance Res

//SIGNATURE//

DR. RODGER D. VANDERBEEK
Chair, Aeromedical Research Dept

This report is published in the interest of scientific and technical information exchange, and its publication does not constitute the Government's approval or disapproval of its ideas or findings.

REPORT DOCUMENTATION PAGE				<i>Form Approved</i> OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) 7 Sep 2013		2. REPORT TYPE Special Report		3. DATES COVERED (From – To) July 2012 – September 2012	
4. TITLE AND SUBTITLE Proof-of-Concept of a Revolutionary Cooling Shirt with a Thermal Manikin				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Reginald B. O'Hara, Ph.D. Jennifer Serres, Ph.D.				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) USAF School of Aerospace Medicine Aeromedical Research Dept/FHC 2510 Fifth St. Wright-Patterson AFB, OH 45433-7913				8. PERFORMING ORGANIZATION REPORT NUMBER AFRL-SA-WP-SR-2013-0013	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSORING/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION / AVAILABILITY STATEMENT Distribution A: Approved for public release; distribution is unlimited. Case Number: 88ABW-2013-5296, 13 Dec 2013					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT Heat-related illness is a critical factor for personnel operating in high heat environments. Traditional cooling technologies are limited by the need for a power supply, the added weight of the product, and the cooling duration. This research investigates a lightweight (47-g), passive cooling textile material provided by Arctic Ease® (Phoenixville, PA) and designed by the United States Air Force School of Aerospace Medicine (USAFSAM/FHC) that offers multiple hours of sustained cooling. The ability to deliver cooling was evaluated using a thermal manikin. Initial research was conducted under dry heat conditions at 35°C/50% relative humidity as the first step to evaluate the technology. Effective cooling rate was determined to be 30 W for the system. Calculations were based on the manikin zones covered by the shirt. Preliminary dry tests indicated a cooling duration longer than 2 hours.					
15. SUBJECT TERMS Heat-related illness, cooling shirt, thermal manikin, military					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 11	19a. NAME OF RESPONSIBLE PERSON Dr. Reginald O'Hara
a. REPORT U	b. ABSTRACT U	c. THIS PAGE U			19b. TELEPHONE NUMBER (include area code)

This page intentionally left blank.

TABLE OF CONTENTS

Section	Page
1.0 SUMMARY	1
2.0 INTRODUCTION/BACKGROUND	1
3.0 METHODS	2
4.0 RESULTS	3
5.0 CONCLUSIONS.....	3
6.0 REFERENCES	5

This page intentionally left blank.

1.0 SUMMARY

Battlefield Airmen exposed to heat may experience reductions in physical performance that decrease their work capacity. Reductions in work capacity could severely limit the ability of Airmen to adequately sustain and satisfactorily complete specified duties required during intense ground operations. Physiological stressors caused by heat stress are expressed in individuals as reductions in cardiac output and reduced blood flow to the brain, skeletal muscle, kidneys, and skin tissues. Prolonged work (e.g., 8 hours) in hot, humid environments may also cause dehydration resulting from excessive sweat and associated sodium chloride losses in skeletal muscle, which collectively result in physical and mental exhaustion.

Cooling garment evaluations can be a challenge due to variations among influencing factors. Environmental factors including temperature, humidity, and wind speed need to be controlled to accurately compare the effectiveness of the device. Physiological factors can be influenced by the time of day of the test and the subject's diet, thus affecting the physical or cognitive performance of the research participant. Therefore, environmental chambers and human thermal surrogates are useful tools to gain knowledge on the performance of cooling garments in a controlled environment.

In this study, an epoxy thermal manikin from Measurement Technology Northwest was used to quantify the cooling effect of a gel-based, passive cooling technology inserted into a specially designed T-shirt. Sustained cooling rates of 20 W and 30 W were obtained at 50% and 25% relative humidity during dry tests. With the limited data presented in this paper, it was shown that a change in relative humidity increases measured cooling rate of the product but decreases cooling life. Further testing must be conducted to fully evaluate the garment's limitations and capabilities.

2.0 INTRODUCTION/BACKGROUND

Heat exhaustion is a leading cause of injury in many occupations involving high levels of physical activity or exposure to high temperature environments including military, fire protection, and sports. Battlefield Airmen exposed to heat may experience reductions in physical performance that decrease their work capacity. Reductions in work capacity could severely limit the ability of Airmen to adequately sustain and satisfactorily complete specified duties required during intense ground operations. Physiological stressors caused by heat stress are expressed in individuals as reductions in cardiac output and reduced blood flow to the brain, skeletal muscle, kidneys, and skin tissues. Prolonged work (e.g., 8 hours) in hot, humid environments may also cause dehydration resulting from excessive sweat and associated sodium chloride losses in skeletal muscle, which collectively result in physical and mental exhaustion [1-3].

Personal cooling systems employ active and passive means of cooling the human subject to remove or reduce the effects of overheating. Active systems often use a liquid-based cooling system that circulates a chilled heat transfer medium throughout fluid lines built into the garment construction. Because of the necessity for watertight liquid lines and a pump and/or power source, these systems are often heavy and restrict or inhibit movement. Passive systems are designed to work without the need for a pump or power source and often employ the use of phase change materials (ice, salt, gel) to provide a cooling effect.

Cooling garment evaluations can be a challenge due to variations among influencing factors. Environmental factors including temperature, humidity, and wind speed need to be

controlled to accurately compare the effectiveness of the device. Physiological factors can be influenced by the time of day of the test and the subject's diet, thus affecting the physical or cognitive performance of the research participant. Therefore, environmental chambers and human thermal surrogates are useful tools to gain knowledge on the performance of cooling garments in a controlled environment.

One such option for research of this kind is an epoxy thermal manikin from Measurement Technology Northwest (Seattle, WA). This technological system includes a thermally conductive, aluminum-filled, carbon-epoxy shell manikin representative of a 50th percentile Western male and ThermDAC control software. The thermal manikin includes 34 independent thermal zones, an optional sweating skin that allows for computerized fluid flow, two ambient temperature sensors, one relative humidity sensor, and one wind speed sensor. ThermDAC software both controls the thermal properties of the manikin and allows for real-time data display and logging capabilities. Temperature and relative humidity can be controlled in the environmental chamber. Temperature options range from -20°C to 50°C, and relative humidity ranges from 0 to 100% including condensation [4].

The cooling effects of passive and active cooling vests have been measured using thermal manikins in various studies. The objective of this study was to quantify the cooling effect of a gel-based, passive cooling technology inserted into a specially designed T-shirt using a thermal manikin.

3.0 METHODS

A 34-zone thermal manikin in the form of a 50th percentile human was used to capture the data for this study. The manikin accurately simulates metabolic heat output of the human body using a computer-controlled system of heating elements and sensors. The system also has the ability to sweat via micro-pump-controlled pores; however, this study focused solely on dry testing. Established thermal manikin testing procedures [5,6] were used as a guideline to design this experiment.

The cooling garment textile material was supplied by Arctic Ease® (Phoenixville, PA) and contained 44% pima cotton, 44% MicroModal®, 8% polyester, and 4% spandex. Pockets of the same material were created to fully encapsulate the lightweight cryotherapy pad. The cooling medium is flame resistant to 815°C, adding to the garment's capabilities of meeting Air Force requirements for flame resistance. The shirt weight is 203 grams for a total of 471 grams with the cooling insert.

Before testing, clothing samples were allowed to rest in the controlled environment for a minimum of 12 hours. Initial product concepts involve rechargeable inserts that are added to special garments to obtain the cooling effect. The thermal manikin with cooling garment is pictured in Figure 1.

Chamber conditions were set at 35°C and 50% relative humidity (RH) for the first three sets of three tests and then 35°C and 25% for the next three. Three samples of baseline data were recorded and averaged to confirm that the garment itself was not producing an effect on the manikin. Per manufacturer recommendation, the cryotherapy pads were stored in a refrigerator at 10°C to obtain a maximum effect. New pads were used for each test. Data recording began as soon as product was applied to the manikin and recorded for 2 hours. Heat input to the zones of the manikin was then analyzed and compared to baseline heat input requirements without cooling pads to obtain the maximum cooling effect.

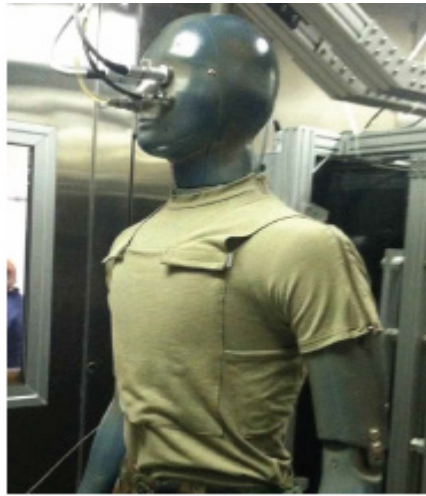


Figure 1. Thermal Manikin with Cooling Garment

4.0 RESULTS

Figures 2 and 3 show the individual zone heat flux results of the two test conditions for the chest, shoulders, stomach, and mid back. The application of the cooling material is limited to the pockets in the garment covering these sections of the body. As a result, the thermal response of the other body sections is negligible. From these two graphs, two clear modes of operation can be determined. Since the product is applied to the manikin at 10°C, the heating elements require an initial spike of energy. Once the cooling medium has reached temperature equilibrium, it is then producing passive cooling through evaporation of the trapped water. Because the chest has the highest surface area of these zones, it also exhibits the largest amount of cooling. In the 25% RH environment, however, the material reaches a point where it dries out and diminishes in cooling capacity. In the 50% RH environment, this drop in cooling capacity does not begin to occur until the very end of the 2-hour period.

Figure 4 compares the total combined wattage of the four zones at both environmental conditions. At the lower RH of 25%, the cooling effect is higher than that of the higher RH environment because of the large gradient in moisture available in the cooling medium compared with surrounding air. This effect begins to drop off somewhere around 1 hour as the moisture content of the cooling medium is reduced.

5.0 CONCLUSIONS

Sustained cooling rates of 20 W and 30 W were obtained at 50% and 25% relative humidity during dry tests using a thermal manikin. The cooling power per weight of the system tested was 64 W/kg. Compared to the 42 W/kg found with the ice vest tested by Smolander et al. [7], this is a 50% improvement. However, effectiveness of low level cooling on the human body must be taken into consideration. As discussed in Dionne et al. [8], measured cooling rates of a given system will be affected by skin moisture. As the system studied in this paper relies on evaporative cooling to produce an effect, availability of airflow must also be taken into account.

With the limited data presented in this paper, it was shown that a change in relative humidity increases measured cooling rate of the product but decreases cooling life. Further testing must be conducted to fully evaluate the garment's capabilities.

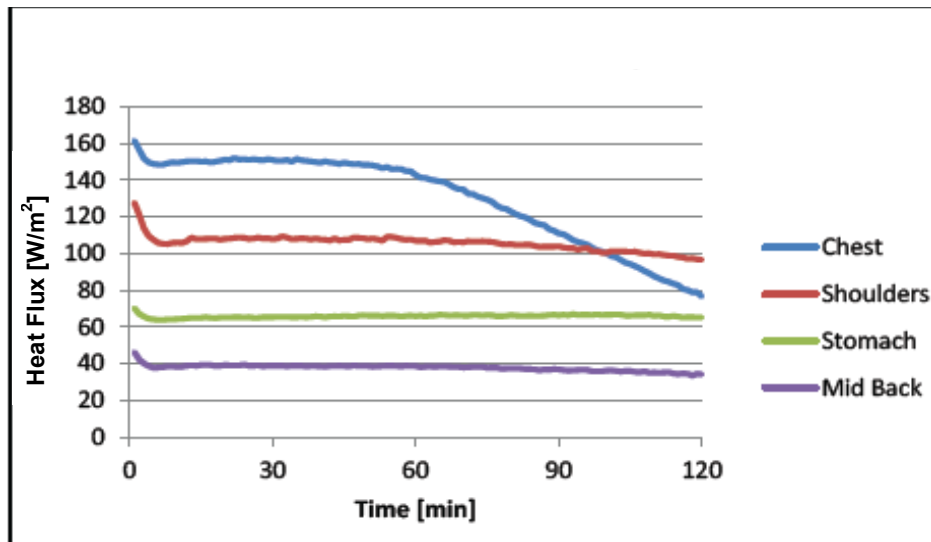


Figure 2. Measured Heat Flux, 35°C, 25% RH

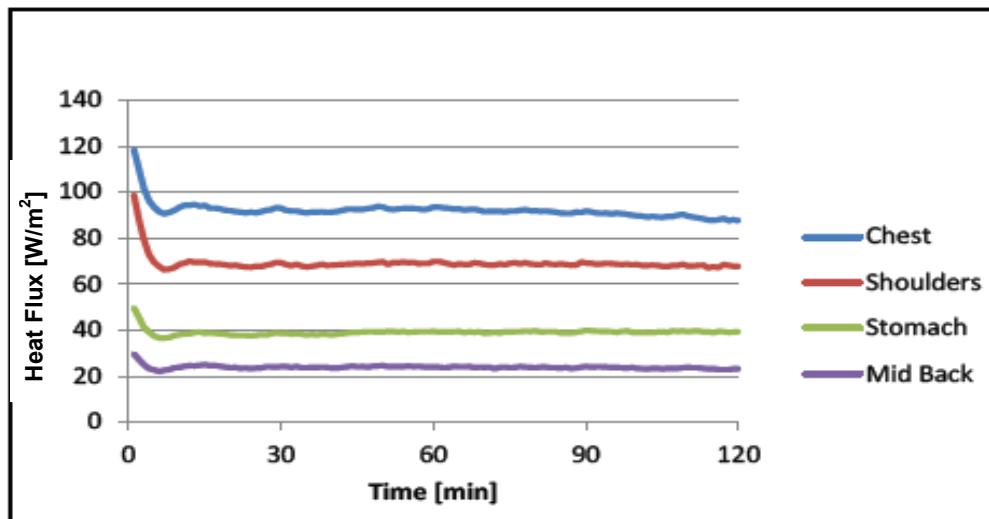


Figure 3. Measured Heat Flux, 35°C, 50% RH

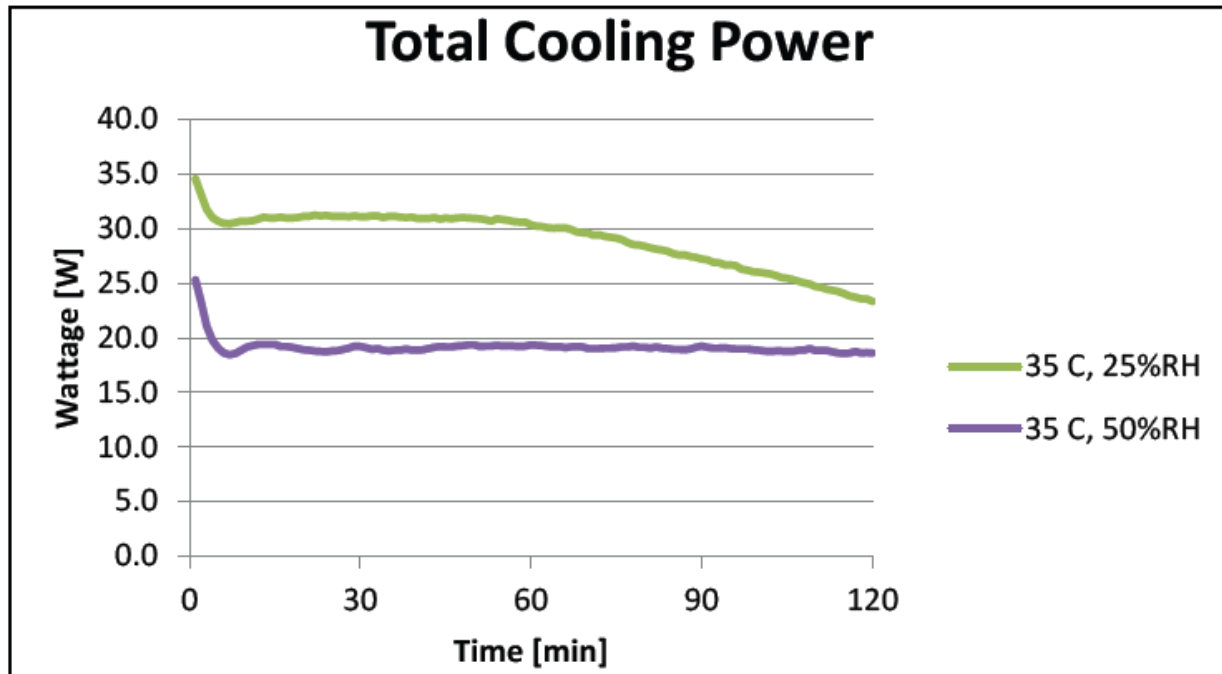


Figure 4. Total Cooling Power

6.0 REFERENCES

1. Cheung S, McLellan T. Heat acclimation, aerobic fitness and hydration effects on tolerance during uncompensable heat stress. *Journal Applied Physiology* 1998; 84: 1719-31.
2. Lars N, Niels SH, Nielson B. Inadequate heat release from the brain during prolonged exercise with hyperthermia. *J. Physiol.* 2002; 545:697-704.
3. Gonzalez AJ, Calbert JA. Reductions in systemic and skeletal muscle blood flow and oxygen delivery limit maximal aerobic capacity in humans. *Circulation* 2003; 107: 824-30.
4. Measurement Technology Northwest. Epoxy thermal manikin [brochure]. Seattle, WA: Measurement Technology Northwest; n.d. Retrieved 15 August 2013 from http://thermal.mtnw-usa.com/sites/thermal.mtnw-usa.com/files/product_brochures/NEWTON%20Manikin_Spec%20Sheet.pdf.
5. American Society for Testing and Materials. Standard test method for measuring the thermal insulation of clothing using a heated manikin. West Conshohocken, PA: ASTM; 2004. ASTM F1291-04.
6. Brady J, Cox T, Moczyłowski S, et al. Proof-of-concept of a revolutionary cooling shirt with a thermal manikin. Poster presented at the American Association of Textile Chemists and Colorists, Greenville, SC; 2013.
7. Smolander J, Kuklane K, Gavhed D, Nilsson H, Holmér I. Effectiveness of a light-weight ice-vest for body cooling while wearing fire fighter's protective clothing in the heat. *Int J Occup Saf Ergon* 2004; 10:111-7.
8. Dionne JP, Jette FX, Semeniuk K, et al. Using thermal manikins to compare the performance of various personal cooling garments. *Proceedings of 2nd European Conference on Protective Clothing (ECPC)*, 2003 May 21-24, Montreux, Switzerland. St. Gallen, Switzerland: EMPA; 2003.