

Cooperative Target-capturing with Incomplete Target Information

Mangal Kothari · Rajnikant Sharma · Ian Postlethwaite · Randy Beard · Daniel Pack

Received: date / Accepted: date

Abstract This paper presents a distributed target-centric formation control strategy for multiple unmanned aerial vehicles (UAVs) in the presence of target motion uncertainty. The formation is maintained around a target using a combination of a consensus protocol and a sliding mode control law. Consensus helps in distributing the target information which is available only to a subset of vehicles. Sliding mode control compensates for the uncertainty in the target information. Hence, collectively the combined strategy enforces each of the vehicle to maintain respective position in a formation. We show that if at least one vehicle in a group has target information with some uncertainty and the corresponding communication graph is connected, then a target-centric formation can be maintained. The performance of the proposed strategy is verified through simulations.

Keywords Formation control · Sliding mode control · Consensus

M. Kothari
Research Associate, School of Computing, Engineering and Information Sciences, Northumbria University, Newcastle Upon Tyne, NE1 8ST, U.K.
E-mail: mangaljain@gmail.com

R. Sharma
Postdoctoral Fellow, Department of Electrical and Computer Engineering, US Air Force Academy, CO, U.S.A
E-mail: raj.drdo@gmail.com

I. Postlethwaite
Deputy Vice-Chancellor, Northumbria University, Ellison Building Newcastle, upon Tyne, NE1 8ST, U.K.
E-mail: ian.postlethwaite@northumbria.ac.uk

R. Beard
Professor, Department of Electrical and Computer Engineering, Brigham Young University, Provo, UT, U.S.A
E-mail: beard@byu.edu

D. Pack
Chair and Professor, Department of Electrical and Computer Engineering, University of Texas at San Antonio, TX, U.S.A
E-mail: daniel.pack@utsa.edu

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 2013		2. REPORT TYPE		3. DATES COVERED 00-00-2013 to 00-00-2013	
4. TITLE AND SUBTITLE Cooperative Target-capturing with Incomplete Target Information				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Brigham Young University, Department of Electrical and Computer Engineering, Provo, UT, 84602				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES In Journal of Intelligent & Robotic Systems (to appear)					
14. ABSTRACT This paper presents a distributed target-centric formation control strategy for multiple unmanned aerial vehicles (UAVs) in the presence of target motion uncertainty. The formation is maintained around a target using a combination of a consensus protocol and a sliding mode control law. Consensus helps in distributing the target information which is available only to a subset of vehicles. Sliding mode control compensates for the uncertainty in the target information. Hence, collectively the combined strategy enforces each of the vehicle to maintain respective position in a formation. We show that if at least one vehicle in a group has target information with some uncertainty and the corresponding communication graph is connected, then a target-centric formation can be maintained. The performance of the proposed strategy is verified through simulations.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 14	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

1 Introduction

Recently, several researchers have studied multi-agent systems to explore their potential advantages over a single system including parallelism, robustness, and scalability [1]. Over the past few years multi-agent coordination and control solutions has been applied to many challenging civilian and defence applications: surveillance [2, 3], search and rescue [4, 5], and fire monitoring [6, 7].

In this paper, we focus on multi-agent target tracking, where a team of vehicles (or UAVs) must maintain a target-centric formation. In a target-centric formation, each vehicle in the group maintains a constant distance from the target with a specified angle. The target-centric formation can be used to restrict the motion of a hostile target or to safely escort a vehicle of importance to a desired location. In real world, small UAVs have limited sensor and communication ranges and they may not be able to access complete target information. Maintaining a formation with these limitations is challenging. In this paper, we address the problem of formation control for multiple UAVs under these conditions.

Several researchers have investigated formation control using different approaches including leader-following [8], [9], [10], [11], [12] virtual structure approaches [13, 14], [15], [16] and behavior-based methods [17], [18]. A concise review on several formation control techniques and stability issues can be found in [19]. In the leader-following approach, some of vehicles act as leaders whereas the rest act as followers. Since, there is no information flow from follower vehicles to leaders, if any leader vehicle deviates from a desired trajectory, this may disturb formation. In the virtual structure approach, there exists no hierarchy and it is assumed all vehicles are virtually connected. Then, the virtual structure (formation geometry) is maintained by generating reference trajectories for each agent and tracking them. The approach works as a centralized manner and hence is not suitable where agents cooperate in a distributed manner and do not scale with number of UAVs. In the behavior-based approach, a particular (e.g, heading alignment) type of behavior is assigned to each vehicle and each agent tries to perform the assigned behavior. The approach can be useful where multiple competing objectives are involved and for large scale systems. However, it is difficult to carry out stability analysis limiting its applicability.

Kim *et al.* [20] proposed a distributive cooperative control method to maintain a target-centric formation based on a cyclic pursuit strategy. However, in this method, every vehicle in the group should have the target information without any uncertainties, which is not always possible. Consensus, as addressed in [21–23], can be used to propagate the target information from a subset of nodes to all the nodes in the network. Consensus is a method of reaching at an agreement on some information of interest in a distributed manner. Ren [24] proposed a consensus based formation control strategy for a multi-vehicle system where the states of all vehicles approach a common time-varying reference state only with a subset of vehicles requiring knowledge of the reference state. Kawakami *et al.* [25] proposed a target-centric formation control strategy based on consensus seeking with a dynamic network topology. The authors show that a desired formation will be maintained if at least one vehicle in the group has the target information. Although, controllers developed using consensus in [24, 25] overcome the limitation of having information to all agents in a group, the controllers do not take into account the uncertainty in the target motion. If the upper bound in the uncertainty

is known, then the sliding mode control can be used to drive the system states to a desired sliding manifold [26].

In this paper, we combine consensus protocol and sliding mode control to derive a target-centric formation controller. We use the sliding mode control to handle uncertainty of a target motion and show that the corresponding controller will produce desired system states, if the upper bound of the target inputs is known. We show that all vehicles maintain a target-centric formation in the presence of target motion uncertainty assuming that the vehicle communication network is connected and at least one of the vehicles has the target information, and only upper bound of the target motion inputs (target velocity and acceleration) is available. Information of a vehicle (target/UAV) consists of vehicle position, orientation, velocity, and acceleration.

The paper is organized as follows. In Section 2, we formulate the problem, and in Section 3, we derive the target-centric formation controller using consensus and sliding mode control. We discuss numerical results in Section 4, and draw conclusions in Section 5.

2 Problem Statement

Let $\mathcal{A} = \{A_i \mid i \in I\}$ be a set of n UAVs, where $I = \{1, \dots, n\}$. A directed graph $\mathcal{G}_n$ is used to model the communication topology and sensing topology among these UAVs. In $\mathcal{G}_n$, the i^{th} node represents the i^{th} agent A_i , and a directed edge from A_i to A_j denoted as (A_i, A_j) represents a unidirectional information exchange link from A_i to A_j , which means that, agent j can receive or obtain information from agent i , $(i, j) \in I$. Two nodes A_i and A_j can communicate with each other if and only if the distance between two nodes ρ_{ij} is less than the sensing/communication range ρ_s . If there is a directed edge from A_i to A_j , A_i is defined as the parent node and A_j is defined as the child node. A directed path in graph $\mathcal{G}_n$ is a sequence of edges $(A_1, A_2), (A_2, A_3), \dots, (A_{q-1}, A_q)$ where $q \leq n$. Graph $\mathcal{G}_n$ is called strongly connected if there is a directed path from A_i to A_j and A_j to A_i between pairs of distinct nodes A_i and A_j , $\forall (i, j) \in I$. A directed tree is a directed graph, where every node, except the root, has exactly one parent. A spanning tree of a directed graph is a directed tree formed by graph edges that connect all the nodes of the graph. We say that, a graph has (or contains) a spanning tree if a subset of the edges forms a spanning tree. Adjacency matrix for a directed graph $\mathcal{G}_n$ is defined as $A = [a_{ij}] \in \mathbb{R}^{n \times n}$, where $a_{ij} = 1$, $i \neq j$, $\forall (i, j) \in I$, if $\rho_{ij} < \rho_s$ and $a_{ij} = 0$ otherwise. Laplacian of a directed graph $\mathcal{G}_n$ is defined as $L_n = [l_{ij}] \in \mathbb{R}^{n \times n}$

$$l_{ij} = \begin{cases} \sum_{j=1}^n a_{ij}, & \text{if } i = j \\ -a_{ij}, & \text{if } i \neq j \end{cases} \quad (1)$$

The objective of n UAVs is to encircle a target A_t as shown in Figure. 1. In rest of the paper, we use target and evader interchangeably. The communication and sensing topology among n UAVs and between UAVs and evader can be modelled by a directed graph $\mathcal{G}_{n+1}$. In directed graph $\mathcal{G}_{n+1}$ the first n nodes represent n UAVs and $(n+1)^{th}$ represents an evader. A directed edge from A_t and A_i , denoted by (A_t, A_i) , represents a unidirectional information exchange link from A_i to A_t ; that is, agent j can receive or obtain information from evader A_t , $i \in I$. However, the evader does not receive any information from any UAV node A_i , and

therefore, $a_{it} = 1$ and $a_{ti} = 0$ in the adjacency matrix of the directed graph G_{n+1} . We can write the Laplacian matrix L_{n+1} for the directed graph $\mathcal{G}_{n+1}$ as

$$L_{n+1} = \begin{bmatrix} L_n + B & -b \\ 0_{1 \times n} & 0 \end{bmatrix} \quad (2)$$

where $B \triangleq [b_{ij}] \in \mathbb{R}^{n \times n}$, $b_{ij} = \begin{cases} a_{it}, & \text{if } i = j \\ 0, & \text{otherwise} \end{cases}$, and $b = [a_{1t}, \dots, a_{nt}]^\top$.

Lemma 1 *Rank of matrix $L_n + B$ is n if and only if $\mathcal{G}_{n+1}$ has a directed spanning tree.*

Proof From (2) we can write

$$\text{rank}(L_{n+1}) = \text{rank}(L_n + B) = \text{rank}([L_n + B | -b]),$$

and therefore, $\text{rank}(L_n + B) = n$, if and only if $\mathcal{G}_{n+1}$ has a spanning tree. ■

Remark 1 In this paper UAVs communicate their position, orientation, and control inputs (velocity and acceleration) with their neighboring UAVs. Therefore unless specified, information will mean position, orientation, and control inputs (velocity and acceleration).

In this paper, we assume that all UAVs and the evader fly at a constant altitude. The equations of the motion of the i^{th} UAV flying at a constant altitude are

$$\dot{r}_i = \begin{bmatrix} v_i \cos \psi_i \\ v_i \sin \psi_i \end{bmatrix} \quad (3)$$

$$\begin{aligned} \ddot{r}_i &= M_i u_i \\ &= \begin{bmatrix} \cos \psi_i & -v_i \sin \psi_i \\ \sin \psi_i & v_i \cos \psi_i \end{bmatrix} \begin{bmatrix} a_i \\ \omega_i \end{bmatrix} \end{aligned} \quad (4)$$

where $r_i = [x_i \ y_i]^T$ is position vector, v_i is airspeed, ψ_i is heading angle, u_i is the control vector, a_i is acceleration, and ω_i is turn rate.

In a target-centric formation each UAV should maintain a constant distance ξ from the target at a constant angle α_i such that $\alpha_{i+1} - \alpha_i = \frac{2\pi}{n}$. To maintain target-centric formation, the following objective should satisfy

$$r_i(t) - r_t(t) \rightarrow R_i, \quad \dot{r}_i(t) \rightarrow \dot{r}_t(t), \quad \forall i \in I, \quad (5)$$

where $R_i = \xi \begin{bmatrix} \cos \alpha_i \\ \sin \alpha_i \end{bmatrix}$. In order to satisfy the above control objective, we assume that the velocity of each UAV and the evader have upper and lower bounds, i.e., $v_{min} < v_i \leq v_{max}$, $\forall i \in I$ and $v_{min} < v_t \leq v_{max}$.

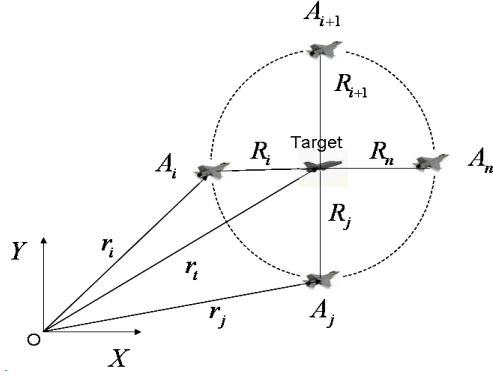


Fig. 1 Desired formation around the target. UAVs have to fly in formation with the target at relative distance $R_i = r_i - r_t = \xi[\cos \alpha_i \quad \sin \alpha_i]^T$. Angle of formation is $\alpha_i = \frac{2\pi i}{n}$, $i = 0, \dots, n-1$.

3 Target-centric formation controller

In this section, we detail control strategies to maintain a target-centric formation for two different cases. First, we derive a controller to maintain target-centric formation without any uncertainty in target motion. Secondly, we derive a target-centric controller using consensus and sliding mode control taking account of target motion uncertainty.

Remark 2 In this paper by incomplete information means that the exact target motion is not known but only the upper and lower bounds are known. We develop a controller which converges to a circular formation around a target if only upper bounds on the target inputs are available to UAVs.

3.1 Target-centric formation controller without evader motion uncertainty

Given the evader state information with no uncertainty, we propose the following evader-centric formation strategy:

$$u_i = M_i^{-1} \frac{1}{\sum_{j \in I} a_{ij} + a_{it}} \left(\sum_{j \in I} a_{ij} [\ddot{r}_j - (\dot{r}_i - \dot{r}_j) - \{\hat{r}_i - \hat{r}_j\}] \right) + M_i^{-1} \frac{1}{\sum_{j \in I} a_{ij} + a_{it}} (a_{it} [\ddot{r}_t - (\dot{r}_i - \dot{r}_t) - k_p \{\hat{r}_i - r_t\}]). \quad (6)$$

where $\hat{r}_i = r_i - R_i$. This controller combines consensus protocol and target tracking information. The following theorem proves that the controller in (6) forms a target-centric formation given that at least one UAV can sense the target, and the communication network among UAVs is connected.

Theorem 1 Let each UAV in the group, with equation of motion given in (3), has the control vector as in (6). As $t \rightarrow \infty$, $r_i - r_t \rightarrow R_i$ and $\dot{r}_i \rightarrow \dot{r}_t$, $\forall i \in I$, if and only if the graph G_{n+1} has a spanning tree.

Proof Let $r \triangleq [r_1^\top, \dots, r_n^\top]^\top$ be the combined position vector of all UAVs in the group. Similarly, we define $\dot{r} \triangleq [\dot{r}_1^\top, \dots, \dot{r}_n^\top]^\top$ and $\ddot{r} \triangleq [\ddot{r}_1^\top, \dots, \ddot{r}_n^\top]^\top$. Using (6) we can write

$$\begin{aligned} [(L_n + B) \otimes \mathbf{I}_2] \ddot{r} = & -[L_n \otimes \mathbf{I}_2] \dot{r} - [L_n \otimes \mathbf{I}_2] \hat{r} - [B \otimes \mathbf{I}_2] (\dot{r} - [\mathbf{1} \otimes I_2] r_t) \\ & - [B \otimes \mathbf{I}_2] (\hat{r} - [\mathbf{1} \otimes I_2] r_t) + [B \otimes \mathbf{I}_2] [\mathbf{1} \otimes I_2] r_t, \end{aligned} \quad (7)$$

where $\hat{r} = r - R$ and $R = [R_1^\top, \dots, R_n^\top]^\top$. We use property of the Laplacian matrix, $(L_n + B)\mathbf{1} = B\mathbf{1}$, and write

$$\begin{aligned} [(L_n + B) \otimes \mathbf{I}_2] (\ddot{r} - [\mathbf{1} \otimes I_2] r_t) = & -[(L_n + B) \otimes \mathbf{I}_2] (\dot{r} - [\mathbf{1} \otimes I_2] \dot{r}_t) \\ & - [(L_n + B) \otimes \mathbf{I}_2] (\hat{r} - [\mathbf{1} \otimes I_2] r_t) \end{aligned} \quad (8)$$

An unique solution of $\ddot{r}$ exists if and only if matrix $(L_n + B)$ is invertible, and from Lemma 1 matrix $(L_n + B)$ is invertible if and only if the $\mathcal{G}_{n+1}$ has a spanning tree. If matrix $(L_n + B)$ is invertible we can multiply $(L_n + B)^{-1}$ both sides of (8) and write

$$\ddot{r} - [\mathbf{1} \otimes I_2] r_t = -(\dot{r} - [\mathbf{1} \otimes I_2] \dot{r}_t) - (\hat{r} - [\mathbf{1} \otimes I_2] r_t), \quad (9)$$

and we can say that as $t \rightarrow \infty$, $r_i - r_t \rightarrow R_i$ and $\dot{r}_i \rightarrow \dot{r}_t$, $\forall i \in I$, if and only if the graph G_{n+1} has a spanning tree. ■

3.2 Target-centric formation controller with evader motion uncertainty

In the previous subsection, the controller needs exact information of the target to maintain a target-centric formation. In the presence of target uncertainty, followers vehicles may not be able to maintain the formation, especially when the target is executing evasive maneuvers. To tackle this issue, we use a sliding mode target tracking approach which compensates for uncertainty in target information and combined it with a consensus protocol to develop a robust target capturing strategy. Using the sliding mode control a target can be tracked if an upper bound on the target input is known. For the given upper bound of target input, we propose the following evader-centric formation strategy, which takes into account uncertainty of the target motion.

$$u_i = M_i^{-1} \frac{1}{n_i} \left\{ \sum_{j \in I} a_{ij} [\ddot{r}_j - (\dot{r}_i - \dot{r}_j) - k_p(\hat{r}_i - \hat{r}_j)] - a_{it} P_i \sigma(s_i, \epsilon) \right\} \quad (10)$$

where $P_i = \text{diag}(\varphi(\dot{r}_i - \dot{r}_t)) + (\ddot{r}_{tmax} + \beta_0)\mathbf{I}_2$, $n_i = (\sum_{j \in I} a_{ij} + a_{it})$, $s_i = \dot{r}_i - \dot{r}_t + (\hat{r}_i - r_t)$, $\beta_0 > 0$, and $\ddot{r}_{tmax} = \begin{bmatrix} \ddot{r}_{tx} \\ \ddot{r}_{ty} \end{bmatrix}$.

$$\sigma \left(\begin{bmatrix} x_1 \\ x_2 \end{bmatrix}, \epsilon \right) = \begin{bmatrix} \text{sat}(\frac{x_1}{\epsilon}) \\ \text{sat}(\frac{x_2}{\epsilon}) \end{bmatrix} \quad (11)$$

$$\varphi \left(\begin{bmatrix} x_1 \\ x_2 \end{bmatrix} \right) = \begin{bmatrix} |x_1| \\ |x_2| \end{bmatrix} \quad (12)$$

where, $\text{sat}(\frac{s}{\epsilon}) = \begin{cases} s, & \text{if } |s| < \epsilon > 0 \\ \text{sign}(s), & \text{otherwise} \end{cases}$.

$$[(L_n + B) \otimes I_2]\ddot{r} = -[L_n \otimes I_2]\dot{r} - [L_n \otimes I_2]\hat{r} - [B \otimes I_2]P\Sigma \quad (13)$$

where $P = \begin{pmatrix} P_1 & \dots & 0_{2 \times 2} \\ \vdots & \ddots & \vdots \\ 0_{2 \times 2} & \dots & P_n \end{pmatrix}$ and $\Sigma = [\sigma^\top(s_1, \epsilon) \dots \sigma^\top(s_n, \epsilon)]^\top$.

The following theorem proves that the controller in (10) maintains a target-centric formation in presence of target motion uncertainty; given that the upper bound on target input is known, the communication graph of UAVs is connected, and at least one of the UAVs have target information.

Theorem 2 *If each UAV in the group, with equation of motion given in (3), has the control vector as in (10) then as $t \rightarrow \infty$, $r_i - r_t \rightarrow R_i$ and $\dot{r}_i \rightarrow \dot{r}_t$, $\forall i \in I$, if and only if the graph G_{n+1} has a spanning tree.*

Proof we choose a Lyapunov candidate function as,

$$V = \frac{1}{2}\bar{r}^\top (L_n \otimes I_2)\bar{r} + \frac{1}{2}S^\top ((L_n + B) \otimes I_2)S \quad (14)$$

where $S = [s_1^\top, \dots, s_n^\top]^\top$ and $\bar{r} = \hat{r} - [\mathbf{1} \otimes I_2]r_t$. The time derivative of the Lyapunov function V along the trajectories satisfies

$$\begin{aligned} \dot{V} &= (\hat{r} - [\mathbf{1} \otimes I_2]r_t)^\top [L_n \otimes I_2]\dot{\hat{r}} + S^\top \{[(L_n + B) \otimes I_2]\dot{S} \\ &= \bar{r}^\top [L_n \otimes I_2](\dot{\hat{r}} - S) + S^\top \{[(L_n + B) \otimes I_2]\dot{\hat{r}} - [(L_n + B) \otimes I_2][\mathbf{1} \otimes I_2]\ddot{r}_t \\ &+ [(L_n + B) \otimes I_2]\dot{r} - [(L_n + B) \otimes I_2][\mathbf{1} \otimes I_2]\dot{r}_t\} \\ &= -\bar{r}^\top [L_n \otimes I_2]\bar{r} + S^\top \{[L_n \otimes I_2]\hat{r} + [(L_n + B) \otimes I_2]\ddot{r} - [(L_n + B) \otimes I_2][\mathbf{1} \otimes I_2]\ddot{r}_t \\ &+ [(L_n + B) \otimes I_2]\dot{r} - [(L_n + B) \otimes I_2][\mathbf{1} \otimes I_2]\dot{r}_t\} \\ &= -\bar{r}^\top [L_n \otimes I_2]\bar{r} + S^\top \{[L_n \otimes I_2]\hat{r} + [(L_n + B) \otimes I_2]\ddot{r} - [B \otimes I_2][\mathbf{1} \otimes I_2]\ddot{r}_t \\ &+ [(L_n + B) \otimes I_2]\dot{r} - [B \otimes I_2][\mathbf{1} \otimes I_2]\dot{r}_t\}. \end{aligned}$$

Substituting the expression of $[(L_n + B) \otimes I_2]\ddot{r}$ from (13) we get

$$\begin{aligned} \dot{V} &= -\bar{r}^\top [L_n \otimes I_2]\bar{r} + S^\top \{[L_n \otimes I_2]\hat{r} - [L_n \otimes I_2]\dot{r} - [L_n \otimes I_2]\hat{r} - [B \otimes I_2]P\Sigma \\ &- [B \otimes I_2][\mathbf{1} \otimes I_2]\ddot{r}_t + [(L_n + B) \otimes I_2]\dot{r} - [B \otimes I_2][\mathbf{1} \otimes I_2]\dot{r}_t\}, \\ &= -\bar{r}^\top [L_n \otimes I_2]\bar{r} + S^\top \{-[B \otimes I_2]P\Sigma - [B \otimes I_2][\mathbf{1} \otimes I_2]\ddot{r}_t \\ &+ [B \otimes I_2](\dot{r} - [\mathbf{1} \otimes I_2]\dot{r}_t)\}. \end{aligned}$$

Now we use inequality $S^\top [B \otimes I_2]P\Sigma - S^\top [B \otimes I_2](\dot{r} - [\mathbf{1} \otimes I_2]\dot{r}_t) > \beta_0 S^\top [B \otimes I_2]\Sigma$. Therefore, we can write

$$\dot{V} \leq -\bar{r}^\top [L_n \otimes I_2]\bar{r} - \beta_0 S^\top [B \otimes I_2]\Sigma, \quad [B \otimes I_2]\bar{S} > [B \otimes I_2][\mathbf{1} \otimes I_2]\epsilon. \quad (15)$$

If G_{n+1} has a spanning tree then we can write the above inequality as,

$$\dot{V} \leq -\bar{r}^\top [L_n \otimes I_2]\bar{r} - \beta_0 \sum_{i \in I} b_{ii}\varphi(s_i) < 0, \quad s_i > \epsilon, \quad \forall i \in I \quad (16)$$

and therefore, as $t \rightarrow \infty$, $r_i - r_t \rightarrow R_i$ and $\dot{r}_i \rightarrow \dot{r}_t$, $\forall i \in I$. ■

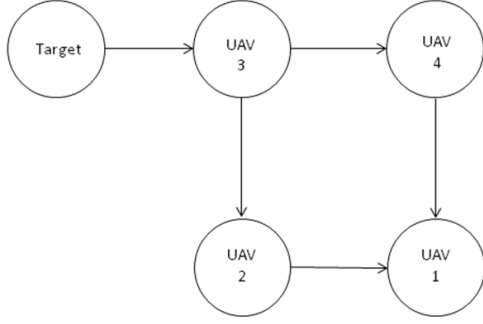


Fig. 2 Information exchange topology graph including the target

4 Numerical results

In this section, we present simulation studies to demonstrate the performance of the proposed distributed control laws to capture a target. Consider a team of fixed wing-UAVs attempting to capture a sinusoidally maneuvering target. The simulation parameters are

- Speed constraint of an UAV ($v_{min} = 5m/s, v_{max} = 25m/sec$).
- Desired distance from the target = $50\ m$.
- Desired angle from the target ($\alpha_i = \frac{2\pi i}{3}$).

The limit on the UAV speed represent physical constraints on UAVs. We assume that the target is executing a sinusoidal manoeuvre. This is because many complex maneuvers can be represented by a series of sinusoidal maneuver. The target vehicle applies input $U = [0\ 0.5 \sin(\frac{2\pi}{50}t)]^T$ to execute such a maneuver from point $(0, 0)$ with airspeed of $10\ m/sec$ and initial heading of 0° .

The performance of the target-capturing cooperative strategies are demonstrated using the following example scenarios. The first example considers a target capturing problem with no uncertainty. However, it is assumed that at least one of UAVs in the group has complete target information and the graph including the target has a directed spanning tree. In the second example, assumption of complete information is relaxed and the performance is verified.

Table 1 Initial conditions

UAV ID	x	y	v	ψ
1	50	50	8	0
2	-50	50	8.5	$\frac{\pi}{4}$
3	-50	-50	9	$\frac{\pi}{2}$
4	50	-50	9.5	$\frac{3\pi}{4}$

4.1 Target-capturing with complete target information

In this section, we check the performance of cooperative strategy for target-capturing using the control law proposed in (6). The simulation is set up for four follower UAVs to capture a target. The initial conditions of follower UAVs are given in Table 1. The information exchange topology is shown in Figure 2 with $a_{ij} = 1$ if there is an information flow from j^{th} UAV to i^{th} UAV, otherwise $a_{ij} = 0$. We assume that only UAV 3 has complete target information. The Laplacian matrices of the graphs, excluding the target (denote as L_n) and including the target (denoted as L_{n+1}) are given by

$$L_n = \begin{bmatrix} 2 & -1 & 0 & -1 \\ 0 & 1 & -1 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & -1 & 1 \end{bmatrix}, L_{n+1} = \begin{bmatrix} 2 & -1 & 0 & -1 \\ 0 & 1 & -1 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & -1 & 1 \end{bmatrix}$$

The rank of L_n is three, whereas the rank of L_{n+1} is four. The full rank of matrix L_{n+1} satisfies the condition of target-capturing in Lemma 1. As the topology of the UAVs has a directed spanning tree and the root of the graph has access to the target, the condition of target-capturing is met, as evaluated by the rank of L_{n+1} (which is full rank). It can also be observed from Figure 2 that all the UAVs get information of the target through UAV 3. For example, UAV 1 gets information of the target through UAV 2. Note that here we do not mean that the target information is passing through the link as it does in a communication link.

As mentioned before, the target is maneuvering in a sinusoidal manner with a given initial condition. The objective is to maintain target centric formation which can be ensured by satisfying the control objective stated in (5). This is achieved by employing the distributed control law as in (6).

Figure 3 depicts the target and UAV trajectories around the target. The formation geometry is plotted in Figure 3 at five instances in magenta colour. It can be observed that the initial formation does not satisfy the target-capturing conditions. Then, the cooperative strategy drives each UAV such that the desired separation at the given orientation with the target is maintained. The formation geometry at the second instance in Figure 3 shows the desired formation around the target. It can be further noted that the formation geometry is maintained throughout the mission. The associated formation error for each UAV is shown in Figure 4. As the follower UAVs start from random positions, there is a relatively large formation error at the beginning. The formation error for each UAV quickly settles to zero which results in the desired formation around the target. The speed and heading convergence are shown in Figure 5. Each UAV attains the same speed and heading with respect to the target and maintains these for all time. This means that they reach a consensus using the distributed law. Figure 6 shows the target centred trajectory for each UAV. It can be noted that each UAV maintains the desired separation at the given orientation to capture the target.

4.2 Target-capturing with incomplete target information

In the previous section, we assume that complete target information was available to each one of the UAVs to achieve the target centred formation. Now, we relax this

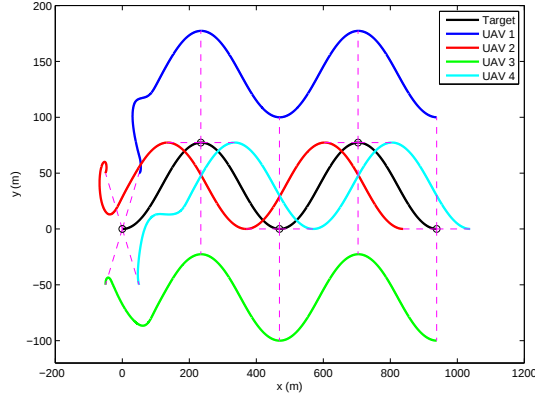


Fig. 3 Trajectory of the UAVs while maintaining a constant separation with the target

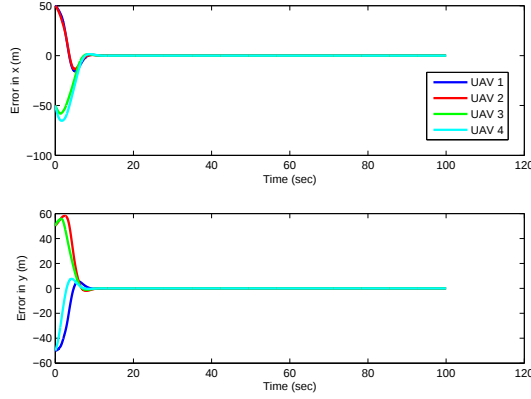


Fig. 4 Tracking errors

assumption and assume that the followers UAVs do not have complete access to the target input; instead, it has a bound on the target input (in this example only UAV 3). To capture the target, we employ the robust distributed control law proposed in (10), which is a combination of a linear policy (a dynamic inversion approach) and a nonlinear policy (sliding mode control). We perform simulations with the same initial conditions (both for the target and UAVs) and information exchange topology as considered in the previous section. Figure 7 shows trajectories of the target and follower UAVs around the target. The dashed magenta lines show the formation geometry around the target. UAVs start with a random formation and achieve the desired formation quickly. The formation tracking error for each UAV is shown in Figure 8. It can be observed again that the formation errors settle to zero in time similar to that in the previous example. The speed and heading convergence are shown in Figure 9. The convergence in this case confirms that all UAVs arrive at a consensus quickly using the robust distributed control law (10). The target centred formation is depicted in the polar plot in Figure 10. It can

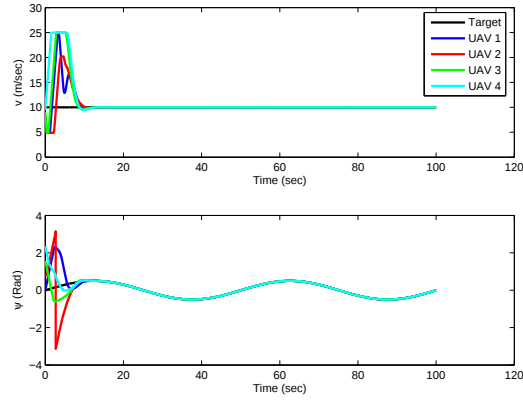


Fig. 5 Velocity and heading convergence




Fig. 6 Target centric trajectory in polar coordinates

be observed again that each vehicle maintains the desired separation at the given orientation to capture the target.

5 Conclusions and future work

In this paper, we developed a distributive controller for multiple UAVs to make a formation around a maneuvering target. We used consensus and sliding mode control theory to take into account uncertainty in target motion. We have shown both analytically and by simulations that UAVs can maintain a circular formation around the target if there exists a spanning tree in the communication graph with target as the root node and only upper bounds on target inputs (target velocity and acceleration) is available to the UAVs.

Although results presented in this paper show the advantage of using consensus and sliding mode control to form a formation around a maneuvering target without knowledge of exact target inputs, there are several important future directions

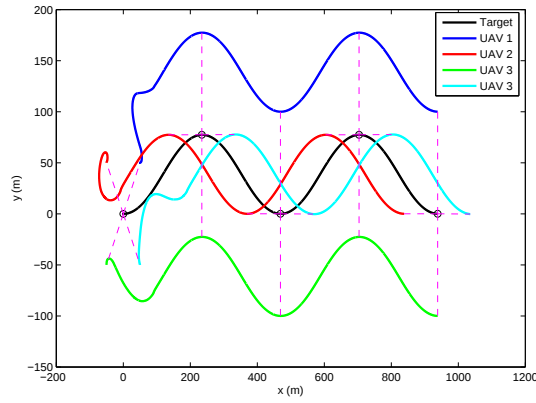


Fig. 7 Trajectory of the UAVs while maintaining a constant separation with the target

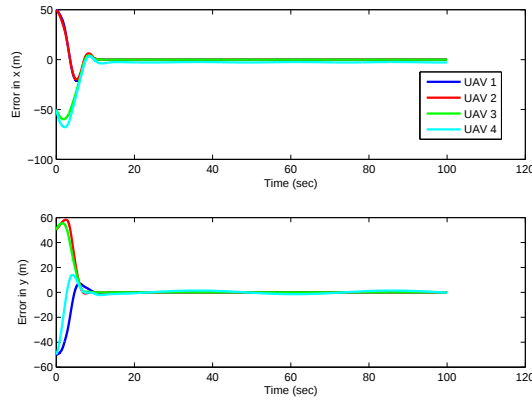


Fig. 8 Tracking errors

which need attention. First it is important to analyze the controller behavior in 3D and analyze the effect of delays in the information caused by communication lags and uncertainty in UAVs state as well. Finally, we plan to validate these results in real flight tests.

References

1. G. Wei and S. Sen, "Adaption and learning in multi-agent systems," *Lecture Notes in Computer Science 1042* (Springer, Berlin), 1995.
2. R. W. Beard, T. W. McLain, D. B. Nelson, D. Kingston, and D. Johanson, "Decentralized cooperative aerial surveillance using fixed-wing miniature uavs," vol. 94, no. 7, pp. 1306–1324, 2006.
3. A. E. Gil, K. M. Passino, and J. B. Cruz, "Stable cooperative surveillance with information flow constraints," vol. 16, no. 5, pp. 856–868, 2008.

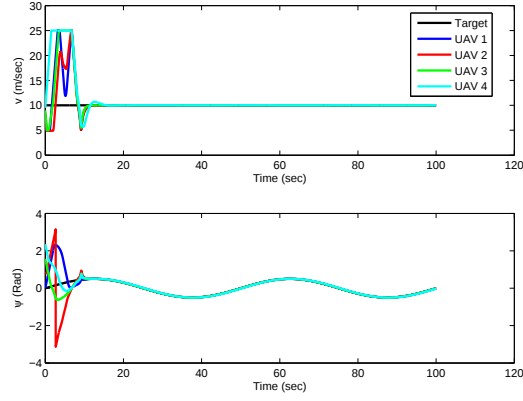


Fig. 9 Velocity and heading convergence




Fig. 10 Target centric trajectory in polar coordinates

4. R. W. Beard and T. W. McLain, "Multiple uav cooperative search under collision avoidance and limited range communication constraints," in *Proc. 42nd IEEE Conf. Decision and Control*, vol. 1, 2003, pp. 25–30.
5. J. S. Jennings, G. Whelan, and W. F. Evans, "Cooperative search and rescue with a team of mobile robots," in *Proc. Conf. th Int Advanced Robotics ICAR '97*, 1997, pp. 193–200.
6. D. W. Casbeer, R. W. Beard, T. W. McLain, S.-M. Li, and R. K. Mehra, "Forest fire monitoring with multiple small uavs," in *Proc. American Control Conf the 2005*, 2005, pp. 3530–3535.
7. P. B. Sujit, D. Kingston, and R. Beard, "Cooperative forest fire monitoring using multiple uavs," in *Proc. 46th IEEE Conf. Decision and Control*, 2007, pp. 4875–4880.
8. J. P. Desai, J. Ostrowski, and V. Kumar, "Controlling formations of multiple mobile robots," in *Proceeding of the IEEE International Conference on Robotics and Automation*, 1998.
9. H. Tanner, G. Pappas, and V. Kumar, "Leader-to-formation stability," *Robotics and Automation, IEEE Transactions on*, vol. 20, no. 3, pp. 443–455, 2004.
10. L. Consolini, F. Morbidi, D. Prattichizzo, and M. Tosques, "Leader-follower formation control of nonholonomic mobile robots with input constraints," *Automatica*, vol. 44, no. 5, pp. 1343–1349, 2008.
11. R. Vidal, O. Shakernia, and S. Sastry, "Formation control of nonholonomic mobile robots with omnidirectional visual servoing and motion segmentation," in *Robotics and Automa-*

- tion, 2003. *Proceedings. ICRA'03. IEEE International Conference on*, vol. 1. IEEE, 2003, pp. 584–589.
12. J. Shao, G. Xie, J. Yu, and L. Wang, “Leader-following formation control of multiple mobile robots,” in *Intelligent Control, 2005. Proceedings of the 2005 IEEE International Symposium on, Mediterrean Conference on Control and Automation*. IEEE, 2005, pp. 808–813.
 13. W. Ren and R. W. Beard, “A decentralized scheme for spacecraft formation flying via the virtual structure approach,” in *Proceeding of the IEEE American Control Conference*, vol. 2, June 4–6, 2003, pp. 1746–1751.
 14. K.-H. Tan and M. A. Lewis, “Virtual structures for high-precision cooperative mobile robotic control,” in *Proceeding of the IEEE/RSJ International Conference on Intelligent Robots and Systems*, 1996.
 15. M. Lewis and K. Tan, “High precision formation control of mobile robots using virtual structures,” *Autonomous Robots*, vol. 4, no. 4, pp. 387–403, 1997.
 16. E. Lalish, K. Morgansen, and T. Tsukamaki, “Formation tracking control using virtual structures and deconfliction,” in *Decision and Control, 2006 45th IEEE Conference on*. IEEE, 2006, pp. 5699–5705.
 17. T. Balch and R. C. Arkin, “Behavior-based formation control for multirobot teams,” *IEEE Transactions on Robotics and Automation*, vol. 14, no. 6, pp. 926–939, Dec. 1999.
 18. S. Monteiro and E. Bicho, “A dynamical systems approach to behavior-based formation control,” in *Robotics and Automation, 2002. Proceedings. ICRA'02. IEEE International Conference on*, vol. 3. IEEE, 2002, pp. 2606–2611.
 19. Y. Q. Chen and Z. Wang, “Formation control: a review and a new consideration,” in *Proceedings of IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS 2005)*, 2–6 Aug. 2005, pp. 3181–3186.
 20. T. H. Kim and T. Sugie, “Cooperative control for target-capturing task based on a cyclic pursuit strategy,” *Automatica*, vol. 43, pp. 1426–1431, 2007.
 21. A. Jadbabaie., J. Lin, and A. S. Morse, “Correction to ”coordination of groups of mobile autonomous agents using nearest neighbor rules”,” *IEEE Transactions on Automatic Control*, vol. 48, no. 9, pp. 1675–1675, Sept. 2003.
 22. W. Ren and R. W. Beard, “Consensus seeking in multiagent systems under dynamically changing interaction topologies,” vol. 50, no. 5, pp. 655–661, 2005.
 23. R. Olfati-Saber, J. A. Fax, and R. M. Murray, “Consensus and cooperation in networked multi-agent systems,” *Proceedings of the IEEE*, vol. 95, no. 1, pp. 215–233, Jan. 2007.
 24. W. Ren, “Second-order consensus algorithm with extensions to switching topologies and reference models,” in *Proceeding of the IEEE American Control Conference*, 9–13 July 2007, pp. 1431–1436.
 25. H. Kawakami and T. Namerikawa, “Cooperative target-capturing strategy for multi-vehicle systems with dynamic network topology,” in *Proceeding of the IEEE American Control Conference*, 2009.
 26. H. K. Khalil, *Nonlinear systems*. Prentice Hall, 2002.