

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) November 2012		2. REPORT TYPE Viewgraph		3. DATES COVERED (From - To) August 2012- November 2012	
4. TITLE AND SUBTITLE Validity of Molecular Tagging Velocimetry in a Cavitating Flow for Turbopump Analysis				5a. CONTRACT NUMBER In-House	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Kayla Kuzmich and Doug Bohl PhD				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER Q09Z	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Air Force Research Laboratory (AFMC) AFRL/RQRC 10 E. Saturn Blvd. Edwards AFB CA 93524-7680				8. PERFORMING ORGANIZATION REPORT NO.	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) Air Force Research Laboratory (AFMC) AFRL/RQR 5 Pollux Drive Edwards AFB CA 93524-7048				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) AFRL-RQ-ED-VG-2012-400	
12. DISTRIBUTION / AVAILABILITY STATEMENT Distribution A: Approved for Public Release; Distribution Unlimited. PA#12957					
13. SUPPLEMENTARY NOTES Viewgraph Presentation for the American Physical Society, San Diego, CA in 18-20 November 2012.					
14. ABSTRACT This research establishes multi-phase molecular tagging velocimetry (MTV) use and explores its limitations. The flow conditions and geometry in the inducer of an upper stage liquid Oxygen (LOX)/LH2 engine frequently cause cavitation which decreases turbopump performance. Complications arise in performing experiments in liquid hydrogen and oxygen due to high costs, high pressures, extremely low fluid temperatures, the presence of cavitation, and associated safety risks. Due to the complex geometry and hazardous nature of the fluids, a simplified throat geometry with water as a simulant fluid is used. Flow characteristics are measured using MTV, a noninvasive flow diagnostic technique. MTV is found to be an applicable tool in cases of low cavitation. Highly cavitating flows reflect and scatter most of the laser beam disallowing penetration into the cavitation cloud. However, data can be obtained in high cavitation cases near the cloud boundary layer.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 19	19a. NAME OF RESPONSIBLE PERSON Nils Sedano
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NO (include area code) 661-275-5972



Validity of Molecular Tagging Velocimetry in a Cavitating Flow for Turbopump Analysis

19 November 2012



Kayla Kuzmich
Doug Bohl, Ph. D.

Clarkson University
Potsdam, NY

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Outline



- **Objectives**
- **Flow diagnostic**
 - Molecular tagging velocimetry
- **Facility and experimental design**
 - Deaeration system
 - Cavitating test section
- **Test points**
- **Results**
- **Conclusions**



Objectives



- **Develop data necessary to calibrate cavitation codes**
- **Explore the application of MTV in two phase flow**
- **Explore the fluid dynamics of the model**



Molecular Tagging Velocimetry (MTV)




- **Whole field, non-intrusive, optical technique**
- **Tracer uniformly mixed with working fluid**
 - Measurements possible everywhere
 - Tagged region imaged twice during life time of tracer
- **Long lived tracer excited (tagged) at proper wavelength**
 - Phosphorescence
 - Quenched by oxygen
- **Velocity is the derivative of the Lagrangian displacement**



Molecular Tagging Velocimetry



- **Triplex - $\tau=3.5\text{ms}$**
 - Bromonaphthalene – Saturated [$\sim 10^{-5}\text{ M}$]
 - Cyclodextrin – [10^{-4} M]
 - Cyclohexanol – [0.055 M]

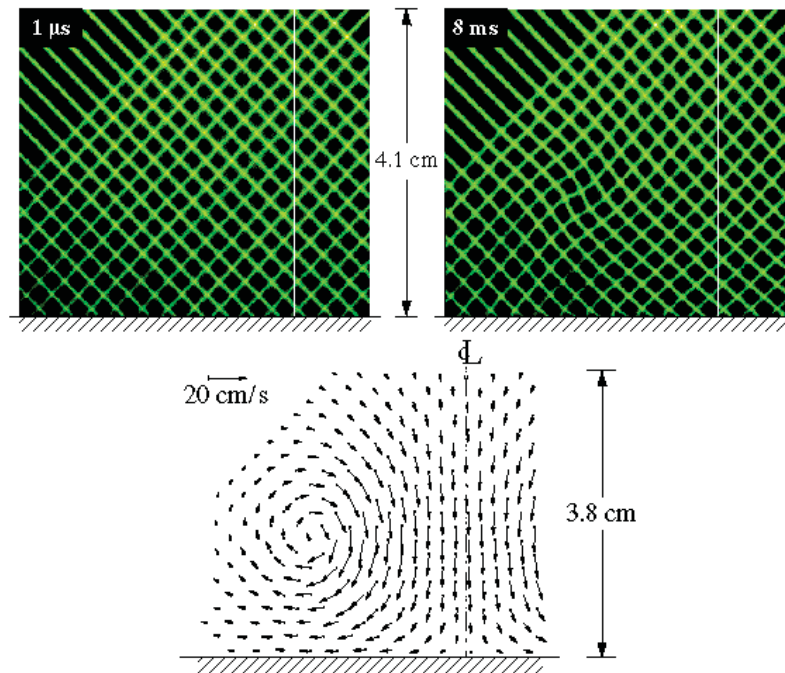

MTV grid at two different times and the resultant velocity field



Facility Design


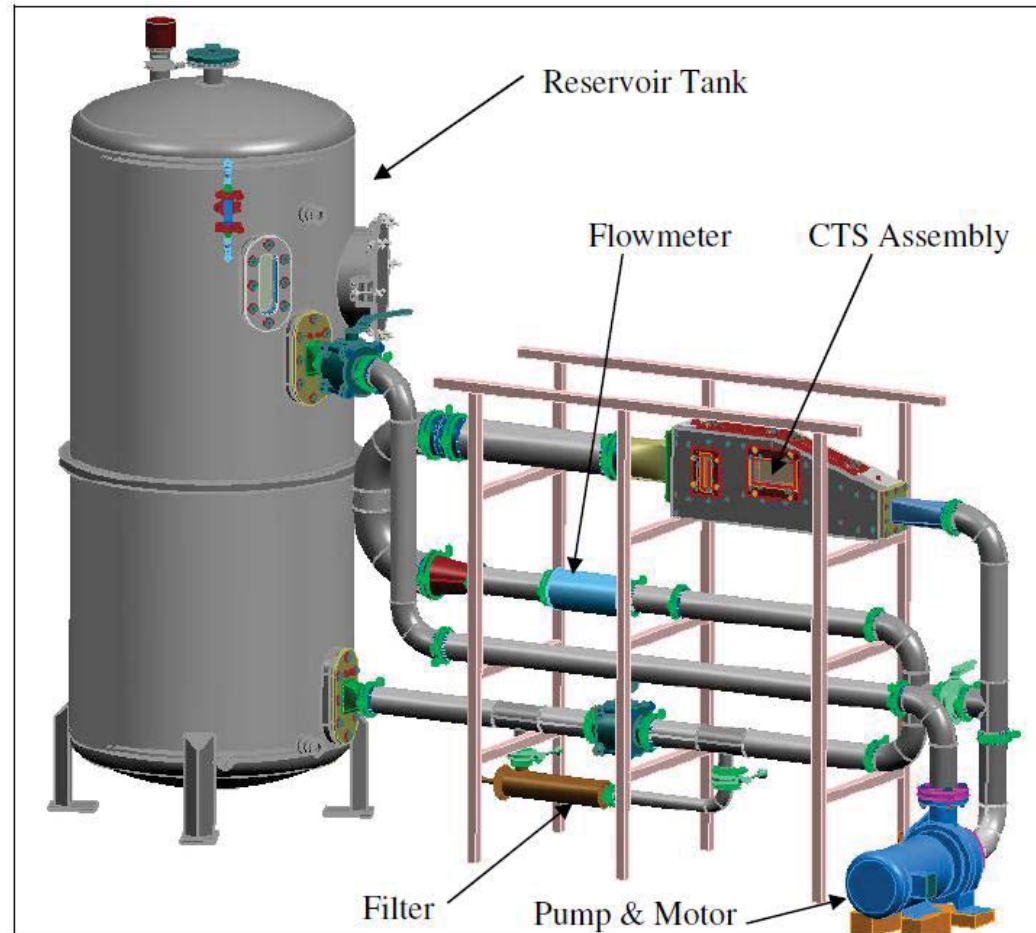


Figure 5: Facility Model



Deaeration System

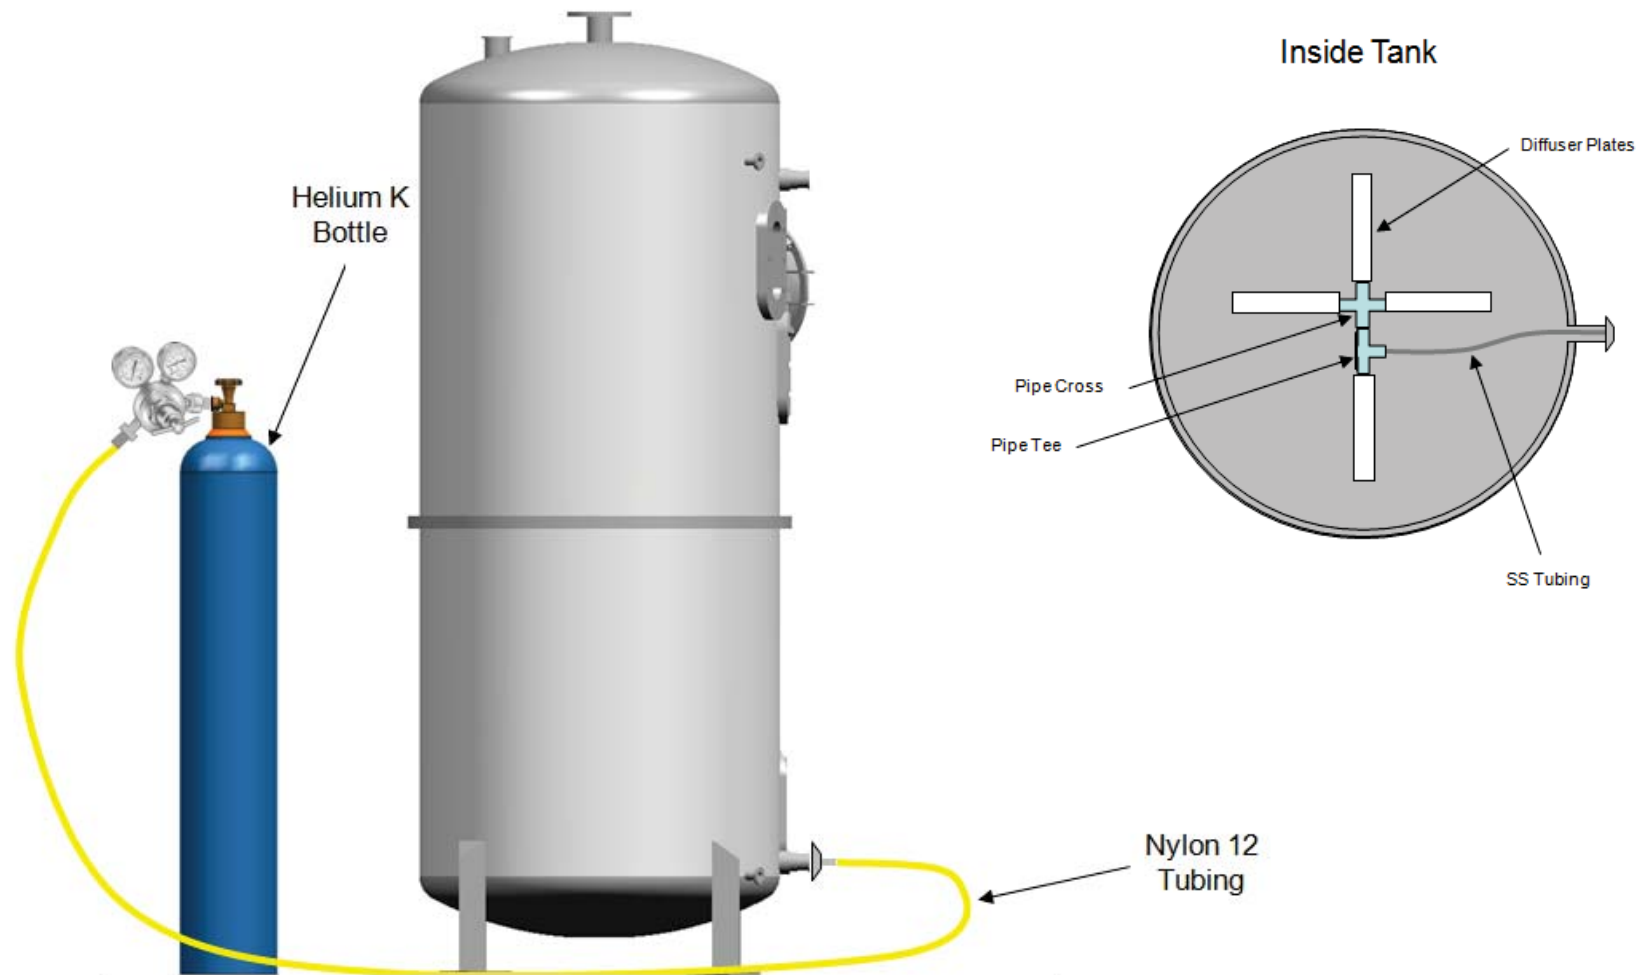


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Cavitating Test Section (CTS)




- 25" long CTS
- Two slits on the top surface
- Black anodized aluminum

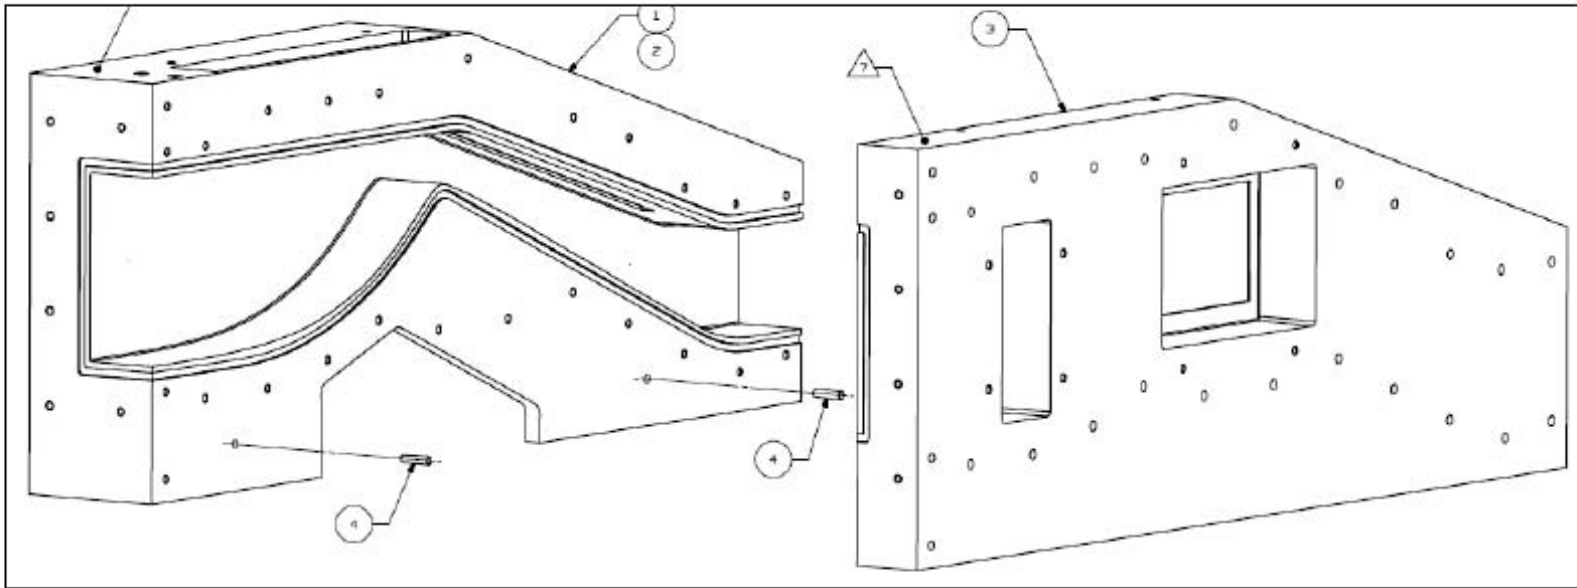

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.




CTS with Laser Grid

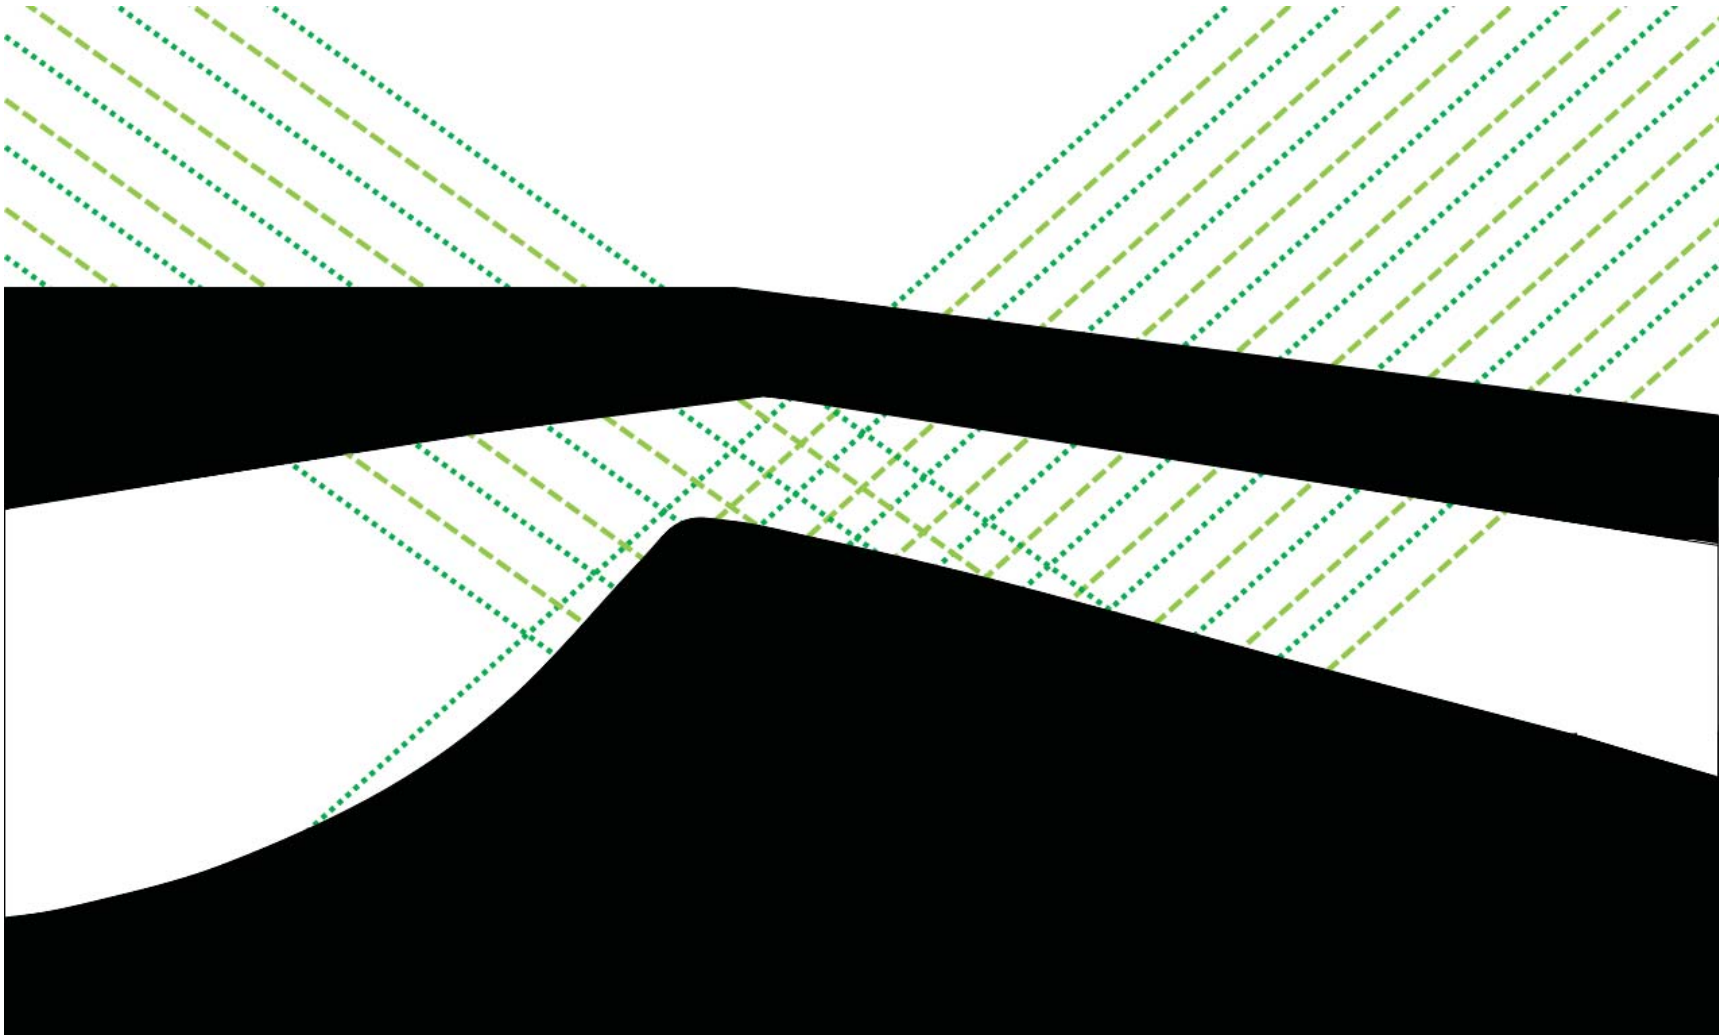

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Experimental Set-up

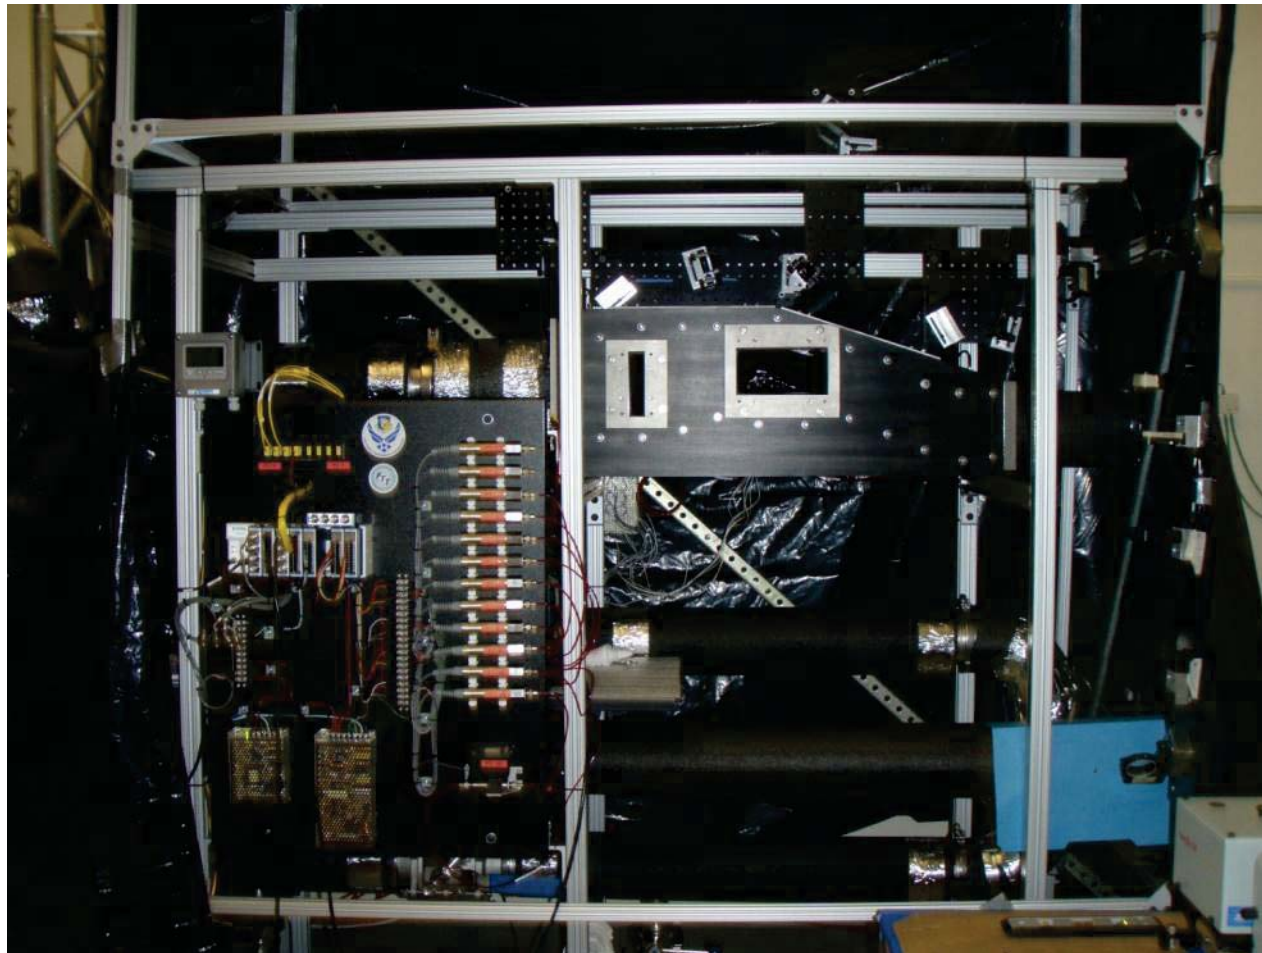

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Experiment






- **20 runs of each test point**
 - Volumetric flow rate
 - Ten offset
- **209 images for each run**
- **Test points**
 - 3 non-cavitating
 - 1 inception of cavitation
 - 3 fully cavitating

Test Point	Flow Rate [gpm]
1.0	326
1.1	354
1.2	377
1.3	388
1.4	398
1.5	409
1.6	430






Non-cavitating (Point 1.2)

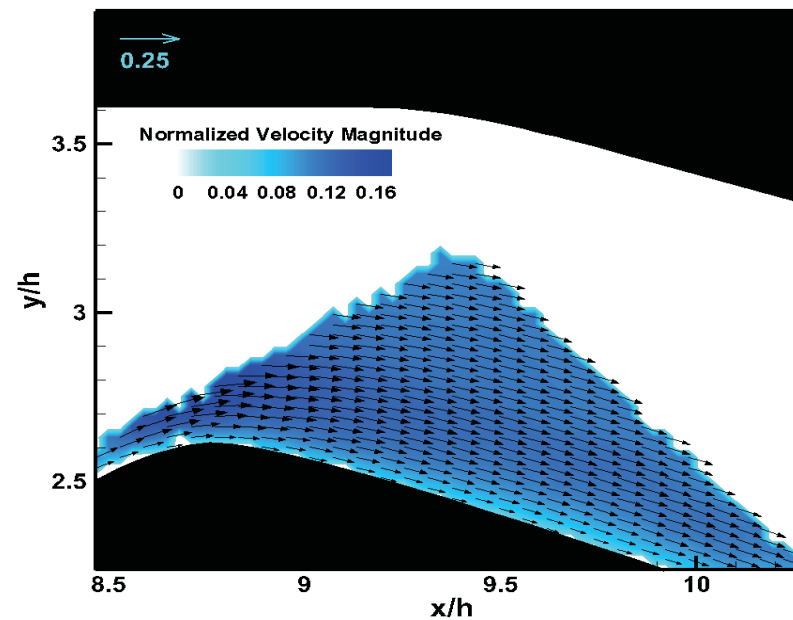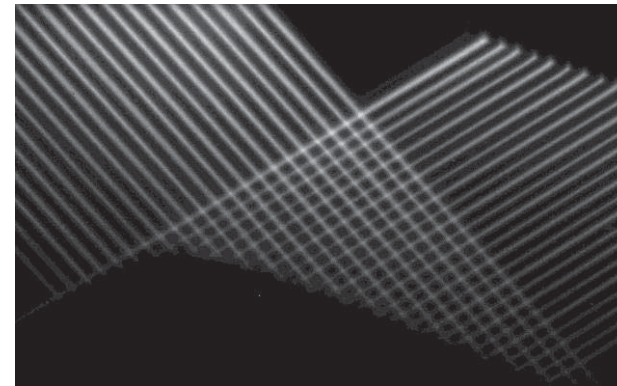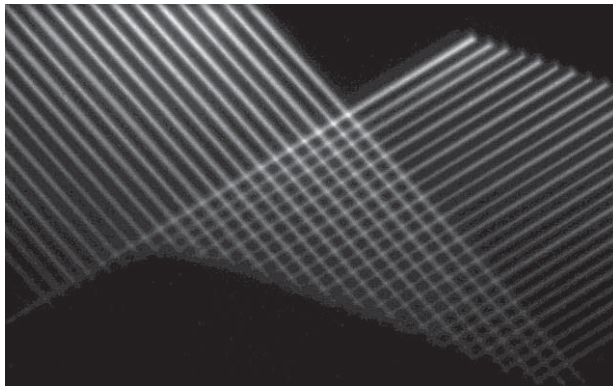

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.






Light Cavitation (Point 1.3)

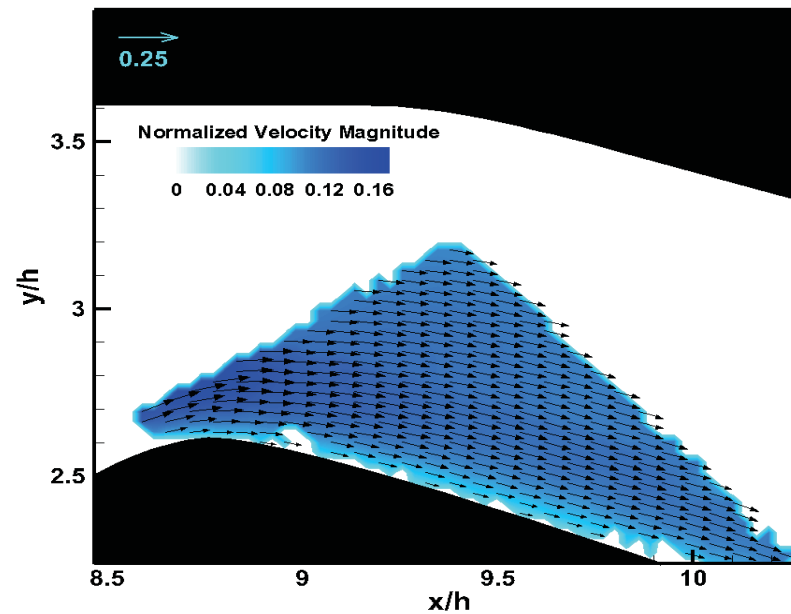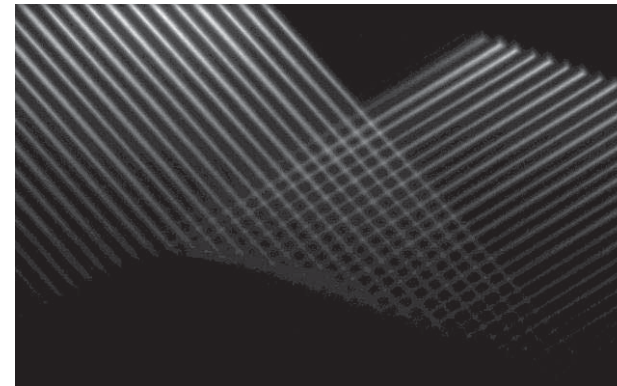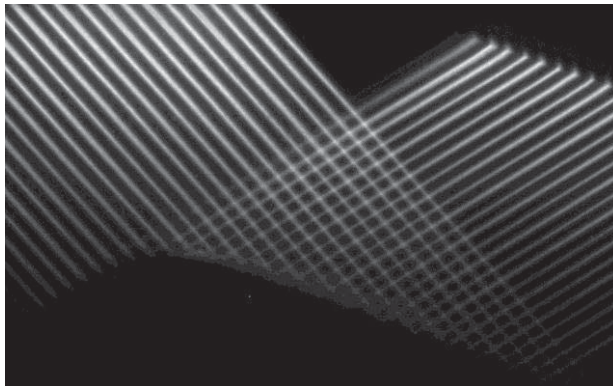

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.






Moderate Cavitation (Point 1.4)

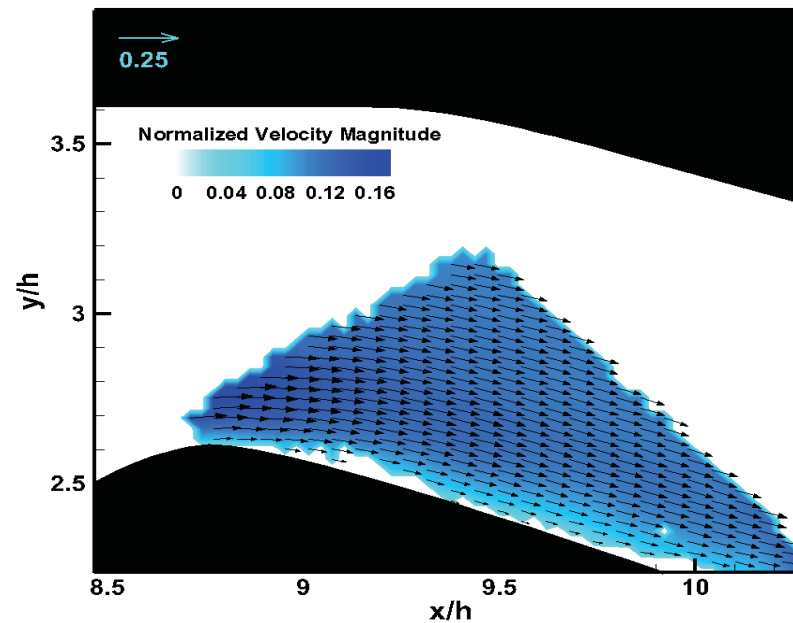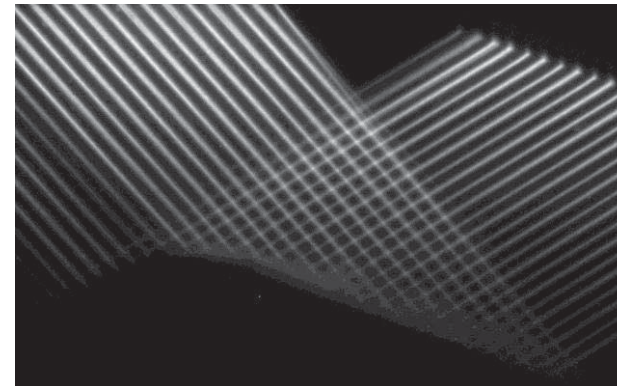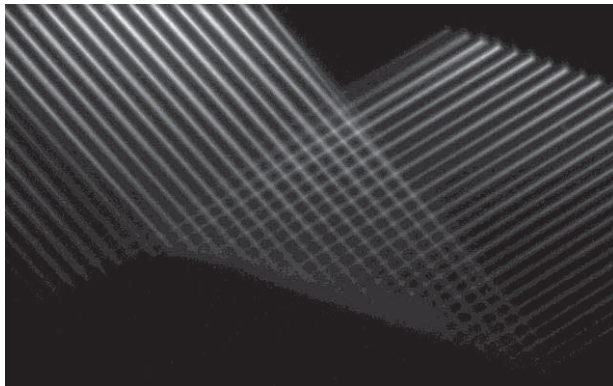

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.




Heavy Cavitation (Point 1.6)

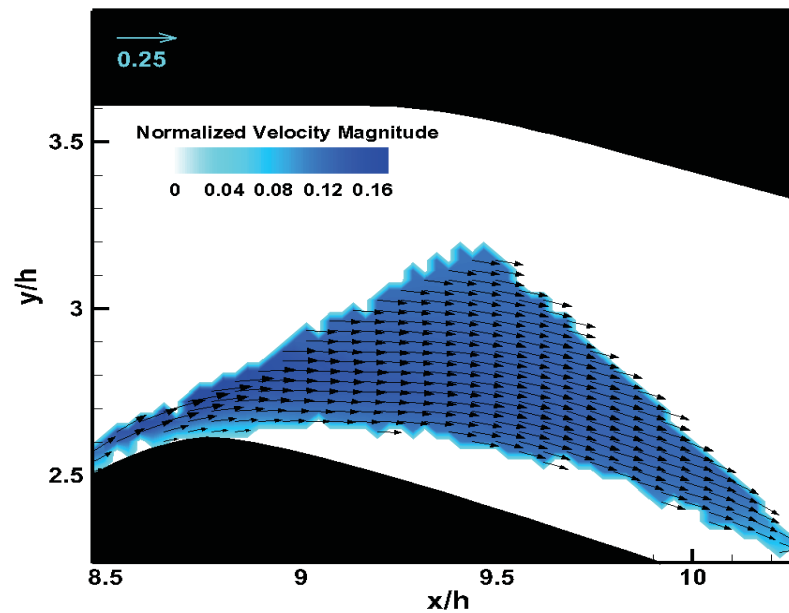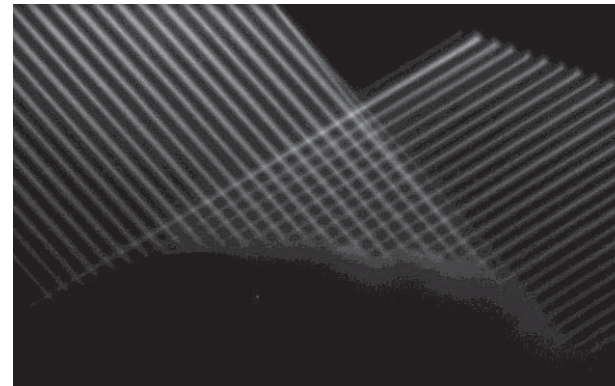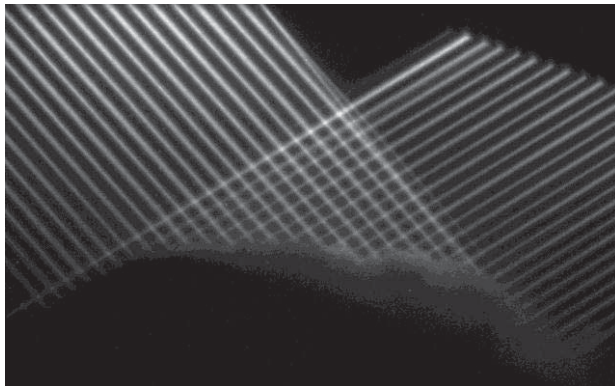

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.




Normalized Velocity Profiles

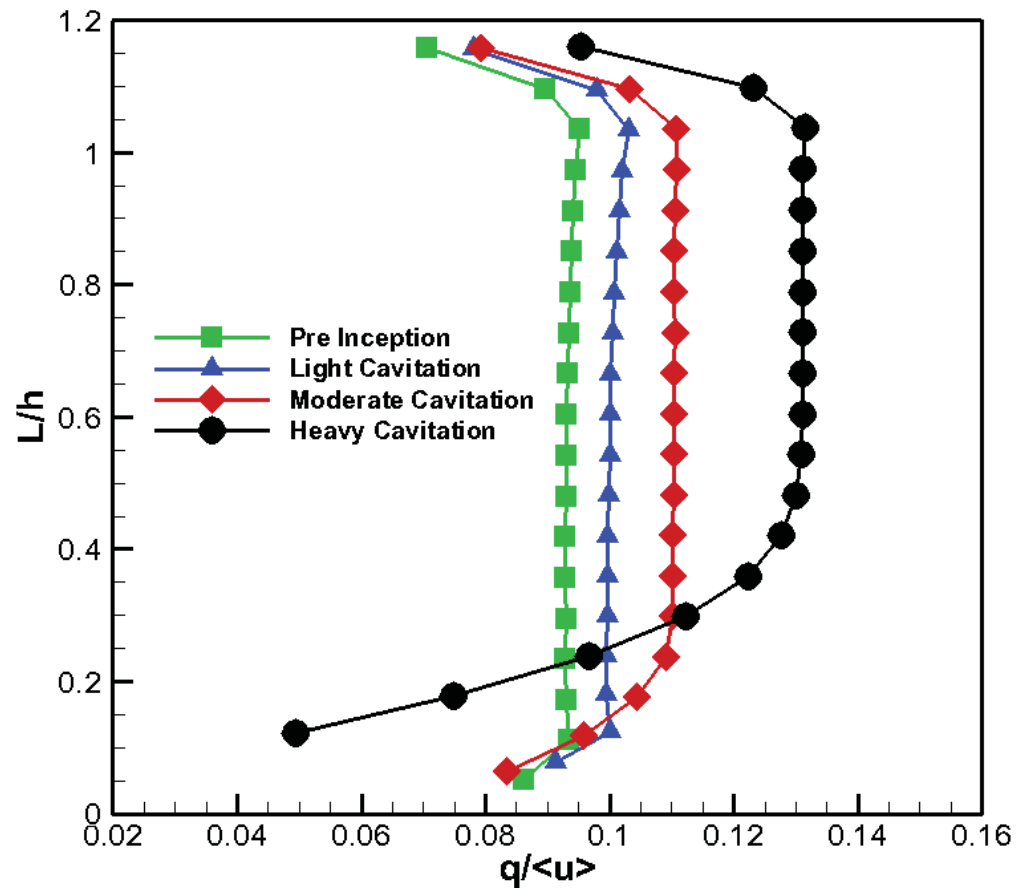

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Normalized v-Velocity Profiles

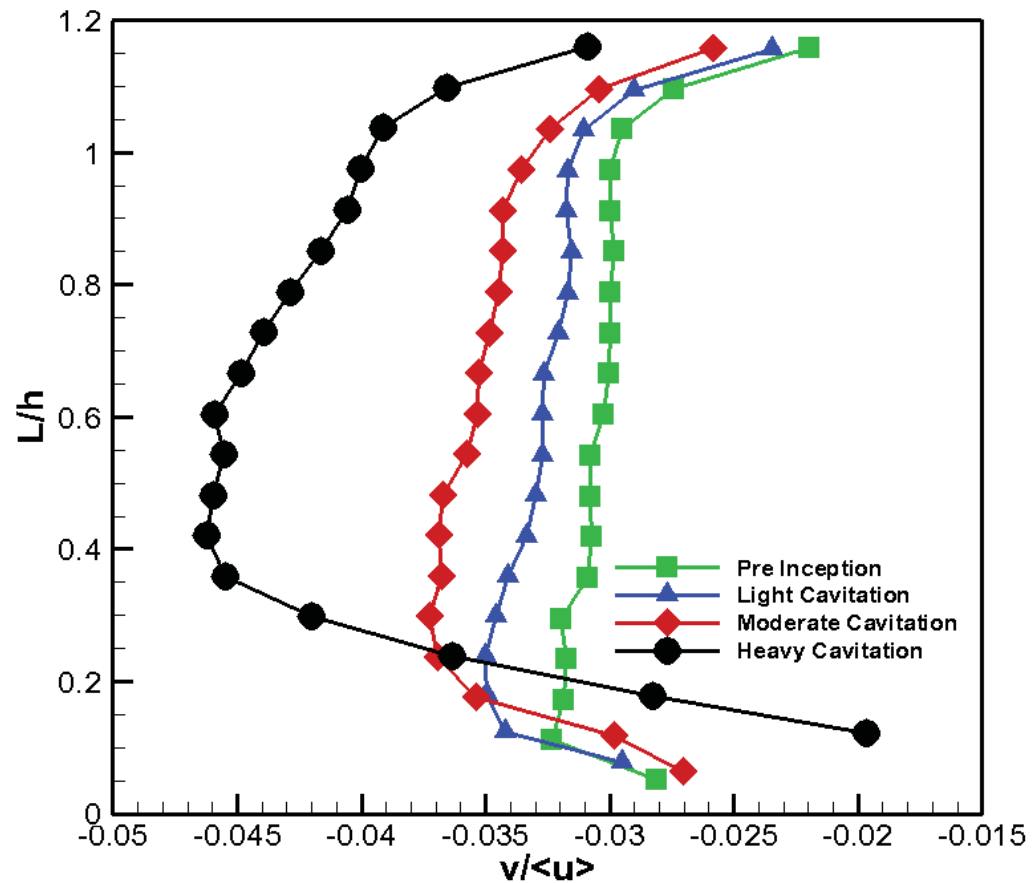

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Conclusions

- **Data was used to aid in cavitation number calibration**
- **MTV was successfully used in two phase flow**
 - Though the limits of use were established based on cavitation cloud density
- **Velocity at the throat increased with increased cavitation**