

North Atlantic coast of the USA – sea level change vulnerability and adaptation measures

Presentation to iGLASS on US North Atlantic coast SLC issues

Report Documentation Page

Form Approved
OMB No. 0704-0188


Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE 07 JAN 2014	2. REPORT TYPE	3. DATES COVERED 00-00-2014 to 00-00-2014			
4. TITLE AND SUBTITLE North Atlantic coast of the USA - sea level change vulnerability and adaptation measures		5a. CONTRACT NUMBER W911NF-13-1-0453			
		5b. GRANT NUMBER			
		5c. PROGRAM ELEMENT NUMBER			
6. AUTHOR(S)		5d. PROJECT NUMBER			
		5e. TASK NUMBER			
		5f. WORK UNIT NUMBER			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) HR Wallingford,Howbery Park,Wallingford, UK,		8. PERFORMING ORGANIZATION REPORT NUMBER ; 1666-EN-01			
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Army Engineer Research & Development Center - International Research Office, ERDC-IRO, ATT: RICHMOND, Unit 4507, APO, AE, 09421		10. SPONSOR/MONITOR'S ACRONYM(S)			
		11. SPONSOR/MONITOR'S REPORT NUMBER(S) 1666-EN-01			
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 43	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

- Progress in evaluating the 7 sites
 - Land profile analysis
 - Submergence analysis and impact of sea level change
 - SLOSH analysis and how to evaluate impact of SLC on this
 - Comments on Blackwater National refuge
- Discussion on selecting measures and the approach to their evaluation





Assateague Island, MD / VA

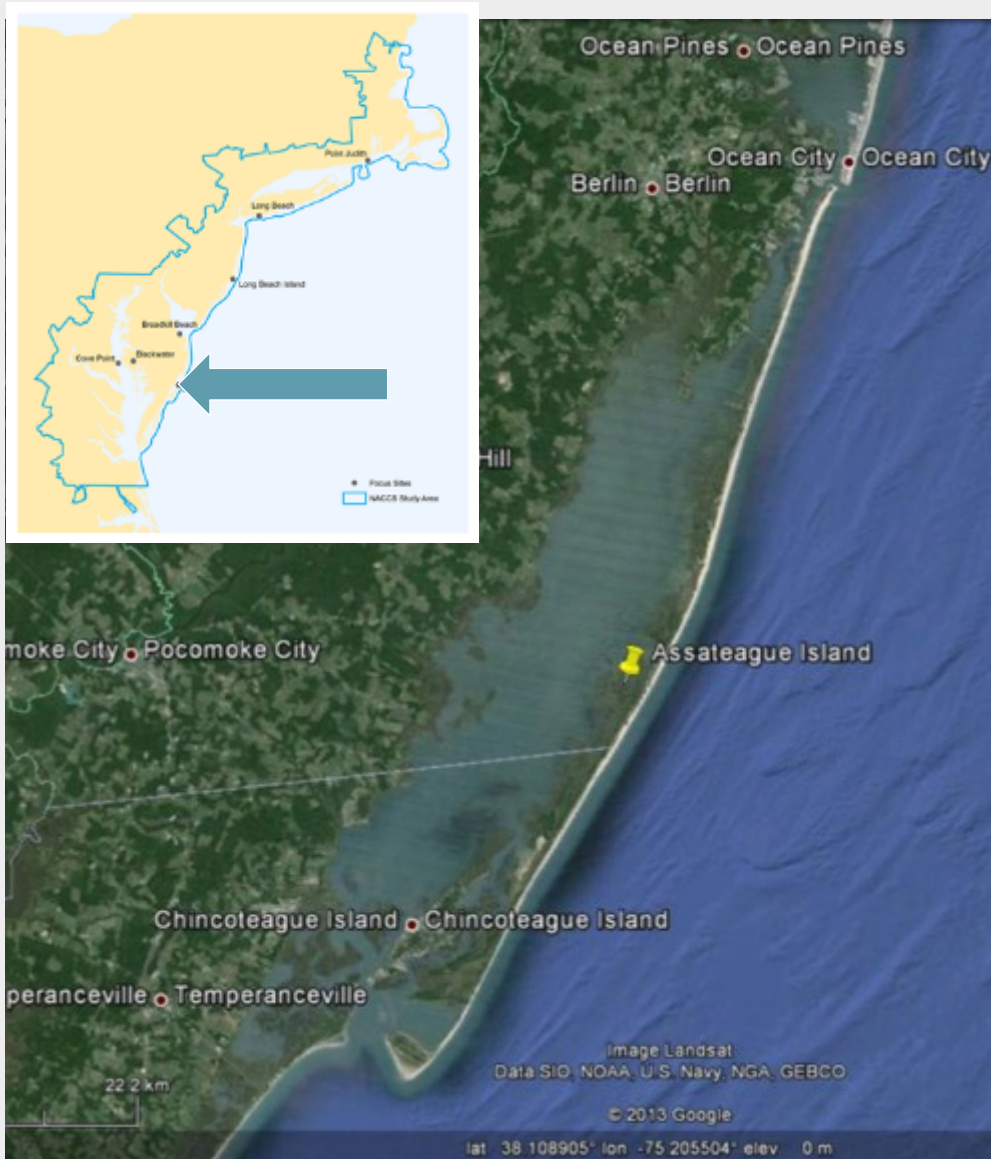

General issues for barrier islands

- Barrier islands naturally migrate in response to sediment supply, prevailing wind conditions, tidal currents and severe storm actions.
- Migration is defence against sea level rise, as they can naturally reshape in response to the coastal process changes.
- Addition of permanent infrastructure and expecting infrastructure to be defended is counter-productive cfd. resilience of holistic coastline communities

Assateague Island - submergence

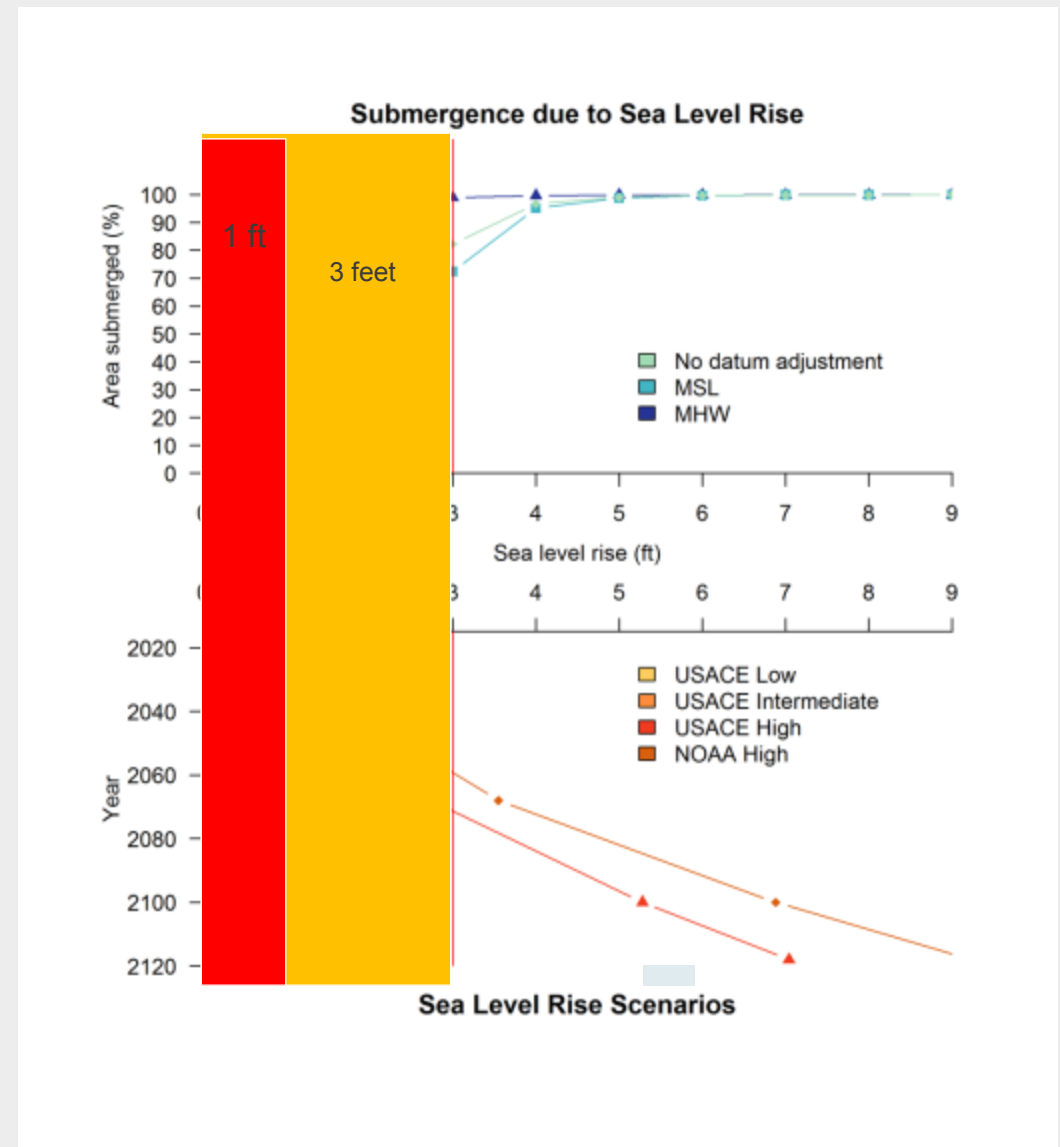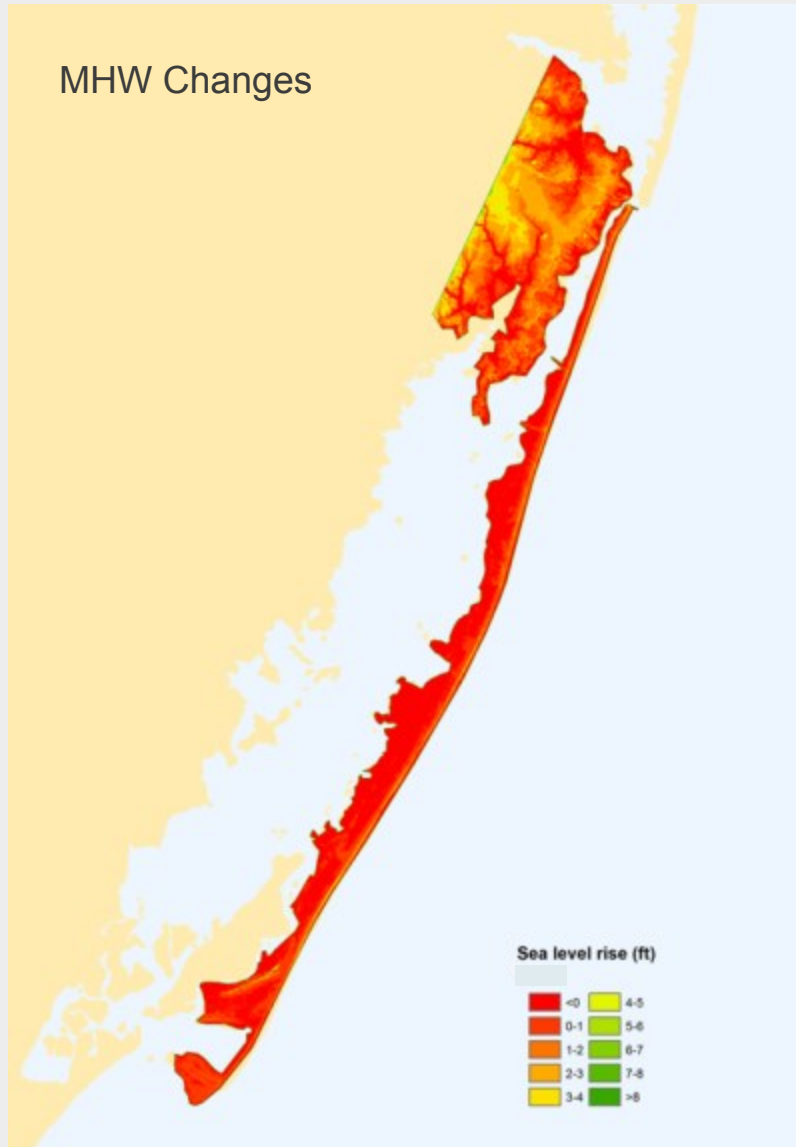





A 'tale of two halves'

- breach channel in front of Ocean City formed during 1933 hurricane.
- breach channel maintained by jetties and dredging, in order to provide navigational access to Ocean City.
- longshore sediment drift during normal weather conditions disrupted
- Hence, migration of north and south parts of Assateague very different


Strategies

- beach replenishment on seaward face, and sediment bypassing around the jetties, has allowed the two halves to be maintained as coastal defences.
- encouraging the natural vegetation to continue to act as dune or marsh stabilisation is also a priority method of maintenance.
- restricting the development of human infrastructure or encouraging relocation of existing infrastructure would be beneficial if the barrier islands are to continue as an effective coastal defence for the mainland as sea levels rise.





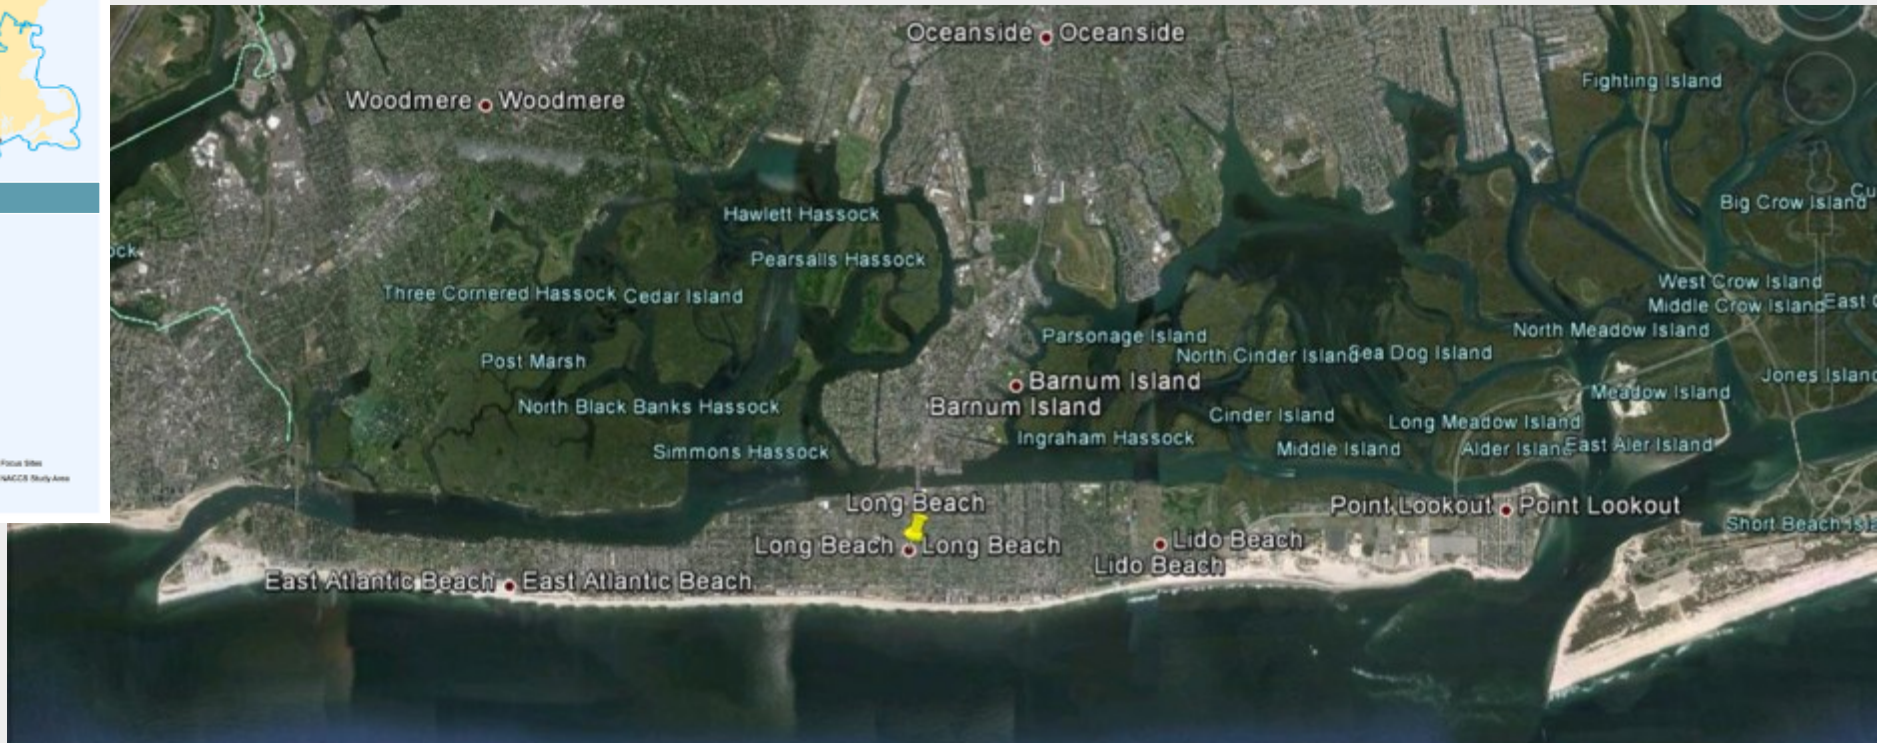


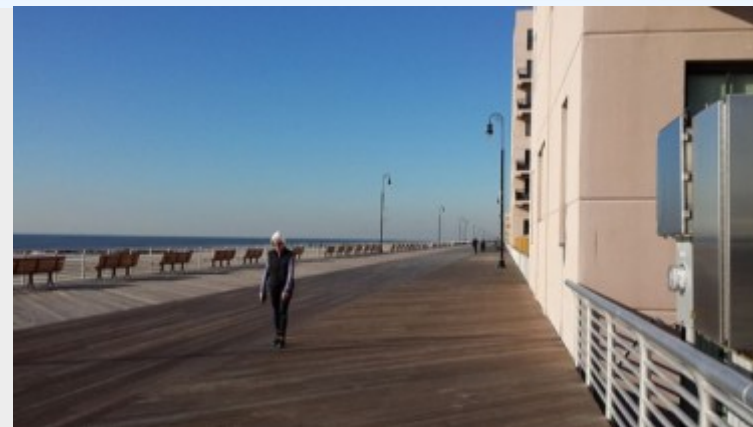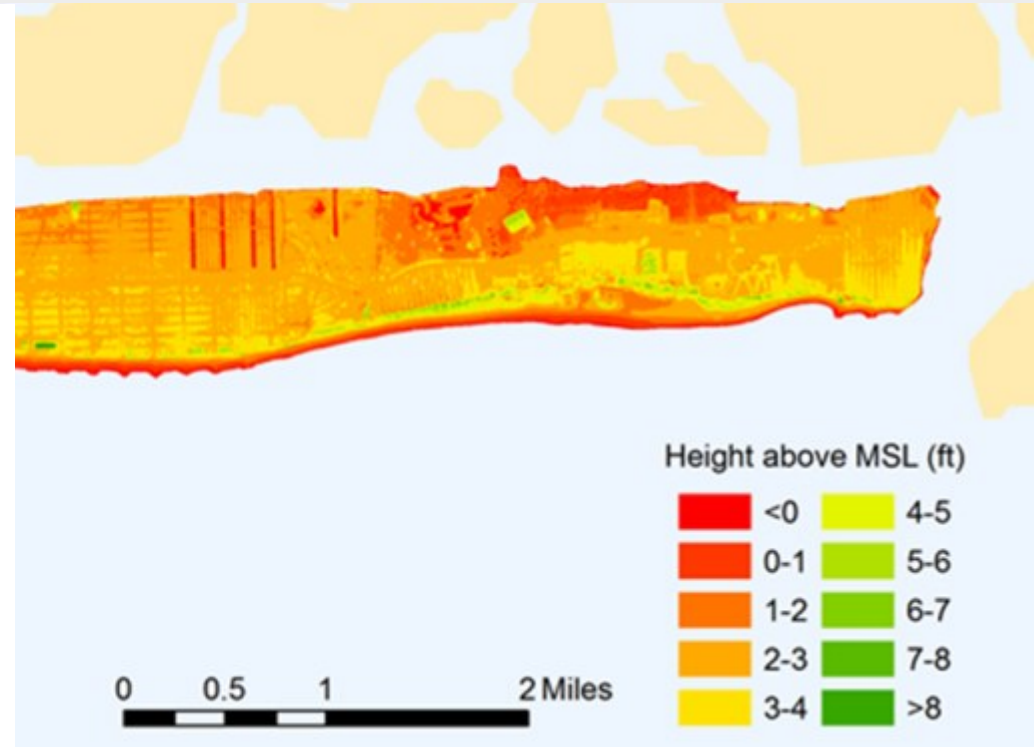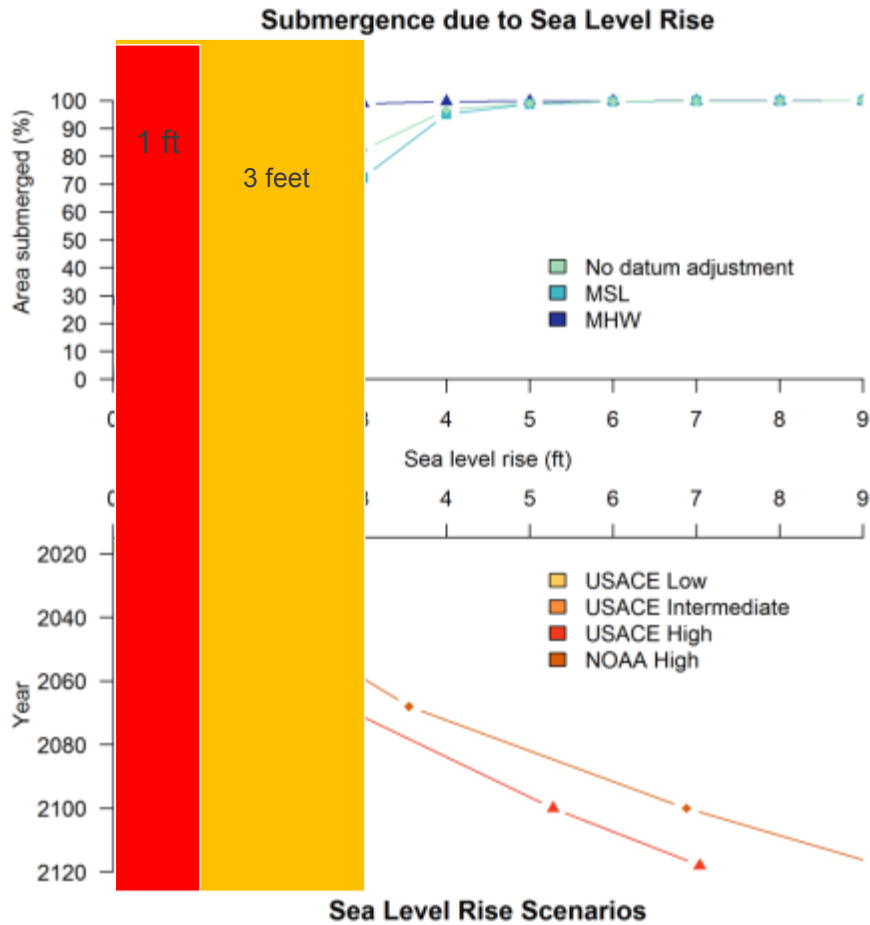


Long Beach Island, NJ

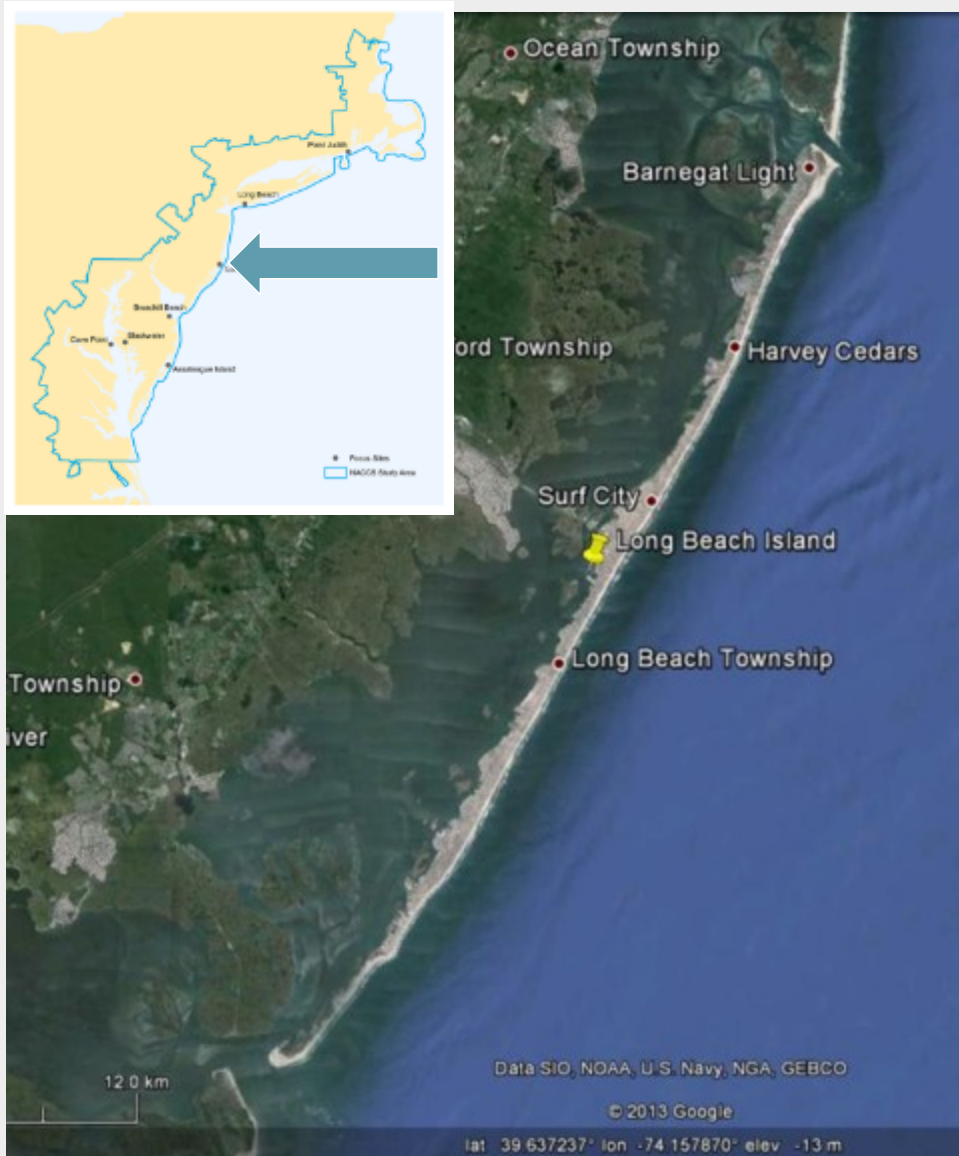



Long Beach Island, NJ – cross sections

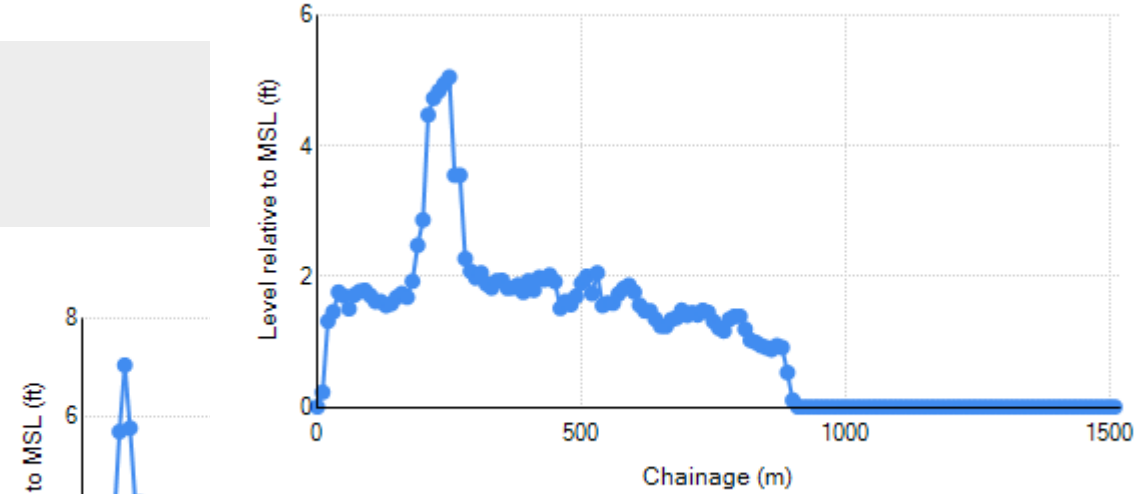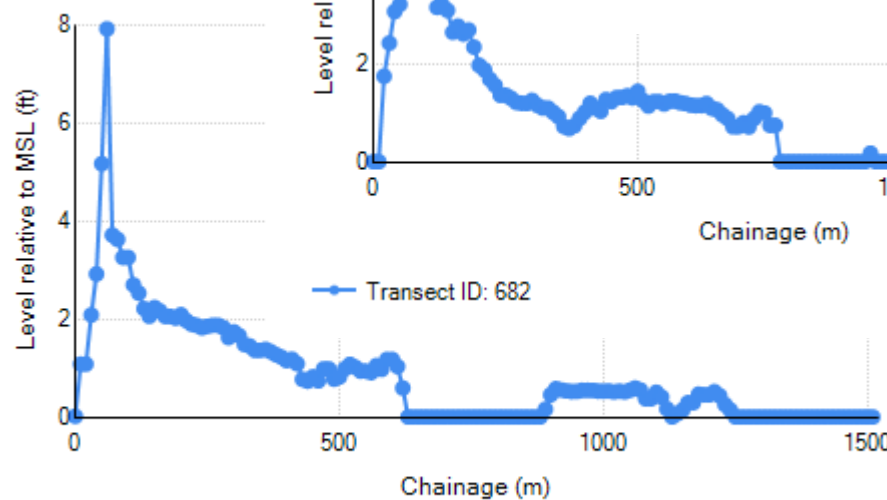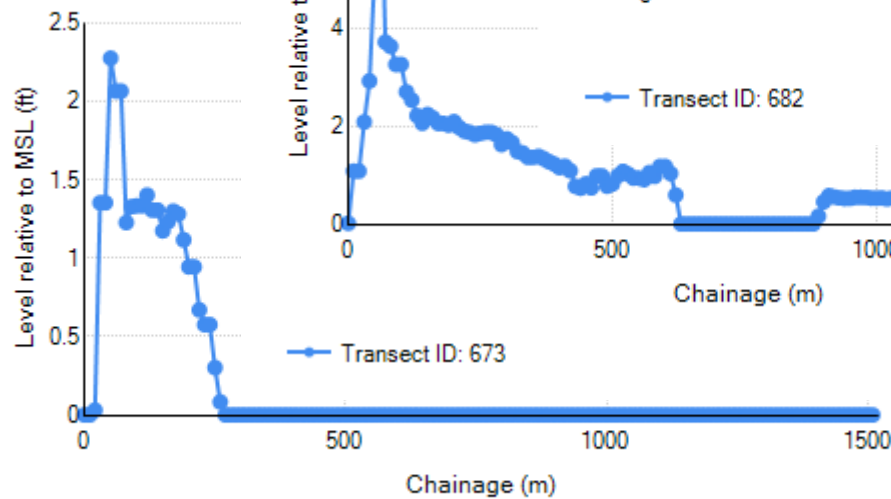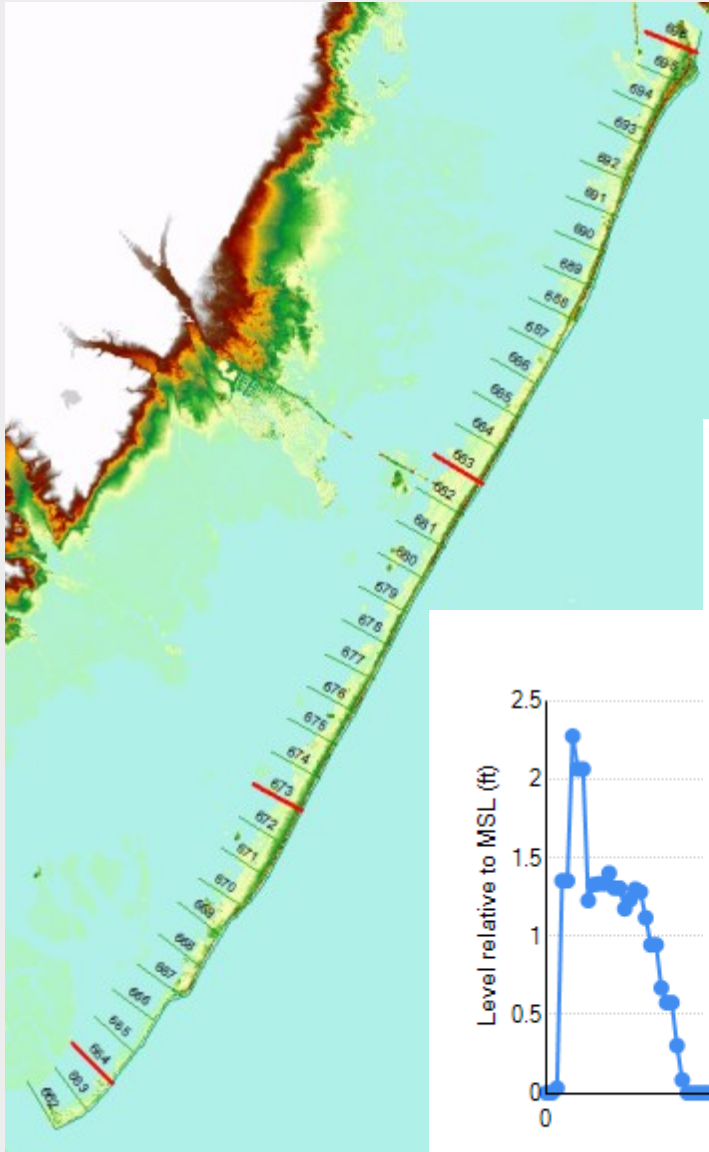


Long Beach Island, New Jersey

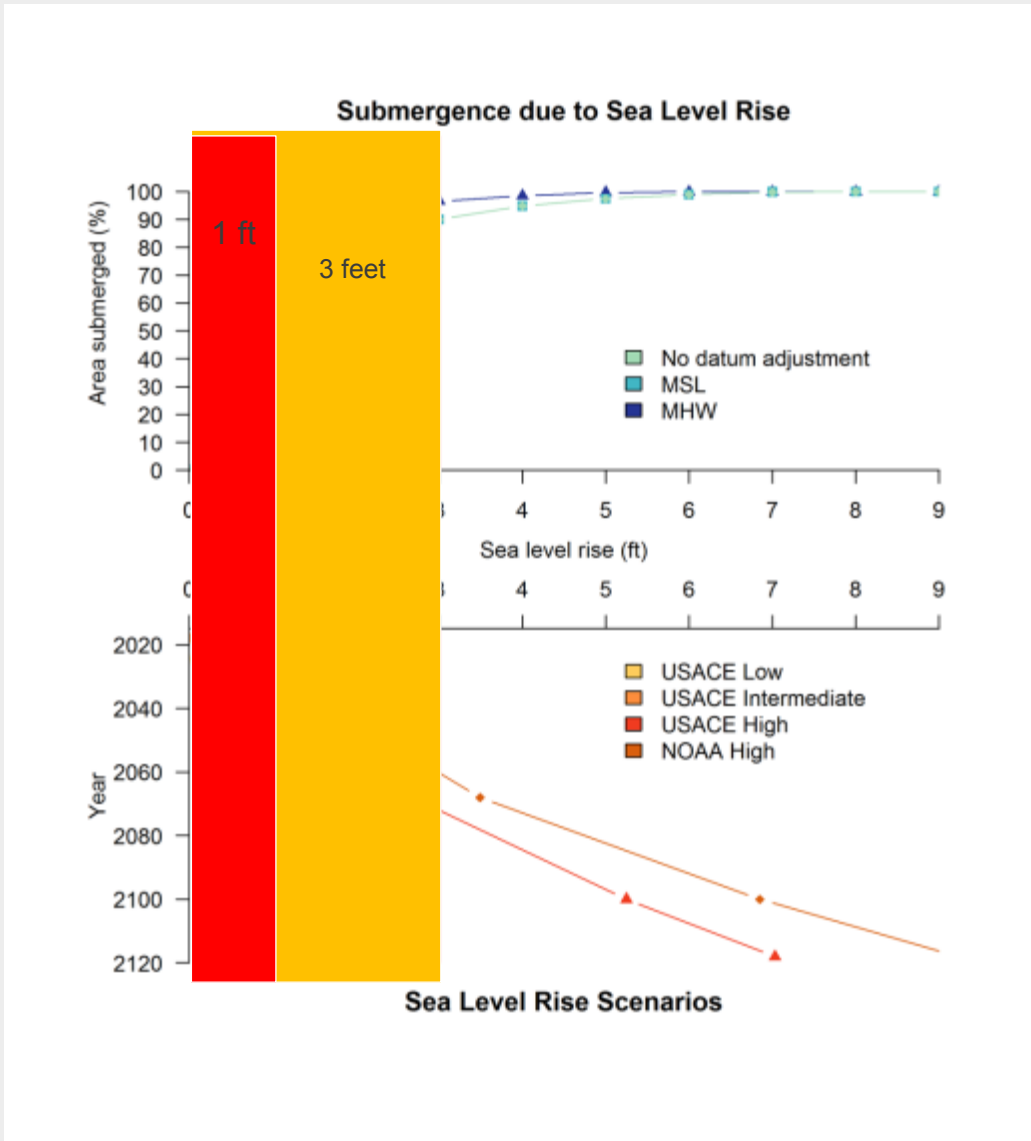

Long Beach Island NJ - SLOSH zones

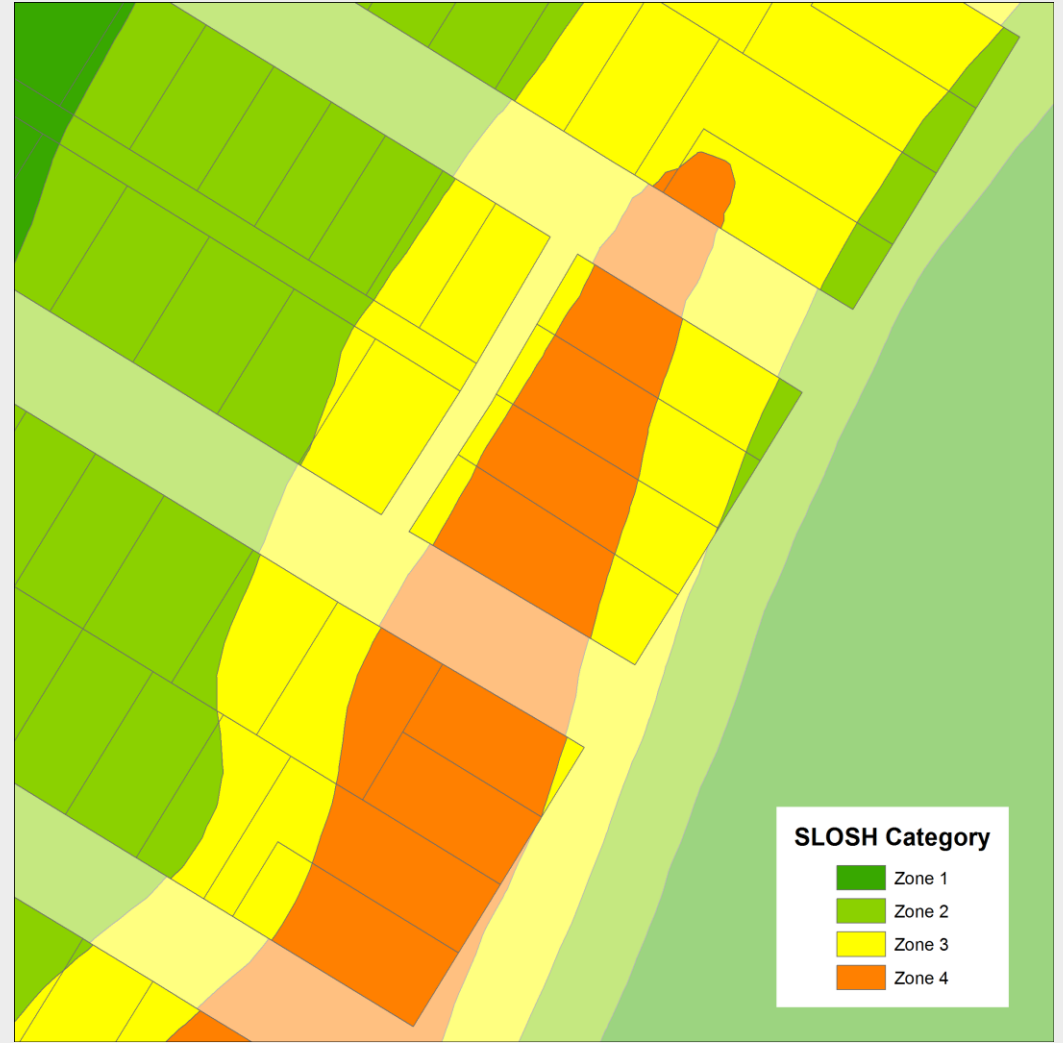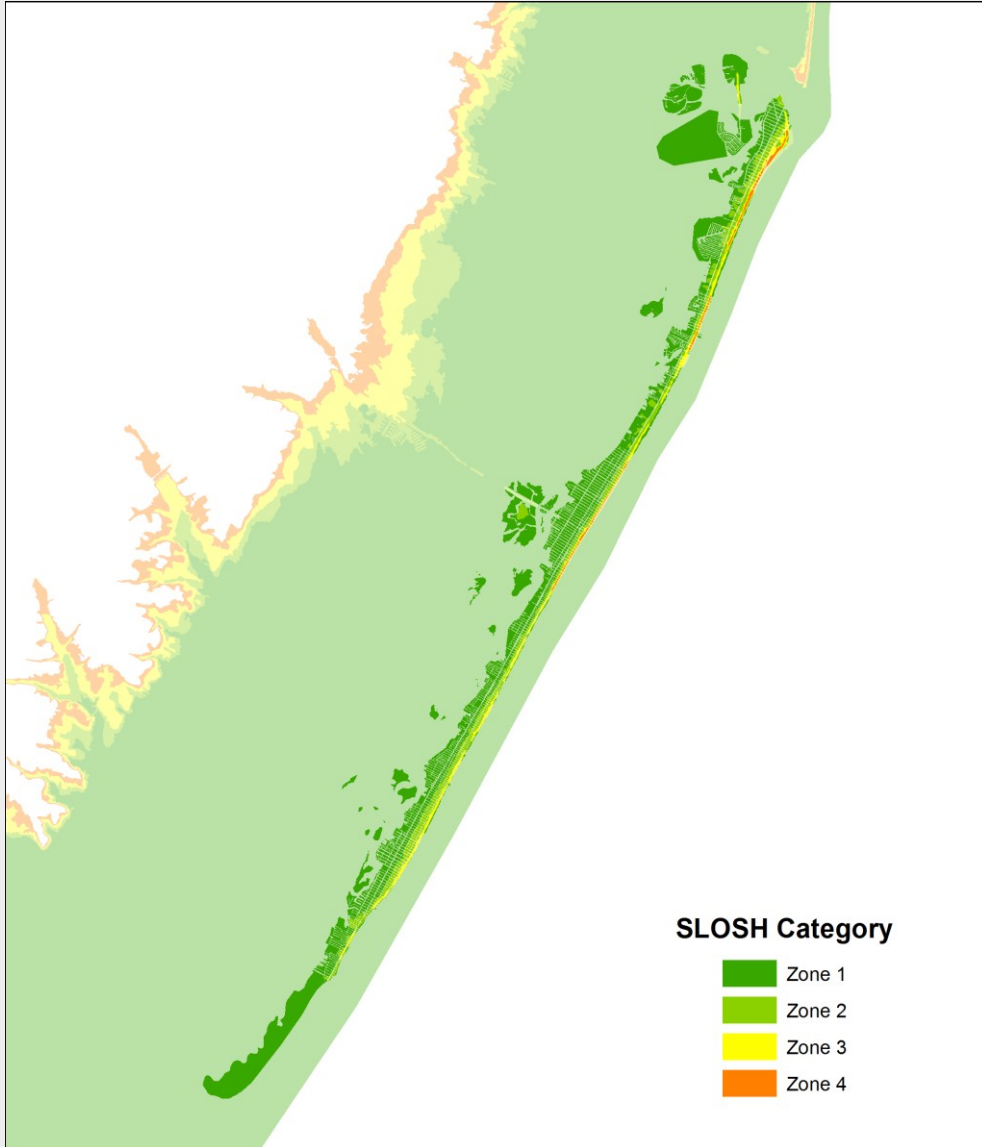

- a. Use of Saffir-Simpson scale to convert (approximately) storm categories to surge levels
- b. Approx return periods from ERDC StormSim analysis

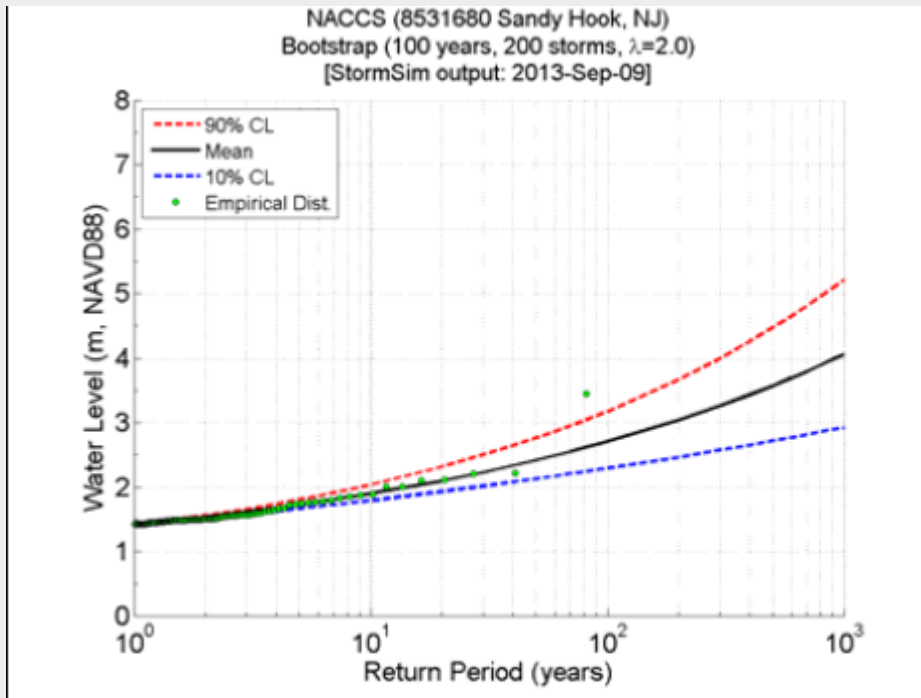

Saffir-Simpson Hurricane Scale		
Category	Wind speed	Storm surge
	mph	ft
	(km/h)	(m)
Five	≥ 156 (≥ 250)	> 18 (> 5.5)
Four	131–155 (210–249)	13–18 (4.0–5.5)
Three	111–130 (178–209)	9–12 (2.7–3.7)
Two	96–110 (154–177)	6–8 (1.8–2.4)
One	74–95 (119–153)	4–5 (1.2–1.5)

Expected Annual Flooded Parcels							
	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5	TOTAL	
Parcels	1041	300	59	3	4	1407	7.0%
Expected Annual Flooded Area							
	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5	TOTAL	
Area (sq m)	1372230	347574	67469	3102	4654	1795030	7.7%
Area (sq ft)	14770564	3741261	726235	33395	50092	19321547	7.7%



c. Expected annual flooded area /no of parcels =
7% of total for present day conditions


‘Pathway’ measures

- Atlantic freeboard: Maintain beach schemes (need for backing walls?)
- Backshore of islands – solution of protecting by flood walls or levees
- Back bay frontage – dunes and walls
- Alternative: protect both backshore of islands and back bay using Venice style barriers between barrier islands

‘Receptor’ measures


- Building elevation - short term effectiveness due to submergence of access
- Others??

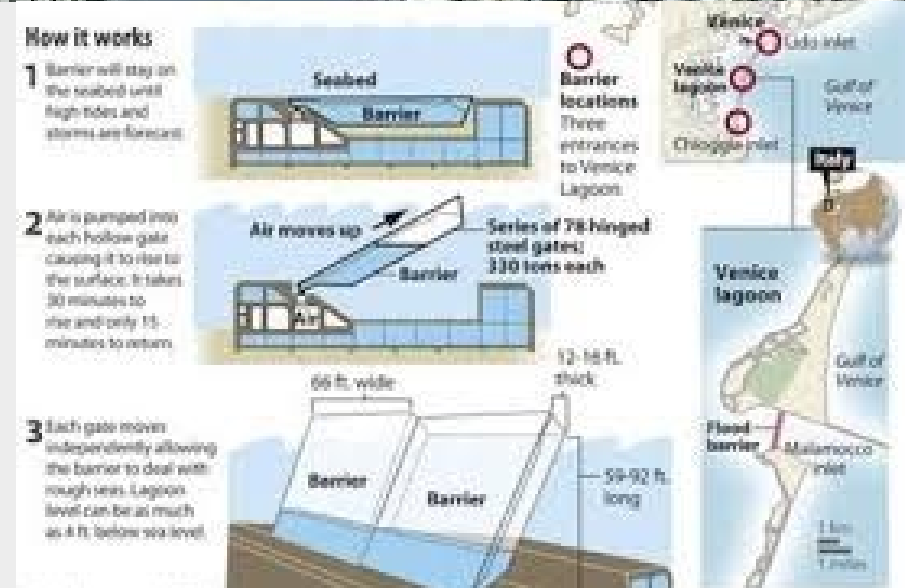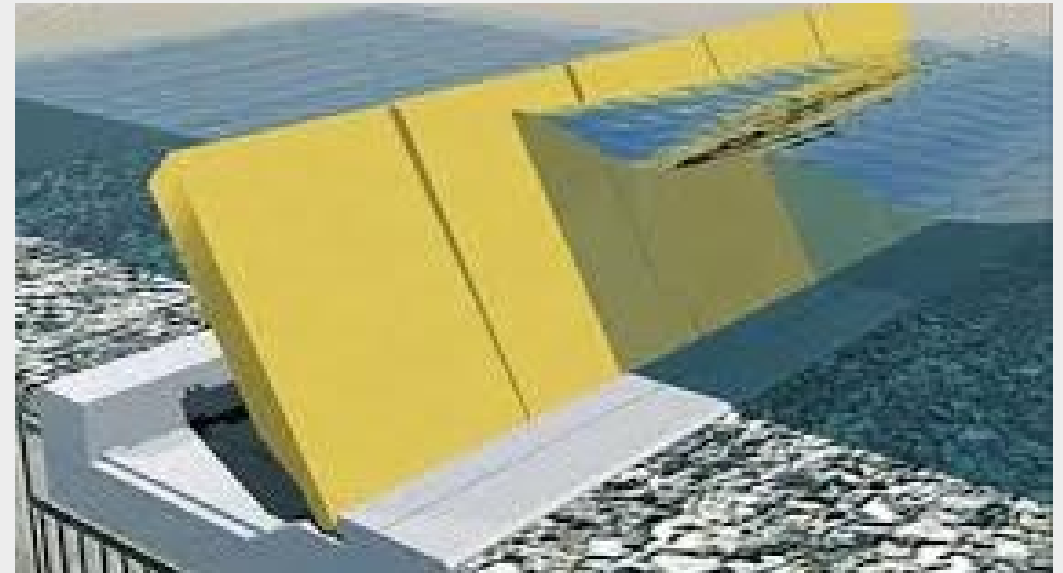

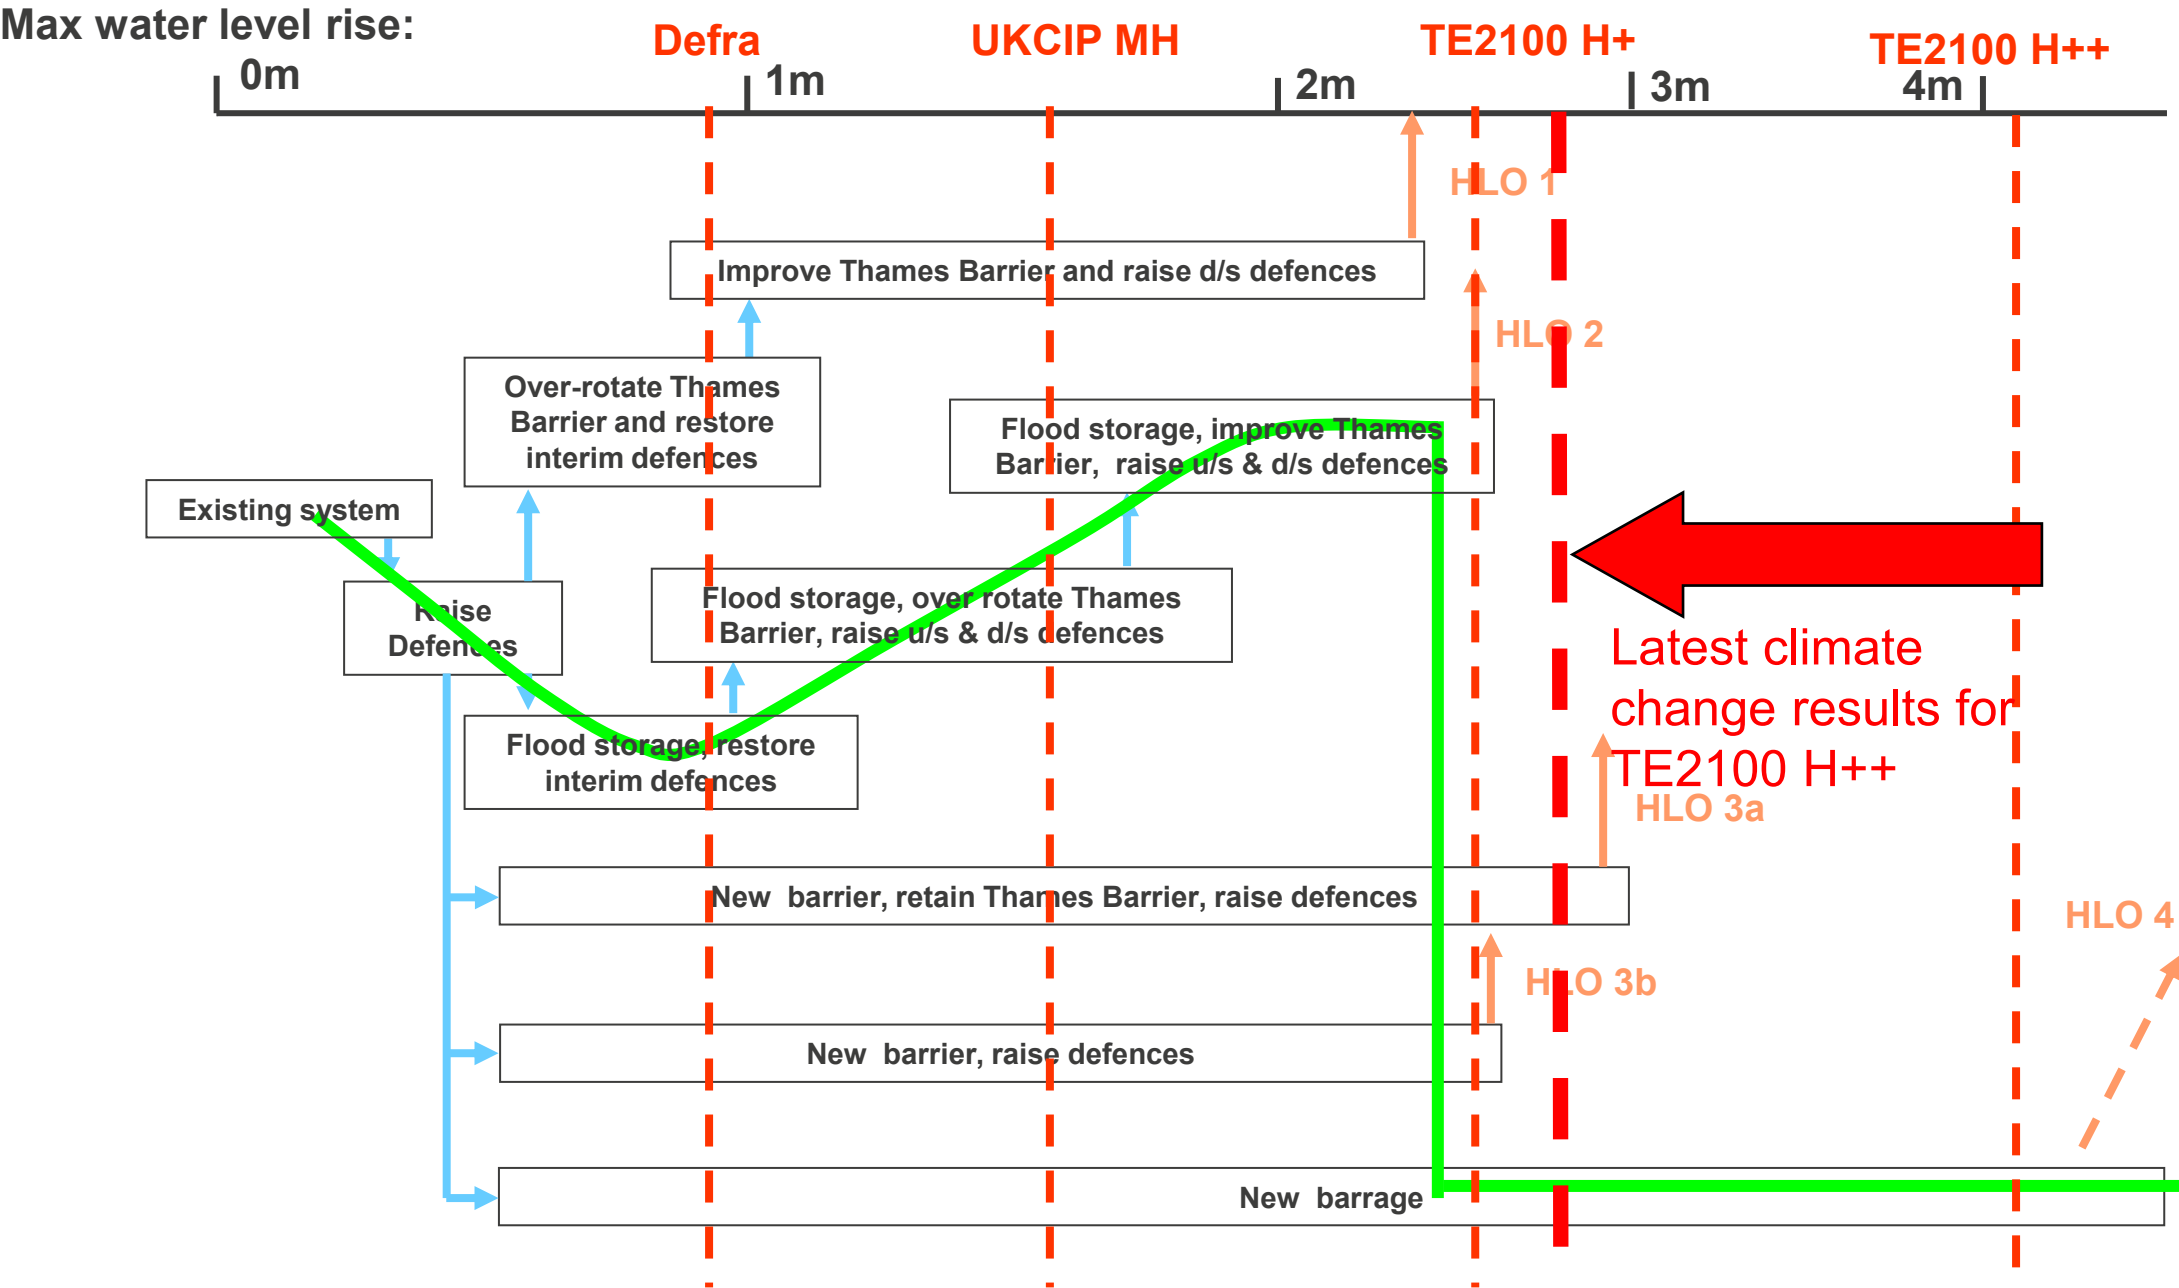

TE 2100 final plan: combination of approaches

Decision pathways for inhabited barrier island

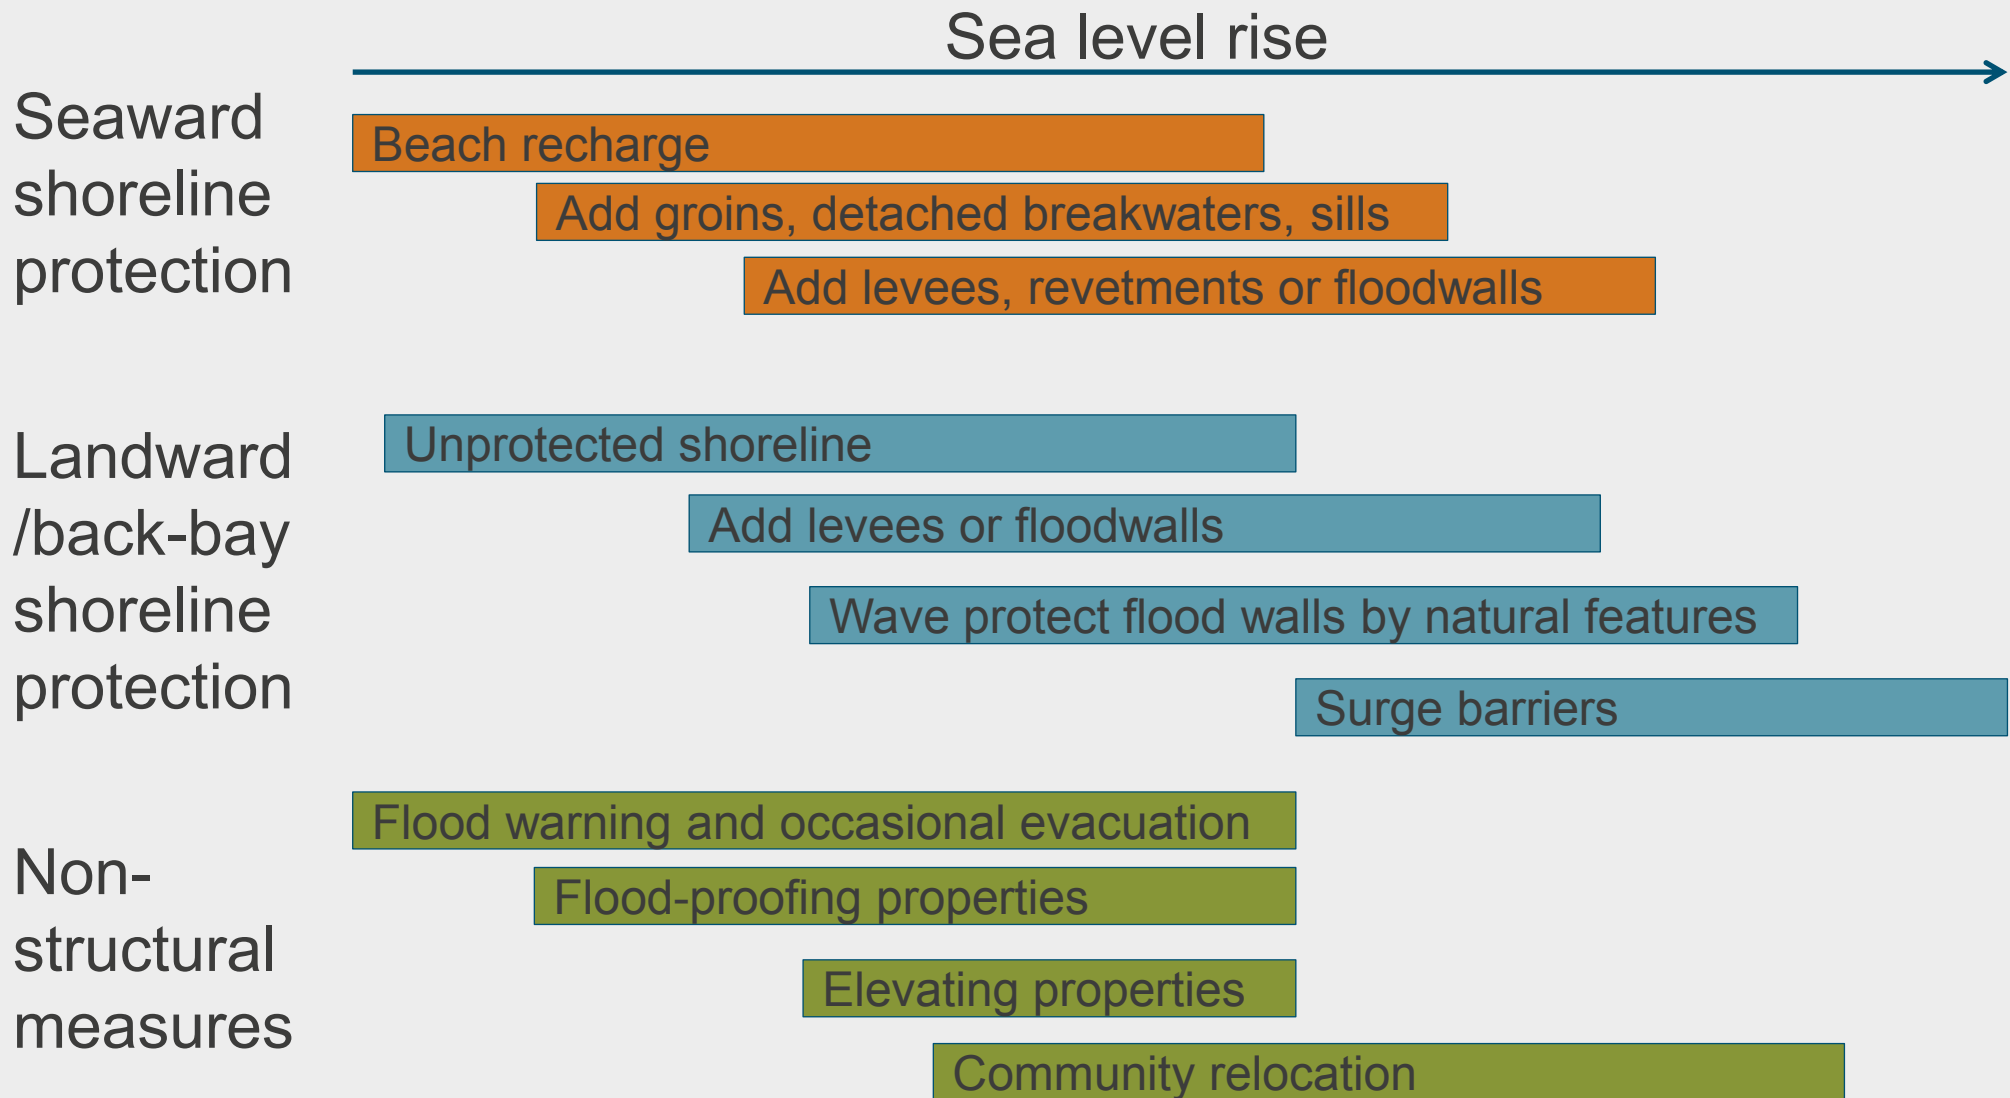


Morphological issues on Atlantic freeboard (approach modified over last month)


- Decision to focus (given limited time) primarily on cross-shore response rather than long shore response
- Long Island NJ focus – best data available

Steps to evaluate dune-beach systems


1. Overview existing morphological data using review of literature and results of comprehensive studies.

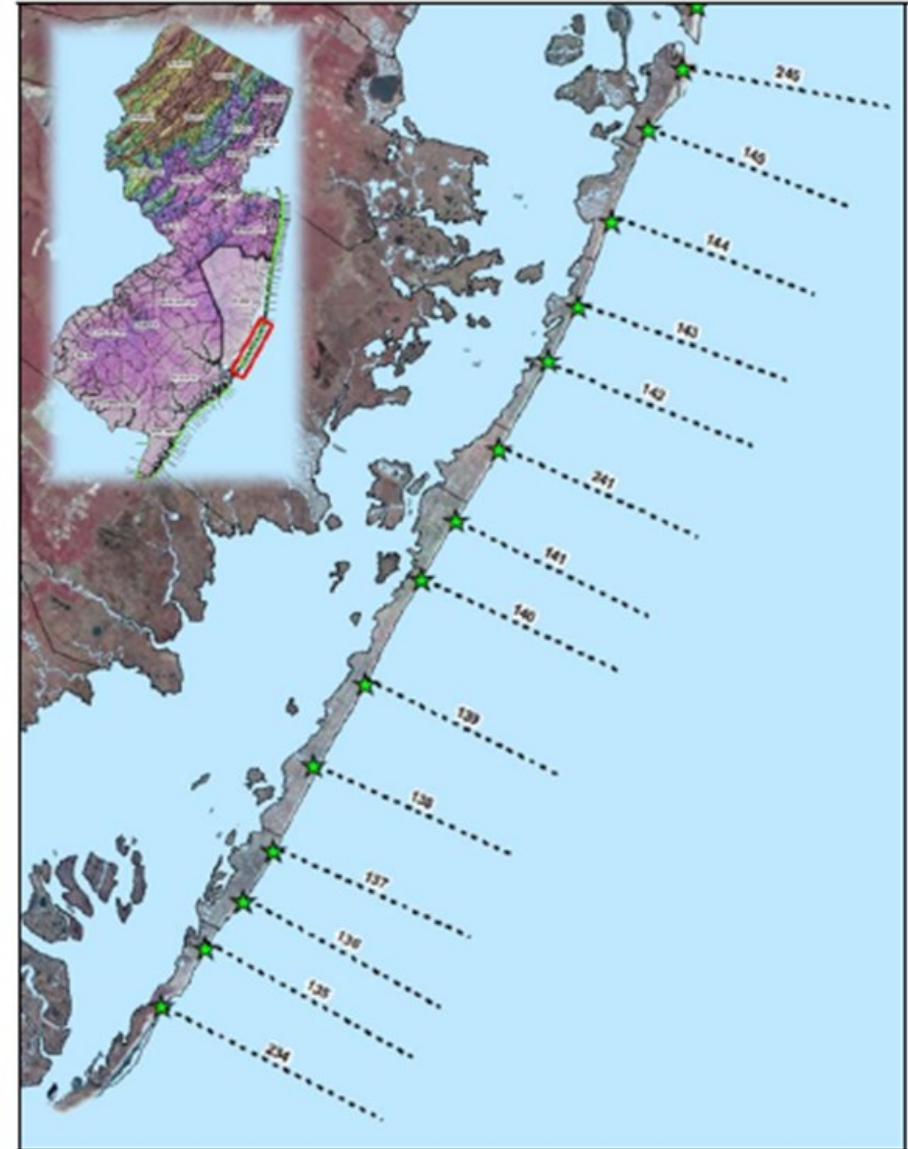

Geomorphological review and characterisation

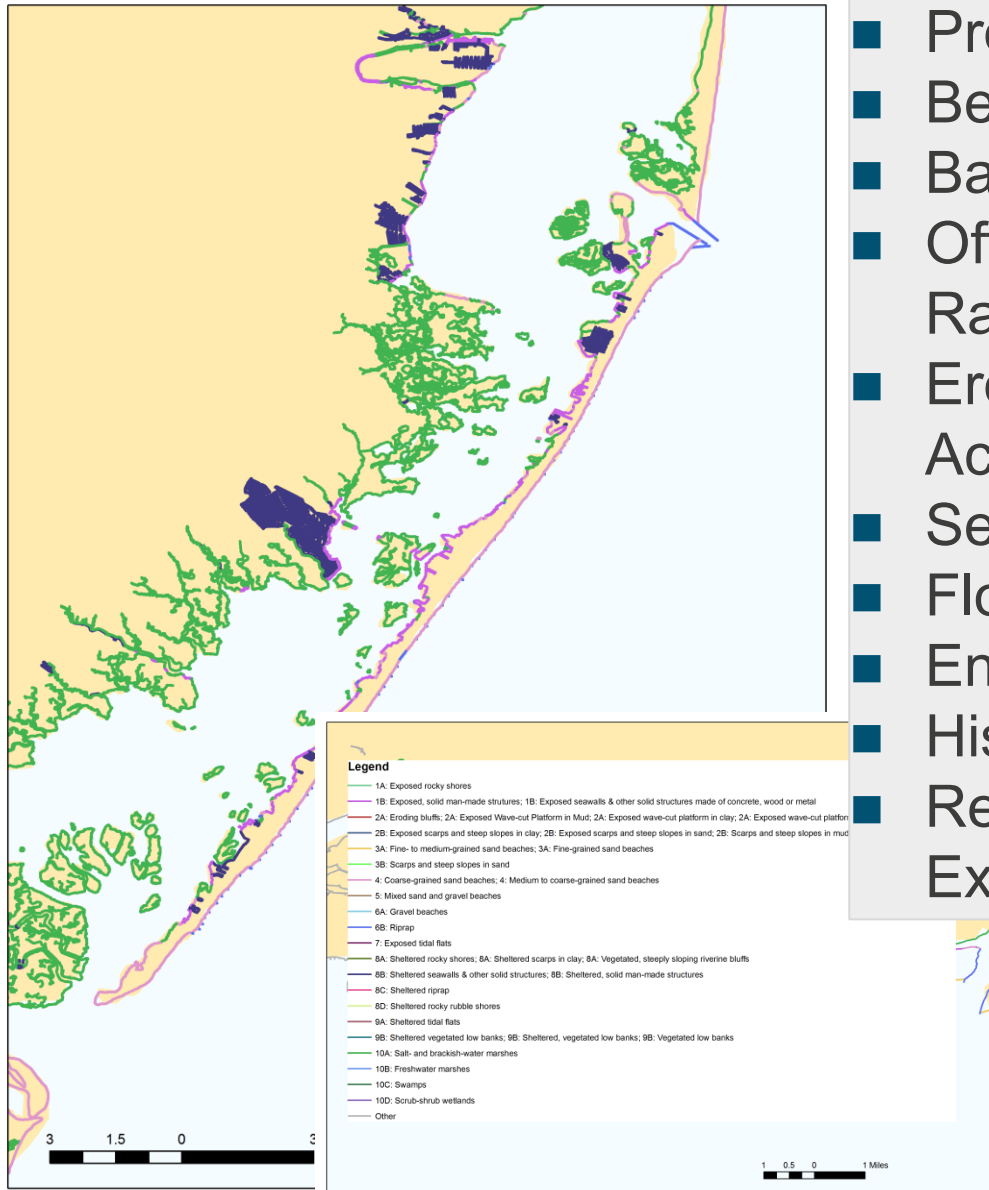

- Protection Areas
- Beaches
- Backshore
- Offshore Transport Rates
- Erosion and Accretion
- Sediment Budget
- Flood Risk Areas
- Engineering Works
- Historical Data
- Response to Extreme Events

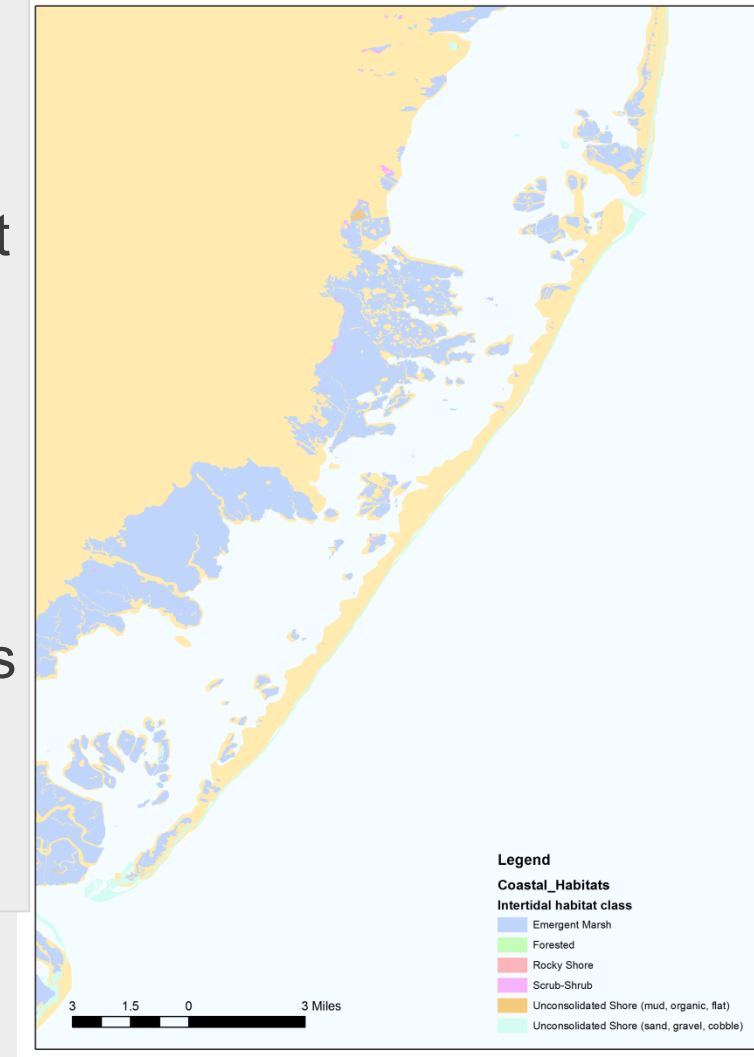


Morphological issues on Atlantic freeboard (approach modified over last month)

- Decision to focus (given limited time) primarily on cross-shore response rather than long shore response
- Long Island NJ focus – best data available


Steps to evaluate dune-beach systems

1. Overview existing morphological data using review of literature and results of comprehensive studies
2. Validate a dune erosion rule using Stockton CMC measured profiles.


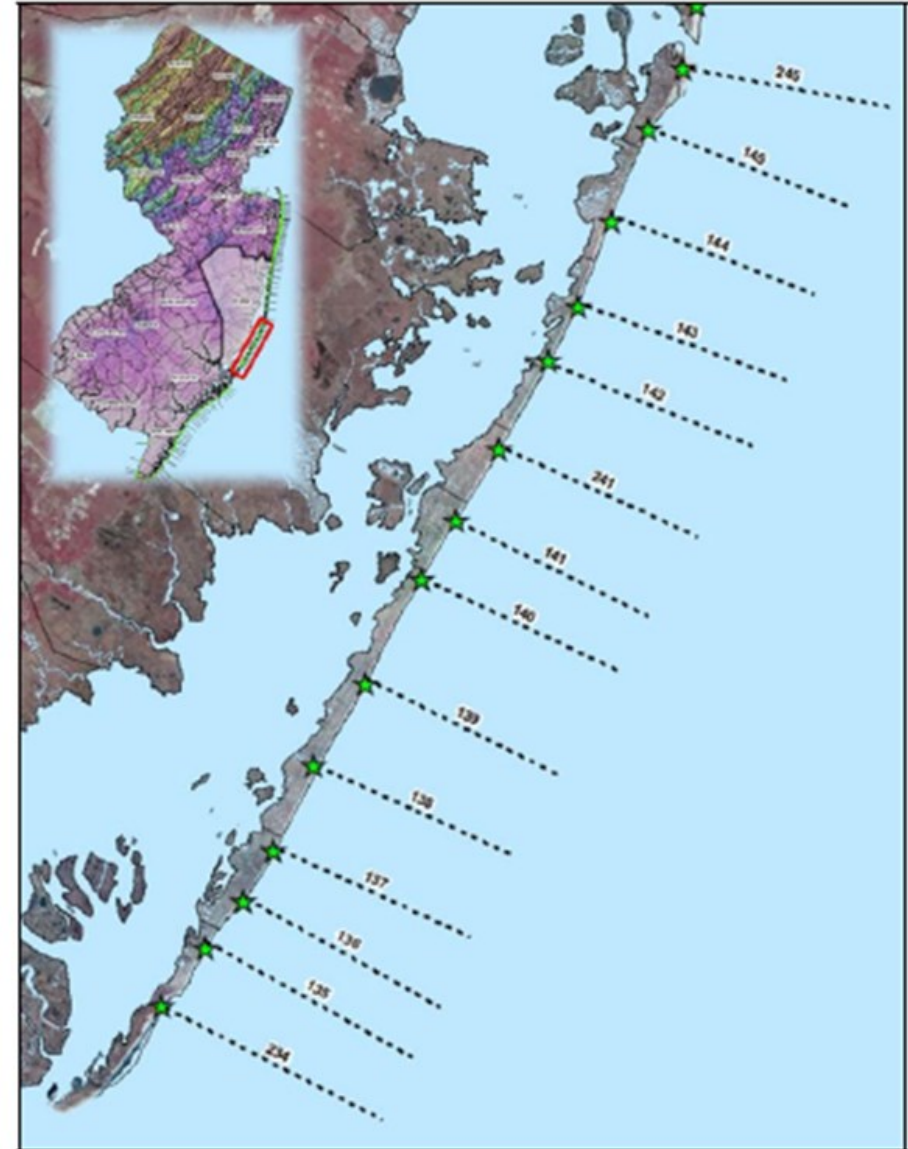


- Stockton CRC (2013) survey data on Long Beach Island (NJ) on the NJ Beach Profile Network
- Fall 2012
- November 2012

NJBPN 144 – La Raja St, Loveladies

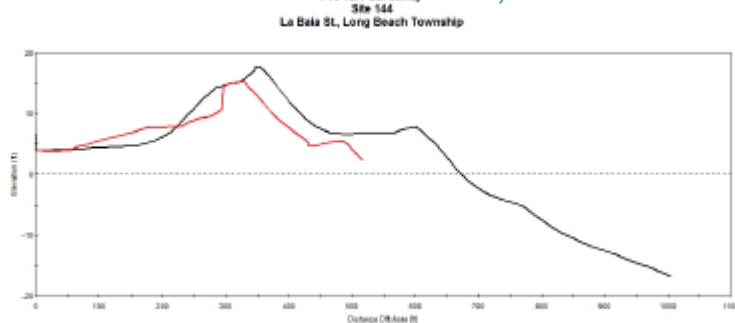

NJBPN143 - 73rd St - Harvey Cedars

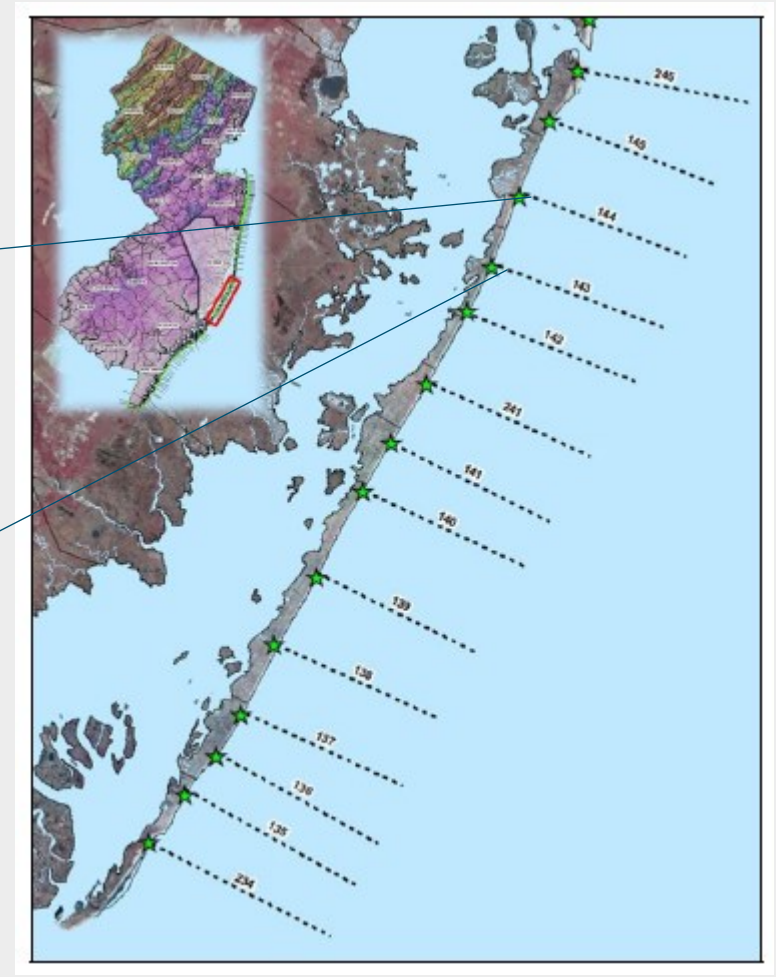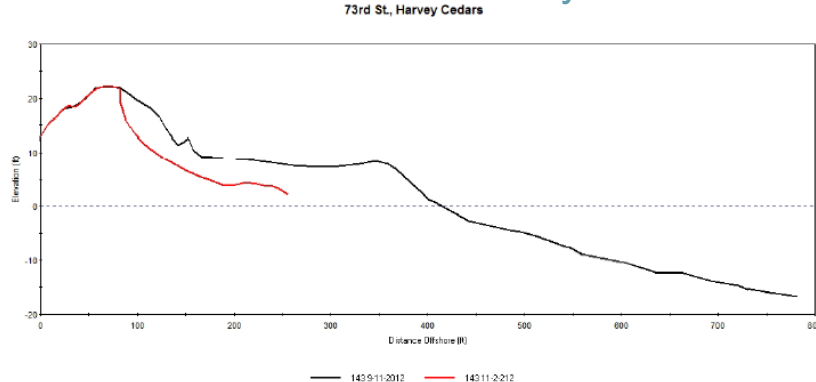

Utilise data in order to validate dune erosion rule by comparing

Stockton CMC profiles during

- normal SL and elevated SL
- during Hurricane Sandy


Various dune erosion rules available

DUNERULE model (van Rijn, 2013):

Based on sensitivity tests to the CROSMOR model

It gives Dune erosion area (A) above storm surge level (S) as a function of peak period (T), offshore significant wave height (H), median bed material diameter (d_{50}), slope gradient ($\tan\beta$), offshore wave incidence angle (θ)

$$A_{d,t=5} = A_{d,ref} (d_{50,ref}/d_{50})^{\alpha_1} (S/S_{ref})^{\alpha_2} (H_{s,o}/H_{s,o,ref})^{\alpha_3} (T_p/T_{p,ref})^{\alpha_4} (\tan\beta/\tan\beta_{ref})^{\alpha_5} (1+\theta_o/100)^{\alpha_6}$$

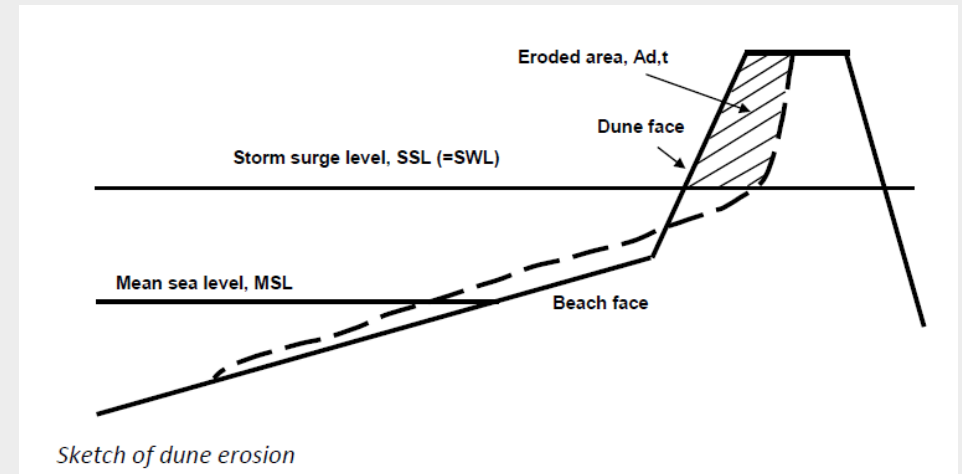


Morphological issues on Atlantic freeboard (approach modified over last month)

- Decision to focus (given limited time) primarily on cross-shore response rather than long shore response
- Long Island NJ focus – best data available

Steps to evaluate dune-beach systems

1. Overview existing morphological data using review of literature and results of comprehensive studies
2. Validate a dune erosion rule using Stockton CMC measured profiles.
3. Predict dune erosion for different sea level rise scenarios
4. Calculate overtopping rates for different sea level rise scenarios to input into inundation models

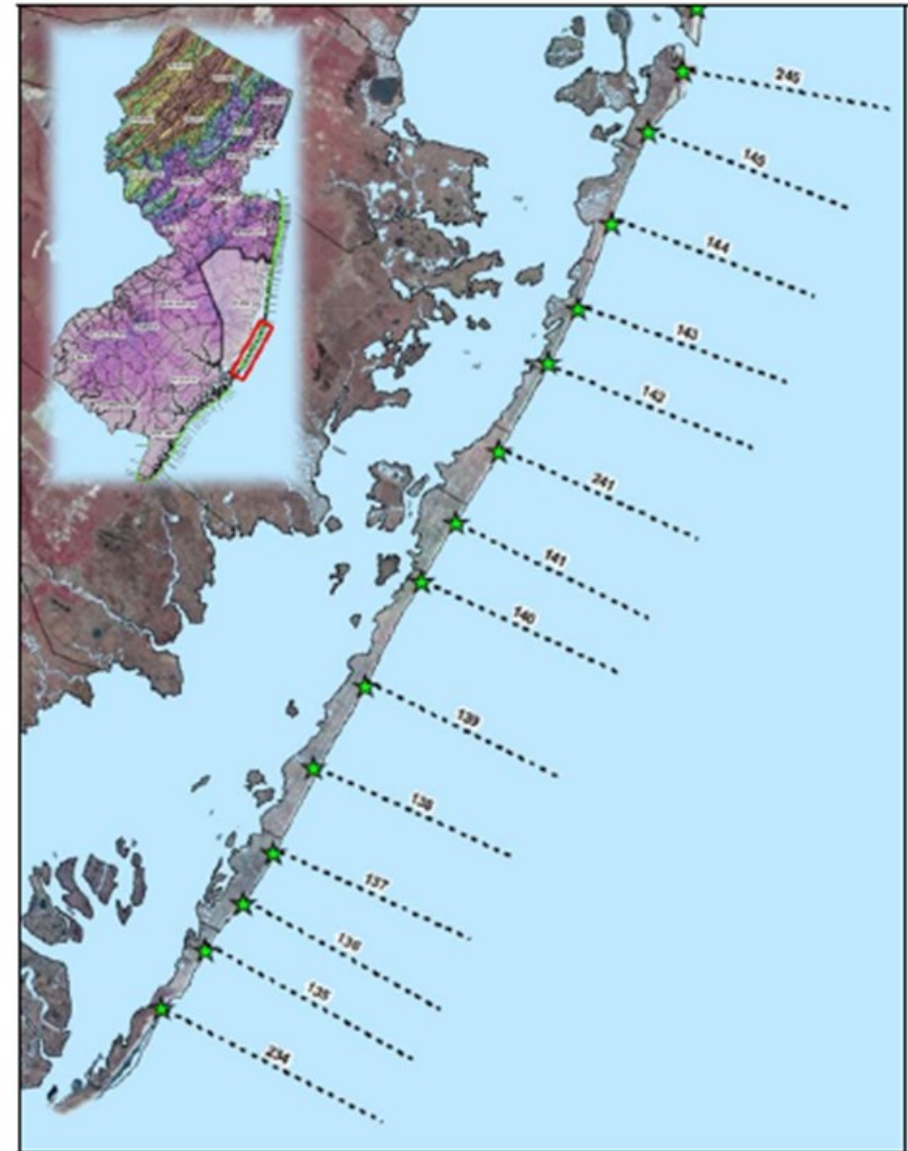



Propose to look at the following policy options for both beach-dune systems (following general approach adopted during Thames Estuary 2100 study) and assess the following alternative policies

- P1 – walk away
- P3 – maintain defences at 2014 crest level and structural condition
- P4 – raise defences in line with sea level change and maintain condition


Whether defences breach as well as overtop will depend on condition

For each case, examine impact of policy options via:




- Submergence studies for barrier islands and other low-lying areas (normal conditions)
- Assessments of flood risk in populated areas by examining a range of extreme conditions

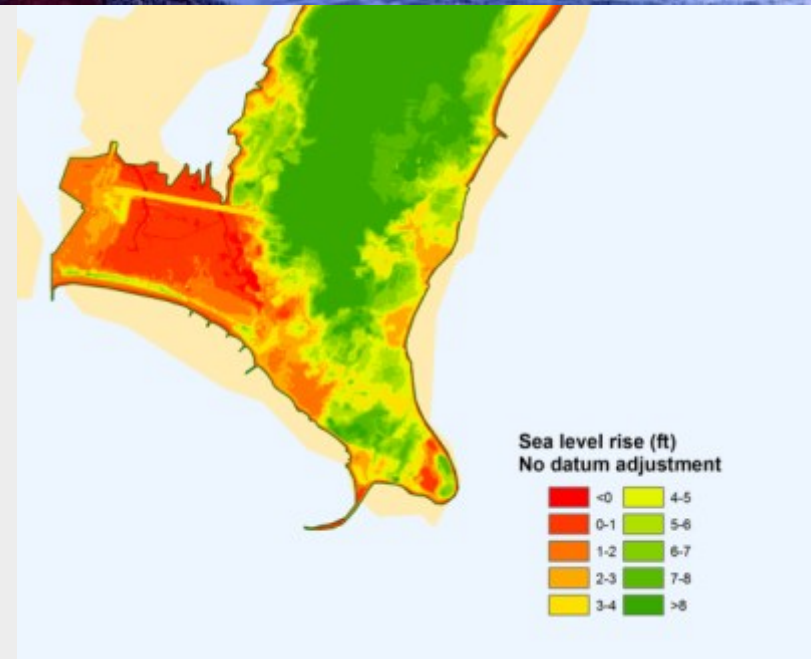
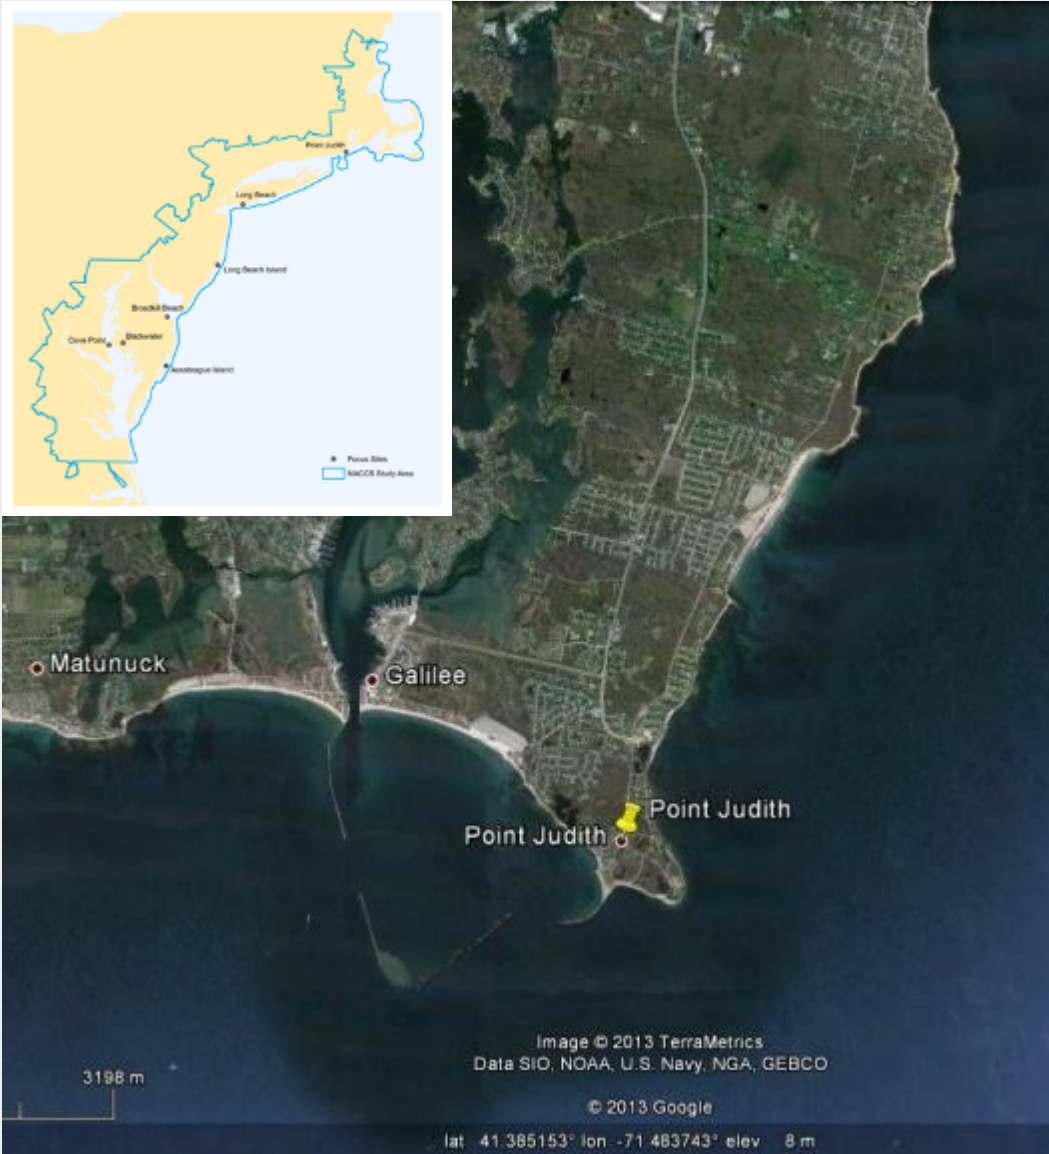


Sensitivity of seaward design armour for rubble-mound structure

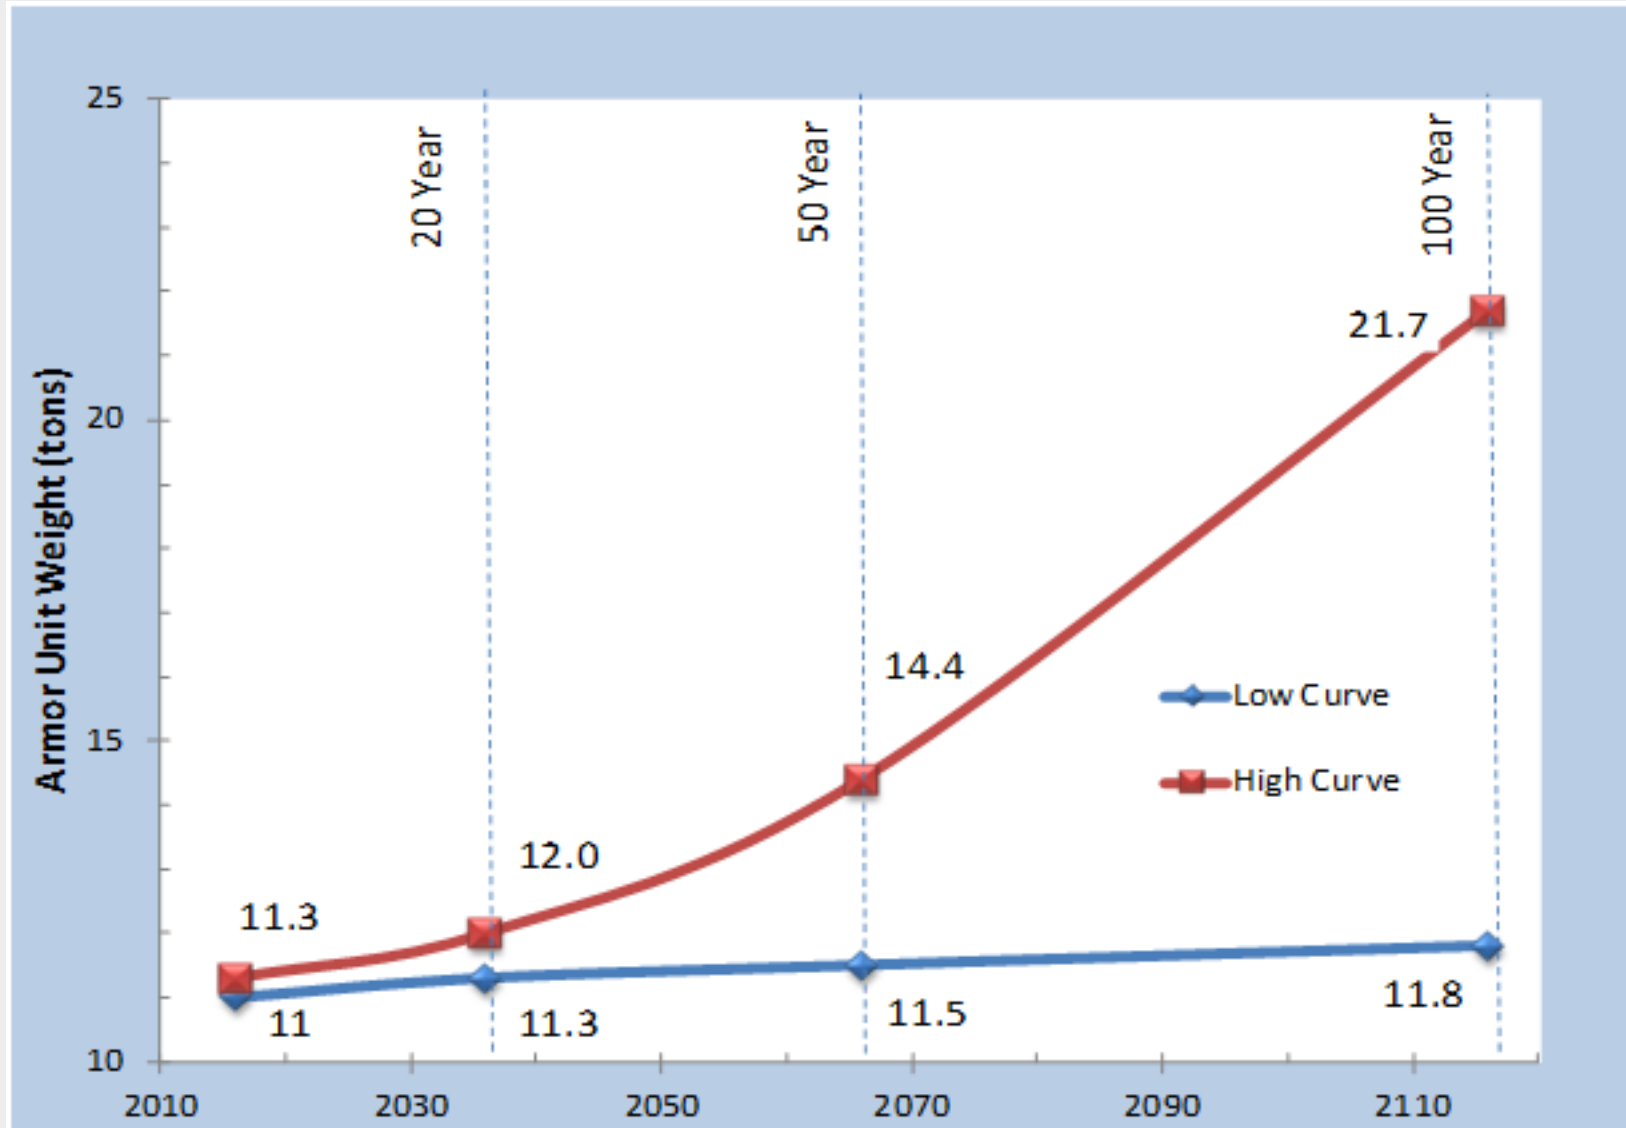


Source: John Headland, Moffatt & Nichol

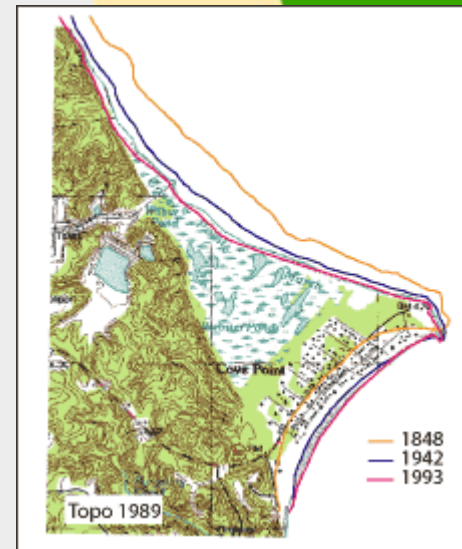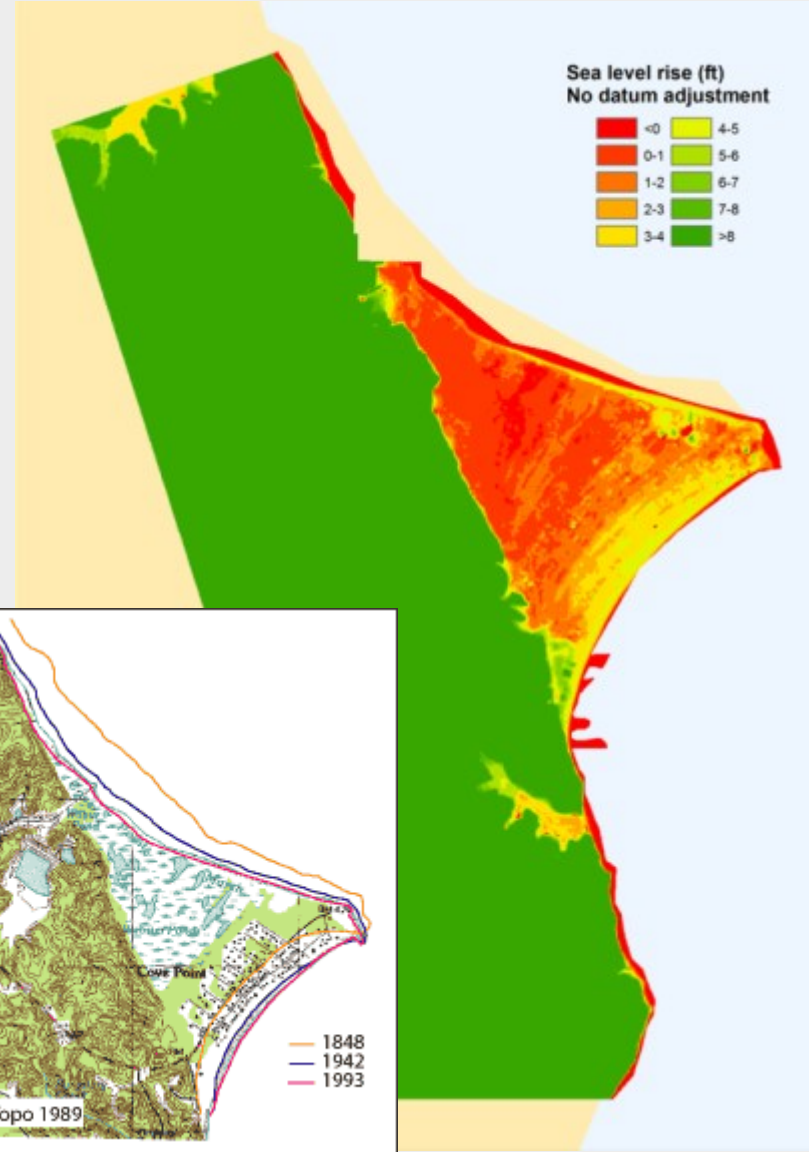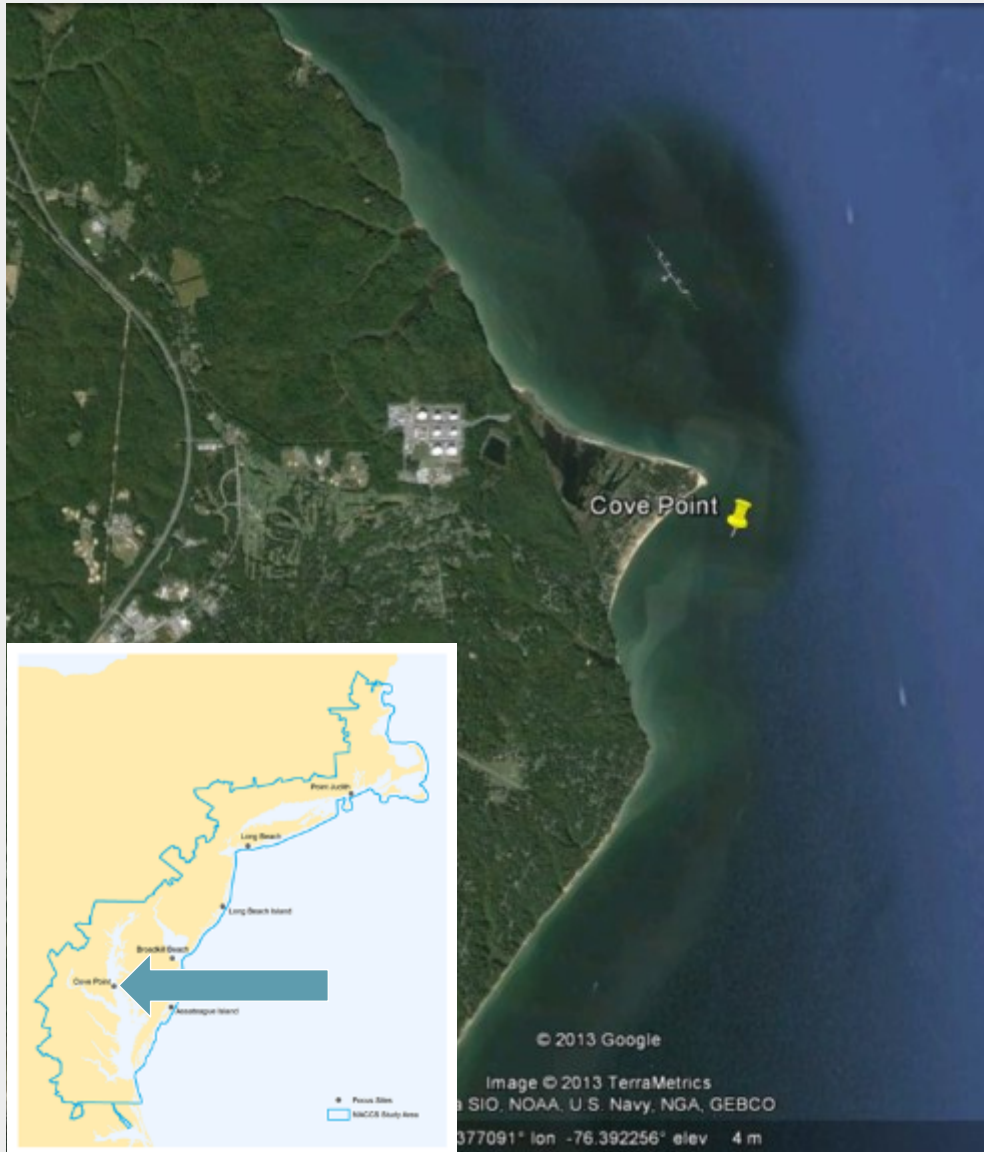

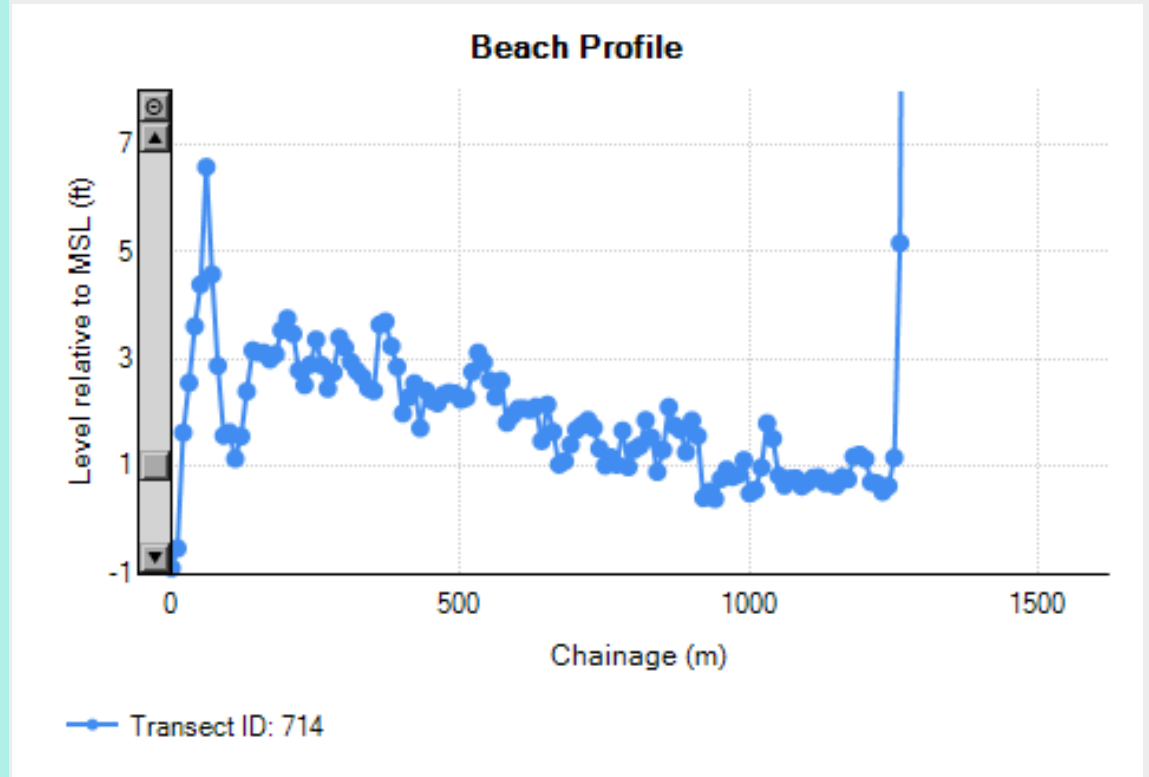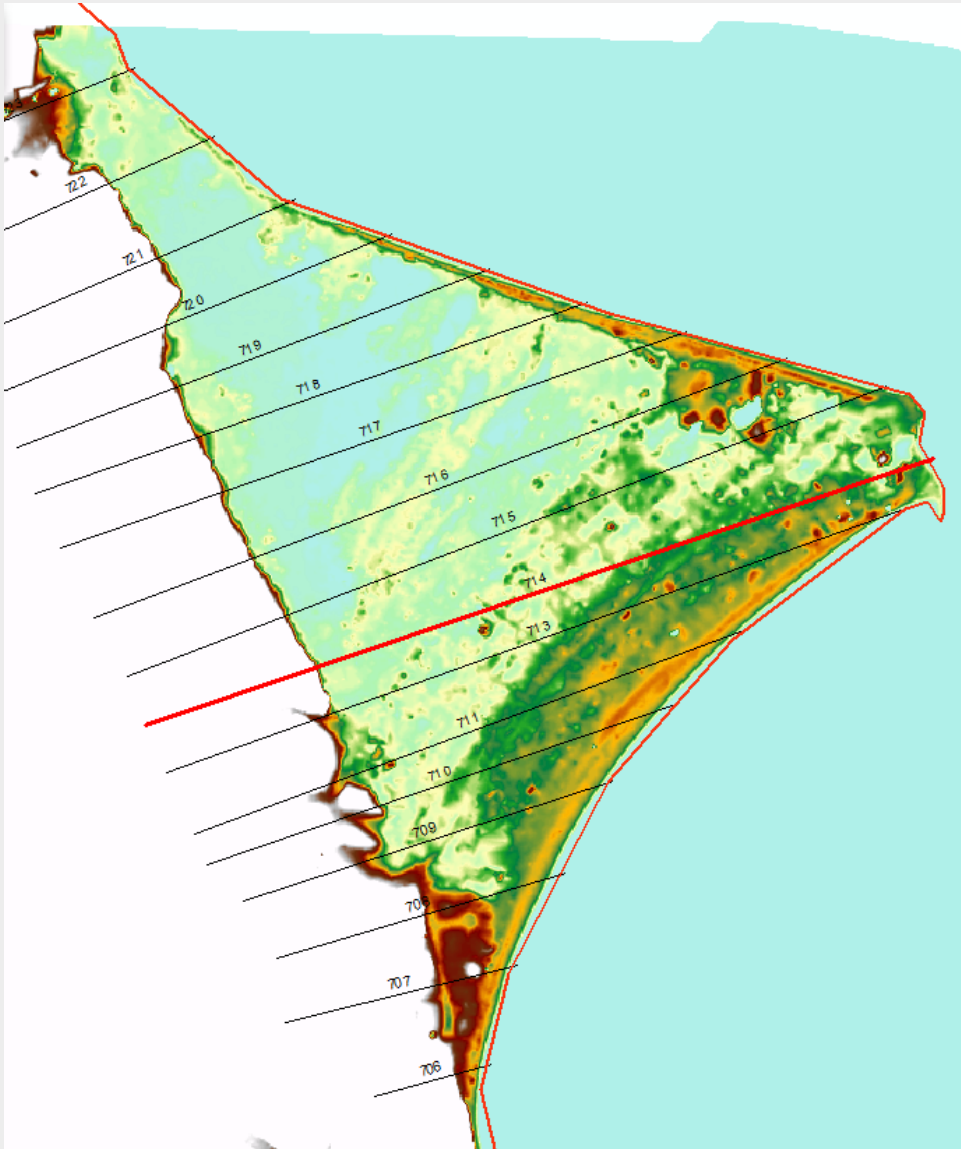


Recession of Calvert Cliffs near Cove Point

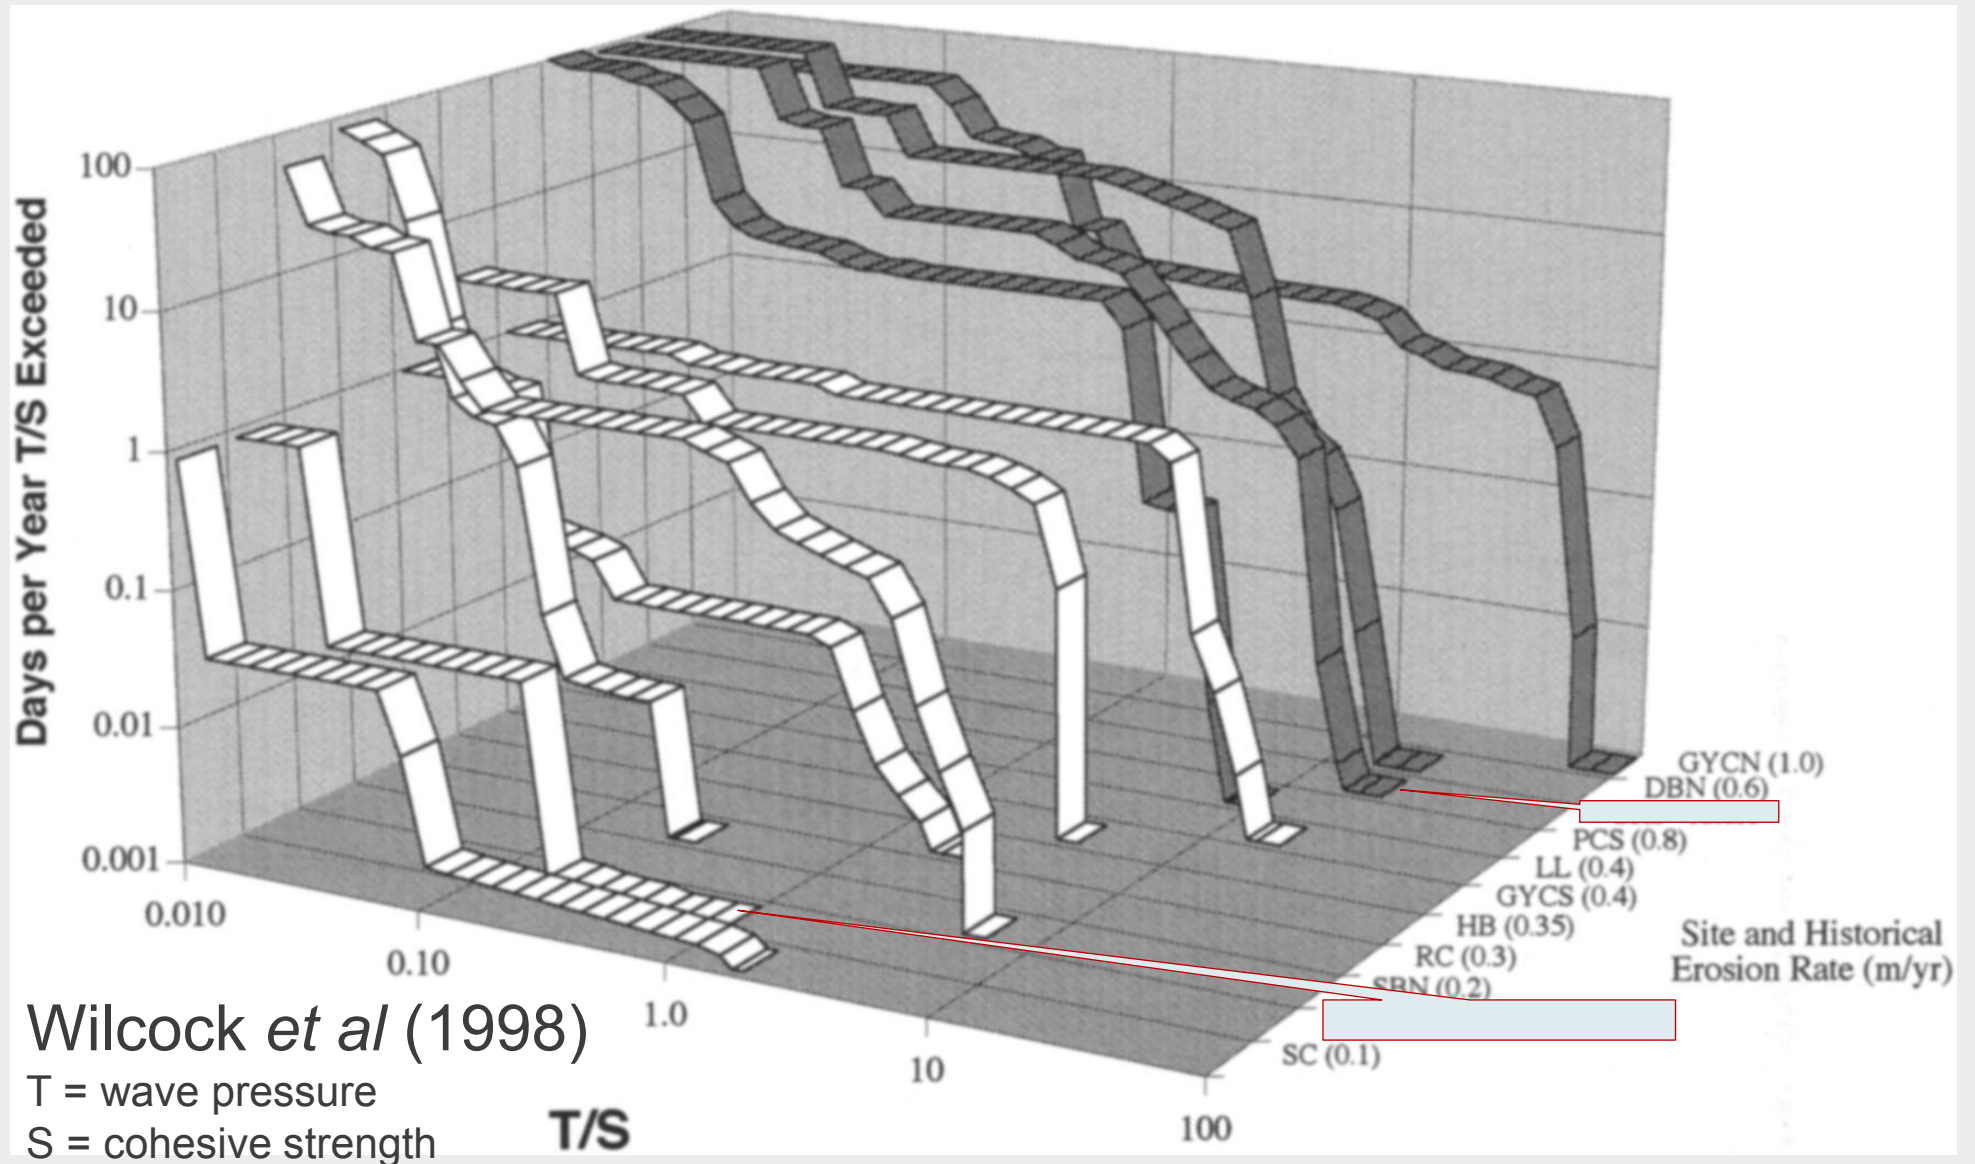


Wider environment of Chesapeake Bay



Blackwater National Nature Reserve

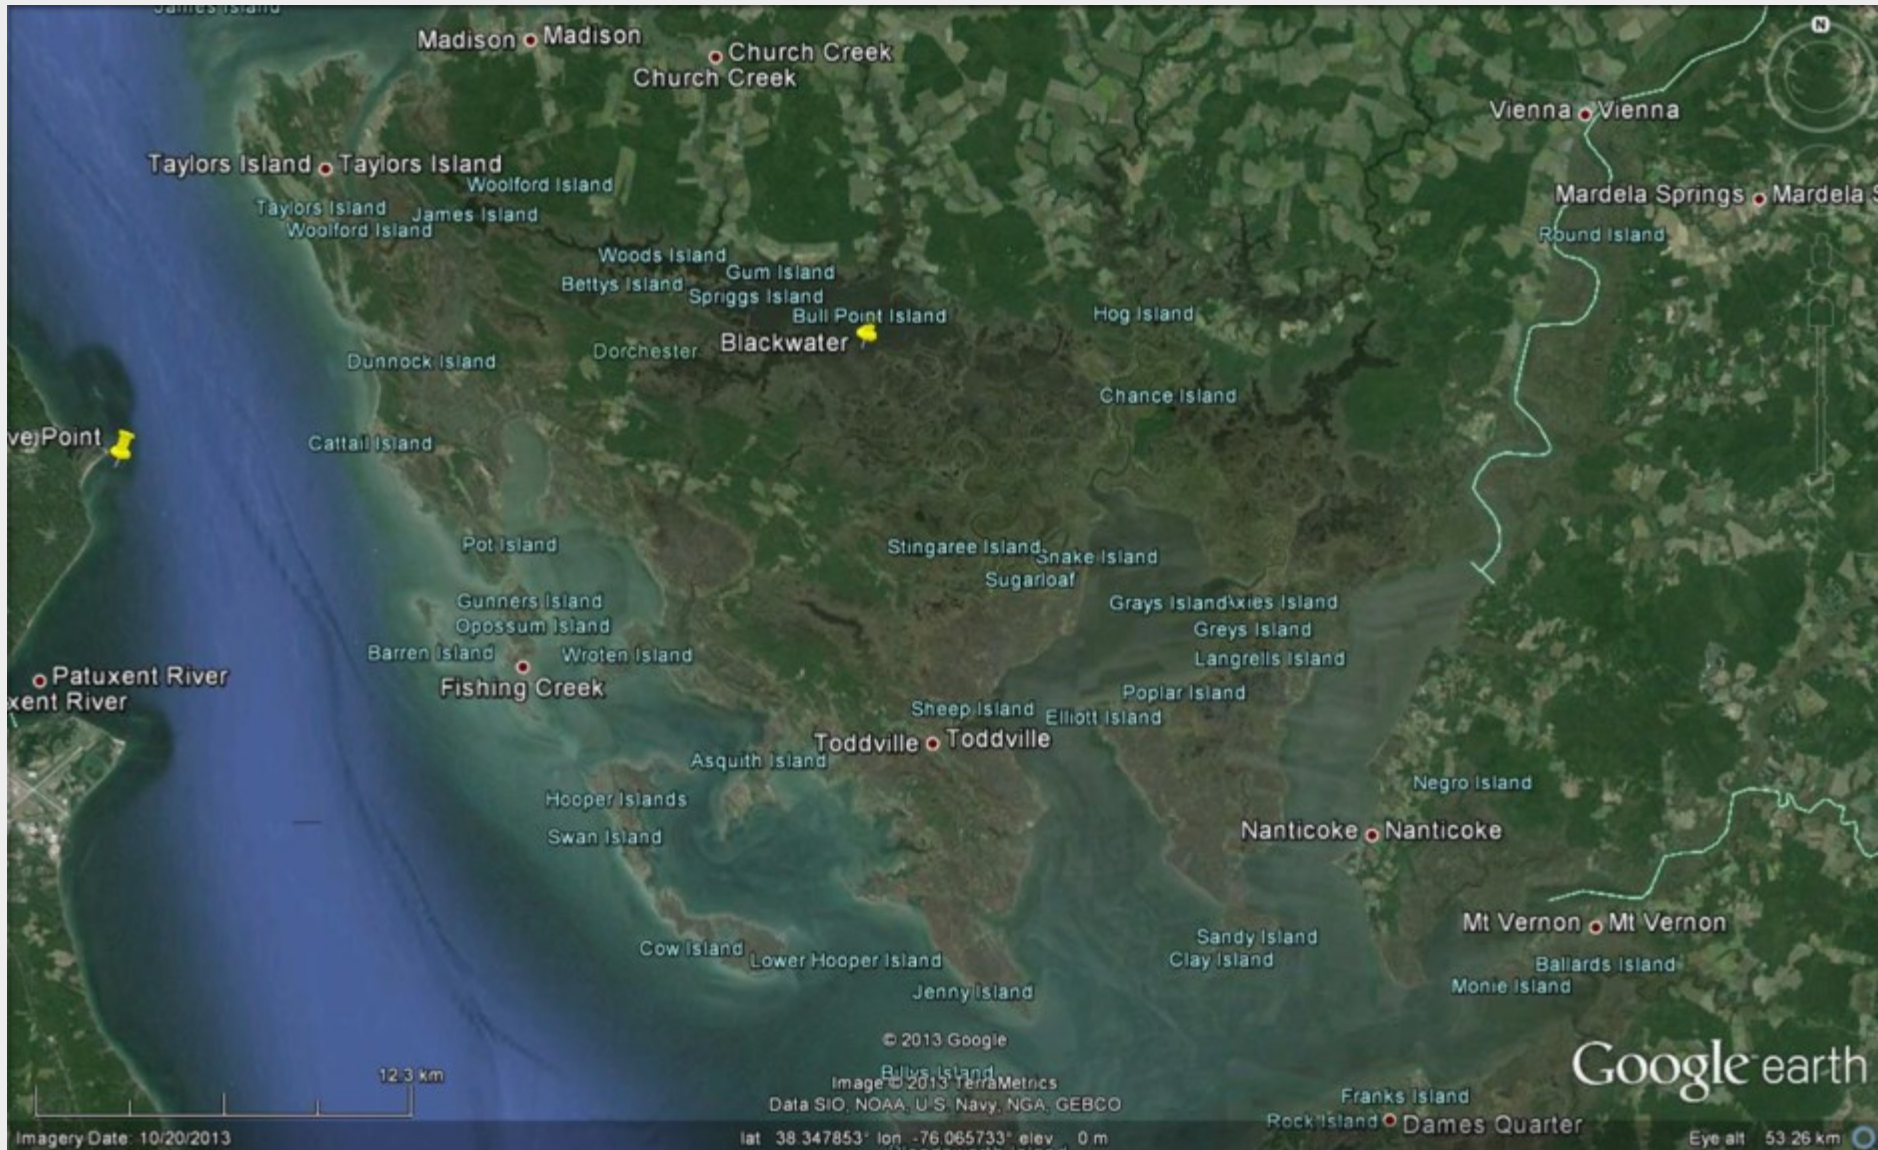

Inundation extensive with very little increase in sea level

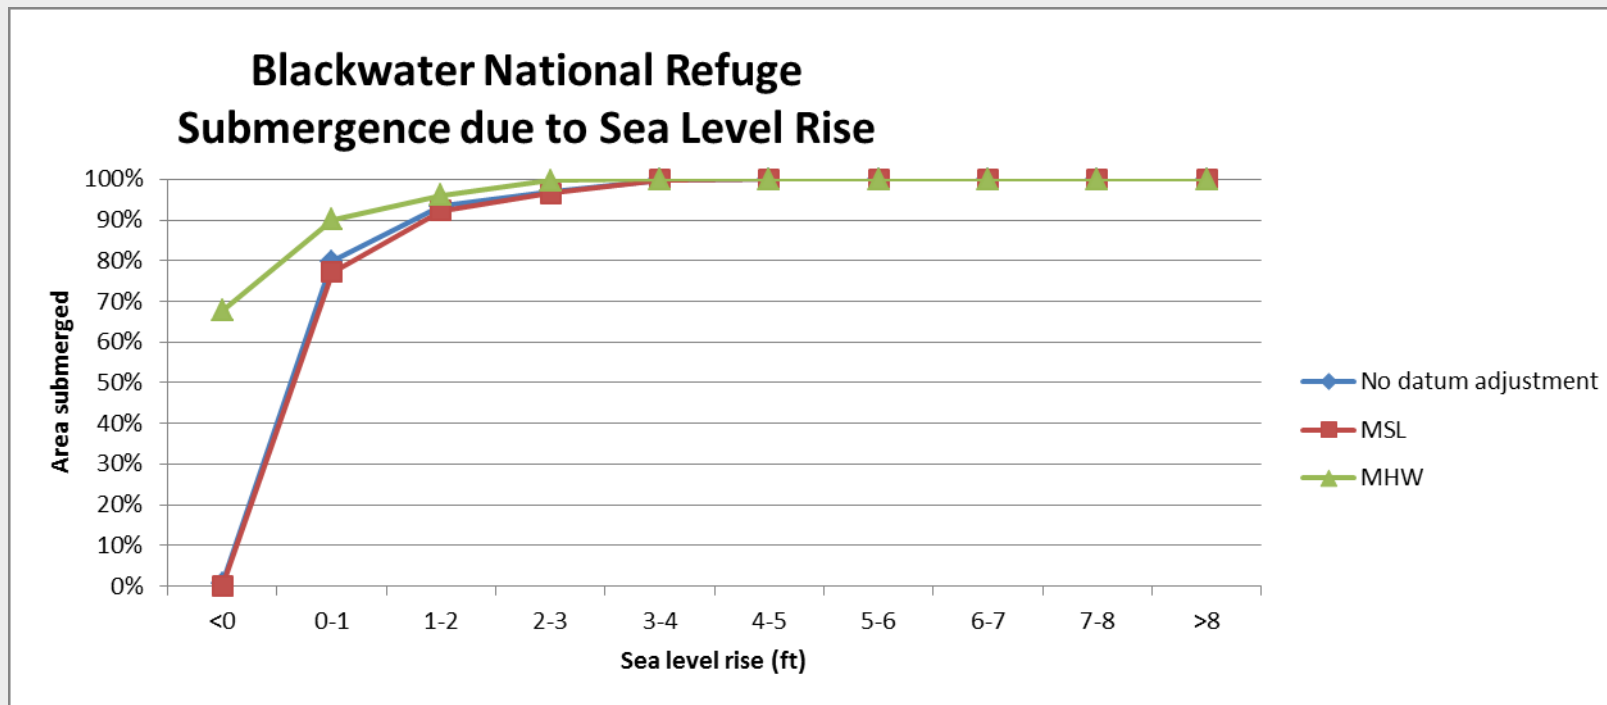

The wider area is gradually being lost as well

Straight cut drainage ditches as example of extensive anthropogenic modification



Blackwater National Nature Reserve - measures

- Existing study of potential measures fairly comprehensive
- Encouraging migration of wetlands most effective, but barriers to such require identification and addressing
- Trickle charging with sediment might be useful, rather than direct placement?
- Reshaping of straight cuts
 - Use a more dendritic drainage pattern rather than infilling, or leaving as is
 - Slowing the straight cut drainage erosion by strategic brushwood check dams
- Ensuring propagule supply and distribution rather than a deliberate planting scheme




Engineered dendritic ditches in managed realignment site, UK

Trickle-charging at Stour-Orwell estuary UK



- Marsh erosion and loss of extent through coastal squeeze.
- Trickle charging using sediments from navigational dredgings.
- Trickle charging ‘tuned’
 - to the location
 - to reduce siltation in undesirable areas and
 - to optimise the flow of sediment by reducing the speed of discharge into the water column.
- Monitoring conclusions so far:
 - few areas of erosion
 - more accretion areas
 - trickle charging potentially useful



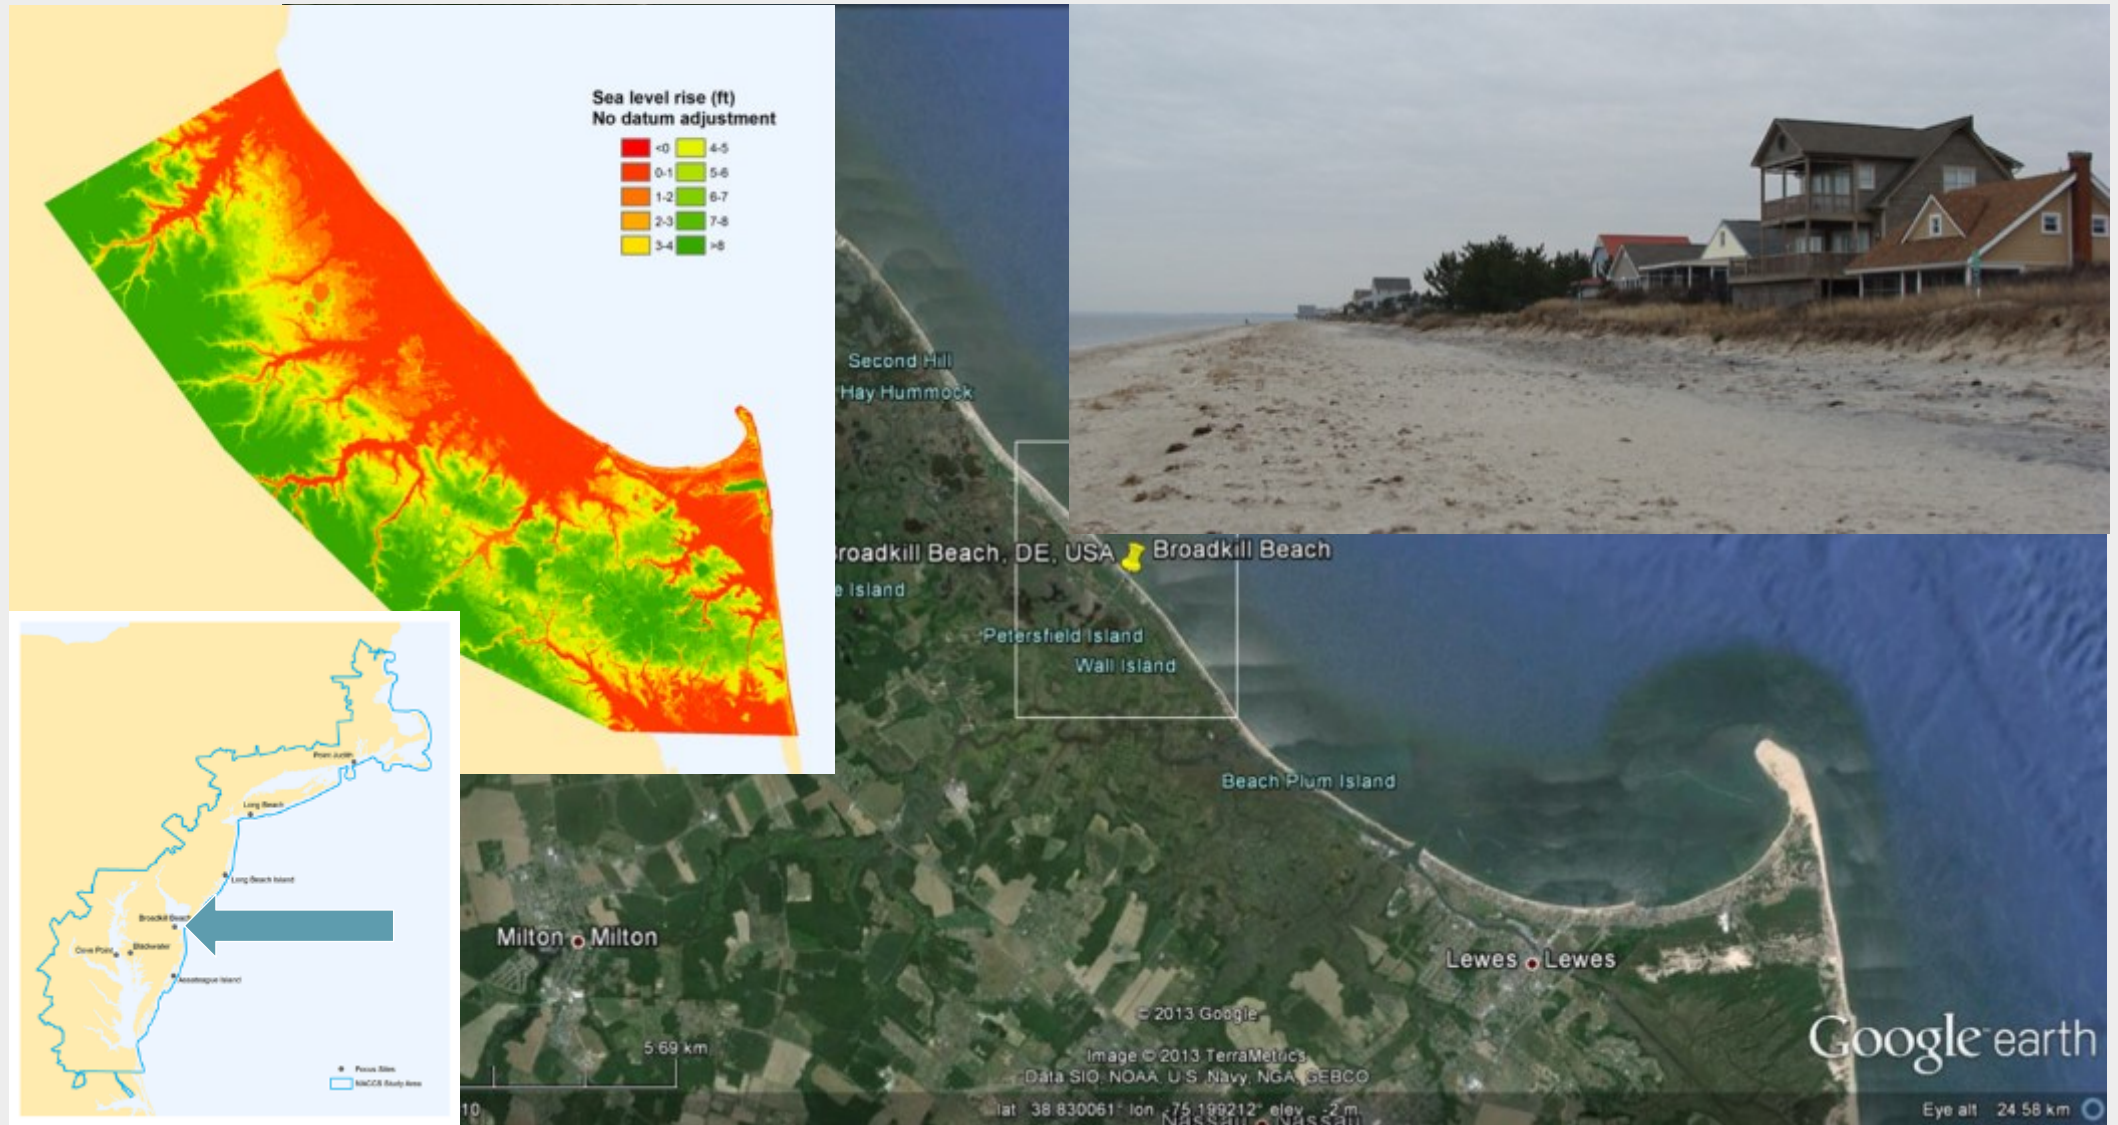

Broadkill Beach

Beach Profile

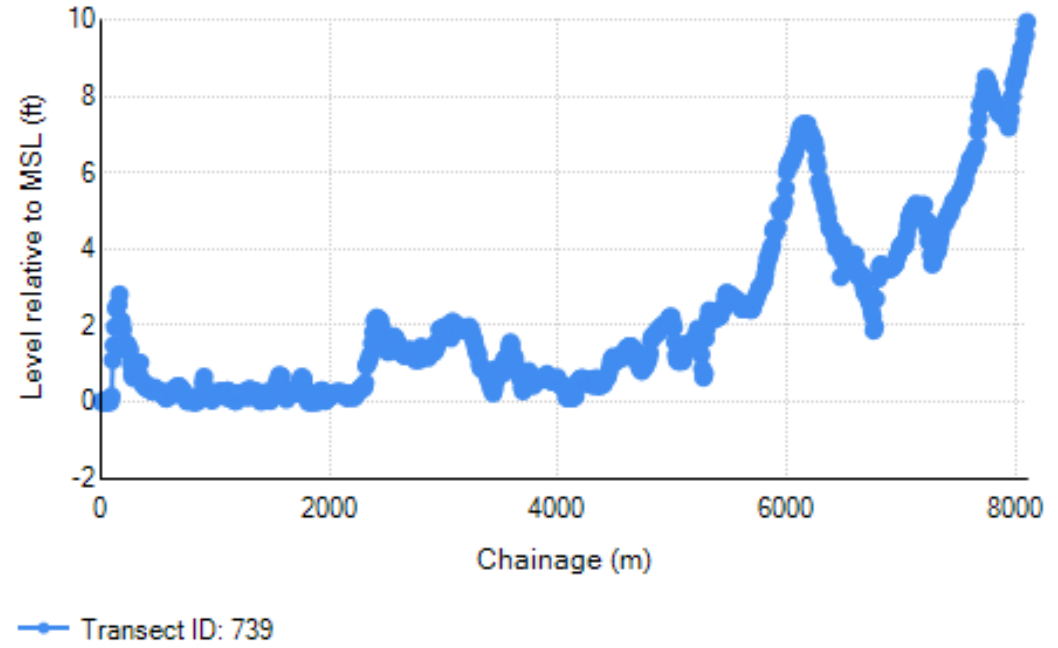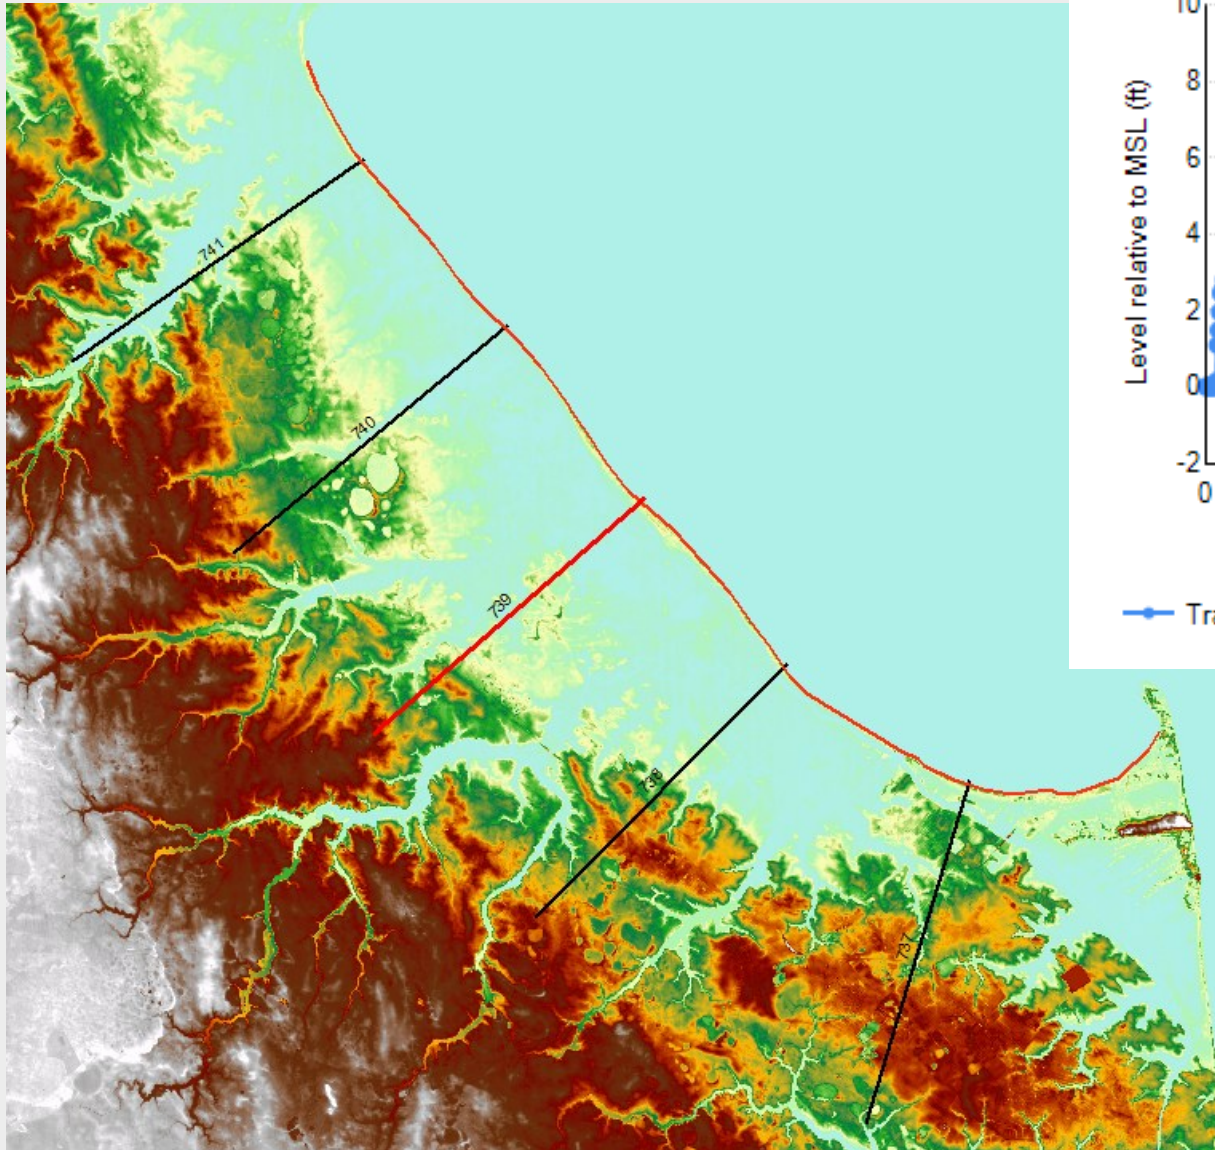

Similarities to barrier islands

- Narrow strip of properties protected by beach nourishment.
- No protection of 'back' side which is floodable due to tidal river and marsh areas behind


Similarities to Blackwater National Nature reserve

- Low lying marsh areas being progressively drowned by sea level rise
- Marsh areas may well not accrete due to (a) insufficient sediment and (b) regular land drainage pattern

The more severe SLC scenarios are (potentially) controversial in USA. However they can be useful:

1. In defining the extent of the project area
2. In representing (through the SLR rate curve) the earliest by which a problem may need to be addressed (including lead times)
 - e.g. tipping point in barrier island submergence

Tipping points: thresholds, lead times and decision points

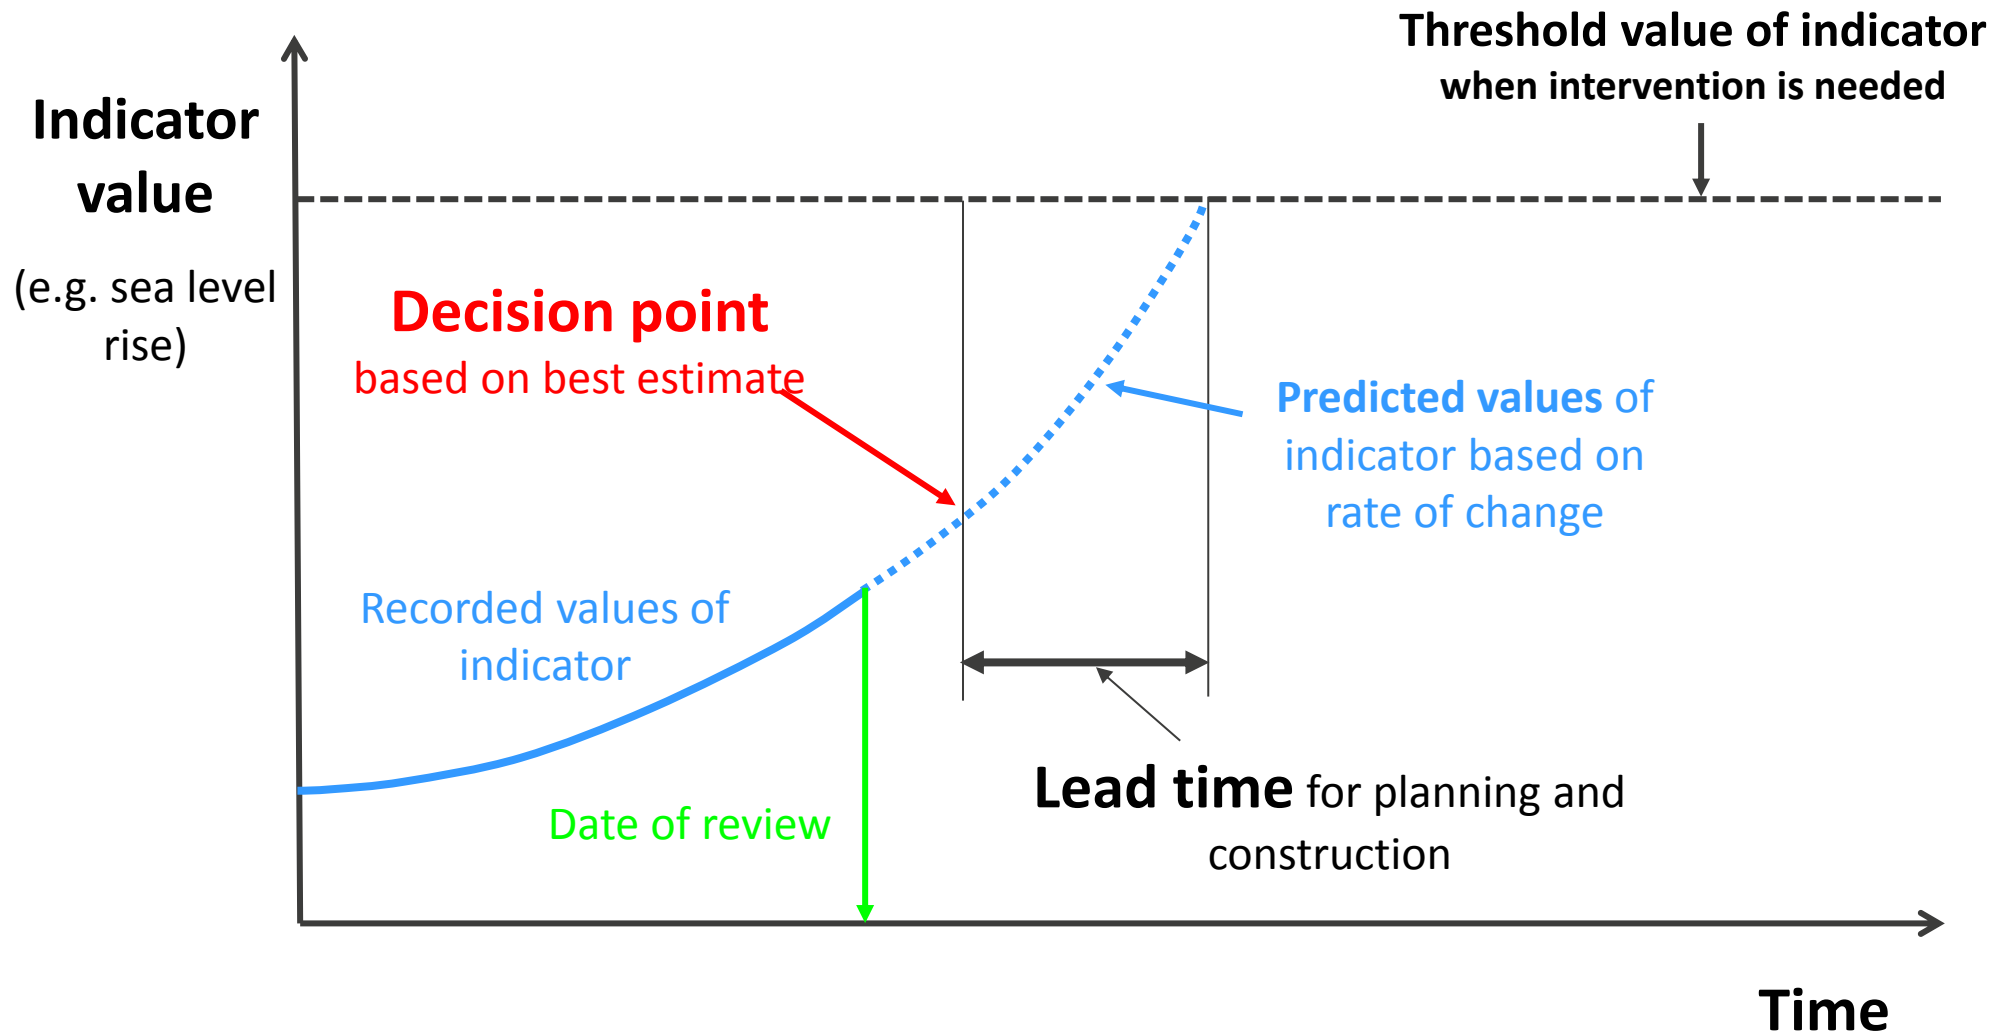

The more severe SLC scenarios are (potentially) controversial in USA. However they can be useful:


1. In defining the extent of the project area
2. In representing (through the SLR rate curve) the earliest by which a problem may need to be addressed (including lead times)
 - e.g. tipping point in barrier island submergence
3. In helping to identify realistic decision pathways, maybe discouraging use of some options that might otherwise have been considered
 - illustrated via barrier island studies
4. In assessing a maximum rate for increased coastal erosion processes
 - e.g. Calvert Cliffs illustration
5. In situations “where there is little tolerance for risk (e.g. new infrastructure with a long anticipated life cycle such as a power plant)” (NOAA, 2012).
 - e.g. possibly ‘overdesigning’ armor size for an exposed location like Point Judith

Write up thinking to date on all sites

Illustrate value of thinking about a range of sea level change scenarios

Focus further analysis on Long Beach Island NJ

- Investigation of implementation of policy options, including long-term effectiveness of beach nourishment projects and identification of tipping points at which various options become viable / non-viable
- Determination of realistic decision pathways

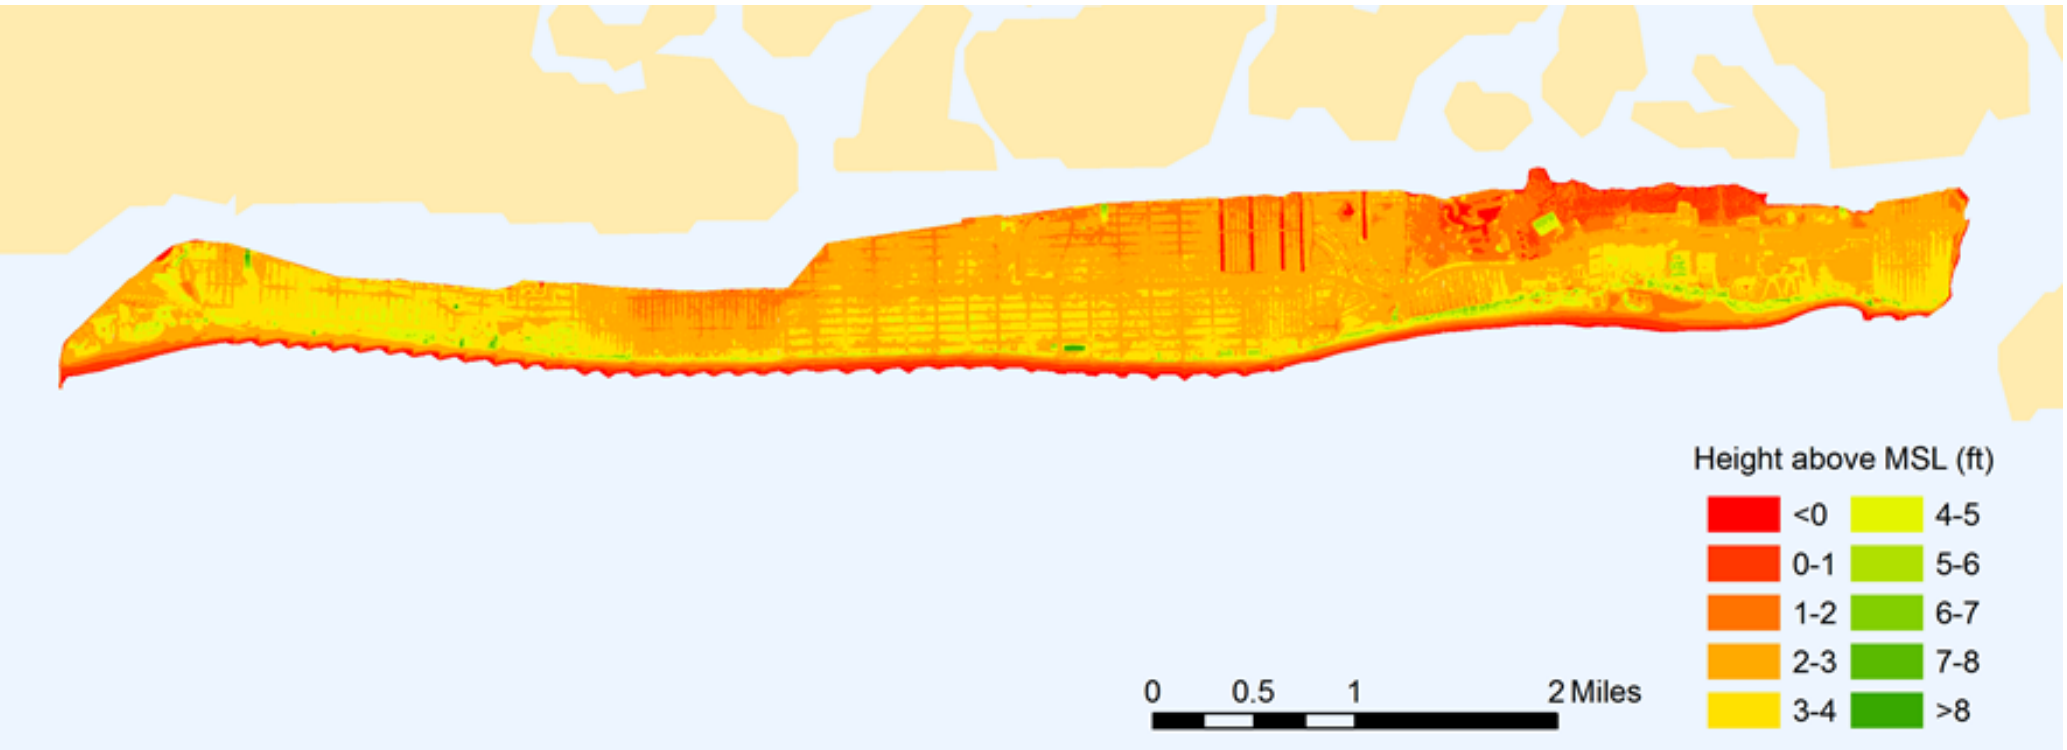

North Atlantic coast of the USA – sea level change vulnerability and adaptation measures