



Nanostructured Zn-Based Electrodeposits for Cd-Replacement on High-Strength Steel Fasteners

Project Number WP-1616

Jonathan McCrea
Integran Technologies Inc.

ASETS Defense, Tempe, AZ

February 28th, 2008

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 28 FEB 2008		2. REPORT TYPE		3. DATES COVERED 00-00-2008 to 00-00-2008	
4. TITLE AND SUBTITLE Nanostructured Zn-Based Electrodeposits for Cd-Replacement on High-Strength Steel Fasteners				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Integran Technologies Inc.,1725 Washington Road, Suite 305,Pittsburgh,PA,15241-1209				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES Surface Finishing and Repair Issues for Sustaining New Military Aircraft Workshop, February 26-28, 2008, Tempe, AZ. Sponsored by SERDP/ESTCP.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 12	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Technical Objective

Project Objective of SERDP Project

- Investigate the benefit of a nanostructured microstructure on the properties and performance of various Zn-Based alloy coatings
- Where possible work on simple modifications to conventional electroplating techniques with the end goal of developing an alloy that:
 - Meets or exceeds the overall performance (corrosion protection, torque-tension, hydrogen embrittlement, etc.) and life-cycle cost of existing cadmium electroplating
 - Provides a “Drop-in” replacement for Cadmium plating, capable of using existing Cd plating infrastructure
 - Does not have any environmental or worker safety issues

Develop an understanding between the microstructure (grain size, crystal structure (phase) and composition) and the properties and performance (sacrificial corrosion, lubricity, hydrogen embrittlement) of Zn-based alloy coatings on HSS → **Microstructurally Designed Cd-Replacement**

Performers



Integran Performers

Jonathan McCrea

Francisco Gonzalez

Iain Brooks

Gino Palumbo

Integran Technologies Inc.

Specialists in Development of Nanometal Coatings

Military Representation

Steve Brown (PAX-River)

NAVAIR Rep “Inorganic Coatings” Group

Commercial Representation


Steven Gaydos

Boeing, St. Louis

Technical Background

Nanostructured Materials – Grain Size less than 100nm

Polycrystalline Structure (um)

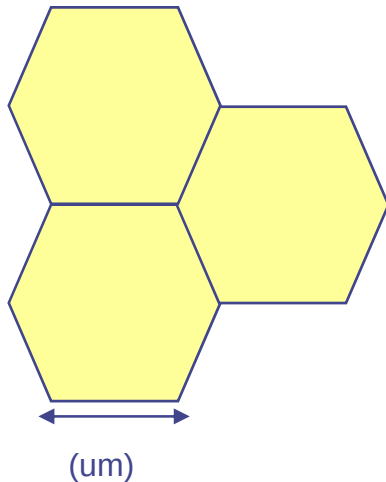


nanoPlate - a low-cost, repeatable process for producing nanocrystalline metals and alloys (nano-material)



When grain size is reduced, there is an increase in mechanical properties, due to the Hall-Petch effect

Nano-crystalline Structure (nm)

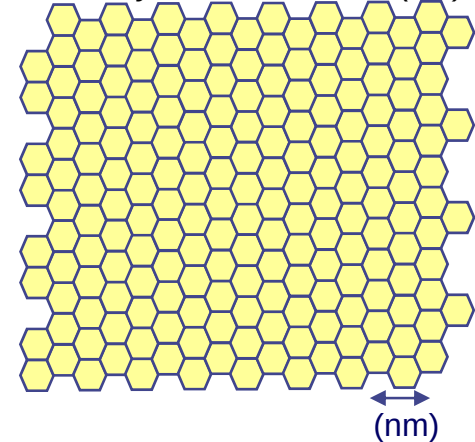


Typical Property Enhancement due to Decreased Grain Size to Nano Regime Includes:

- Hardness (3–5x)
- Yield and Tensile Strength
- Wear Resistance, Impact Resistance

Investigate the relationship between **Microstructure** and **Material Properties** for Fastener Applications


Technical Background

Friction Behavior of Nanostructured Materials

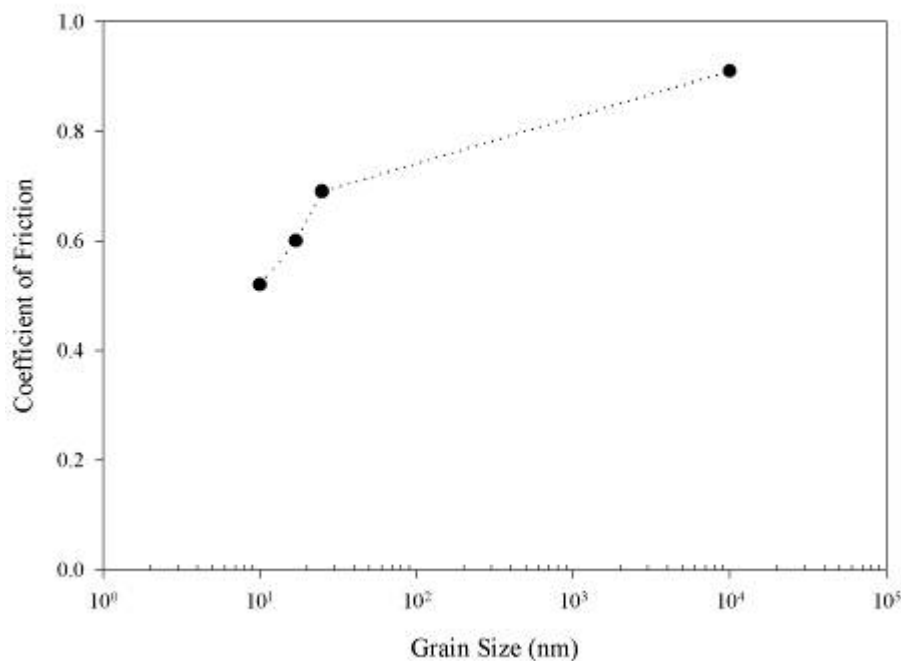

- 6mm Steel ball on Nano Ni Disk

A.M. El-Sherik and U. Erb, in "Nickel-Cobalt 97-Vol. IV, Applications and Materials Performance", F.N. Smith et al. (eds), The Metallurgical Society of CIM, Montreal (1997) 257.

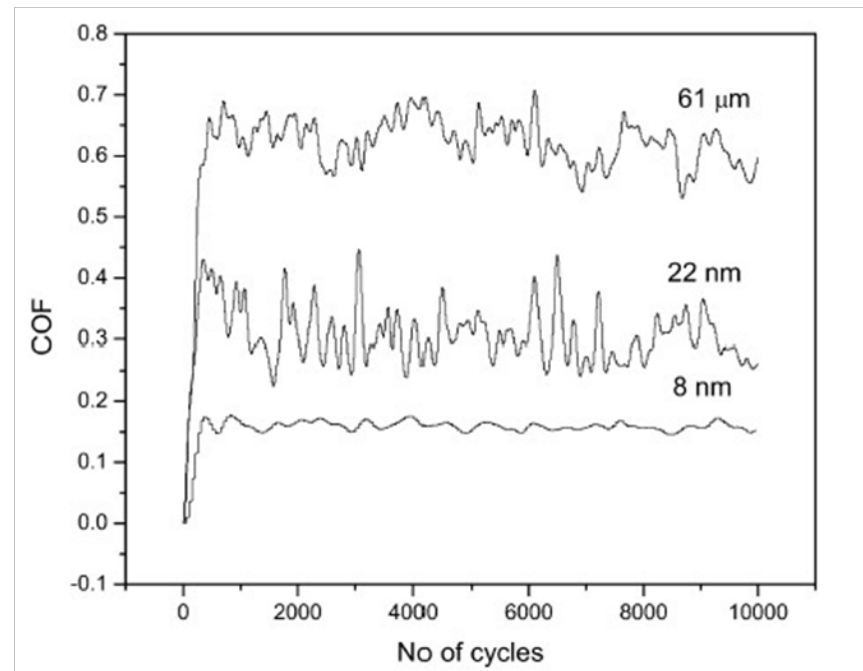


- 8mm Steel ball on Nano Ni disk

R. Mishra, B. Basu, R. Balasubramaniam, Materials Science and Engineering A 373 (2004) p. 370–373

Decrease in grain size has been found to reduce the coefficient of friction

Technical Background

Corrosion Resistance of Nanostructured Nickel

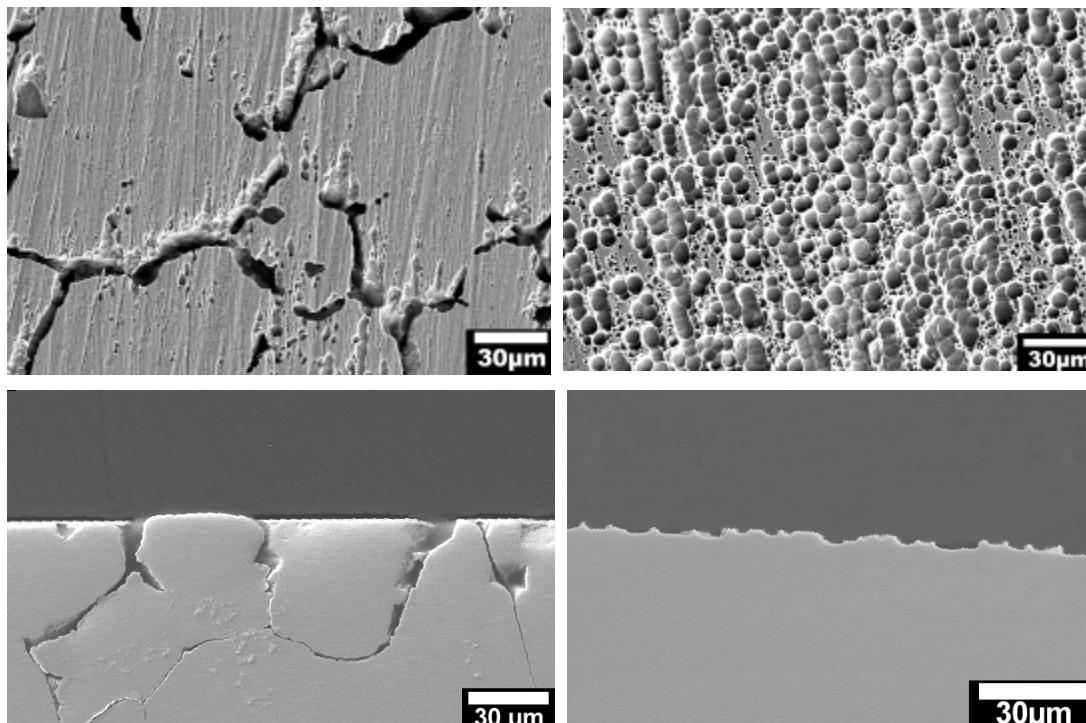

The ultra-fine grain size of nanocrystalline materials reduces the potential for deleterious intergranular corrosion. [Kim et al., AESF Sur/Fin Proc. (2002) 225].

**More uniform
corrosion, less
susceptibility to
localized corrosion**



Surface (top) and cross-sectional (bottom) corrosion morphologies of polycrystalline (left) and nanocrystalline (right) Ni tested in de-aerated 0.25M Na_2SO_4 .

ASETS Defense, Tempe 2008

Technical Background

Hydrogen Permeation through Nanostructured Materials

Increased H_2 permeation through nanocrystalline Zn-alloys will decrease risk of HE issues after baking

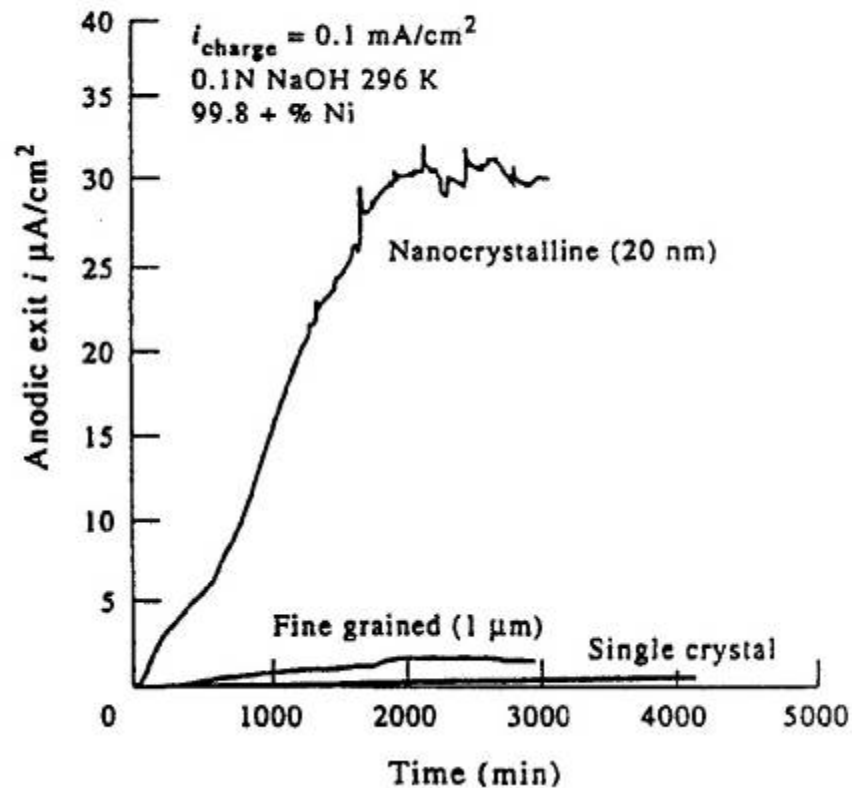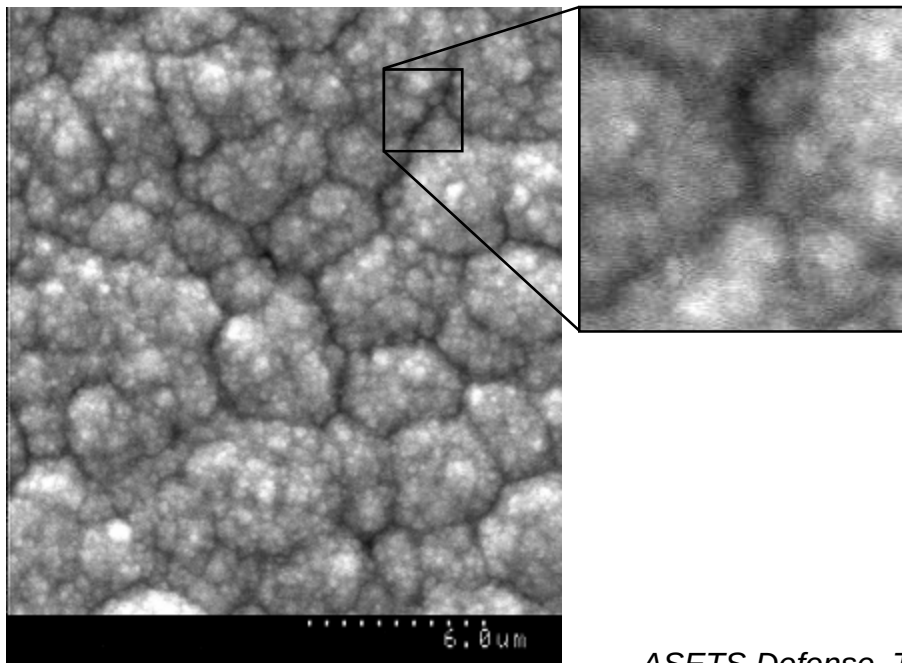

Hydrogen permeation transients showing anodic exit current density (flux) vs. time for nanocrystalline (20nm), fine grained (1 μm), and single crystal Ni foils [Doyle et al, Acta Metall. Mater, 43 (1995)]

Anticipated Benefits of Nanostructured Zn-Based Coatings

Process

- Versatile production process / Drop-in replacement to Cd
- Pulse plating may be used to vary composition/grain size/phase

Properties/Performance

- High hardness, strength and wear/scratch resistance
- High Hydrogen Permeation → Low Hydrogen Embrittlement (non-embrittling, H₂ can be baked-out)
- Fully Dense Uniform / non-localized corrosion
 - corrosion activity at surface coating surface
 - good re-embrittlement characteristics
- Low Friction / High lubricity coating

Project Task Flow

PHASE I

TASK 1
Identify Alloys

TASK 2
Lab Scale
Development

TASK 3
Preliminary
Characterization
and Testing

TASK 4
Coating
Analysis /
Downselect

Go/No-Go

TASK 1 – Identification of Nanoscale Coating Alloys

TASK 2 – Laboratory Development of Three
Nanoscale Zn-Based Alloys

TASK 3 – Preliminary Characterization and Testing

TASK 4 – Coating Performance Evaluation on HSS

Go/No Go

TASK 5 – Optimization of Specific Nanoscale Alloy

TASK 6 – Evaluation of Conversion Coatings

TASK 7 – Final Characterization and Testing

TASK 8 – Comprehensive Performance Evaluation

TASK 9 – Rack/Tank/Barrel Plating Evaluation

Go/No Go

PHASE II

TASK 5
Optimize Alloy

TASK 6
Evaluation.
Conversion
Coatings

TASK 7
Characterization
and Testing

TASK 8
Comprehensive
Performance
Evaluation

TASK 9
Production plating
evaluation

**Go/No-Go
to Proceed to
Dem/Val**

Laboratory Scale Development and Evaluation Three Nanoscale Zn-Based Coatings

- Specific Zn-alloy constituents TBD (Co, Fe, Ni, Sn, etc)
- Evaluation will include assessment of:
 - Grain size / phase / texture
 - Throwing power, composition/thickness uniformity
 - Adhesion
 - Deposit coherency, ductility
 - Cathodic current efficiency
 - Hydrogen embrittlement potential on high strength steels
 - Corrosion performance (Sacrificial cathodic protection for steel)
 - Density of corrosion product
 - Lubricity/friction characteristics (Torque-tension) → Match Cd



**Recommend Zn-Alloy for further
Development and Evaluation in Phase II**

Technical Approach - Phase II



Scale-up/Optimization of Selected Nanoscale Zn-Alloy

- Further optimize Nanoscale deposition process for:
 - Deposition on fasteners
 - Process stability / Industrial Robustness
- Investigate effective stripping methods



Evaluation of Cr6+ free Conversion Coatings

Final Characterization and Testing

- Neutral Salt Spray, Fluid corrosion resistance, Torque Tension, Fastener Test Methods (Method 15 Torque Tension), Rotating Beam (RR Moore) Fatigue Tests, Sustained Tensile Load Hydrogen Embrittlement Tests

Rack/Tank/Barrel Plating Evaluation

Completion of Comprehensive Coating Performance

Evaluation

- Benchmark comparison against Cd and other competitive technologies

Provide Recommendation to Proceed to Dem/Val

Comments, suggestions, recommendations:
mccrea@integran.com

Questions?