

Registration No.

24486



Retractor-Based Stroking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration

Presented at the NATO/STO AVT-221 Specialists Meeting on "Design and Protection Technologies for Land and Amphibious NATO Vehicles", Copenhagen, Denmark, Apr 07-10, 2014

Venkatesh Babu
Ravi Thyagarajan
Sudhakar Arepally

UNCLASSIFIED: Distribution Statement A
Approved for Public Release

15 April 2014

U.S. Army Tank Automotive Research,
Development, and Engineering Center
Detroit Arsenal
Warren, Michigan 48397-5000

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188		
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) 15 Apr 2014		2. REPORT TYPE Paper presented at NATO AVT221 Meeting		3. DATES COVERED (From - To) 10 OCT 2013 – 15 APR 2014	
4. TITLE AND SUBTITLE Retractor-Based Stroking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration			5a. CONTRACT NUMBER		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S) Venkatesh Babu, Ravi Thyagarajan and Sudhakar Arepally			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) TARDEC/Analytics 6501 E 11 Mile Road Warren MI 48397			8. PERFORMING ORGANIZATION REPORT NUMBER #24486 (TARDEC)		
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSOR/MONITOR'S ACRONYM(S)		
			11. SPONSOR/MONITOR'S REPORT NUMBER(S) #24486 (TARDEC)		
12. DISTRIBUTION / AVAILABILITY STATEMENT UNCLASSIFIED: Distribution Statement A. Approved for public release.					
13. SUPPLEMENTARY NOTES Presented at the NATO/STO AVT-221 Specialists Meeting on "Design and Protection Technologies for Land and Amphibious NATO Vehicles", Copenhagen, Denmark, Apr 07-10, 2014					
14. ABSTRACT The beneficial effects of seat stroke on lower lumbar loads, and energy absorbing floors on lower and upper tibia loads are numerically simulated by LS-DYNA3D in an accelerative vertical loading environment. The Hybrid III 50% male dummy occupant dummy is seated in a generic seat system of a ground vehicle interior and restrained with a 5-point seatbelt system. A retractor system is attached between the back of the stroking seat and the hull to provide the desired seat stroking characteristics. The occupant lower lumbar loads and lower tibia loads are analyzed and compared for eight different retractor functions.					
15. SUBJECT TERMS Retractor, Energy absorbing floor, Seat stroke, Lumbar loads, Accelerative load, M&S analysis, Blast, UBB, LS-DYNA, ATD					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT Unlimited	b. ABSTRACT Unlimited	c. THIS PAGE Unlimited	Unlimited	21	Venkatesh Babu
					19b. TELEPHONE NUMBER 586-282-9649

Standard Form 298 (Rev. 8-98)
Prescribed by ANSI Std. Z39.18

**TANK-AUTOMOTIVE RESEARCH
DEVELOPMENT ENGINEERING CENTER**

Warren, MI 48397-5000

Ground System Engineering Assessment & Assurance (GSEAA) / Analytics

15 April 2014

Retractor-Based Stroking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration

By

Venkatesh Babu, Ravi Thyagarajan and Sudhakar Arepally

This is a reprint of a paper presented at the NATO/STO AVT-221 Specialists Meeting on "Design and Protection Technologies for Land and Amphibious NATO Vehicles", Copenhagen, Denmark, Apr 07-10, 2014.

Distribution List

- Mr. Sudhakar Arepally, Associate Director, Analytics, US Army TARDEC
- Dr. Pat Baker, Director, ARL/WMRD, Aberdeen, MD
- Mr. Craig Barker, Program Manager, UBM/T&E, SLAD, US Army Research Lab
- Mr. Ross Boelke, OCP-TECD PM, TARDEC/GSS
- Mr. Robert Bowen, ARL/SLAD, Aberdeen, MD
- Dr. Kent Danielson, Engineer Research and Development Center (ERDC), Army Core of Engineers
- Mr. Paul Decker, PM, DARPA Programs
- Mr. Matt Donohue, DASA/R&T, ASA-ALT
- Ms. Nora Eldredge, WMRD, US Army Research Lab
- Mr. Ed Fioravante, WMRD, US Army Research Lab
- Mr. Ami Frydman, WMRD, US Army Research Lab
- Mr. Mark Germundson, Deputy Associate Director, TARDEC/GSS
- Mr. Neil Gniazdowski, WMRD, US Army Research Lab
- Dr. David Gorsich, Chief Scientist, US Army TARDEC
- Mr. Jeff Jaster, Deputy Associate Director, TARDEC/GSS
- Mr. Steve Knott, Deputy Executive Director, TARDEC/GSEAA, US Army TARDEC
- Mr. Jeff Koshko, Associate Director, TARDEC/GSS, UA Army TARDEC
- Mr. Joe Kott, OCP-TECD Deputy PM, TARDEC/GSS
- Mr. Dick Koffinke, Survivability Directorate, US Army Evaluation Center
- Dr. Scott Kukuck, PM/Blast Institute, WMRD, US Army Research Lab
- Dr. David Lamb, STE/Analytics, US Army TARDEC
- Mr. Mark Mahaffey, ARL/SLAD, Aberdeen, MD
- Dr. Tom McGrath, US Navy NSWC-IHD
- Mr. Tony McKheen, Associate Director/Chief Integration Engineers, US Army TARDEC
- Dr. Tom Meitzler, STE, TARDEC/GSS
- Ms. Erin Norton, OCP-TECD Standards and Specifications, TARDEC/GSS
- Mr. Micheal O'Neil, MARCOR SYSCOM, USMC
- Mr. Ed Sievika, NAVAIR
- Mr. Mark Simon, Survivability Directorate, US Army Evaluation Center
- Dr. Paul Tanenbaum, Director, ARL/SLAD, Aberdeen, MD
- Mr. Pat Thompson, US Army Testing and Evaluation Command (ATEC)
- Mr. Madan Vunnam, Team Leader, Analytics/EECS, US Army TARDEC
- TARDEC TIC (Technical Information Center) archives, US Army TARDEC
- Defense Technical Information Center (DTIC) Online, <http://dtic.mil/dtic/>

Retractor-Based Stroking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration

Venkatesh Babu

U.S. Army, RDECOM-TARDEC
Warren, MI 48397
USA

Venkatesh.Babu.civ@mail.mil

Dr. Ravi Thyagarajan, Ph. D.

U.S. Army, RDECOM-TARDEC
Warren, MI 48397
USA

Ravi.S.Thyagarajan.civ@mail.mil

Sudhakar Arepally

U.S. Army, RDECOM-TARDEC
Warren, MI 48397
USA

Sudhakar.R.Arepally.civ@mail.mil

ABSTRACT

The beneficial effects of seat stroke on lower lumbar loads, and energy absorbing floors on lower and upper tibia loads are numerically simulated by LS-DYNA3D in an accelerative vertical loading environment. The Hybrid III 50% male dummy occupant dummy is seated in a generic seat system of a ground vehicle interior and restrained with a 5-point seatbelt system. A retractor system is attached between the back of the stroking seat and the hull to provide the desired seat stroking characteristics. The occupant lower lumbar loads and lower tibia loads are analyzed and compared for eight different retractor functions.

Keywords: Retractor, Energy absorbing floor, Seat stroke, Lumbar loads, Accelerative load, M&S analysis

1.0 INTRODUCTION

Today's military scenarios have changed from force-on-force involving large troops to smaller local conflicts in asymmetric warfare [1]. Subsequently, the war fighter needs protected mobility and blast-resisting capability to combat both homeland and global security threats [2, 3]. With ever-increasing threat sizes and types, protection against injuries during under body blasts is of utmost importance in developing new armored vehicles, and retrofitting existing fleets. The configuration of the crew compartment is largely defined by the required level of protection and crew safety, vehicle weight and mobility on land and water.

Army ground combat vehicles have to withstand high vertical accelerative loads on the vehicle hull, floor and seat structures. These loads are in turn transmitted, in part or in full, to the mounted soldier, depending on seat and interior design features, causing injuries to the lumbar and lower leg regions. There are numerous ways of mitigating the high accelerative loads imparted into

Retractor-Based Stroking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration

the structure using shaped hulls, (V-shape hull, Double-V hull), and/or material selection, and thus the resulting vertical acceleration to the seat and soldiers. These alone may not enough to reduce the injuries experienced by the soldiers on the field. Newer Army vehicles have blast-mitigating floor systems and stroking mine seats for enhanced energy management. Most of the stroking seat systems today are based on deforming steel cable or specially designed geometries capable of stroking up to 10 inches. These systems are fairly easy to design and incorporate into the seats and work quite well during vertical loading conditions. However, during off-axis loading, these seats may not perform as well in injury reduction, for several reasons such as unexpected soldier posture, binding of stroking mechanisms etc.

This paper demonstrates the on-axis and off-axis effectiveness of (1) a conceptual load-limiting retractor-based stroking seat system, as well as (2) the same seat integrated with an energy-absorbing (EA) floor design. A vertical drop tower simulation is employed to investigate the potential performance of these concepts during a typical blast. In order to accomplish this research, a generic seat system is modelled using finite element methods. The 50% percentile Hybrid III dummy from Humanetics is used to represent a soldier restrained with a standard automotive seat belt system. A retractor-based seat belt system is attached to the seat structure with varying load limiters to achieve the desired seat stroke. The seat-floor-occupant system is subjected to a time-varying generic vertical accelerative load to mimic a typical blast input load to the seat. Resulting crew injuries are monitored for various vertical accelerative loading scenarios. The retractor load limits for the stroking seats are optimized for varying input loading condition using modelling and simulation methods.

There are several advantages to retractor-based energy-management systems. These systems can be efficiently incorporated into the seat structures of today's military ground vehicles. When compared to the more traditional EA mechanisms with metal strips or cables, it is easier to control the stroking in retractor-based concepts using different seat belt materials and load-limiting retractors. In addition, integration of an energy-absorbing floor to such a retractor-based seat stroking system has the potential to be even more effective in mitigating the high shock and accelerative loads transmitted to the soldier in typical under body blasts, thereby reducing the potential occupant injuries. Retractor-based EA systems can be developed as a modular kit and implemented in vehicles that are already fielded as well as those under development. The underlying concept is independent of the size or weight of the vehicle, and can be easily tuned for specific configurations.

2.0 MODEL SETUP

A generic occupant compartment of light tactical vehicle (LTV) driver side is numerically modelled using finite element methods as shown in Figure 1. with a V-hull design. Shock-attenuating and energy-absorbing floor mechanism is also shown in the Figure 1. A generic seat structure with retractor-based stroking mechanism is shown in Figure 2. The passenger side also consists of a similar occupant compartment not shown in this report. The driver and passenger compartments are connected by a tunnel structure along the vehicle centre line.

Retractor-Based Stroking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration

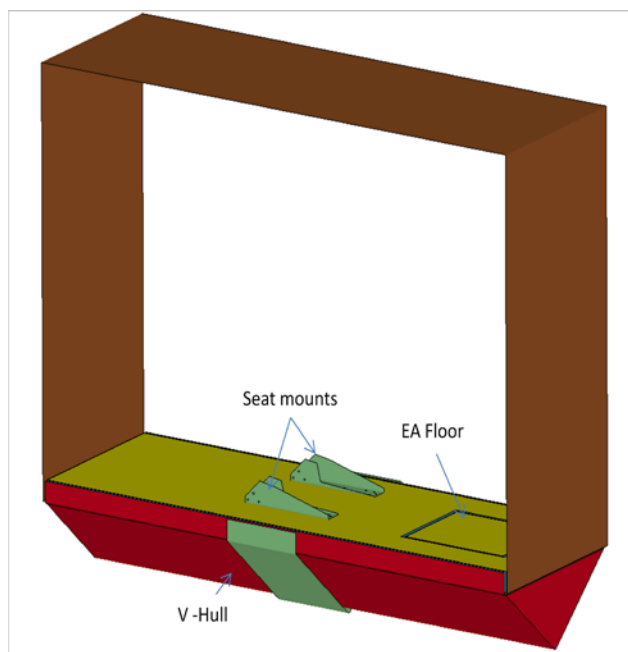


Figure 1: V-Hull occupant compartment

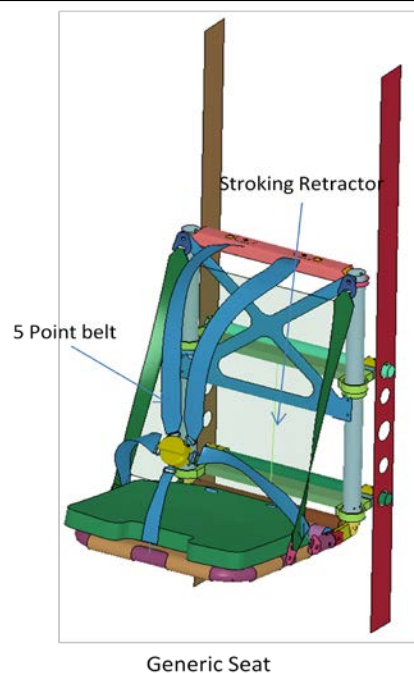


Figure 2: Generic Seat with Stroking Retractor

The Humanetics Hybrid III dummy [7] used in this study to investigate the lower lumbar loads, lower tibia loads, pelvic accelerations, etc. is shown in Figure 3. The complete subsystem is shown in Figure 4.

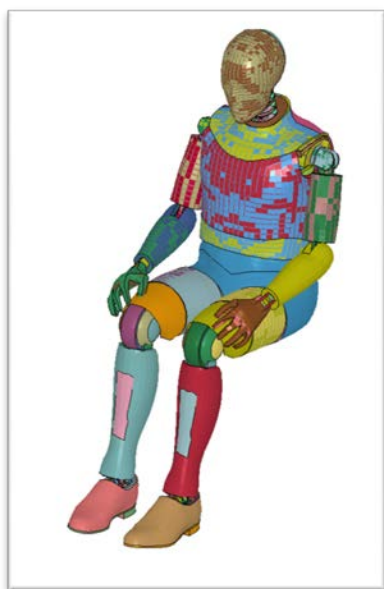


Figure 3: Hybrid III dummy

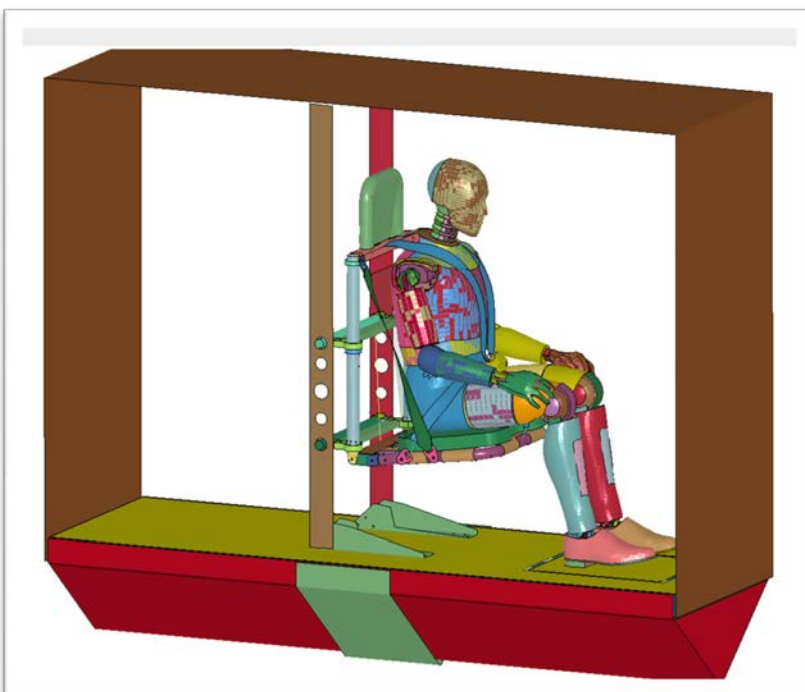


Figure 4: Complete subsystem

Retractor-Based Stroking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration

2.1 Structure model

The structure is modeled with ½" RHA material and is a generic representation of the typical occupant compartment in a light tactical vehicle (LTV). Because the loading used here is an enforced blast pulse, this hull structural thickness does not have any effect on the results.

2.2 Seatbelt model

Automotive seat belts with five point restraints and 10% elongation webbing is modeled using ELEMENT_SEATBELT, SECTION_SEATBELT and MAT_SEATBELT input cards. LS-DYNA provides features to model the loading and unloading characteristics from a uni-axial test. Parameter LLCID in MAT_SEATBELT provides the ability to model the loading curve which allows the definition of force as a function of engineering strain. Parameter ULCID , provides the unloading characteristics as a function of force versus engineering strain. LLCID and ULCID curves are shown in Figure 5 as a Percentage elongation on x-axis and Newtons on y-axis.

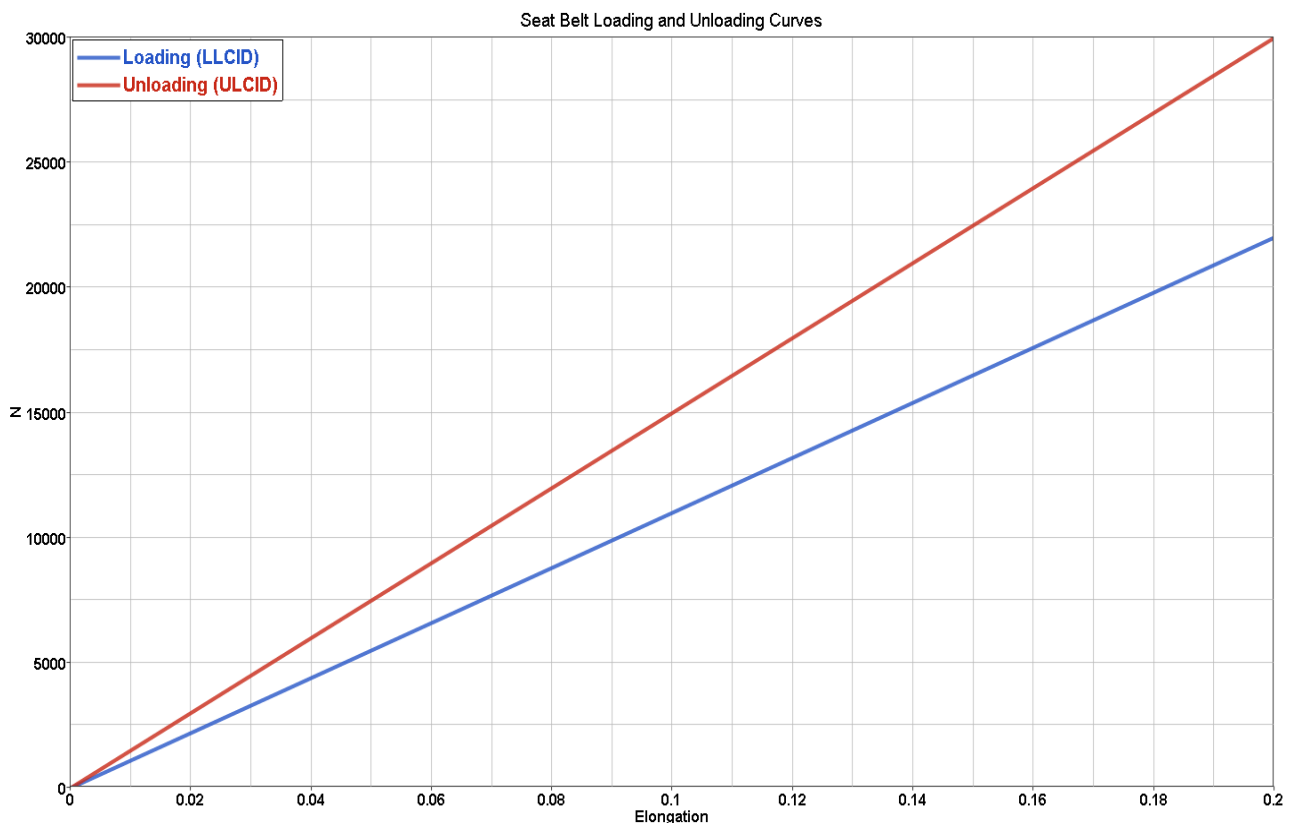


Figure 5: Seat belt loading and unloading curves

Retractor-Based Stroking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration

2.3 Retractor model

Retractor[8] is modeled using ELEMENT_SEATBELT_RETRACTOR card in LS-DYNA. This card requires two curves one for loading and one unloading.

2.4 Floor model

The floor structure is modeled with ¼" RHA. Blast mitigating energy absorbing material is inserted below the floor and above the V hull. During loading, this material will absorb the shock and deform sufficiently enough to mitigate the lower tibia loads.

2.5 Hybrid III dummy model

The Humanetics Hybrid III model is positioned as shown in Figure 4. Both the feet are placed on the floor separated 132 mm apart.

3.0 NUMERICAL ANALYSIS METHOD

The vertical loading from the blast is modeled in this report by imposing a short-duration acceleration (pulse) into the vehicle hull [4]. The numerical analysis method presented in this report involves the following four steps:

- (1) The first step is to establish the baseline occupant injury responses for a non-stroking seat, without energy-absorbing floors, when the structure is exposed to a half-sine vertical acceleration pulse (peak of 200 g), lasting 5 ms, as shown in Figure 6; the corresponding velocity, or ΔV , is 6.3 m/s. For the 350 g and 500 g pulses, the velocities are 8.7 m/s and 9.3 m/s, respectively, as shown in the right side of Figure 6.
- (2) The second step is to compare the baseline occupant injury responses from step 1 with a conventional stroking seat as shown in Figure 7.
- (3) The third step is to establish occupant injury responses of retractor-based stroking seat system for a variety of retractor designs.
- (4) The fourth step is to evaluate the best performing retractor seat system against the 350 g and 500 g vertical pulses to show the robustness of the new retractor-based EA system as compared to the conventional stroking seat.
- (5) The last step is to evaluate the effect of off-axis loading on the hull and determine how the seat and the dummy respond when the 200g, 350g and 500g peak accelerations are applied along an oblique vector (non-vertical). Again, the best performing retractor system is compared against the conventional stroking system.

Retractor-Based Stroking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration

The retractor force-displacement curves used in this study are shown in Figure 9. All simulations have been performed using LS-DYNA [5,6]

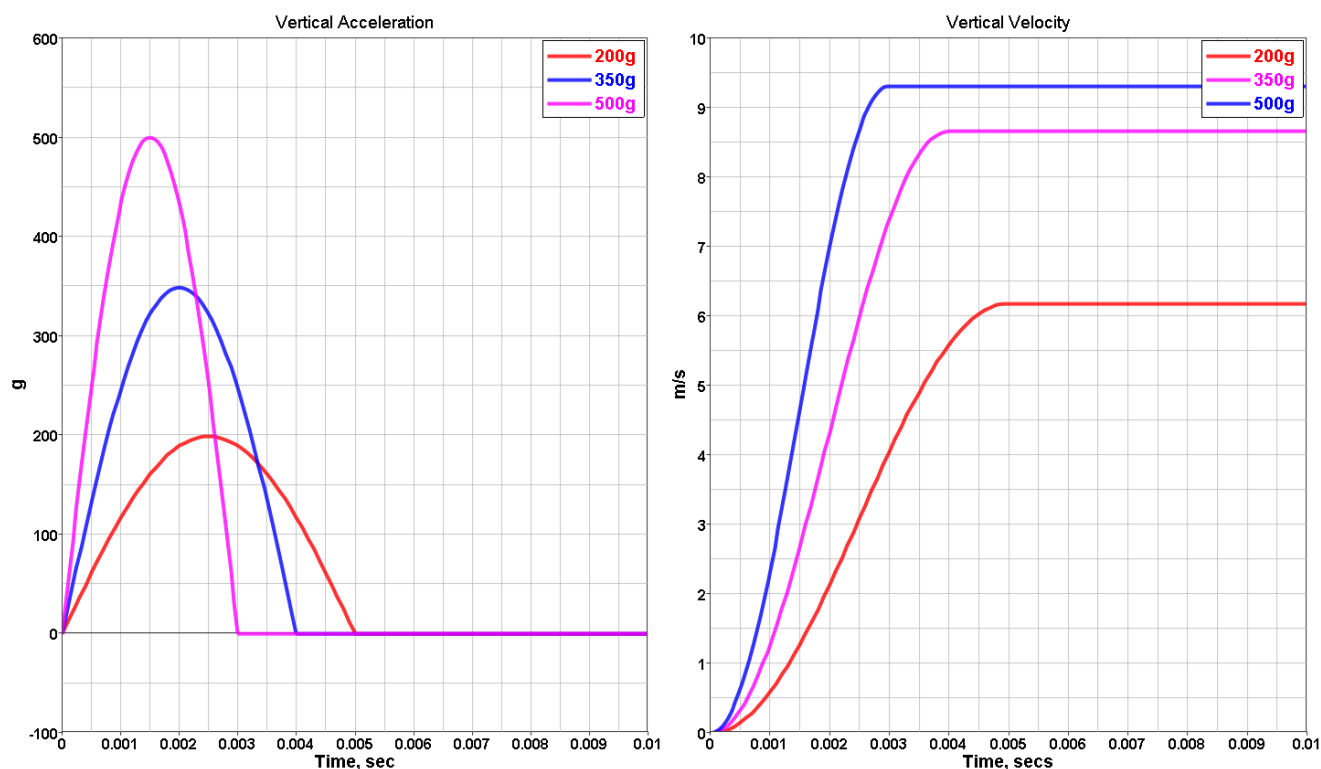


Figure 6: Input vertical acceleration & velocity

3.1 Baseline

Initial baseline analysis is performed with a generic vertical accelerative load of 200 g for 5 milliseconds shown in Figure 6 is input to the V hull. Baseline M&S analysis seat is not allowed to stroke and dummy floors does not have any energy absorbing or shock attenuating mechanisms.

3.2 Conventional stroking seat

In order to assess the validity of the retractor based stroking seat model, it is necessary to understand how the conventional stroking seat will perform in a vertical accelerative loading. The stroking mechanism is represented as a non-linear spring with force vs displacement (FD) as shown in figure 7 as model input. Figure 7 is a typical FD characteristics of a conventional stroking seat. The conventional seat stroking mechanism can be a simple metal wire pulling, a coiled spring

Retractor-Based Stroking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration

compression, tube on tube or can be any other mechanical devices moving relative to each other causing the seat to stroke

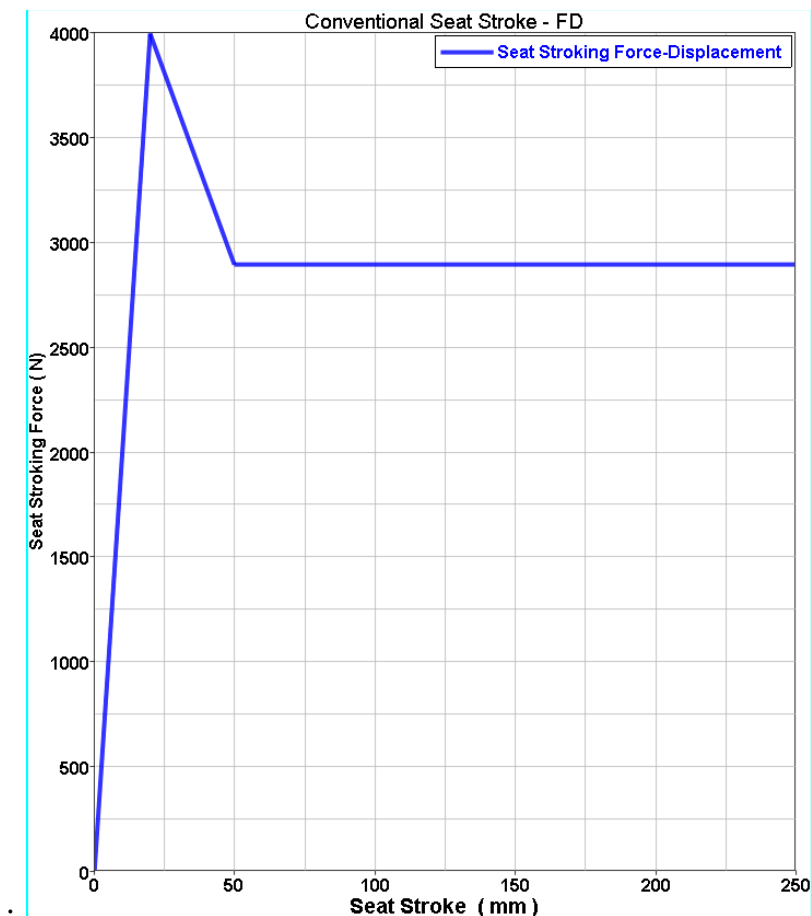


Figure 7: Conventional seat force-displacement (FD) curve

3.3 Retractor-based stroking seat

The conventional stroking seat mechanism is replaced by a seatbelt retractor. There are several advantages to retractor-based energy-management systems. These systems can be efficiently incorporated into the seat structures of today's military ground vehicles. When compared to the more traditional EA mechanisms, it is easier to control the stroking in retractor-based concepts using different seat belt webbing and load-limiters. Retractor-based EA systems can be developed as a modular kit and implemented in vehicles that are already fielded as well as those under development. The underlying concept is independent of the size or weight of the vehicle, and can be easily tuned for specific configurations.

Retractor-Based Stroking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration

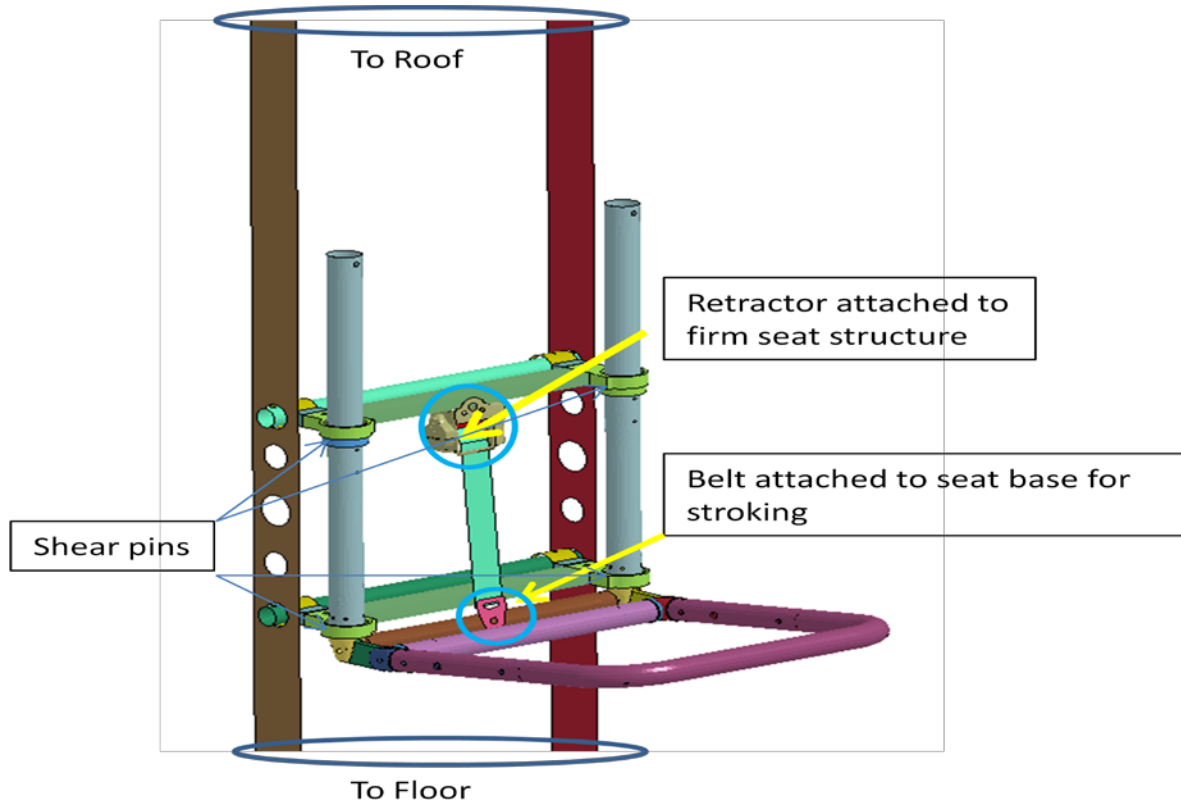


Figure 8: Stroking retractor attachment scheme

Figure 8 shows the detailed attachment scheme for the stroking retractor used in the report. The retractor with torsion bar is attached to the non-stroking stiff part of seat structure as shown on Figure 6. Other end of the retractor is attached to the seat base via the anchor. There are four shear pins that control the initial breaking load. Once the shear pins are released, the seat cushion attached to the retractor is free to move downwards depending upon the occupant load against the vertical accelerative load from the hull (input). The downward motion of the seat cushion and the occupant is controlled by the retractor system which is attached to the stroking seat as shown.

Eight different retractors are analyzed in this study. Figure 9 shows the normalized retractor force-displacement curves. The retractor forces are normalized to the conventional seat-stroking force and displacements or stroke is normalized to peak value of 250 mm. Retractor 8 is a two-stage [9, 10] digressive load limiting retractor (DLLR), all others are constant-force retractors with different load limiters. Maximum seat stroke allowable in this study is 250 mm.

Retractor-Based Stroking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration

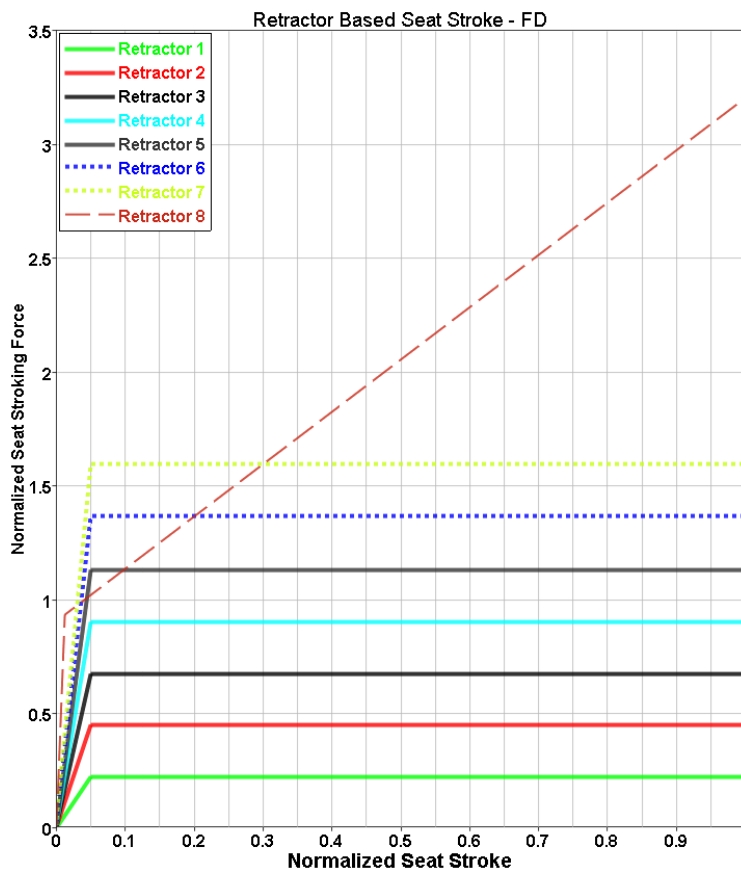


Figure 9: Retractor based seat FD

4.0 NUMERICAL ANALYSIS RESULTS

4.1 Baseline – Non-stroking seat

The injury responses of the occupant seated in the non-stroking seat are shown in Figure 10. The lower lumbar vertical load peaks at 650 lbf (2,891 N) and the duration is between 15 ms to 35 ms. The left lower tibia loads peaks around 3500 lbf (15,568N) and the right lower tibia loads shows peak value of 4500 lbf (20,016 N) with duration from 7 ms to 15 ms for a non-stroking seat. The pelvic vertical acceleration shows a peak value of 45 g's between 12 ms to 45 ms. From the curves below, it is clear that the lower tibia experiences the shock between 7 ms to 15 ms. During this time, the lower lumbar spine experiences minimal load and it will be in tension. When the tibia loads peak, the lower lumbar load starts to pick up a compressive load. The lower lumbar compressive load is

Retractor-Based Stroking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration

active between 15 ms to 35 ms. Peak pelvic vertical accelerations also occur during this time frame.


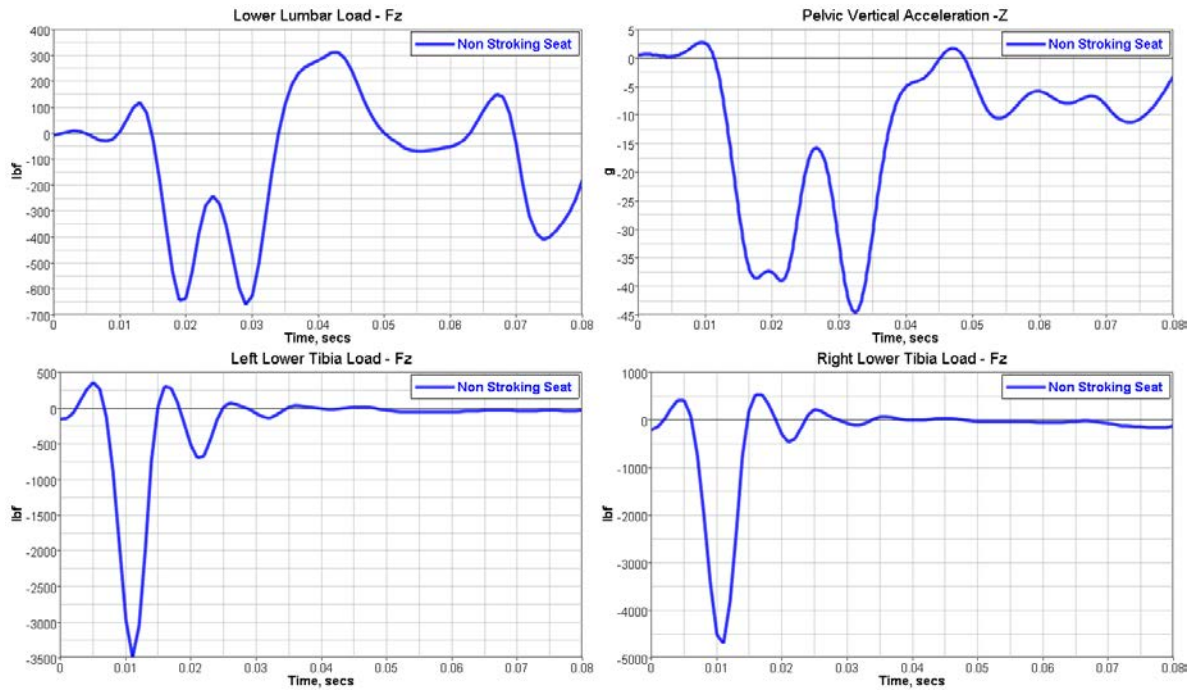


Figure 10: Dummy responses of a non stroking seat

4.2 Conventional Stroking Seat Performance

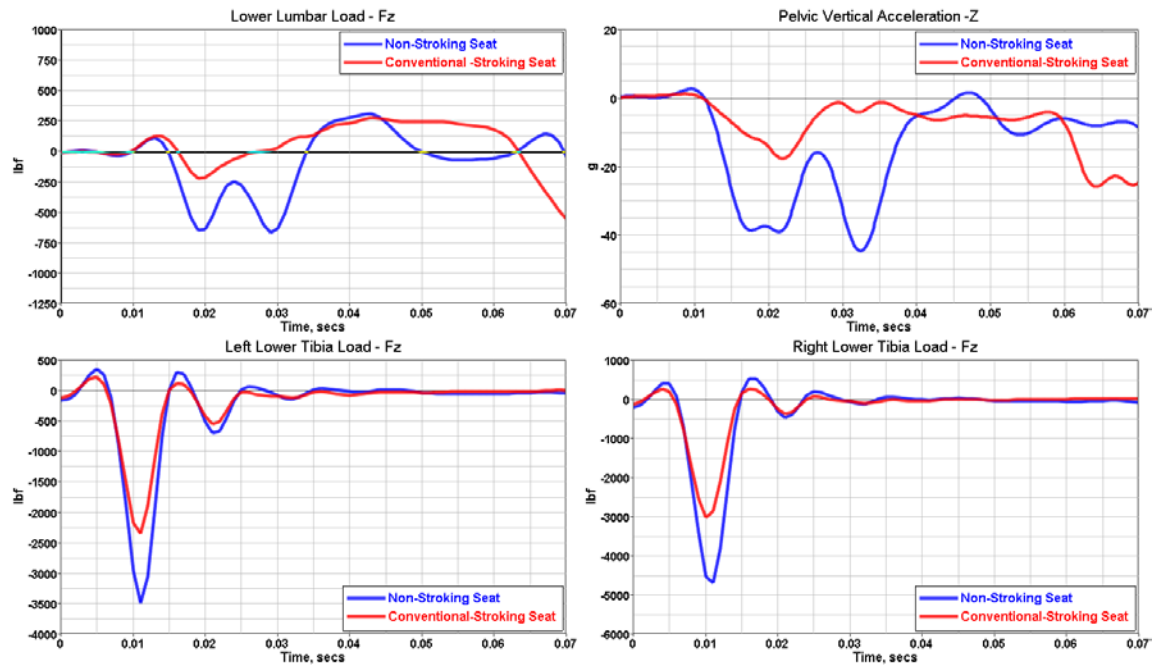

Retractor-Based Stroking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration

Figure 11: Crew responses for non-stroking & conventional stroking seat

Figure 11 shows the dummy responses for a conventional stroking seat comparing to the non-stroking seat. It is clear from the lower lumbar loads and pelvic acceleration curves that the stroking seat does reduce the lumbar loads and pelvic vertical accelerations, as expected. For stroking seats, the peak lumbar loads and pelvic accelerations are slightly lower than that of the non-stroking seat and occur between 12 ms to 35 ms. Since there is no EA mechanism for floor, tibia loads remain nearly unchanged between non-stroking and stroking seats.

4.3 Retractor-based stroking seat performance

Dummy responses for eight different retractors are analyzed and compared to the non-stroking and stroking seats. Table 1 summarizes the dummy responses of non-stroking, conventional stroking and retractor-based stroking seat.

Table 1: Dummy responses for different seat EA concepts

Seat system		Pelvic vertical acceleration (g)	Lower lumbar load (lbf)	Left lower tibia load (lbf)	Right lower tibia load (lbf)
Non Stroking	NS	45	657 [2922 N]	3472 [15443 N]	4675 [20794 N]
Conv Stroking (CS)	CS	18	310 [1378 N]	3000 [13344 N]	4664 [20745 N]
Retractor Stroking (RS)	1	44	795 [3536 N]	1988 [8843 N]	2485 [11053 N]
	2	43	613 [2727 N]	1986 [8834 N]	2479 [11027 N]
	3	30	580 [2580 N]	1986 [8834 N]	2480 [11031 N]
	4	22	453 [2015 N]	1988 [8843 N]	2483 [11044 N]
	5	17	212 [943 N]	1990 [8852 N]	2483 [5445 N]
	6	19	300 [1334 N]	2320 [10319 N]	2486 [11058 N]
	7	21	440 [1957 N]	2350 [10453 N]	2832 [12597 N]
	8	35	490 [2180 N]	3500 [15568 N]	4300 [19126 N]

Retractor-Based Stroking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration

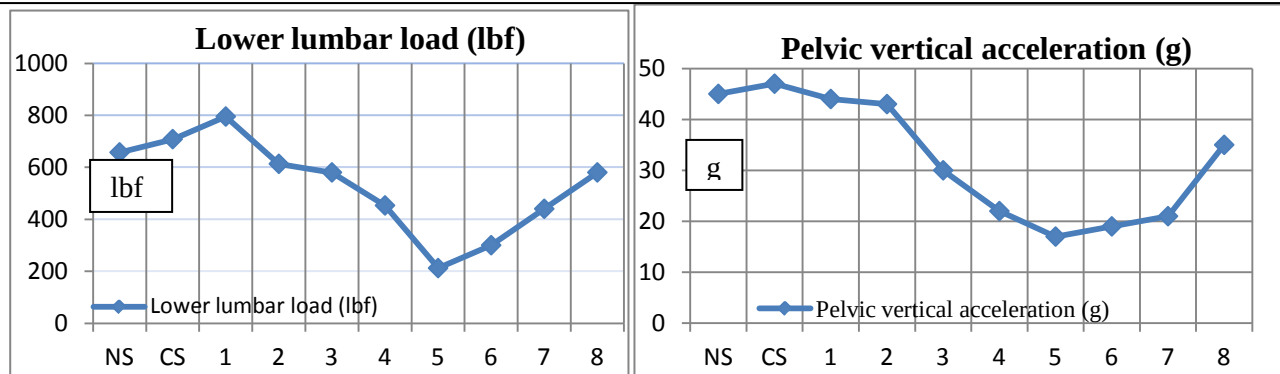


Figure 12: Pelvic vertical acceleration and Lower lumbar load for different seat EA systems

Figure 12 shows the lower lumbar loads and pelvic vertical accelerations from Table 1. The curves in the Figure 12 and Table 1 show that Retractor 5 results in lowest dummy responses for 200 g vertical acceleration input. The lower lumbar loads for non-stroking, conventional stroking and retractor based stroking seats are shown in Figure 13. It is clear from the curves that retractor-based stroking shows significant reductions in lower lumbar loads for 200 g vertical input. Retractor 5 is chosen for further studies in the next step to optimize the lumbar loads, tibia loads and pelvic vertical acceleration for higher input accelerations. Figure 14 shows the occupant positions at different instants of time.

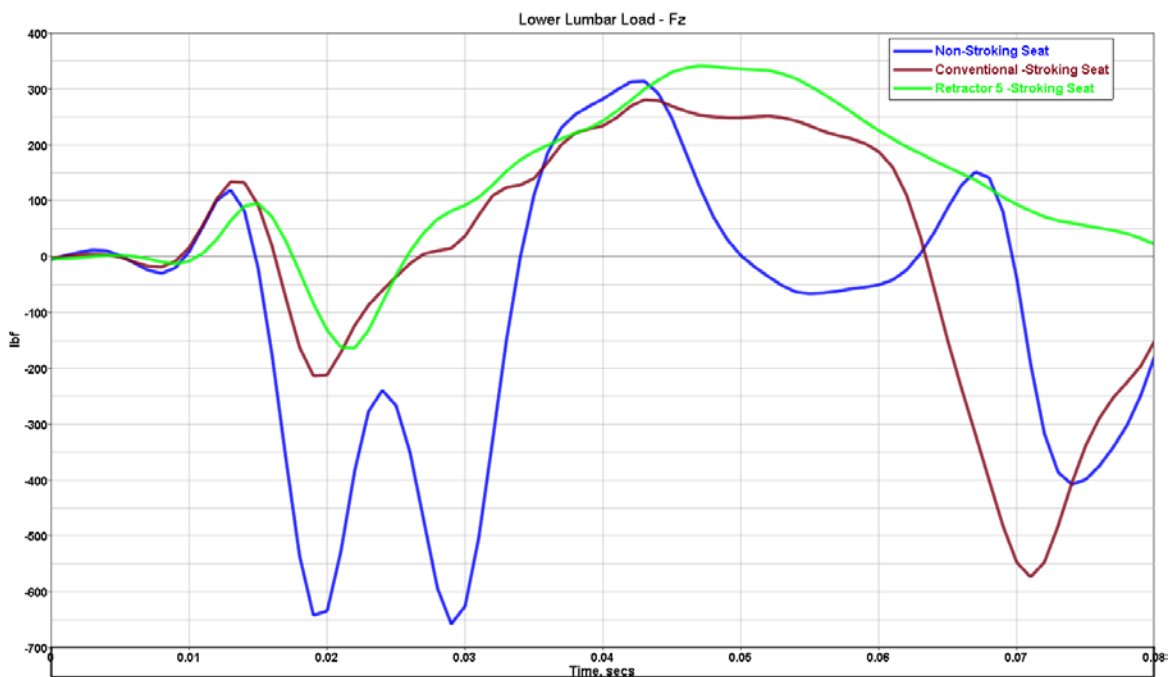


Figure 13: Dummy responses for retractor-based stroking seat vs. conventional stroking seat & non-stroking seat

Retractor-Based Stroking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration

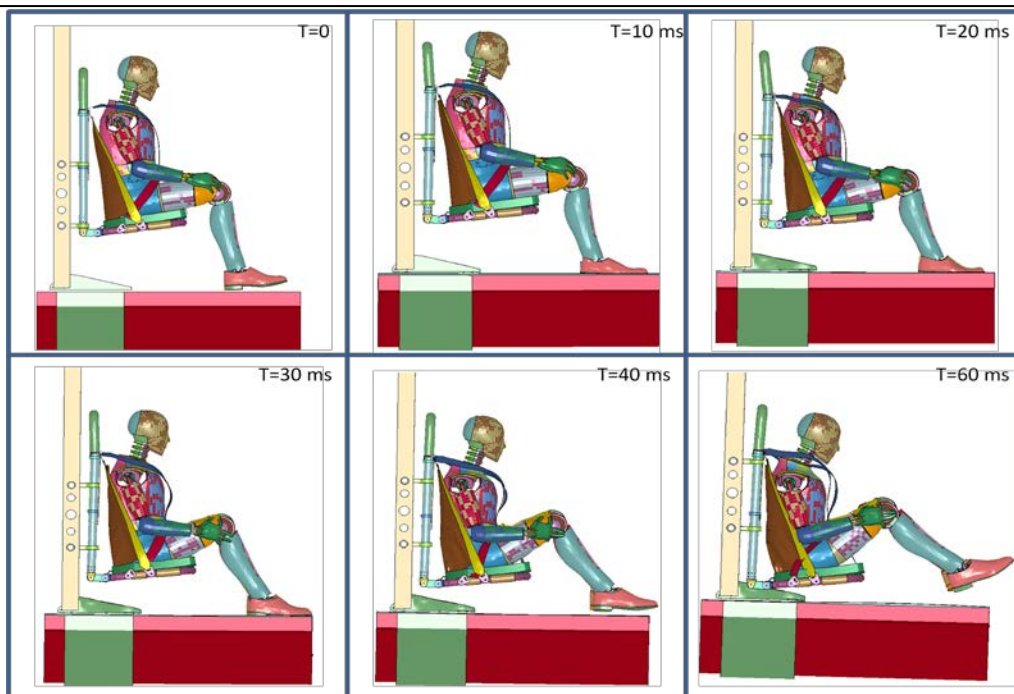


Figure 14: Dummy kinematics at different instants of time

5.0 EFFECT OF ENERGY-ABSORBING (EA) FLOOR

Having identified the best retractor system (Design #5), the next step is to find out how will the energy-absorbing (EA) floor will influence the dummy responses when exposed to same input vertical acceleration. In this set of simulations, the effect of EA floor is analyzed for a non stroking seat, conventional stroking seat and the best retractor stroking seat at 200g, 350g and 500g vertical acceleration input. Results are summarized in table 2.

Table 2: Dummy responses with floating floor & stroking seats

Input	Pelvic vertical acceleration (g)			Lower lumbar loads (lbf)			Average tibia loads (lbf)		
	NS Seat	CS Seat	RS Seat	NS Seat	CS Seat	RS Seat	NS Seat	CS Seat	RS Seat
200 g	42	18	16	600 [2669 N]	300 [1334 N]	196 [872 N]	900 [4003 N]	950 [4226 N]	956 [4252 N]
350 g	44	35	17	1250 [5560 N]	605 [2691 N]	212 [943 N]	1500 [6672 N]	1600 [7117 N]	1053 [4684 N]
500 g	46	42	24	1260 [5604 N]	650 [2891 N]	244 [1085 N]	1700 [7562 N]	1700 [7562 N]	1586 [7055 N]

Retractor-Based Stroking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration

5.1 Off-Axis loading

The last step in the analysis is to evaluate the effect of off-axis loading on the hull and determine how the seat and the dummy respond when 200g, 350g and 500g peak accelerations are applied along the vector defined in Figure 15.

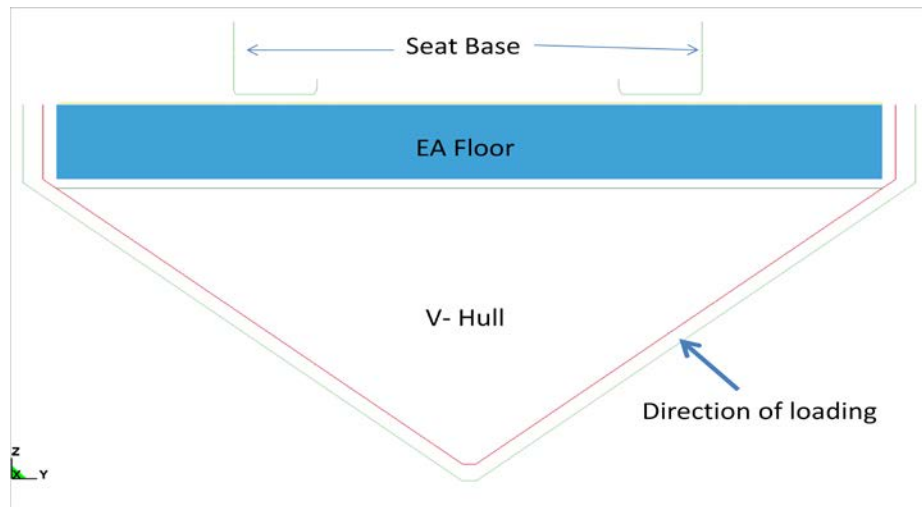


Figure 15: Off-axis loading on the V hull

Table 3: Dummy responses and responses for conventional (CS) and retractor (RS) seats

Input	Pelvic vertical acceleration (g)		Lower lumbar loads (lbf)		Average tibia loads (lbf)		Seat Stroke (mm)	
	CS Seat	RS Seat	CS Seat	RS Seat	CS Seat	RS Seat	CS Seat	RS Seat
200 g	11	8	322 [1432 N]	105 [467 N]	200 [890 N]	300 [1334 N]	35	90
350 g	18	10	350 [1557 N]	150 [667 N]	370 [1646 N]	360 [1601N]	64	110
500 g	19	16	470 [2091 N]	330 [1468 N]	420 [1868 N]	390 [1735 N]	78	170

Table 3 summarizes the dummy responses and seat stroke results from off –axis loading. The retractor stroking seat shows lower dummy responses compared to conventional stroking seat when exposed to off-axis loading. The seat strokes more in retractor-based system compared to conventional seat stroking system, on an average, by an increase of 50%. The initial and final positions of the seat

Retractor-Based Stroking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration

and dummy are in captured in Figure 16.

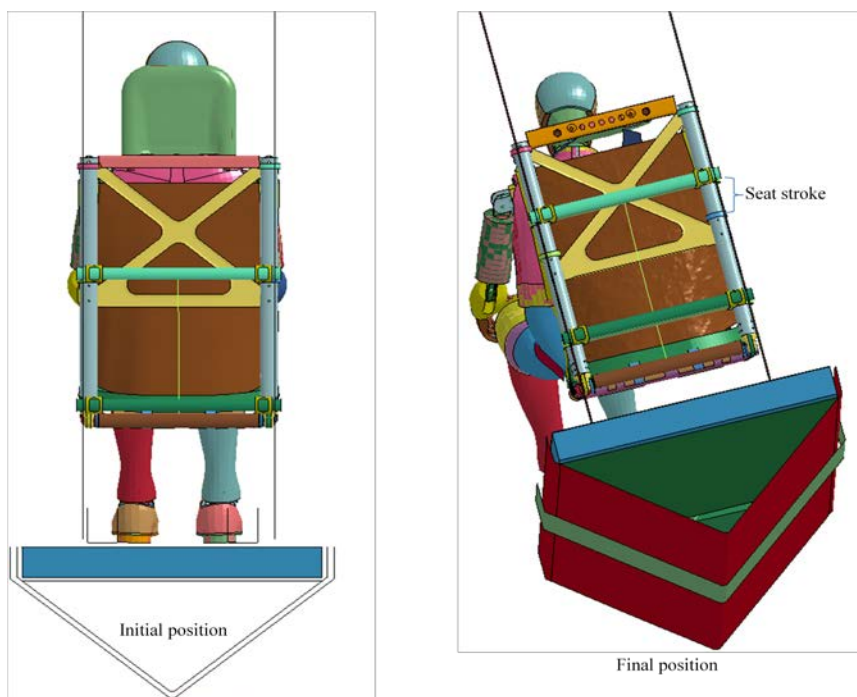


Figure 16: Initial and final positions of the Seat and dummy for off-axis loading

6.0 CONCLUSIONS

- Dummy responses have been analyzed numerically in a generic occupant compartment consisting of a various stroking and non-stroking seat and floor mechanisms.
- A retractor-based stroking seat has been proposed to mitigate the high vertical accelerative loads arising from under body blasts, and shows promising results. The retractor-based stroking seat helps reduce the pelvic vertical acceleration and lower lumbar spine loads significantly, when compared to other two designs described in this report.
- Retractor-based systems are relatively easier to develop and tune the seat stroke for varying inputs compared to traditional methods of pulling a wire, bending metal components, etc. In addition, these systems are relatively easier to integrate to any seat due to their modular design nature.
- The next step is to develop the physical retractor system analyzed in this report and evaluate in a vertical drop tower test to validate the numerical findings.
- Numerical setup in this report is an ideal boundary condition for both conventional and retractor stroking seats to stroke, which may not be completely realistic.

Retractor-Based Striking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration

Disclaimer: Reference herein to any specific commercial company, product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favouring by the United States Government or the Dept. of the Army (DoA). The opinions of the authors expressed herein do not necessarily state or reflect those of the United States Government or the DoA, and shall not be used for advertising or product endorsement purposes.

REFERENCES

- [1] Bird, S., and Fairweather. C., "Recent military fatalities in Afghanistan (and Iraq) by cause and nationality", MRC Biostatistics Unit, UK, February 2010.
- [2] Dooge D., Dwarampudi R., Schaffner G., Miller A., Thyagarajan R., Vunnam M., Babu V., 2011, "Evolution of Occupant Survivability Simulation Framework Using FEM-SPH Coupling," 2011 NDIA Ground Vehicle System Engineering and Technology Symposium (GVSETS), MSTV Mini-Symposium Paper, August 9-11, Dearborn, Michigan. DTIC Report Number: ADA571176
- [3] Thyagarajan, R., "End-to-end System level M&S tool for Under body Blast Events", 27th Army Science Conference, Army Technology Showcase, Orlando, FL, Nov 29 – Dec 2, 2010. DTIC Report # ADA550921
- [4] Kulkarni, K.B., Ramalingam, J., and Thyagarajan, R., "Evaluating the Effectiveness of Various Blast Loading Descriptors as Occupant Injury Predictors for Under body Blast Events", 2013 NDIA Ground Vehicle Systems Engineering and Technology Symposium (GVSETS) Modelling & Simulation, Testing and Validation (MSTV) Mini-Symposium August 21-22, 2013 – Troy, Michigan. DTIC Report Number: ADA590537
- [5] Halquist, J.O., LSDYNA Keyword User's Manual, Version 971/Rev 5, May 2010
- [6] Halquist, J.O., LSDYNA Theory Manual, 2006
- [7] Humanetics Innovative Solutions, Hybrid-III 50th Male Dummy, 78051-218-H, FMVSS208, 49CFR Part 572, Subpart E, Hybrid-III 50th Male Dummy Parts Catalogue, Rev. 4, July 2013
- [8] Seat Belt Retractor Performance Evaluation in Rollover Crashes. Klima, M., Toomey, D., and Weber, M., "Seat Belt Retractor Performance Evaluation in Rollover Crashes," SAE Technical Paper 2005-01-1702, 2005, doi:10.4271/2005-01-1702
- [9] Wahed, A.E., Sproston, J.L., Schreyer G.K. 2002. "Electrorheological and Magneto rheological Fluids in Blast Resistant Design Applications." Materials and Design 23: 391–404
- [10] Paulitz, T.J., Blackketter, D.M., Rink, K.K.2005. "Fully-Adaptive Seatbelts for Frontal

Retractor-Based Stroking Seat System and Energy-Absorbing Floor to Mitigate High Shock and Vertical Acceleration

Collisions.” In Proceedings of the 19th International Technical Conference on the Enhanced Safety of Vehicles (Washington D.C., U.S.). Paper No. 05-0127

LIST OF SYMBOLS, ABBREVIATIONS, ACRONYMS

M&S	Modelling and Simulation
RHA	Rolled Homogeneous Armor (steel)
LS-DYNA	COTS structural dynamics software from Lawrence Livermore
DoA	Department of the Army
DoD/DOD	Department of Defense
EA	Energy Absorbing
LTV	Light Tactical Vehicle
FD	Force-Displacement
LLCID	Load curve for loading (Pull-out, Force)
ULCID	Load curve for unloading (Pull-out, Force)
DLLR	Digressive load limiting retractor
NS	Non Stroking
CS	Conventional Stroking
RS	Retractor Stroking
RDECOM	Research, Development and Engineering Command
TARDEC	Tank Automotive Research, Development and Engineering Centre