

**2014 NDIA GROUND VEHICLE SYSTEMS ENGINEERING AND TECHNOLOGY
SYMPOSIUM
AUTONOMOUS GROUND SYSTEMS (AGS) TECHNICAL SESSION
AUGUST 12-14, 2014 - NOVI, MICHIGAN**

IMITATIVE ROBOTIC CONTROL: THE PUPPET MASTER

David Rusbarsky
RE2, Inc.
Pittsburgh, PA

Jeremy P. Gray
U.S. Army Tank Automotive
Research Development and
Engineering Center (TARDEC)
Warren, MI

Jim Grebinoski
Andrew B. Mor, PhD
RE2, Inc.
Pittsburgh, PA

ABSTRACT

Automated systems can have a hard time completing complex tasks in a timely manner. When controlling a robot outside of autonomous mode, a good control device needs to give the user full control of the system while enabling the mission to be completed in a quick, accurate and efficient manner. This paper outlines the potential features of a puppet style control device and the lessons learned while implementing such a device.

INTRODUCTION

As ground robotics moves towards autonomous and semi-autonomous operations, the need to have full control over manipulators is still required for complex situations or where a user feels the need to take control of the system. Repetitive tasks tend to be the tasks where humans begin to feel fatigued and make mistakes. Automation is often great in these situations. Complex tasks keep a human alert and thinking as long as the task can be performed in a short amount of time. Automated systems tend to have a harder time completing these complex tasks accurately and in a timely manner. Our research has shown that when controlling a robot outside of autonomous mode, a good control device needs to give the user full control of the system while enabling the mission to be completed in a quick, accurate and efficient manner [1]. Additional research shows that limitations in a control device can often reduce the usefulness of the robot [2].

In recent years, manipulators have become more capable and more dexterous through additional degrees of freedom. As a result, new control techniques and new control devices have been required. Techniques such as “flying the end effector” require little cognitive load when working in environments with a minimal amount of obstacles, but users do not have control of all of the joints and links with this control method. This can potentially result in unwanted configurations of the robot or collisions with obstacles. Current methods for having full control over all of the joints

often requires moving one or two joints at a time through the use of knobs or buttons, resulting in an overall system that is hard to control, very slow and is tedious for the operator.

RE2 in conjunction with TARDEC, through an SBIR project called Modular Intuitive Manipulation with Intuitive Control (MIMIC), set out to research a wide range of existing control devices with the goal of determining which devices were the most intuitive to use and resulted in the fastest and highest success rate for common tasks. This research also looked into combining devices to utilize the positive aspects of the devices while canceling out the negative aspects. Phase I of the project looked at existing products and techniques to determine their strengths and weaknesses in terms of ease of control and their extensibility to additional degrees of freedom, among other factors. This research identified several approaches to manipulation control of high degree of freedom arms. Under the resulting Phase II effort, the MIMIC program performed in-depth testing and analysis of the most promising devices with a wide range of users. These prototypes and concepts led to further research and development of the most promising solution – a puppet controller – through a contract with the U.S. Navy. This new control device, called Imitative Controller (IC), allows the user to move a scaled model, sometimes referred to as a puppet, of the robot’s manipulators. This controller has been shown to effectively control a highly dexterous two-arm system, consisting of two 7 degrees-of-freedom arms and a 2 degrees-of-freedom

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE 09 JUL 2014		2. REPORT TYPE Journal Article		3. DATES COVERED 05-02-2014 to 09-04-2014	
4. TITLE AND SUBTITLE IMITATIVE ROBOTIC CONTROL: THE PUPPET MASTER				5a. CONTRACT NUMBER W56HZV-11-C-0204	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) David Rusbarsky; Jeremy Gray; Jim Grebinoski; Andrew Mor				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) RE2, Inc.,4925 Harrison Street,Pittsburgh,PA,15201				8. PERFORMING ORGANIZATION REPORT NUMBER ; #25132	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army TARDEC, 6501 East Eleven Mile Rd, Warren, Mi, 48397-5000				10. SPONSOR/MONITOR'S ACRONYM(S) TARDEC	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) #25132	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES For 2014 NDIA GROUND VEHICLE SYSTEMS ENGINEERING AND TECHNOLOGY SYMPOSIUM AUTONOMOUS GROUND SYSTEMS (AGS) TECHNICAL SESSION AUGUST 12-14, 2014 - NOVI, MICHIGAN					
14. ABSTRACT Automated systems can have a hard time completing complex tasks in a timely manner. When controlling a robot outside of autonomous mode, a good control device needs to give the user full control of the system while enabling the mission to be completed in a quick, accurate and efficient manner. This paper outlines the potential features of a puppet style control device and the lessons learned while implementing such a device.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Public Release	18. NUMBER OF PAGES 5	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

torso (16 total degrees-of-freedom), developed through a contract with the Office of Naval Research entitled Dexterous Manipulation System (DMS).

PUPPETS

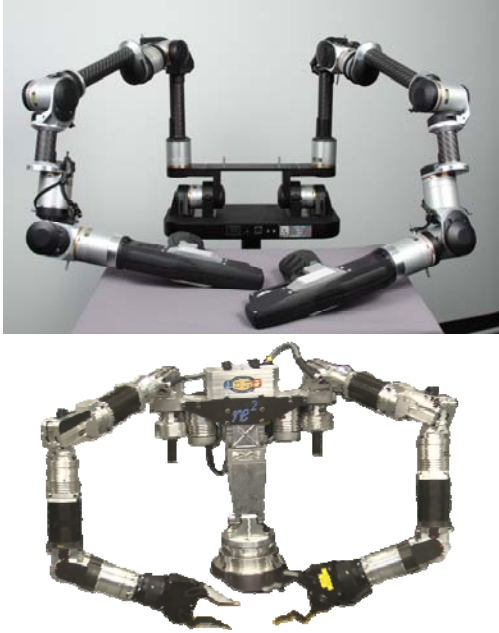


Figure 1: Imitative Controller (top) in a configuration set to be a scaled down match of the joints and links of the HDMS robot (bottom)

A puppet control device is often comprised of joints and links that are to scale of the robot that the device is controlling. The joints have encoders in them to determine the position and orientation of the device, which is then translated to movement and position commands for the robot. In the case of IC (Figure 1, top), the user holds onto a handle and moves their hand around, which moves all of the joints and links between the handle and the base of the device. Given that the puppet device is a model of the robot, the robot will attempt to match the position and orientation in a master/slave relationship. This point of interaction between the human and the control device is similar to that which is sometimes used for flying the end effector (Monakhova, 2013), as seen in Figure 2.



Figure 2: Control devices that fly the end effector can result in the robot moving to unintended orientations

In this respect, the user is using the device in a similar manner, but with a puppet device they get a physical confirmation that the overall state of the robot will consist of a set of specific positions and orientations. Flying the end effector relies on mathematical formulas which can produce multiple solutions to the same desired position and orientation resulting in an unknown final state of the robot even when the position and orientation of the end effector is known.

Handles

Our most recent research has centered around handle types, handle locations, and the overall size, or scaling factor, of puppet systems in order to optimize the user's experience and ensure the most accurate and intuitive control of the robot.

Handle types refer to the style of grip that is intended as the connection point between the user and the control device. We have found that the best handles are those that are designed to fit in the user's hand in such a manner that it is at an angle to the piece of the control device that is being controlled, such as the grip on the left hand side of Figure 3.

The curvature of the grip between the thumb and forefinger also appears to aid in better control and more comfort for the user. This style handle also allows for several easy to reach buttons to be added. Straight "bicycle handle bar" style handles cause extra strain on the user's wrists and is especially uncomfortable when buttons are added since the user's fingers need to stretch and assert force in an unnatural angle.

We have found the location of the handle works best when it is located close to the end point of the control device. This allows the user to intuitively control the robotic arms since the user's hands are in a similar location as to where the robot's end effectors are located. This especially becomes important when controlling a two armed system and coordinated movement between the two arms is required, such as when handing an object from one end effector to another, unscrewing an object while also holding the base of that object, or performing complex multi-end-effector

manipulation such as tying a knot. When the location of the handle was moved further up the control device (away from the end point), the user took longer to line up the manipulator to the object that was being manipulated and had a higher “miss” rate where the user misjudged the location of the end effector compared to the object that they intended to manipulate. Handle locations are also important since humans can only bend and twist their own bodies in certain directions and to certain extents, often proving to be the limiting factor for the range of motion in the system. Proper handle locations ensure full control of the device while providing an intuitive method for doing any given task.



Figure 3: A grip with a handle that is at an angle offers better ergonomics to the user when compared to straight handles (right)

Links and Joints

A proper scaling factor for a puppet system is important to ensure users can comfortably control the manipulators using the natural motion of their arms and hands. Link lengths that are too long result in the user stretching to reach certain positions and the user will become fatigued faster. If the link lengths are too short, the user’s workspace gets smaller and can increase the difficulty of controlling the robot. A good scaling factor needs to be determined for each individual robot and controller pair. This becomes a hard problem to solve as users may have different length arms, making it hard to find a good fit for all potential users. It is also important to keep the same scale factor throughout the puppet device. Failing to do so will violate the puppet nature of the controller and the end effector position of the manipulator will not match the position of the controller.

The design of the robot is also a factor when choosing a scale factor. If several small joints are clustered in one area of the robot and then the rest of the robot is large and sparse between joints, a scaled down puppet device may be hard to achieve due to the small size needed to keep the proper scaling near the cluster of joints.

To further ensure the puppet system matches the capabilities of the robot, the joint limits on the puppet device should match those of the robot. In addition to ensuring the range of motion is the same between the puppet and the robot, joint limits act as a physical feedback mechanism to the user to let them know they have reached the joint limits.

Base

The base of the puppet can take many different forms. The one that is best is dependent on the application as well as how and where the user intends to use the puppet. Fast movements call for a stable base, such as on a tripod or otherwise attached to a heavy, stable object (such as a table or the chair the user is sitting in). Slower movements can be less demanding on the base of the control device, however it still requires a base that is heavy enough or to be otherwise attached to something sturdy to stay in place when the joints are being moved.

FEEDBACK

Feedback to the user enables the user to better understand the interaction between the robot and the environment around the robot. Feedback can inform a user how tightly the robot is grasping an object, if the robot has bumped into something, or to simply give the user a status update. Feedback can be expressed in several different methods, such as light, sound or force.

Light

Light feedback can also be further broken down into several different modalities. A simple light, such as a single LED, can change colors to indicate feedback. It can blink and change the speed at which it blinks. If the light source is on a movable platform or if there are several lights spread out across a specified area, the location of the lights can also offer feedback.

For example, imagine a row of 4 LEDs that are located on the handle of a control device. These 4 LEDs could indicate the location of the robot’s gripper in terms of how open or closed the gripper is. A separate LED could change colors from green to yellow to red to indicate how hard the gripper is grasping an object. This same LED can start to blink if the robot detects that the object is starting to slip out of its grasp. This simple visual feedback will offer the user valuable information that can increase the user’s ability to successfully complete the task at hand.

Sound

Similar to light based feedback, sound can offer simple feedback to the user. A user is often using their sight to control a robot. Asking the user to divert their gaze to an LED, even for a fraction of a second, could result in a failed mission. Pulsing sounds, such as a “Geiger counter” noise, can allow the user to keep their visual attention on the task while adding to the user’s knowledge by this repetition of noise.

An example of the use of sound can include using a repeating sound that repeats faster as the robot’s gripper gets

closer to an object and slower as the gripper moves away from the object.

Haptic

Our earlier research found haptic feedback to be the most useful of the feedback types when manipulating objects. Haptic feedback can come in a variety of types including vibration and through resistance by pushing or pulling against the user.

Vibration feedback can be accomplished through small vibrating motors such as those found in modern cell phones. The placement and intensity of these motors is important to ensure the user feels the device vibrating [3], but also to ensure the device does not vibrate so much as to distract the user from the task.

Force feedback can be accomplished by giving the puppet device motors in the joints or in the portion of the device that controls the robot's grippers. The motors can attempt to hold a specific position, or push back in a certain direction, once a signal from the robot is received indicating the robot is grasping an object, one of the joints cannot move in a specific direction, or for any other number of reasons. This resistance prevents further movement in the wrong direction and informs the user that further movement in that direction is not possible.

PROS AND CONS

A puppet control device, consisting of a scaled model of a robot, allows the user to have very specific control over all the joints of that robot while providing an interface that is intuitive and easy to use. Through this method of manipulation, a control device can contain more degrees of freedom than the user has on their own arm. Although this sounds counter-intuitive, the additional degrees of freedom are controlled through the help of biased movements of the joints. For example, a bending joint may be biased to bend in one direction more so than in the other direction. This bias can be easily overcome by the user if they wish a joint to bend in a particular manner, but otherwise the decision on which way to bend is pre-determined. So even though the operator can only actively control the six degrees of freedom of the handle of the controller, the biasing helps control the additional degrees of freedom. This is, in part, what solves the drawbacks with the "flying the end effector" design and can contribute towards making a puppet control device more intuitive to use.

There are drawbacks to using a puppet device too. Often an entirely new control device is needed that is specific to the robot under control. Specializing controllers in this manner often means higher cost. By having a modular architecture, similar to the one developed for IC, links can be cut to size and joints are non-specific. This lowers the cost of creating a novel configuration for a given robot and

makes it more available to a wider range of customers and applications.

TESTING

Through previous phases of this project and through other related projects, RE2 has evaluated various control devices. For comparative means, some tasks are common across these tests to help determine the feasibility of a robotic system. For the purposes of this section, we will consider a robotic system to be a combination of the robot and the control device that is being used to control the robot. Previous tests paired existing control devices with existing robot systems, but neither was designed with the other device in mind – software was written to bridge that gap. The latest results of our testing focused on Imitative Controller (IC) paired with RE2's Highly Dexterous Manipulation System (HDMS). The IC device is not specifically designed to work with HDMS, but is configurable to match an existing (or future) robotic manipulator by adjusting the link lengths of the IC device. This adjustment was made before this round of testing.

One test that was performed in this round of evaluation included picking up a tube and placing it in a box of roughly the same size as the tube. The tube is a semi compliant plastic cylindrical container measuring roughly 8 inches tall with a diameter of 3.25 inches, as shown in Figure 4. The box is made out of cardboard and is open at the top. The inside of the box is divided into a 2x3 grid of 4 inch by 4 inch compartments and is roughly 13 inches tall. A small table was used to place these objects within the robot's workspace.

Users were told which of the box's six compartments they had to place the tube into using the IC control device and the HDMS robot. The box was not attached to the table and could shift its location if bumped by the arm. If the user knocked the tube off the table or otherwise dropped it while attempting to place it into the box, both the robot and the timer were paused while the proctor of the test retrieved the tube. The tube was placed back onto the table in its original starting location, then the robot and timer resumed when the user continued the task. Figure 4 shows the robot dropping the tube into the box.

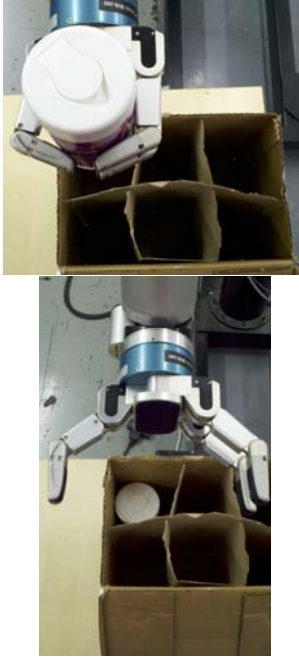


Figure 4: A robot dropping a tube into a box as part of a timed test

The IC device, paired with HDMS, outperformed other previously tested non-puppet control devices in this task by over 50 seconds.

Controller	Canister Test Time (seconds)
Non-puppet device	75
Puppet device	56
IC device	24

Other tests that were performed include removing a blasting cap from a block of clay, reaching behind and around a box to grasp an object, and pressing a series of 6 elevator style buttons in a specified order. In these test, IC was consistently two to three times faster than previously tested systems.

CONCLUSION

When done properly, puppet systems have the benefits of the “flying the end effector” technique, but maintain full control over all the joints and links of the robot. This combination allows the user to intuitively and easily adjust all of the joints of a manipulator, whether it is 3, 7, or any other number of joints on a single or dual arm system. Puppet systems, though, have the down side of only being useful for the robot that the puppet is designed to control. To counteract this shortcoming, these control devices can be designed to be easily reconfigurable for changes in the number of joints, link lengths and offsets between joints.

This allows the device to match several different models of manipulators with minimal effort.

The simplicity of puppet devices offers the ability to control complex manipulators and has sparked the interest of various programs and fields. In a project for the Office of Naval Research, a two armed underwater robot with 7 DOF for each arm is being developed. The ability to control such a system would be nearly impossible with techniques such as individual joint control. EOD and bomb squads have shown interest in using a puppet control device to control existing robots, such as the PackBot and the Remotec F6A. Home healthcare is also an industry where this type of control shows potential. A simple control mechanism, such as IC, can enable a person in a wheelchair to control a complex robotic arm to help lift items off the floor, reach up high into cabinets, open doors or carry heavy items.

REFERENCES

- [1] David Rusbarsky, et al., “Intuitive control of robotic manipulators”, Proceedings of SPIE Unmanned Systems Technology XIII, Orlando, FL, 2011
- [2] Kristina Monakhova, “Development of arm controller for robotic satellite servicing demonstrations”, Proceedings of the 2013 SpaceVision Conference, Tempe, AZ, 2013
- [3] Lilly Spirkovska, “Summary of Tactile User Interfaces Techniques and Systems”, NASA Ames Research Center, 2004