


Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE FEB 1980		2. REPORT TYPE		3. DATES COVERED 00-00-1980 to 00-00-1980	
4. TITLE AND SUBTITLE A Device for Cutting Sediment Core Liners				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Corps of Engineers (USACE),Coastal and Hydraulics Laboratory,3909 Halls Ferry Road,Vicksburg,MS,39180				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 2	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

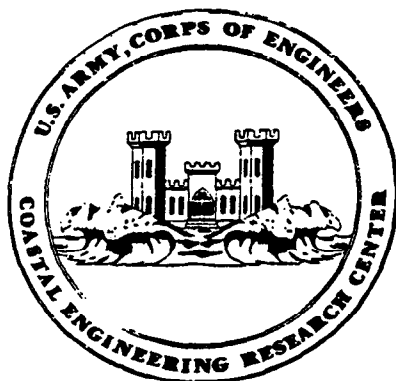

Coastal Engineering Technical Note

A DEVICE FOR CUTTING SEDIMENT CORE LINERS

PROBLEM: Longitudinally cutting the core-barrel liner containing a coastal sediment core.

BACKGROUND: Most coring devices use plastic or thin-wall metal tubing as core-barrel liners. Coastal sediments entering the core barrel during the drilling operations are contained within this liner which is removed, capped, identified, and stored. In order to make a detailed visual log of the core and to selectively sample the sediments it is necessary to split the core lengthwise into halves. An assembly for splitting core liners that has proven very satisfactory at the Coastal Engineering Research Center is described below.

DESCRIPTION OF EQUIPMENT: The core liner cutting assembly consists of two main components: 1) a metal table and trough assembly for holding the core and 2) a high-speed router fitted with a guide arm. The metal table and trough are shown in Figure 1 (Meisburger et al., 1980).

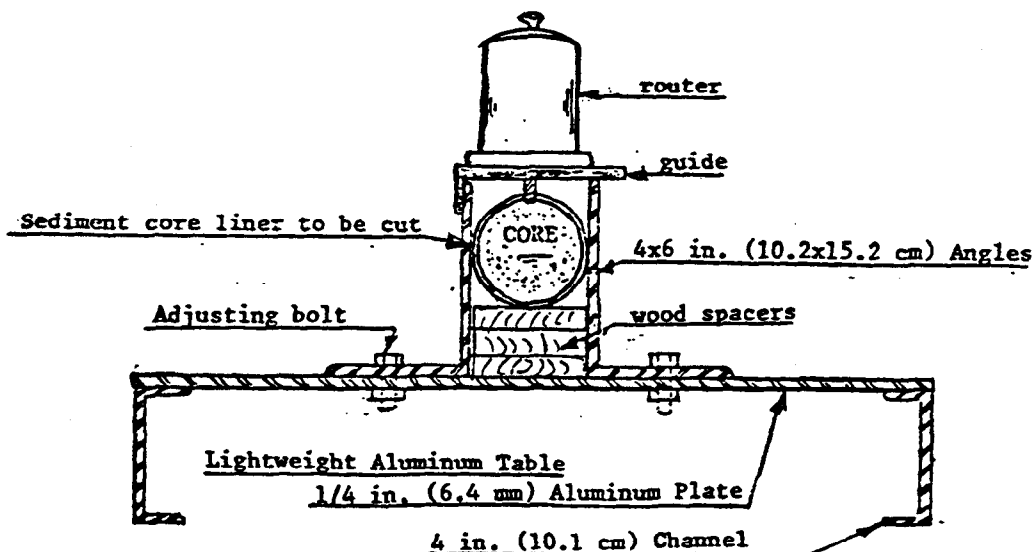


Figure 1. End view of the core splitting device..

The light weight table is constructed of aluminum plate with aluminum channels for bracing. The trough is made by mounting two steel angles on the table. One angle is fixed; the other is bolted to the table through slotted holes to permit width adjustment to various core liner diameters. The entire assembly can be set on saw horses when used. The length of the table is determined by the length of the core liners to be split. As an example, the pneumatic vibratory coring device (Williams et al., 1979) used at Galveston produced a 4-inch (10.1 cm) diameter sediment core with a maximum length of 20 feet (6.1 m).

The router used is a commercial model equipped with a 5/16 inch (7.9 mm) diameter carbide bit. The only modification necessary to the router is the addition of a metal guide bolted directly to the router base plate (see Figure). It is important to use only carbide bits as ordinary steel bits are not adequate for cutting some liners and quickly become dull due to sediment abrasion. Circular saws previously were tried to cut the liners but they did not prove as good as a router.

METHODS: In use the core is placed in the trough and its elevation adjusted by inserting plywood spacers beneath the core so that the top of the liner is slightly below the top level of the trough sides. The router is then set on top of the trough angles and the bit adjusted to just cut through the liner and not disturb the core. The guide is set so that the router will ride along one side of the trough, and keeping the bit on the centerline, the router is guided along the trough making a longitudinal cut through the liner. The core is then rotated 180 degrees and a second cut made. Once the liner is cut the core must be taped or held together when removed from the trough. The core is then moved to the table where a complete splitting of the sediment core is accomplished using a knife or wire.

REFERENCES:

- MEISBURGER, E.P., S.J. WILLIAMS, and D.A. PRINS, "A Device to Cut Core Liners," Journal of Sedimentary Petrology, in press, 1980.
- WILLIAMS, S.J., D.A. PRINS, and E.P. MEISBURGER, "Sediment Distribution, Sand Resources, and Geologic Character of the Inner Continental Shelf Off Galveston, Texas," MR 79-4, U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Ft. Belvoir, VA, July 1979.