

Numerical Modeling of RF Propagation Over Rough Ocean Surface

Ramakrishna Janaswamy, Professor
215-D Marcus Hall, Department of Electrical & Computer Engineering
University of Massachusetts, Amherst, MA 01003
phone: (413)545-0937 fax: (413)545-4611 email: janaswamy@ecs.umass.edu

Grant Number: N000140210873

LONG TERM GOALS

The long terms goals of the project are to develop efficient numerical schemes for the assessment of ocean surface roughness and atmospheric ducting on the strength of a received RF signal.

OBJECTIVES

The objectives of the proposed work are to develop and optimize parabolic equation based techniques for treating forward propagation on an electrically large rough surface. We propose to look at two specific tasks in the proposed work with the parabolic equation: (1) explore the use of complex refractive index for terminating the computational domain at large heights; (2) determine the equivalent impedance of a rough surface for capturing the specular wave.

APPROACH

After a computational model has been developed, we intend to validate and compare the results with the experimental results generated by the Tropospheric Propagation branch of SPAWARSYSCEN, San Diego under the measurement campaign RED. A graduate student, Zhiguo Lai, was supported through the grant to help carry out the current research work.

WORK COMPLETED AND RESULTS

In the first task, we studied the effectiveness of a complex refractive index in terminating the upper region of the computational domain in the split-step Fourier algorithm of the parabolic equation. Propagation over a flat surface using scanned-beam transmitting antenna was considered for this purpose. The split-step Fourier solution of the wide-angle parabolic equation over a flat conducting surface with Dirichlet boundary condition is [3]

$$U(x + \Delta x, z) = e^{-jk_0(\bar{m}-1)\Delta x} \int_0^{\infty} e^{j(k_0^2 - \sqrt{k_0^2 - p^2})\Delta x} \tilde{U}(x, p) \sin pz \, dp,$$

where U is the field in the spatial domain and \tilde{U} is the field in the transformed domain, $\bar{m}(x, z)$ is the modified refractive index, k_0 is the wavenumber of the RF signal, and (x, z) are the range and height coordinates, Fig. 1.

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

| | | | | | |
|---|------------------------------------|-------------------------------------|----------------------------|---|---------------------------------|
| 1. REPORT DATE 30 SEP 2003 | | 2. REPORT TYPE | | 3. DATES COVERED 00-00-2003 to 00-00-2003 | |
| 4. TITLE AND SUBTITLE Numerical Modeling of RF Propagation Over Rough Ocean Surface | | | | 5a. CONTRACT NUMBER | |
| | | | | 5b. GRANT NUMBER | |
| | | | | 5c. PROGRAM ELEMENT NUMBER | |
| 6. AUTHOR(S) | | | | 5d. PROJECT NUMBER | |
| | | | | 5e. TASK NUMBER | |
| | | | | 5f. WORK UNIT NUMBER | |
| 7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) 215-D Marcus Hall, Department of Electrical & Computer Engineering,,University of Massachusetts,,Amherst,,MA,01003 | | | | 8. PERFORMING ORGANIZATION REPORT NUMBER | |
| 9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) | | | | 10. SPONSOR/MONITOR'S ACRONYM(S) | |
| | | | | 11. SPONSOR/MONITOR'S REPORT NUMBER(S) | |
| 12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited | | | | | |
| 13. SUPPLEMENTARY NOTES | | | | | |
| 14. ABSTRACT | | | | | |
| 15. SUBJECT TERMS | | | | | |
| 16. SECURITY CLASSIFICATION OF: | | | 17. LIMITATION OF ABSTRACT | 18. NUMBER OF PAGES | 19a. NAME OF RESPONSIBLE PERSON |
| a. REPORT unclassified | b. ABSTRACT unclassified | c. THIS PAGE unclassified | | | |

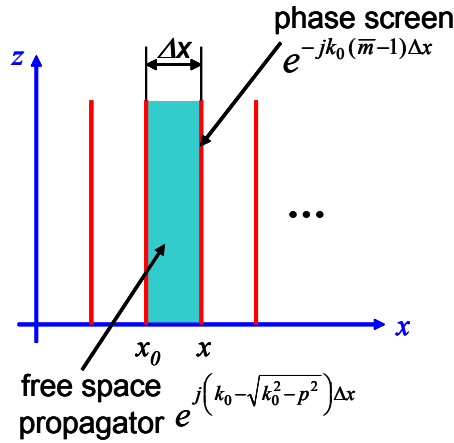


Fig. 1: Marching with wide-angle PE over a flat plane.

A Gaussian source with tilted beam is used at zero range to drive the problem. An absorbing layer with complex refractive index is used in the region $z_c \leq z \leq z_{\max}$

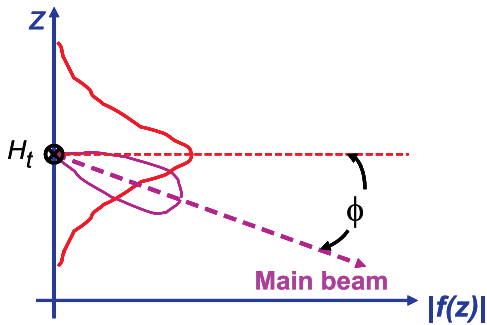


Fig. 2: A Gaussian source with tilted beam.

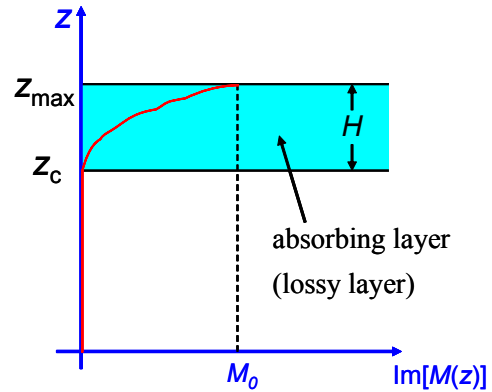


Fig. 3: Absorbing layer in $z_c \leq z \leq z_{\max}$

Several profiles shapes for the absorbing layer were chosen including a linear, quadratic and exponential. Fig. 4 shows comparison of the results with the analytical results generated by the 2-ray model. The results were rather insensitive to the profile shapes and good agreement is seen with the analytical model.

We also compared the results with those generated using a Hanning window [1]. In most cases the results with complex refractive index duplicated those generated with the Hanning window. However, cases were identified where the Hanning window fails to produce good results, while the complex refractive index continued to produce correct results as shown in Fig. 5. The incorrect results with Hanning window are believed to be caused by imperfect termination at the upper boundary, which the complex refractive index appears to have addressed. More test cases with propagation beyond the horizon are needed to confirm our initial conclusions.

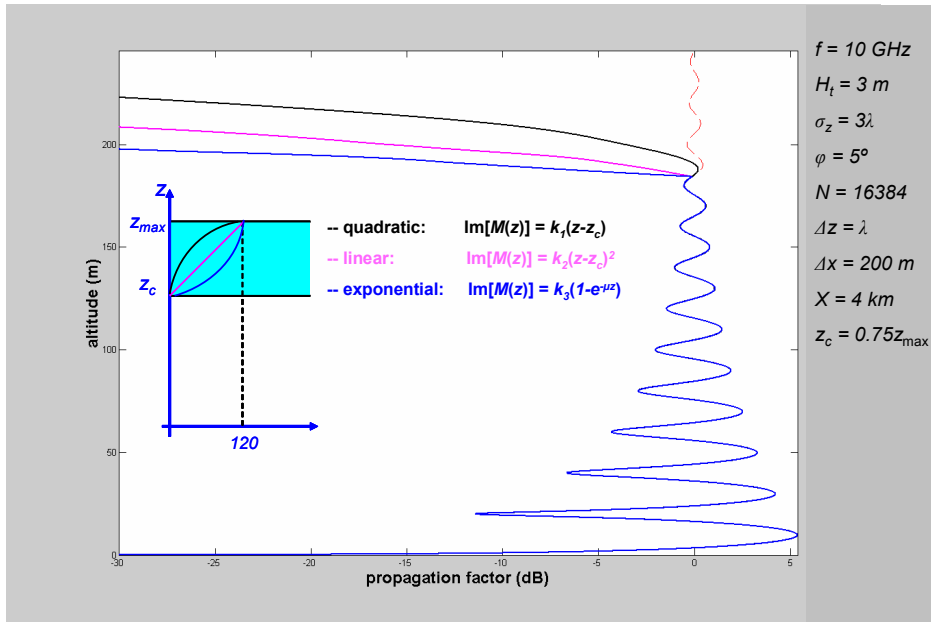


Fig. 4: Comparison of the propagation factor with the use of complex refractive index.

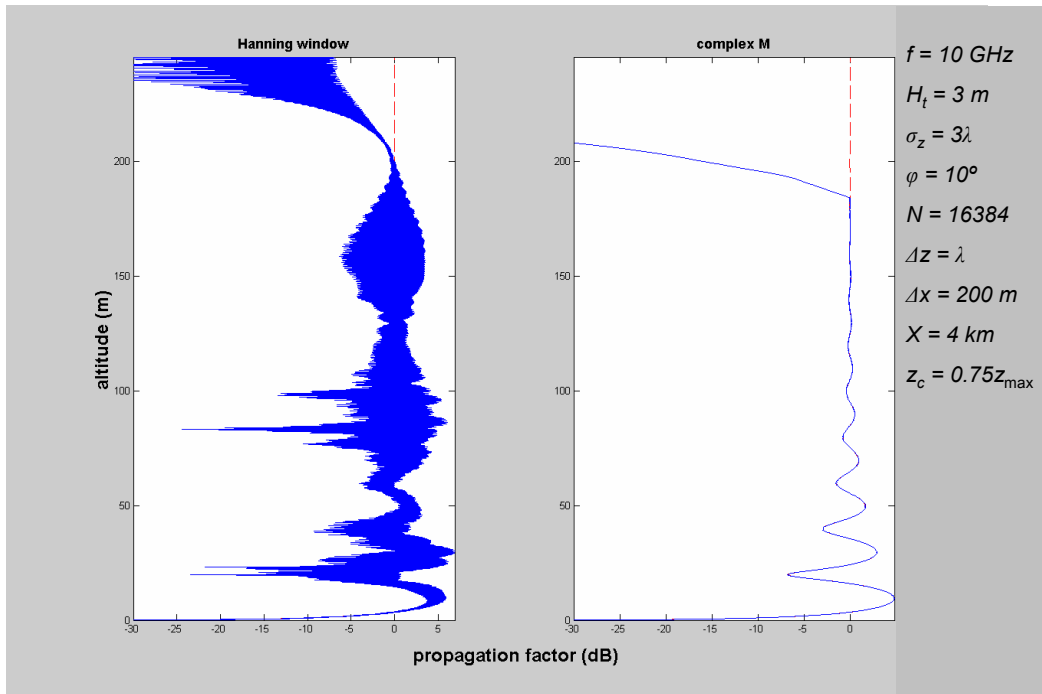


Fig. 5: Propagation factor with the use of complex refractive index versus the Hanning window.

IMPACT/APPLICATIONS

It is concluded that the complex refractive index approach can be used effectively to terminate the computational domain in practical PE codes.

REFERENCES

1. Dockery, G. D., Modeling Electromagnetic Wave Propagation in the Troposphere using the Parabolic Equation, *IEEE Transactions On Antennas and Propagation*, Volume 36, Number 10, pp. 1464-1470, 1988.
2. Kuttler, J. R., and G. D. Dockery, Theoretical Description of the Parabolic Approximation/Fourier Split-Step Method of Representing Electromagnetic Propagation in the Troposphere, *Radio Science*, Volume 26, Number 2, pp. 381-393, 1991.
3. Jensen, F. B., *et al.*, Computational Ocean Acoustics, New York: AIP, 1994.
4. Janaswamy, R., Radio Wave Propagation over a Nonconstant Immittance Plane, *Radio Science*, Volume 36, Number 3, pp. 387-405, 2001.

PUBLICATIONS

Z. Lai and R. Janaswamy, "Use of complex refractive index for domain truncation in split-step PE solutions," paper URSI-F 35.5, 2003 Joint IEEE Antennas & Propagation International Symposium/URSI Meeting, Columbus, OH, June 22-27, 2003.