

Modeling of the Shallow Water Reverberation for ONR ASIAEX Experiment

Yevgeniy Dorfman
BBN Technologies – a Verizon Company
10 Moulton St., Cambridge, MA 02138
phone: (617) 873-3173 fax: (617) 873-2918 email: edorfman@bbn.com

Award Number: N00014-D-0133/ T. O. 6

LONG-TERM GOALS

The long-term goal of the research is to better understand the mechanisms of bottom reverberation in shallow water, and enhance modeling of the shallow water reverberation.

OBJECTIVES

The objective of this research is to study bottom reverberation as observed during the recent ONR Asian Seas International Acoustics Experiment (ASIAEX), with emphasis on careful extraction of bottom scattering strengths as a function of frequency and scattering angle, with the ultimate goal to infer scattering mechanisms responsible for low frequency bottom scattering in shallow water, and to improve modeling of the low-frequency reverberation in shallow water.

APPROACH

Proposed approach consists of

1. Using a normal mode approach based on the inversion of the environmental parameters [1] to remove propagation effects from the received signal.
2. Using Wakeley source model [e.g., 2] to provide source function.
3. Using modeling and analysis of data collected during quiet sea state and during high sea state in order to separate bottom and surface contributions to the reverberation.
4. Using empirical and model-based analysis of the reverberation frequency and angular dependence in order to separate bottom interface and subbottom scattering, and overall better understand reverberation mechanisms.
5. Using VLA data to infer angular dependence of the scattering strength.

WORK COMPLETED

During GFY03 Peter Cable (BBN), Yevgeniy Dorfman (BBN), David Knobles (ARL/UT) and Tomas Yudichak (ARL/UT) have collaborated, working with the IAO reverberation data and with ASIAEX ECS transmission data obtained by Jim Miller, Gopu Potty (URI), and Peter Dahl (APL/UW), as well as with other East China Sea data sources.

Monostatic reverberation data were inverted to infer empirical bottom scattering strength (SS) as function of frequency using environmental inputs generated by ARL/UT. Empirical data collected from 1 kg shots deployed during high sea state were initially analyzed. Data from 1 kg shots deployed

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 30 SEP 2003		2. REPORT TYPE		3. DATES COVERED 00-00-2003 to 00-00-2003	
4. TITLE AND SUBTITLE Modeling of the Shallow Water Reverberation for ONR ASIAEX Experiment				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) BBN Technologies - a Verizon Company,,10 Moulton St.,Cambridge,,MA,02138				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT The long-term goal of the research is to better understand the mechanisms of bottom reverberation in shallow water, and enhance modeling of the shallow water reverberation					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 4	19a. NAME OF RESPONSIBLE PERSON
a REPORT unclassified	b ABSTRACT unclassified	c THIS PAGE unclassified			

during low sea state are currently being analyzed in order to assess potential contribution of ocean surface scattering to the reverberation.

Uncertainties in the experiment and inversion procedures were analyzed in order to provide error bound on the extracted scattering strength. Issues considered included:

1. Uncertainty in the inferred environmental inputs used for forward transmission loss modeling.
2. Uncertainty in the wideband explosive source level.

Data collected by the VLA were analyzed in order to infer angular dependence of the scattering strength. Two approaches to infer scattering strength angular dependence were exercised:

1. VLA data were beamformed yielding scattering strength as a function of VLA steering angle. Raytracing was used to relate VLA steering angle to the scattering grazing angle on the bottom. Implied in this method is that scattering happens in the far field of the array. While sometimes true, this assumption is often violated when large array is used in shallow channel.
2. Alternatively, numerical normal mode code was used to compare field distribution on the VLA with that which would be caused by a point source positioned at the scattering range (source depth was varied, directive source can be simulated by coherently processing contribution from several sources). This approach may provide valuable (albeit indirect) information of the scattering strength physics, such as angular dependence of the scattering strength and separation of surface, bottom interface and subbottom inhomogeneities to the overall reverberation.

An initial report on the frequency dependence of East China Sea bottom scattering strength and effects of source uncertainty was presented at the ASIAEX International Symposium in Chengdu, China, in October 2002. In addition, three papers were presented at the First Pan-American/Iberian Meeting on Acoustics in Cancun, Mexico, 2-6 December 2002: “Comparison of East China Sea low frequency bottom scattering strength determinations” (Cable *et al.*, J.Acoust Soc. Am.**112**(5), Pt.2, 2362 (2002)); “Analysis of time series data in the East China Sea generated from explosive sources” (Knobles *et al.*, J.Acoust Soc. Am.**112**(5), Pt.2, 2361 (2002)); and “Mechanisms for the Asian Sea International Acoustics Experiment East China Sea reverberation measurements” (Dorfman *et al.*, J.Acoust Soc. Am.**112**(5), Pt.2 2254 (2002)).

RESULTS

Empirical scattering strength was inferred from the reverberation data, error bound of the scattering strength was also determined. Initial results for the frequency dependence of the scattering strength indicate that it is very shallow (almost flat) below a few hundred Hz, and very steep (close to $F^2 - F^3$) above a few hundred Hz, with a very sharp transition. This may suggest a change in the mechanisms of the reverberation, with the low-frequency part of the curve being dominated by subbottom scatterers [3], and the high frequency part of the curve dominated by contribution of the small scatterers on the interface.

Initial results of the angular distribution of the scattering strength at frequencies above a few hundred Hz indicate that it may be consistent with a point omnidirectional source positioned at or near the bottom interface, consistent with interface contribution being dominant at this frequencies. Interestingly, if VLA data are beamformed and beam power is converted to angular dependence of the bottom scattering strength, resulting angular dependence is very close to that predicted by Lambert Law (see Fig. 1), which (except for the level) is also consistent with a combined effect of a large group

of uncorrelated small scatterers. Work is underway to further analyze these results in order to better understand mechanisms of the bottom reverberation.

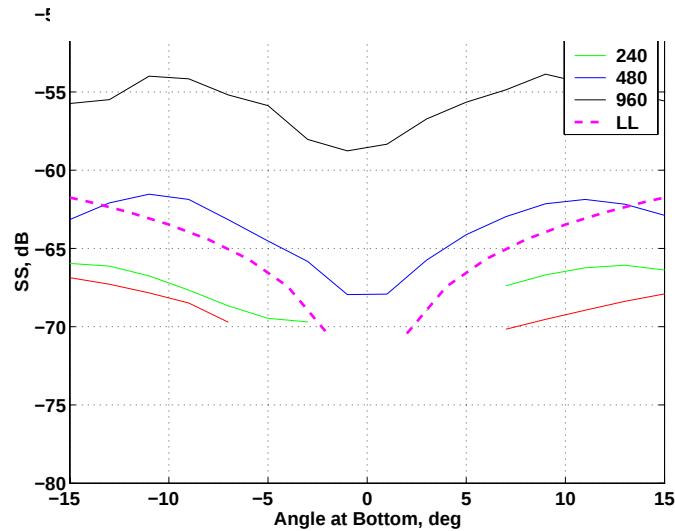


Fig. 1. Angular dependence of the scattering strength (dB) as function of scattering angle at the bottom (shown in degrees). Red, green and blue lines: 120, 240, 480 and 960 Hz, respectively. Dash magenta line: Lambertian angular distribution (dB//arb.ref.)

IMPACT/APPLICATIONS

Bottom reverberation is a major factor limiting active sonar performance in shallow downrefracting channels. Better understanding and predictive modeling of bottom reverberation will aid in sonar design, optimization, and performance and tradeoff studies.

RELATED PROJECTS

This research is being conducted jointly with David Knobles, ARL/UT and with Peter Cable (BBN). In addition, the ASIAEX long range reverberation studies of Renhe Zhang and Ji-Xun Zhou were used in this present research.

REFERENCES

- [1] D. Knobles, "Inversion of forward problem in extraction of bottom backscattering strength in shallow water," presented at the Shallow-Water Reverberation Focus Workshop, 25-27 August 1999, Santa Fe, NM.
- [2] J. Wakeley, "Coherent ray tracing – measured and predicted shallow water frequency spectrum," J. Acoust. Soc. Am. **63**, 1820-1823 (1978).
- [3] P. Cable, "Low frequency reverberation in continental shelf environments" Proceedings of the Fifth European Conference on Underwater Acoustics, ECUA 2000, P. Chevret and M. Zakharia, eds., paper 134, Lyon, France (2000).