

Image Cover Sheet

CLASSIFICATION

UNCLASSIFIED

SYSTEM NUMBER

505377

**TITLE**

AEROBALLISTIC RANGE TESTS OF THE BASIC FINNER REFERENCE PROJECTILE AT SUPERSONIC VELOCITIES

System Number:

Patron Number:

Requester:

Notes:

DSIS Use only:

Deliver to: FF

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE AUG 1997		2. REPORT TYPE		3. DATES COVERED	
4. TITLE AND SUBTITLE Aeroballistic Range Tests of the Basic Finner Reference Projectile at Supersonic Velocities			5a. CONTRACT NUMBER		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Defence R&D Canada - Valcartier, 2459 Pie-XI Blvd North, Quebec (Quebec) G3J 1X5 Canada, ,			8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSOR/MONITOR'S ACRONYM(S)		
			11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT Free-flight tests were conducted in the Defence Research Establishment Valcartier (DREV) Aeroballistic Range on the Basic Finner reference projectile from transonic to high supersonic velocities. The projectile consisted of four rectangular fins on a cone-cylinder body with a total length-to-diameter ratio of 10.0. Fin cant angles of 0°, 2° and 4° were imposed. The Mach number range tested was between 1.0 and 4.5. All the main aerodynamic coefficients and stability derivatives were well determined using linear theory, six-degree-of-freedom single- and multiple-fit reductions techniques. The results were also compared with results from other aeroballistic ranges. The fins on the models fired at Mach 4.5 ablated during flight. A dynamic stability analysis showed a Magnus instability at certain Mach numbers and spin rates.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES 152	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

UNCLASSIFIED

DEFENCE RESEARCH ESTABLISHMENT
CENTRE DE RECHERCHES POUR LA DÉFENSE
VALCARTIER, QUÉBEC

DREV - TM - 9703

Unlimited Distribution/Distribution illimitée

AEROBALLISTIC RANGE TESTS OF THE
BASIC FINNER REFERENCE PROJECTILE
AT SUPERSONIC VELOCITIES


by

A. D. Dupuis and W. Hathaway*

August/août 1997

* Arrow Tech Associates

Approved by / approuvé par



Head, Delivery Systems Section
Chef, Section systèmes de lancement

30 July 97
Date

SANS CLASSIFICATION

ABSTRACT

Free-flight tests were conducted in the Defence Research Establishment Valcartier (DREV) Aeroballistic Range on the Basic Finner reference projectile from transonic to high supersonic velocities. The projectile consisted of four rectangular fins on a cone-cylinder body with a total length-to-diameter ratio of 10.0. Fin cants of 0° , 2° and 4° were imposed. The Mach number range tested was between 1.0 and 4.5. All the main aerodynamic coefficients and stability derivatives were well determined using linear theory, six-degree-of-freedom single- and multiple-fit reductions techniques. The results were also compared with results from other aeroballistic ranges. The fins on the models fired at Mach 4.5 ablated during flight. A dynamic stability analysis showed a Magnus instability at certain Mach numbers and spin rates.

RÉSUMÉ

Des essais en vol libre ont été effectués dans le corridor aérobalistique du Centre de recherches pour la défense Valcartier (CRDV) avec le projectile de référence Basic Finner à des vitesses transsoniques et supersoniques. Le projectile était muni de quatre ailettes rectangulaires sur un corps cone-cylindre avec un allongement de 10. L'inclinaison des ailettes par rapport au corps principal était de 0° , 2° et 4° . La gamme de nombres de Mach se situait entre 1.0 et 4.5. Tous les coefficients aérodynamiques principaux et les dérivés de stabilité ont été très bien déterminés avec les méthodologies de réduction des données linéaires et six degrés de liberté par les options de réduction simple et multiple. Les résultats sont aussi comparés à des résultats d'autres corridors aérobalistiques. Les ailettes sur les modèles tirés à Mach 4.5 ont subi une ablation. Une analyse de stabilité dynamique a démontré une instabilité Magnus à certains nombres de Mach et taux de roulis.

TABLE OF CONTENTS

ABSTRACT/RÉSUMÉ	i
EXECUTIVE SUMMARY.....	v
NOMENCLATURE.....	vii
1.0 INTRODUCTION	1
2.0 FACILITY DESCRIPTION	2
3.0 MODELS AND TEST CONDITIONS	3
3.1 Model configuration	3
3.2 Sabot Design.....	4
3.3 Test Conditions and Particularities	5
4.0 FREE-FLIGHT DATA REDUCTION	7
5.0 FREE-FLIGHT RESULTS AND DISCUSSIONS.....	8
5.1 Linear Theory Results.....	8
5.2 Six-Degree-of-Freedom Results	9
5.3 Comparison of 6DOF Single and Multiple Fit Results	12
6.0 COMPARISON OF DREV RESULTS WITH PUBLISHED DATA.....	14
7.0 DYNAMIC STABILITY ANALYSIS	15
8.0 CONCLUSIONS.....	18
9.0 ACKNOWLEDGMENTS.....	19
10.0 REFERENCES.....	20

TABLES I to X

FIGURES 1 to 18

APPENDIX A - Drawings for Sabot Design of Basic Finner Model

APPENDIX B - Motion Plots

EXECUTIVE SUMMARY

The DREV Aeroballistic Range is a unique facility where projectile trajectories are accurately determined and converted to aerodynamic coefficients and stability derivatives. Even though the DREV Aeroballistic range has been fully operational since 1990, other priorities (small caliber Range Limited Training Ammunition, 105-mm Spinning Tubular Projectiles and several international obligations) prevented firing a reference projectile configuration to evaluate the accuracy of the determined coefficients. It was therefore deemed necessary to fire the Basic Finner reference projectile in the DREV Aeroballistic range. The opportunity was also taken to increase the aerodynamic data base to higher supersonic Mach numbers which was lacking with the previous tests. This increase in the data base will allow empirical and analytical prediction tools to be adjusted with reliable and absolute data at the higher Mach numbers.

The Basic Finner configuration was used for many years as a reference projectile and it was tested extensively in other aeroballistic ranges and in wind tunnels. The model consists of a 20° nose cone on a cylindrical body with four rectangular fins. The l/d of the model was 10.0. The nominal diameter of the projectiles was 30 mm. Fin cants of 0° , 2° and 4° were imposed to produce a desired roll motion. The highest Mach numbers tested at the other aeroballistic ranges was Mach 3 and the data analysis used at the time consisted only of linear theory.

All of the main aerodynamic coefficients (C_{x0} , $C_{N\alpha}$, $C_{M\alpha}$, C_{Mq} , $C_{np\alpha}$, C_{lp} , $C_{l\delta}$) were very well determined over a Mach number range of 1.05 to 4.5. Some nonlinear behaviors in the axial force and in the static pitch moment were also determined. The aerodynamic coefficients determined from these tests are in excellent agreement with published data.

A dynamic stability analysis explained a growth in angle of attack that was observed on some shots as the projectile flew downrange. This was attributed to a Magnus dynamic instability on the precession mode. A stability diagram showing the onset of instability as a function of spin rate (or cant angle) and Mach number was also determined. Some aeroheating aspects were observed on the projectiles fired at the highest muzzle velocity of approximately 1520 m/s.

The results show that the DREV Aeroballistic Range is a unique and excellent tool to obtain the dynamics of a projectile in flight and the absolute values for the aerodynamic coefficients. Other facilities, such as wind tunnels or predictive tools, such as computational fluid dynamics, are useful for relative comparisons but cannot provide absolute values with a high degree of reliability and are quite limited in the acquisition of dynamic stability derivatives.

NOMENCLATURE

<u>Variable</u>	<u>Computer Output</u>	<u>Description</u>
A		Cross sectional area of projectile (m ²)
d		Diameter of projectile (mm)
C _D	CD	Total drag coefficient
C _{D0}	CD0	Drag force coefficient at zero angle of attack
C _{Dδ2}	CDSQ	Yaw drag coefficient derivative
c. g.	CG	Center of gravity (m)
C _{lp}		Roll damping moment coefficient
C _{lδ}		Roll moment coefficient due to fin cant
C _{lγ}	Clg	Induced roll moment coefficient
C _{np}	Cnp	Magnus moment coefficient
C _{nγ}	Cng	Induced yaw moment coefficient
C _{nsm}	Cnsm	Side moment coefficient
C _N	CN	Normal force coefficient
C _{Nδ δ_A}	CNda	Trim force coefficient component
C _{Nδ δ_B}	CNdB	Trim force coefficient component
C _M	Cm	Static pitch moment coefficient
C _{Mq}	Cmq	Pitch damping moment coefficient
C _{Mδ δ_A}	Cmda	Trim moment coefficient component
C _{Mδ δ_B}	CmdB	Trim moment coefficient component
C _{mγ}	Cmg	Induced pitching moment coefficient
C _{x0}	CX	Axial force coefficient at zero angle of attack
C _{Yp}	CYp	Magnus moment coefficient
C _{Yγ}	CYg	Induced normal force coefficient
C _{Zγ}	CZg	Induced normal force coefficient
I _x , I _y	-	Axial and transverse moments of inertia (kg m ²)
l	-	Length of projectile (m)
l/d	-	Length-to-diameter ratio
m	-	Mass of projectile (kg)

M	Mach	Mach number
p	-	Spin rate (rad/s or deg/m)
Re _l	-	Reynolds number based on length of projectile
s _g	-	Gyroscopic stability factor
u, v, w	-	Projectile component velocities (m/s)
V	-	Total projectile velocity (m/s)
X, Y, Z	-	Projectile coordinates (m)
t	-	Time of flight (s)
$\bar{\alpha}$	a	Total angle of attack (deg)
$\bar{\alpha}_{\max}$	AMAX	Maximum angle of attack (deg)
λ_N, λ_P	LN, LP	Nutation and precession damping (1/m)
θ, ψ, ϕ	-	Projectile orientation (deg)
δ	-	Fin cant angle (rad or deg)
$\bar{\delta}^2$	DBSQ	Mean squared yaw (deg ²)
ε	-	Sine of the total angle of attack, $\sin \bar{\alpha} = \frac{v^2 + w^2}{V^2}$
ρ	-	Air density (kg/m ³)
6DOF	-	Six degree of freedom

Subscripts

$\bar{\alpha}_i$	ai (i)	Derivative with respect to ε_i
M	M	Variation with Mach number

Examples

$C_{M\bar{\alpha}}$	Cma	Pitching moment coefficient slope
$C_{M\bar{\alpha}^3}$	Cma3	Pitching moment coefficient w.r.t. ε^3
$C_{Mq\bar{\alpha}^2}$	Cmq2	Pitch damping coefficient w.r.t. ε^2

1.0 INTRODUCTION

This memorandum presents free-flight data that have been reduced to aerodynamic coefficients from tests on the Basic Finner reference projectile. The model consisted of four rectangular fins on a cone-cylinder body with a l/d of 10. These tests and data analysis were carried out in the Defence Research Establishment Valcartier (DREV) Aeroballistic Range. Twenty six models were fired in the Mach number range of 1.05 to 4.5.

The Basic Finner configuration was used for many years as a reference projectile and it was tested extensively in other aeroballistic ranges and in wind tunnels. The highest Mach numbers tested at the other aeroballistic ranges was Mach 3. The data analysis used at the time consisted of linear theory where the motion had to be decoupled in time-distance for drag, swerve for normal force, pitch and yaw for aerodynamic yaw moments and roll for the roll damping and roll producing moment coefficients.

It was therefore deemed necessary to fire some Basic Finner projectile in the DREV Aeroballistic Range to compare the accuracy of the determined aerodynamic coefficient and stability derivatives with published data. Even though the DREV Aeroballistic Range has been fully operational since 1990, other priorities prevented firing this projectile configuration until recently. The opportunity was also taken to increase the aerodynamic data base to higher supersonic Mach numbers which was lacking with the previous tests. This increase in the data base will allow empirical and analytical prediction tools to be adjusted with reliable and absolute data at the higher Mach numbers. Also, computational fluid dynamic studies could also use the data to validate their predictions.

The data analyses used in the DREV tests consisted of the linear theory and the six-degree-of-freedom Maximum Likelihood Function methods. The latter method was not utilized in the analysis of the published data. The motion is not decoupled in the six degree-of-freedom (6DOF) analysis. The 6DOF data reduction system can also simultaneously fit multiple data sets (up to five) to

a common set of aerodynamics. Using this multiple-fit approach, a more complete range of angle of attack and roll orientation combinations is available for analysis than would be available from a single flight. This increases the accuracy of the determined aerodynamics over the entire range of angle of attack and roll orientations. Using this reduction technique would also verify the previously published data, especially the dynamic stability derivatives which are difficult to obtain in the best of circumstances.

All of the main aerodynamic coefficients (C_{x0} , $C_{N\alpha}$, $C_{M\alpha}$, C_{Mq} , $C_{np\alpha}$, C_{lp} , $C_{l\delta}$) were determined in linear theory and in both the 6DOF single- and multiple-fit data reduction techniques. Some nonlinear aerodynamic coefficients were also determined as well as some Mach number dependence on the main coefficients with the multiple-fit reductions. These aerodynamic coefficients are also compared with the previously published data.

A dynamic stability analysis was also accomplished to explain the flight behavior of several shots. Motion plots, comparing the theoretical trajectories with the experimental ones, are included for all test shots as well as photographs of typical shock structures at the various velocity regimes. Some ablation due to aerodynamic heating was also observed.

This work was performed at DREV from March 1995 to December 1995 under Work Unit 2ea14, Flight Mechanics of Munitions.

2.0 FACILITY DESCRIPTION

The Defence Research Establishment Valcartier (DREV) Aeroballistic Range (Refs. 1 and 2) is an insulated steel-clad concrete structure used to study the exterior ballistics of various free-flight configurations. The range complex consists of a gun bay, control room and the instrumented range (Fig. 1a). A massive blast wall is located in front of the building to stop sabot pieces and minimize vibrations transmitted to the range structure and instrumentation. Projectiles of caliber ranging from 5.56 to 155 mm, including

tracer types, may be launched. Large-caliber models have been fired up to Mach 7.

The 230-metre instrumented length of the range has a 6.1-m square cross section with a possibility of 54 instrumented sites along the range (Fig. 1b). For these tests all of the stations were operational. These sites house fully instrumented orthogonal shadowgraph stations that yield photographs of the shadow of the projectile as it flies down the range. The maximum shadowgraph window, an imaginary circle within which a projectile will cast a shadow on both reflective screens, is 1.6 m in diameter. There are also four Schlieren stations (three operational for these tests) at the beginning of the range that yield high quality flow photographs. The range is also air conditioned to maintain a constant relative humidity of approximately 45%. The nominal operational conditions of the range are 20° C at standard atmospheric conditions. The spark source and reference point locations that were used were deduced from a standard survey. A dynamic calibration was conducted in the downrange coordinate only.

3.0 MODELS AND TEST CONDITIONS

3.1 Model Configuration

The Basic Finner reference model consists of a 20° nose cone on a cylindrical body with four rectangular fins, as shown in Fig. 2. The configuration was based on Refs. 3, 4 and 5. The l/d of the model was 10.0. The fin dimensions were 1 cal x 1 cal and conical in shape with a thickness of 0.08 cal at the base of the fin. The leading edges of the fins were very sharp with a radius 0.004 cal. The meplat of the nose was also at a radius of a 0.004 cal. The nominal diameter of the tested projectiles was 30 mm.

The models were ballasted to obtain a center of gravity at approximately 5.5 calibers from the nose of the projectiles to assure static

stability at all tested Mach numbers. The ogive of the model was made of a high-density alloy and the fins and the cylindrical portion of the projectile were made of steel. The nominal physical properties of the models tested are given in Table I and the physical properties of each test projectile are listed in Table II.

The fins were deliberately canted to produce roll motion. Nominal fin cants of 0.0° , 2.0° and 4.0° were applied. All the fins were canted at the same nominal cant angle on one model to produce a clockwise roll motion when the projectile is viewed from the rear. The fin cant of each individual fin were measured and the average fin cant angles for each model are given in Table III. Figure 3a shows the tested projectile at the three nominal fin cant angles.

The models (A01-A04, A11-A14, A21-A24), were specifically designed to be fired at the lower velocities and were made of stress-proofed steel with a 100 000 psi yield. All the other projectiles were made with AISI 4340 Heat Treated to a ROC "C" 40-42 hardness so that they could withstand the highly expected launch accelerations at the higher velocities.

The models were modified by adding roll pins to measure the projectile's roll orientation in the Aeroballistic Range (Fig. 3b). Two roll pins are shown in the figure but the smaller one was clipped off for the tests to simplify the film reading.

3.2 Sabot Design

The sabot for the model (Fig. 3b) consisted of a two-piece petal type made of aluminum and was designed to be fired from a 110-mm smooth bore powdered gun. It had four projectile centering screws at the front of the sabot. The saw cut lengths on each side were adjusted to obtain adequate petal separation for the expected velocities. Teflon riders were situated at the front and the rear of the sabot to protect the gun tube from erosion due to friction. A sabot base pad seal was also used to prevent gas leakage pass the sabot body. The projectile rested on a two piece steel pad (not shown) situated at the base

of the sabot to transmit the launch loads to aluminum sabot. The complete drawings of the sabot design are given in Appendix A. The mass of the combined sabot-projectile was approximately 3.6 kg.

All the models were fired from a 110-mm smooth bore gun and worked well at the velocities tested which ranged from 340 to 1511 m/s. Typical model-sabot separations at 6.1 m from the muzzle are shown in Fig. 4 at muzzle velocities of approximately 380 and 1511 m/s. As can be observed, the petals separated cleanly from the projectile and all the sabot pieces were stopped by the massive sabot trap located in front of the instrumented range.

3.3 Test Conditions and Particularities

Twenty-six (26) projectiles were fired in this aeroballistic range program. As part of the experimental design, it was planned to fire, at one nominal Mach number, projectiles with the three fin cant nominal angles. This was done so as to be able to use the full capability of the multiple fit option in the data reduction software in obtaining the aerodynamic coefficients. Also, the whole Mach number range between 1.0 to 4.5 was to be covered.

Due to the expected high launch loads at the higher velocities, two propellant types were utilized. The NQM 044 propellant was used to fire the projectile- sabot at the lower velocities ranging between 380 and 1159 m/s and NQM 047 was used for the higher velocities.

The propellant type, the charge mass, the muzzle velocities and which model was fired at a particular velocity are given in Table IV. The model number with the appropriate nominal fin cant angle are also provided. The number between parentheses below the model number is the mid-range Mach number for that particular shot and an average was taken to obtain the reference Mach numbers necessary for the data reduction process and to select the shot groupings for the multiple data reductions. The muzzle velocity indicated is the average for the number of projectiles fired at that charge. The

associated propellant charge mass is also given. The fins of Shot A14 ablated during in flight and no films could be analyzed. There were also indications that Models A01 and A11 had slight fin ablation (see Section 5.2). The propellant charged was slightly reduced for Shot A23 due to this.

The measured physical properties of each test projectile are given in Table II and the projectiles which had roll data are also indicated. The roll pins of Shots A01 and A23 could not be read on the films. The range conditions for each test projectile at time of firing are given in Table V. The Reynolds number, based on the length of the projectile, ranged between 7.00×10^6 and 30.0×10^6 for the Mach number range of 1.0 to 4.5, respectively.

Typical shadowgraph photographs showing the flow structure around the projectile at various Mach numbers are shown in Figs. 5 to 7. The supersonic flow structures at Mach 4.5 and 3.0 are shown in Figs. 5 and 6 respectively. The boundary layer growth along the projectiles is clearly seen. The transonic flow structure on projectile A10 is shown on three photographs (Fig. 7) as the projectile flew downrange. The velocity and Mach number given on each caption were deduced from the six-degree-of-freedom data reduction techniques. It can be noticed that as the projectile decelerates, the bow shock becomes more normal and the fin shock gets further away from the fins.

The numbering scheme to refer to the shots is as follows. The shot numbers are identified by two letters followed by 8 digits, as for example DA95030111. The "D" implies that the biases from a dynamic calibration were taken into account for this shot. Other numbers (950301) indicates the date (year, month and date) that the projectile was fired in the range. The last two digits correspond to the shot number. For the example given above, the shot number corresponds to the eleventh shot that was fired in the range on March 1st, 1995.

4.0 FREE-FLIGHT DATA REDUCTION

Extraction of the aerodynamic coefficients and stability derivatives is the primary goal in analyzing the trajectories measured in the DREV Aeroballistic Range. This is done by means of the Ballistic Range Data Analysis System (BARDAS, Ref. 6), shown in Fig. 8. This program, BARDAS, incorporates a standard linear theory and a six-degree-of-freedom (6DOF) numerical integration technique. The 6DOF routine incorporates the Maximum Likelihood Method (MLM) to match the theoretical trajectory with the experimentally measured trajectory. The MLM is an iterative procedure that adjusts the aerodynamic coefficients to maximize a likelihood function. The application of this likelihood function eliminates the inherent assumption, in least-square theory, that the magnitude of the measurement noise must be consistent between parameters (irrespective of units). In general, the aerodynamic coefficients are nonlinear functions of angle of attack, Mach number and roll angle.

BARDAS represents a complete ballistic-range data reduction system capable of analyzing both symmetric and asymmetric models. The essential steps of the data reduction system are (1) to assemble the dynamic data (time, position, angles), model measured physical properties and atmospheric conditions, (2) to perform linear theory analysis, and (3) to perform 6DOF analysis.

These three steps have been integrated into BARDAS to provide the test scientist with a convenient and efficient means of interaction. At each step in the analysis, permanent records for each shot are maintained so that subsequent analyses with data modification are much faster.

The 6DOF data reduction system can also simultaneously fit multiple data sets (up to five) to a common set of aerodynamics. Using this multiple-fit approach, a more complete range of angle of attack and roll orientation combinations is available for analysis than would be available from a single

flight. This increases the accuracy of the determined aerodynamics over the entire range of angle of attack and roll orientations.

The aerodynamic data presented in this document were obtained using the linear theory analysis, the fixed-plane 6DOF analysis (MLMFXPL) with both single- and multiple-fit data correlation techniques after a dynamic calibration, as discussed below. The equations of motion have been derived in a fixed-plane coordinate system, with Coriolis effects included. The formal derivation of the fixed-plane model is given in Ref. 7.

All the results presented here were deduced after the dynamic calibration biases were accounted for in the X-direction. The details of the dynamic calibration for the DREV Aeroballistic Range are given in Ref. 8 and the methodology is explained in Ref. 9.

5.0 FREE-FLIGHT RESULTS AND DISCUSSIONS

The aerodynamic coefficients and stability derivatives that were reduced from the free-flight trajectories measured in the Aeroballistic Range are presented in both tabular and plotted form for both the linear theory analysis and 6DOF reductions. All of the determined aerodynamic coefficients are given at the mid-range measured Mach number.

5.1 Linear Theory Results

The linear theory results are presented in Tables VI and VII. The probable errors of fit from the decoupled motion (downrange, swerve, angular and roll) of the linear theory analysis are given in Table V. The maximum angle of attack observed ranged between 0.7° and 9.0° .

The linear theory parameters deduced from the decoupled motion are given in Table VI. All the shots, except for three (DA13, DA22 and DA23) were

dynamically stable, as observed by the negative precession and nutation damping modes. The linear theory parameters indicate the precession arm does not damp (positive value) for these three shots. These will be further investigated in the six-degree-of-freedom analyses.

The aerodynamic coefficients deduced from the linear theory parameters are presented in Table VII. The methodology to obtain the aerodynamic coefficients from the linear theory parameters is explained in Ref. 6. The main aerodynamic coefficients (C_{D0} , $C_{N\alpha}$, $C_{M\alpha}$) are consistent and the probable errors of fit of the motion (Table V) are quite acceptable. All the models were statically stable, as shown by the negative slope of the pitch moment coefficient. There is some dispersion in C_{Mq} and $C_{np\alpha}$ mainly due to the low angles of attack on some shots. The linear analysis does not fit for a roll moment due to a fin cant ($C_{l\delta}\delta$), and therefore, the roll damping coefficient (C_{lp}) in the linear theory results are irrelevant (Table VII). These coefficients and any nonlinearities are best modeled and reduced with the 6DOF reduction technique of the next section.

5.2 Six-Degree-of-Freedom Results

The determined aerodynamic coefficients, their respective probable errors, and the probable errors between the theoretical and experimental trajectories for the axial, angular and roll motions are given in Table VIII and Table IX for the single-fit and multiple-fit data reduction techniques, respectively. The moment reference center for the pitch and Magnus moment coefficients was at 55% of the length from the nose of the projectile (5.50 cal). All the results are given at the mid-range Mach number for the single-fit data reductions and at the average mid-range Mach numbers for the multiple-fit data reductions.

A coefficient that appears with a value and a (*) between parentheses directly below, indicates that this coefficient was held constant and one that has a (-) between parentheses indicates that this coefficient was solved for and

that the probable error for this coefficient was higher than 100%, that is, it does not influence the fit and is considered undetermined. Those with numbers between parentheses represent the probable error for that particular coefficient.

The multiple-fit groups were chosen by Mach numbers, as mentioned previously (Table IV). Eight groups of multiple-fit data reductions were conducted. Whenever possible, individual shots with all three fin cant angles were included in the multiple fits. Two shots (DA22 and DA01) were not included in the multiple-fit data reduction process. The first one since it is believed that $C_{l\delta}$ and C_{lp} are at the transonic trend extreme and the second shot (DA01) is believed to be flying in a resonance condition. Unique C_{x0} were solved for the multiple-shot groups at Mach number of 1.832, 2.375, 2.718 and 3.147 since the probable error of fits improved considerably when doing so.

As seen from the Tables VIII and IX, all of the main aerodynamic coefficients (C_{x0} , $C_{N\alpha}$, $C_{M\alpha}$, C_{Mq} , $C_{np\alpha}$, C_{lp} , $C_{l\delta}$) were very well determined as indicated by the low probable errors of fits on the coefficients. The aerodynamic trims were solved for all the shots that had low spin rates (no fin cant). The nonlinear axial force coefficient ($C_{x\alpha^2}$) was well determined in the multiple-fit data reductions. The cubic pitch moment coefficient term ($C_{M\alpha^3}$) was also determined with both the single- and multiple-fit data reduction techniques at the higher Mach numbers where high angles of attacks were achieved. The variation of the $C_{M\alpha}$ and C_{x0} with Mach number changes rapidly in the transonic region as noticed by the determined coefficients ($C_{M\alpha_M}$ and C_{x0_M}) in the multiple-fit data reductions. These last two coefficients were also solved for in the single-fit reductions (results not in Table) and were consistent with the multiple-fit results.

An attempt to solve for a pure side moment with no influence of spin (C_{nsm}) in lieu of the Magnus moment ($C_{np\alpha}$) was conducted and in all the cases a better fit was obtained when $C_{np\alpha}$ was solved for.

The probable errors of the single and multiple fits are of the order of 0.7 mm in the downrange coordinate, 0.4 mm in the swerve motion, 0.08° in pitch and yaw and of the order of 1.5° in roll. These fits are considered excellent and are consistent with other tests conducted in the DREV Aeroballistic Range. The 6DOF probable errors of fits are smaller than the linear theory ones because of the better mathematical modeling of the motion, such as the inclusion of aerodynamic trims, angle of attack dependent terms and variation with Mach number.

The fins of Shot DA14 fired at an approximate velocity of 1520 m/s ablated during flight. The shadowgraphs showed a continuous light streak on them, which is consistent with observed burning fins on other projectiles fired in the DREV Aeroballistic Range (Ref. 10) where fins ablated. Due to this, no aerodynamic data could be obtained for this shot. The fins of the Basic Finner models were made of steel and were rectangular in shape with a very sharp leading edge. The fin ablation is believed to be caused by the same process as the one observed in Ref. 10. That is, the prime area of heating occurs on the fin leading edge, where the interaction between the fin bow shock, which separates the boundary layer, and the separation shock generated at the leading edge of the viscous interaction, gives rise to a supersonic jet, which impinges on the fin. It is there that the effect of ablation is most apparent, and this interaction causes the re-entrant profile on the fin leading edge.

Two other shots (DA01 and DA11) fired at the same approximate velocity showed some indication that some form of ablation occurred. This was noticed by traces of carbon deposits around the fin cutout imprints on the cardboard target at the end of range indicating that some fin ablation occurred. These two shots were fired at the same propellant charge as shot DA14. This seems to indicate that Shot DA14's muzzle velocity was just a bit higher than the other two and that it was enough to initiate the ablation process.

5.3 Comparison of 6DOF Single- and Multiple-Fit Results

A comparison of the reduced aerodynamic coefficients from the 6DOF data reductions techniques with the single- and multiple-fits results are given in Figs. 9 to 16. The single-fit data points are shown as crosses, while the multiple-fit data reduction results are given as a solid circles.

Appendix B presents, for every test shot, the total angle-of-attack history with the observed angular motion and the theoretical determined one with the reduced aerodynamic coefficients. When a multiple-fit data reduction was conducted, these are given in priority, and if not available, the single-fit ones are presented. The experimental data points (open circles) and the calculated trajectory (continuous line) from the determined coefficients are compared. This allows a verification that the reduced aerodynamic coefficients do fit the experimental trajectory satisfactorily. For every shot, the total angle of attack, the angular motion plots and the spin rate in deg/m are given as a function of the downrange coordinate as well as the motion in the pitch-yaw plane. On the spin plots, the nutation pitch frequency is also given.

The axial force coefficient at zero angle of attack (C_{x0}) as a function of Mach number is shown in Fig. 9. The agreement is excellent between the single fit and the multiple fits. There is a bit of scatter in the single-fit results. The single-fit reductions for this coefficient are plotted in Fig. 10 versus Mach number and with the nominal fin cant angle indicated. This was conducted to investigate any influence of spin on the axial force coefficient and no specific trends can be inferred from Fig. 10 that would indicate such an effect.

$C_{N\alpha}$, the normal coefficient slope, versus Mach number is displayed in Fig. 11. There is some scatter in the single fit results due to some low angle-of-attack cases. One single point, Shot DA01, at Mach 4.45 seems to be above the trend at the higher supersonic Mach number. The spin history of this shot indicates (Appendix B) that it went through resonance. The probable error in the angular motion for this shot is 0.15° and well above the others. Also, as mentioned previously, some indication of fin ablation was also noticed on this

shot which might influence some coefficients. The transonic peak point at approximately Mach 1.25 seems to have been missed at this trial.

The variation of the pitching moment coefficient slope, CM_α , with Mach number is shown in Fig. 12. The scatter in the results was very small. The transonic peak point was also not obtained. The change in CM_α with Mach number in the transonic region is quite high. $CM_{\alpha 3}$ was well determined at Mach numbers above 3.5 (Table IX).

The determined pitch damping coefficient, CM_q , as a function of Mach number is presented in Fig. 13. The scatter is higher than for the other coefficients but the main trend can be observed. The multiple-fit data point at Mach 2.4 does not follow the main trend. The single-fit data point (DA27) at -400 was well determined and the angular motion (Appendix B) shows a possible Magnus instability.

The Magnus moment coefficient slope, $C_{np\alpha}$, is given in Fig. 14. The coefficient was well determined and the agreement between the single and multiple fits is very good. At Mach 1.8 the coefficient is approximately -35 and decreases gradually to -9 as the Mach number increases to Mach 4.5. The magnitude changes very rapidly in the transonic region ($1.05 < M < 1.7$) to peak at approximately -330 at Mach 1.3 and then falls rapidly to zero just over Mach 1. The multiple fit at 1.05 did not detect any $C_{np\alpha}$ at all.

C_{lp} , the roll damping coefficient, is demonstrated versus Mach number in Fig. 15. As with the other cases, it is well determined and the agreement is very good. The transonic peak for this coefficient seems to have been found at roughly Mach 1.4 on Shot DA22.

The data reduction process solves for a total roll moment coefficient due to fin cant $C_{l\delta}$. This coefficient produces the required moment to impose a roll motion or desired spin rate on the projectile. It is solved individually when conducting multiple fits since it is unique for a particular projectile or fin cant.

The coefficient that is usually published is $C_{l\delta}$ and in this case, per radian. To achieve this, the fin cant angles must be measured with accuracy and this was done (Table III). Only the shots with some cant angles can be used in this process. The combined values $C_{l\delta}\delta$ and the computed $C_{l\delta}$ based on the average measured fin cants are given in Table X for each individual shot number and these are based on the single fit data reductions. The trend of $C_{l\delta}$ with Mach number is offered in Fig. 16.

6.0 COMPARISON OF DREV RESULTS WITH PUBLISHED DATA

As the Basic Finner served as a reference or a calibration projectile for many years, there is sufficient data to compare the DREV results with. This projectile was extensively tested in other aeroballistic ranges (Ref. 3 - 5) mostly from Mach 1.0 to 3.0. The data reduction process utilized in these reports was based only on the linear theory analysis. Ref. 3 was utilized to compare the main aerodynamic coefficients of C_{x0} , $C_{N\alpha}$, $C_{M\alpha}$, C_{Mq} and Ref. 4 for C_{lp} and $C_{l\delta}$. The Magnus moment coefficient slope, $C_{np\alpha}$, was not compared since the data of Ref. 3 was very erratic and there was high scatter.

The aerodynamic coefficients of those two reports were transformed to the terminology and convention used in this memorandum. The moment coefficients were transferred to the center of gravity of the projectiles fired in the DREV Aeroballistic Range.

The results from the DREV Aeroballistic Range with the multiple-data reduction technique are compared with the published data of Refs. 3 and 4 in Fig. 17. The agreement is excellent. Some of the scatter in the results of the published data might be inferred from the limitations of the linear theory analysis and the magnitude of the angles of attack.

7.0 DYNAMIC STABILITY ANALYSIS

Several shots showed a large increase in angular growth while some shots were initially damping and increased in angular growth as the projectile flew downrange. Shot DA13 at Mach 1.25 and DA22 at Mach 1.38 show (Annex B) an increase in angle of attack as the projectile flies downrange. The initial angle of attacks for both shots were approximately 2° and DA13 grew to 3° while DA22 to 10° at 250 m. The other shot at the same approximate Mach number, DA09, showed regular damping trend in angle of attack. The last shot had no fin cant, while DA13 and DA22 had fin cants of 2° and 4°, respectively, producing different spin rates as seen in Appendix B. The magnitude of the Magnus coefficient slope in this Mach number region is also very high as shown in Fig. 14. The combined high magnitude of $C_{np\alpha}$ and the high spin rate achieved seems to indicate a Magnus instability. The approximate steady spin rates of the 2° and 4° fins cants (Appendix B) are approximately 65 deg/m and 125 deg/m, respectively.

Shot numbers DA26, DA27, DA28 and DA29 show the initial angle of attack damping and then increasing slightly as the projectile flew down range (Appendix B). All of these shots have a 4° fin cant and the spin rate increases rapidly as the projectile flies down the range. The Mach number range of these shots is between 1.8 and 2.7 and the magnitude of the Magnus moment coefficient slope lies between -100 and -25 in this Mach number range.

To obtain a better understanding of this, a dynamic stability analysis was conducted. The angular motion can best be explained with the linear theory analysis formulation (Ref. 6). The pitch and yaw motions are modeled by a damped sinusoidal function. The yaw damping factors of the nutation and precession arms are given, respectively, by (Ref. 11):

$$\lambda_N = \frac{\rho A}{4 m} \left[-C_{N\alpha} \left(1 - \frac{1}{\sigma} \right) + \frac{k_2^{-2}}{2} \left(1 + \frac{1}{\sigma} \right) C_{Mq} + \frac{k_1^{-2}}{\sigma} C_{np\alpha} \right] \quad [1]$$

and

$$\lambda_P = \frac{\rho A}{4 m} \left[-C_{N\alpha} \left(1 + \frac{1}{\sigma} \right) + \frac{k_2^{-2}}{2} \left(1 - \frac{1}{\sigma} \right) C_{Mq} - \frac{k_1^{-2}}{\sigma} C_{np\alpha} \right] \quad [2]$$

where:

$$k_1^{-2} = \frac{m d^2}{I_x} \quad [3]$$

$$k_2^{-2} = \frac{m d^2}{I_y} \quad [4]$$

$$\sigma = \sqrt{1 - \frac{1}{s_g}} \quad [5]$$

where s_g is given by

$$s_g = \frac{2 I_x^2 p^2}{\pi I_y \rho C_{M\alpha} V^2 d^3} \quad [6]$$

The above formulation is usually utilized for a spin stabilized projectile but it also holds for finned projectiles with adequate spin rates. In this case the gyroscopic stability factor is negative, since $C_{M\alpha}$ is negative.

The criterion for a projectile to be dynamically stable is that the fast and slow arm damping factors be negative. By inspection of the two damping terms above, equation [1] and [2], a high negative Magnus moment coefficient slope, $C_{np\alpha}$, combined with a high spin rate can only render the precession arm unstable, i.e. greater than zero.

A computer algorithm was written to calculate the precession damping term as a function of spin rate for different Mach numbers. The aerodynamic coefficients determined from the aeroballistic range using the multiple-fit data

reduction technique (Table IX), the nominal physical properties of the test projectile as well as typical atmospheric conditions at time of firing were utilized.

The results of the calculations are given in Fig. 18 on two different scales. The precession damping term, λ_P , is given as a function of the spin rate in deg/m for various Mach numbers. If $\lambda_P > 0.0$, the projectile is dynamically unstable and the angle of attack will increase as the projectile flies downrange. The range of spin rate induced by the 0°, 2° and 4° fin cants lies between 0 deg/m and 135° deg/m (Appendix B).

The first observation is that at Mach 1.29 the precession arm goes positive at a spin rate of approximately 30°/m. The two shots that were fired at this approximate Mach number, as explained previously, had a spin rate higher than 30°/m and showed an angular growth, especially for the 4° cant model. Therefore, it can be concluded that a Magnus dynamic instability will occur in the transonic regime for projectiles with high fin cants.

For all the other Mach numbers that were calculated, the precession arm becomes positive, i.e. unstable, in the range of spin rate that lies between 120 deg/m and 160 deg/m. Since the steady spin rates obtained for the 4° cant models are approximately 125 deg/m and some went even as high as 135 deg/m, the possibilities of a Magnus instability to occur are rather high. No doubt that it is at the limit. A higher fin cant angle would definitely have caused a dynamic instability at all Mach numbers. This also explains why some 4° cant models showed some angular growth while others did not.

8.0 CONCLUSIONS

The aerodynamic characteristics of the Basic Finner projectile were determined from free-flight tests in the DREV Aeroballistic Range with the full complement of stations. The Mach number ranged between Mach 1.05 and 4.5. The rectangular fins of the projectiles were canted at nominal angles of 0° , 2° and 4° producing spin rates in the range of 0 deg/m, 65 deg/m and 125 deg/m, respectively. All of the main aerodynamic coefficients (C_{x0} , $C_{N\alpha}$, $C_{M\alpha}$, C_{Mq} , $C_{np\alpha}$, C_{lp} , $C_{l\delta}$) were very well determined. This was confirmed by the probable errors of the reduced coefficients and the low probable errors of fits between the experimental and theoretical trajectories of the linear theory analyses and 6DOF reduction techniques. Some nonlinear behaviors in the axial force and in the static pitch moment were also determined from multiple fits.

There was very good agreement between the single and multiple fits with probable errors of fits of approximately 0.7 mm in the downrange coordinate, 0.4 mm in the swerve motion, 0.08° in pitch and yaw and of the order of 1.5° in roll. Detailed flow photographs showing the shock structure and boundary layer growth in the range of Mach numbers tested are also given.

The aerodynamic coefficients determined from these tests were also compared with published data from other free-flight aeroballistic ranges. The agreement is excellent and the data base was extended to Mach 4.5 with these tests. The Magnus moment coefficient slope obtained from the DREV Aeroballistic Range tests can be considered better determined than the published data.

A dynamic stability analysis explained a growth in angle of attack that was observed on some shots as the projectile flew downrange. This was attributed to a Magnus dynamic instability on the precession mode. A stability diagram showing the onset of instability as a function of spin rate (or cant angle) and Mach number was also determined. It was shown that for transonic Mach numbers and for spin rates greater than 30 deg/m, the projectile would

be dynamically unstable. At Mach numbers greater than 1.8, the projectile would be dynamically unstable if the spin rates are greater than approximately 120 deg/m.

Some aeroheating aspects were detected on the projectiles fired at the highest muzzle velocity of approximately 1520 m/s. This was observed on previous tests in the DREV Aeroballistic Range and is believed to be caused by the same phenomenon. That is, the prime area of heating occurs on the fin leading edge, where the interaction between the fin bow shock, which separates the boundary layer, and the separation shock generated at the leading edge of the viscous interaction, gives rise to a supersonic jet, which impinges on the fin.

9.0 ACKNOWLEDGMENTS

The authors would like to thank Mr. M. Normand, who designed the sabot, for launching the models and assisted in all the trials and Mr. C. Julien and Mme L. Audet for the operation of the range and their many required adjustments on the Schlieren system during the Aeroballistic Range trials. Also, the perseverance of Mme. S. Lafond, of SNC-IT, in the developing, loading and reading the films with such thoroughness is greatly appreciated and is shown in the quality of the reduced coefficients. We are also grateful to the trials team for these tests for their devotion in making these tests a success.

10.0 REFERENCES

1. Drouin, G., Dupuis, A. and Côté, F., "Instrumentation Development and Data Analysis for the DREV Aeroballistic Range", DREV M-2800/87, March 1987, UNCLASSIFIED
2. Dupuis, A. and Drouin, G., "The DREV Aeroballistic Range and Data Analysis System", AIAA Paper No. 88-2017, AIAA 15th Aerodynamic Testing Conference, San Diego, California, 18-20 May, 1988.
3. MacAllister, L. C., "The Aerodynamic Properties of a Simple Non Rolling Finned Cone-Cylinder Configuration Between Mach Numbers 1.0 and 2.5", BRL Report No. 934, May 1955
4. Nicolaides, J. D. and Bolz, R. E., "On the Pure Rolling Motion of Winged and/or Finned Missiles in Varying Supersonic Flight", BRL Report No. 799, March 1952
5. Nicolaides, J. D. and MacAllister, L. C., "A Review of Aeroballistic Range Research on a Winged and/or Finned Missiles", Ballistic Technical Note No. 5, Bureau of Ordnance, Department of the Navy, Oct. 1954
6. "Ballistic Range Data Analysis System (BARDAS)", Arrow Tech Associates Inc., DREV Contract No. W7701-0-1227, March 1992.
7. Hathaway, W. H. and Whyte, R., "Aeroballistic Research Facility Free-Flight Data Analysis using the Maximum Likelihood function", AFATL-TR-79-98, December 1979, UNCLASSIFIED
8. Dupuis, A. D. and Hathaway, W. H., "Aerodynamic Characteristic of a Finned Projectile at Supersonic and Hypersonic Speeds from Free-Flight Tests, DREV R-9404, October 1994, UNCLASSIFIED

9. Whyte, R. and Hathaway, W., "Dynamic Calibration of Spark Aeroballistic Ranges", 44th Aeroballistic Range Association Meeting, 13-17 September, 1993, Munich.
10. Dupuis, A. D., Edwards, J. and Normand, M., "Aerodynamic Characteristic and Aeroheating Aspects of Two Hypersonic Configurations From Free-Flight Tests", DREV - R - 9428, October 1995, UNCLASSIFIED
11. "Projectile Design Analysis System (PRODAS)", Arrow Tech Associates Inc., DREV Contract No. W7701-0-1227, March 1992.

UNCLASSIFIED

TABLE I

Nominal physical properties of model

d	(mm)	30.00
m	(kg)	1.58
I _x	(kg-cm ²)	1.92
I _y	(kg-cm ²)	97.85
l	(cm)	30.00
CG	(cm from nose)	16.50

TABLE II
Physical properties of test projectiles

Shot Number	Projectile Diameter (mm)	Mass (kg)	Axial Inertia (kg-m ²)	Inertia Y (kg-m ²)	Inertia Z (kg-m ²)	Inertia XY (kg-m ²)	Length (mm)	CG (mm)	CG (cal from nose)	Roll (pins)
DA95022010	29.969	1.58	0.192E-03	0.981E-02	0.981E-02	0.000E+00	300.072	164.902	5.502	YES
DA95022219	29.974	1.58	0.192E-03	0.979E-02	0.979E-02	0.000E+00	300.025	165.179	5.511	YES
DA95022230	29.969	1.58	0.192E-03	0.980E-02	0.980E-02	0.000E+00	299.898	165.058	5.508	YES
DA95030613	29.746	1.58	0.192E-03	0.979E-02	0.979E-02	0.000E+00	299.542	164.835	5.541	YES
DA95022009	29.969	1.58	0.191E-03	0.979E-02	0.979E-02	0.000E+00	300.050	165.007	5.506	YES
DA95030622	29.972	1.59	0.193E-03	0.982E-02	0.982E-02	0.000E+00	300.076	165.246	5.513	YES
DA95021318	29.969	1.58	0.192E-03	0.979E-02	0.979E-02	0.000E+00	300.025	165.215	5.513	YES
DA95021529	29.972	1.58	0.193E-03	0.982E-02	0.982E-02	0.000E+00	299.898	164.944	5.503	YES
DA95021308	29.972	1.58	0.192E-03	0.977E-02	0.977E-02	0.000E+00	300.072	165.139	5.510	YES
DA95021328	29.959	1.58	0.192E-03	0.980E-02	0.980E-02	0.000E+00	300.025	165.173	5.513	YES
DA95020907	29.972	1.58	0.191E-03	0.974E-02	0.974E-02	0.000E+00	300.050	165.210	5.512	YES
DA95021317	29.966	1.58	0.191E-03	0.978E-02	0.978E-02	0.000E+00	299.364	164.378	5.485	YES
DA95020927	29.959	1.58	0.192E-03	0.982E-02	0.982E-02	0.000E+00	300.076	165.048	5.509	YES
DA95020906	29.969	1.58	0.191E-03	0.978E-02	0.978E-02	0.000E+00	300.072	165.013	5.506	YES
DA95020916	29.974	1.58	0.192E-03	0.980E-02	0.980E-02	0.000E+00	299.720	164.723	5.496	YES
DA95030603	29.972	1.59	0.193E-03	0.984E-02	0.984E-02	0.000E+00	300.127	165.094	5.508	YES
DA95022205	29.969	1.58	0.191E-03	0.977E-02	0.977E-02	0.000E+00	300.072	165.148	5.511	YES
DA95022215	29.972	1.58	0.192E-03	0.978E-02	0.978E-02	0.000E+00	299.974	165.229	5.513	YES
DA95022726	29.969	1.58	0.192E-03	0.979E-02	0.979E-02	0.000E+00	300.025	165.083	5.508	YES
DA95022702	29.972	1.58	0.192E-03	0.979E-02	0.979E-02	0.000E+00	299.619	164.740	5.496	YES
DA95030121	29.972	1.59	0.193E-03	0.984E-02	0.984E-02	0.000E+00	299.492	164.520	5.489	YES
DA95022712	29.974	1.59	0.193E-03	0.982E-02	0.982E-02	0.000E+00	299.847	164.964	5.504	YES
DA95031523	29.979	1.59	0.193E-03	0.982E-02	0.982E-02	0.000E+00	300.050	165.243	5.512	NO
DA95030101	29.972	1.59	0.193E-03	0.981E-02	0.981E-02	0.000E+00	299.593	164.689	5.495	NO
DA95030111	29.979	1.59	0.193E-03	0.984E-02	0.984E-02	0.000E+00	300.050	165.208	5.511	YES

UNCLASSIFIED

TABLE III
Measured average fin cant angles

MODEL NUMBER	Fin cant angle	
	(deg)	(rad)
A01	0.000792	0.000014
A02	0.001000	0.000017
A03	0.000458	0.000008
A05	0.000417	0.000007
A06	0.000708	0.000012
A07	0.000708	0.000012
A08	0.000667	0.000012
A09	0.000833	0.000015
A10	0.000458	0.000008
A11	2.000542	0.034916
A12	2.000292	0.034912
A13	2.000625	0.034918
A15	2.000000	0.034907
A16	2.000208	0.034910
A17	2.000667	0.034918
A18	2.000042	0.034907
A19	2.000417	0.034914
A21	4.000500	0.069822
A22	4.000417	0.069821
A23	4.000375	0.069820
A26	4.000042	0.069814
A27	4.000208	0.069817
A28	4.000083	0.069815
A29	4.000042	0.069814
A30	4.000125	0.069815

UNCLASSIFIED

TABLE IV
Summary of launch conditions

a) Propellant NQM 044

			Nominal fin cant angle (deg)		
Mid Range Mach Ref #	$\bar{V}_{\text{muz}}$ (m/s)	Propellant Charge Mass (kg)	0	2	4
3.1	1159	4.536	-	A15 (3.31)	A26 (3.34)
3.1	1035	4.082	A05,A03 (2.97, 2.97)	-	-
2.7	947	3.630	A06 (2.74)	A16 (2.75)	A27 (2.67)
2.4	830	3.176	A07 (2.37)	A17 (2.42)	A28 (2.35)
1.8	643	2.268	A08 (1.85)	A18 (1.80)	A29 (1.85)
1.3	466	1.814	A09 (1.33)	A13 (1.26)	A22 (1.38)
1.1	380	1.360	A10 (1.05)	A19 (1.06)	A30 (1.12)

UNCLASSIFIED

b) Propellant NQM 047

			Nominal fin cant angle (deg)		
Mid Range Mach Ref #	$\bar{V}_{\text{muz}}$ (m/s)	Propellant Charge Mass (kg)	0	2	4
4.4	1511	6.260, 5.896 ⁽²³⁾	A01 (4.42)	A11, A14* (4.47, -)	A23 (4.13)
3.75	1298	5.444	A02 (3.68)	A12 (3.78)	A21 (3.74)

* Fins ablated during flight - no films

TABLE V
Range conditions

Shot Number	No. of Stations	Observed Distance (m)	Air Density (kg/m ³)	Speed of Sound (m/sec)	Reynolds Number (length)	 X (m)	Probable Swerve (m)	Error Angle (deg)	Roll (deg)
DA95022010	48	180.0	1.17143	344.00	0.699E+07	0.0006	0.0011	0.070	0.41
DA95022219	48	180.0	1.17792	343.68	0.704E+07	0.0006	0.0004	0.082	0.36
DA95022230	49	190.0	1.17643	343.88	0.742E+07	0.0006	0.0004	0.059	18.30
DA95030613	52	210.0	1.17949	343.96	0.836E+07	0.0009	0.0004	0.084	0.90
DA95022009	51	200.0	1.17998	343.59	0.889E+07	0.0006	0.0006	0.086	0.48
DA95030622	51	210.0	1.17952	344.00	0.920E+07	0.0008	0.0004	0.113	3.01
DA95021318	51	210.0	1.17301	343.74	0.119E+08	0.0007	0.0003	0.058	0.52
DA95021529	50	210.0	1.19148	343.68	0.124E+08	0.0007	0.0003	0.114	0.85
DA95021308	51	210.0	1.17472	343.74	0.123E+08	0.0007	0.0012	0.080	1.62
DA95021328	51	210.0	1.17718	343.59	0.156E+08	0.0008	0.0004	0.071	0.84
DA95020907	50	210.0	1.15631	343.73	0.155E+08	0.0006	0.0011	0.094	0.30
DA95021317	50	210.0	1.17843	343.41	0.161E+08	0.0007	0.0003	0.074	14.84
DA95020927	51	210.0	1.15687	343.78	0.174E+08	0.0009	0.0006	0.107	0.68
DA95020906	45	180.0	1.16084	343.66	0.180E+08	0.0007	0.0005	0.086	0.57
DA95020916	42	187.5	1.15931	343.83	0.180E+08	0.0008	0.0004	0.073	0.55
DA95030603	52	210.0	1.18152	343.83	0.198E+08	0.0007	0.0007	0.076	0.55
DA95022205	53	210.0	1.17484	343.85	0.197E+08	0.0007	0.0019	0.094	6.19
DA95022215	50	210.0	1.17395	343.91	0.220E+08	0.0007	0.0003	0.070	0.95
DA95022726	52	210.0	1.20303	343.52	0.227E+08	0.0007	0.0013	0.085	20.14
DA95022702	51	210.0	1.19975	343.64	0.250E+08	0.0007	0.0019	0.076	4.88
DA95030121	52	210.0	1.18519	343.60	0.251E+08	0.0008	0.0009	0.202	16.36
DA95022712	50	210.0	1.19728	343.52	0.256E+08	0.0006	0.0004	0.082	2.70
DA95031523	52	210.0	1.18066	343.83	0.276E+08	0.0006	0.0005	0.101	0.00
DA95030101	36	150.0	1.18209	343.88	0.296E+08	0.0008	0.0006	0.132	0.00
DA95030111	51	210.0	1.18122	343.80	0.299E+08	0.0009	0.0007	0.111	8.16

UNCLASSIFIED

TABLE VI
Linear theory parameters

Shot Number	Mach Number	Nutation DBSQ Vector [K10] (deg**2) (deg)	Precession Vector [K20] (deg)	Nutation Damping [L1] (1/m)	Precession Damping [L2] (1/m)	Nutation Frequency [W10] (deg/m)	Precession Frequency [W20] (deg/m)	Nutation Change [WD1] (deg/m2)	Precession Change [WD2] (deg/m2)	
DA95022010	1.056	0.4	0.79	0.64	-0.00544	-0.00572	14.541	-14.473	0.00000	0.00000
DA95022219	1.057	2.1	1.86	1.09	-0.00504	-0.00646	15.116	-14.372	0.00000	0.00000
DA95022230	1.116	0.1	0.38	0.38	-0.00570	-0.00494	15.845	-14.398	0.00000	0.00000
DA95030613	1.254	2.4	0.98	0.91	-0.01631	0.00413	14.970	-14.198	0.00000	0.00000
DA95022009	1.332	0.7	1.10	0.91	-0.00556	-0.00806	14.410	-14.307	0.00000	0.00000
DA95030622	1.380	17.9	0.16	0.89	-0.00734	0.01110	13.712	-12.797	0.00000	0.00000
DA95021318	1.799	0.5	0.80	0.72	-0.00713	-0.00273	11.431	-10.375	0.00000	0.00000
DA95021529	1.846	0.6	0.81	0.66	-0.00855	-0.00039	11.736	-9.716	0.00000	0.00000
DA95021308	1.850	0.9	1.06	0.97	-0.00478	-0.00508	10.638	-10.626	0.00000	0.00000
DA95021328	2.348	0.3	0.75	0.47	-0.00785	-0.00121	9.866	-7.922	0.00000	0.00000
DA95020907	2.364	0.4	0.78	0.62	-0.00465	-0.00465	8.820	-8.853	0.00000	0.00000
DA95021317	2.413	2.0	1.21	1.50	-0.00542	-0.00246	9.195	-8.224	0.00000	0.00000
DA95020927	2.663	3.4	1.57	1.77	-0.00708	-0.00096	8.991	-7.137	0.00000	0.00000
DA95020906	2.741	1.9	1.29	1.30	-0.00294	-0.00394	7.798	-7.861	0.00000	0.00000
DA95020916	2.749	0.1	0.26	0.07	-0.00200	-0.00200	8.392	-7.118	0.00000	0.00000
DA95030603	2.969	0.1	0.35	0.28	-0.00437	-0.00385	7.482	-7.414	0.00000	0.00000
DA95022205	2.970	1.6	1.21	1.23	-0.00362	-0.00330	7.495	-7.511	0.00000	0.00000
DA95022215	3.312	2.8	1.41	1.71	-0.00494	-0.00205	7.314	-6.451	0.00000	0.00000
DA95022726	3.337	0.4	0.44	0.66	-0.00428	-0.00175	7.755	-6.068	0.00000	0.00000
DA95022702	3.681	8.0	2.50	2.77	-0.00261	-0.00324	6.559	-6.556	0.00000	0.00000
DA95030121	3.741	17.0	4.06	3.56	-0.00560	-0.00082	7.473	-5.736	0.00000	0.00000
DA95022712	3.774	4.7	1.98	1.98	-0.00472	-0.00142	6.782	-5.881	0.00000	0.00000
DA95031523	4.127	2.6	1.40	1.33	-0.00533	0.00004	6.787	-5.073	0.00000	0.00000
DA95030101	4.422	45.3	5.42	6.28	-0.00420	-0.00225	6.105	-6.060	0.00000	0.00000
DA95030111	4.471	16.3	3.53	3.81	-0.00349	-0.00203	6.213	-5.392	0.00000	0.00000

UNCLASSIFIED

TABLE VII
Linear theory aerodynamic coefficients

Shot Number	Mach Number	DBSQ	CD	CD0	CDSQ	CNa	Cma	Cmq	Cnpa	Roll Fit Clp	Frequency Fit Clp
DA95022010	1.056	0.4	0.871	0.868	23.141	16.391	-50.786	-319.4	63.737	13.746	0.000
DA95022219	1.057	2.1	0.882	0.866	25.140	18.390	-52.022	-333.3	29.490	-9.058	0.000
DA95022230	1.116	0.1	0.854	0.853	29.087	22.337	-54.772	-289.2	-8.039	3.416	0.000
DA95030613	1.254	2.4	0.775	0.756	25.862	18.522	-51.982	-416.1	-407.288	-24.739	0.000
DA95022009	1.332	0.7	0.705	0.701	18.762	11.422	-49.282	-475.1	356.002	32.327	0.000
DA95030622	1.380	17.9	0.746	0.625	22.321	15.371	-42.073	418.7	-282.505	-35.438	0.000
DA95021318	1.799	0.5	0.596	0.593	17.859	12.039	-28.524	-331.7	-45.396	-25.377	0.000
DA95021529	1.846	0.6	0.599	0.596	16.643	10.823	-27.076	-277.2	-43.383	-16.379	0.000
DA95021308	1.850	0.9	0.571	0.565	22.083	16.263	-27.085	-330.3	269.034	21.394	0.000
DA95021328	2.348	0.3	0.500	0.498	15.208	10.181	-18.764	-338.2	-29.411	-9.269	0.000
DA95020907	2.364	0.4	0.479	0.478	12.456	7.532	-18.945	-360.2	3.039	4.491	0.000
DA95021317	2.413	2.0	0.480	0.471	14.794	9.870	-18.096	-278.8	-25.793	2.773	0.000
DA95020927	2.663	3.4	0.455	0.441	13.344	8.804	-15.710	-307.3	-26.194	-7.198	0.000
DA95020906	2.741	1.9	0.406	0.398	13.231	8.691	-14.888	-242.1	-126.322	-2.481	0.000
DA95020916	2.749	0.1	0.451	0.451	6.497	1.957	-14.543	-89.7	-0.333	2.405	0.000
DA95030603	2.969	0.1	0.385	0.385	15.758	11.638	-13.310	-319.3	-56.540	11.999	0.000
DA95022205	2.970	1.6	0.381	0.376	11.063	6.942	-13.489	-250.8	150.009	32.950	0.000
DA95022215	3.312	2.8	0.358	0.348	12.228	8.300	-11.331	-263.6	-22.203	-10.020	0.000
DA95022726	3.337	0.4	0.376	0.375	12.628	8.700	-11.036	-205.7	-9.448	3.513	0.000
DA95022702	3.681	8.0	0.333	0.304	11.842	8.170	-10.106	-209.0	1139.350	-57.738	0.000
DA95030121	3.741	17.0	0.359	0.297	11.881	8.209	-10.256	-244.4	-17.207	3.656	0.000
DA95022712	3.774	4.7	0.321	0.305	11.302	7.694	-9.419	-228.2	-22.274	-15.795	0.000
DA95031523	4.127	2.6	0.291	0.283	10.897	7.482	-8.243	-195.3	-18.088	0.000	0.000
DA95030101	4.422	45.3	0.408	0.243	11.941	8.721	-8.845	-261.0	-267.211	0.000	0.000
DA95030111	4.471	16.3	0.303	0.249	10.856	7.701	-8.034	-214.1	-9.275	4.057	0.000

UNCLASSIFIED

TABLE VIII
Six-degree-of freedom aerodynamic coefficients - Single fit

Shot Number	Mach Number	DBSQ ABARM	CX CX2	CNa CNa3	CYpa Cnpa	Cma Cma3	Cmq Cmq2	CZga3 Cmga3	CYga3 Cnga3	Clga2 Cnsm	Clp Cld	CNda CNdB	Cmda CmdB	Probable Error	
														X(m) Y-Z(m)	Angle(deg) Roll(deg)
DA95022010	1.056	0.4	0.868	18.73	0.00	-50.489	-332.0	0.0	0.0	0.00	-18.200	0.000	0.021	0.0005	0.072
		(0.%)	(7.%)	(*)	(0.%)	(11.%)	(*)	(*)	(*)	(*)	(*)	(*)	(4.%)		
		1.3	6.500	0.00	0.00	0.00	0.0	0.0	0.0	0.00	-0.001	0.000	0.011	0.0003	0.431
		(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*)	(2.%)	(*)	(4.%)		
DA95022219	1.058	2.0	0.868	18.02	0.00	-51.605	-349.6	0.0	0.0	0.00	-18.240	0.000	0.000	0.0005	0.080
		(0.%)	(3.%)	(*)	(0.%)	(7.%)	(*)	(*)	(*)	(0.%)	(*)	(*)			
		2.7	6.500	0.00	0.92	0.00	0.0	0.0	0.0	0.00	0.288	0.000	0.000	0.0003	0.692
		(*)	(*)	(-)	(*)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)	(*)		
DA95022230	1.116	0.1	0.854	18.50	0.00	-54.595	-320.0	0.0	0.0	0.00	-18.145	0.000	0.000	0.0007	0.058
		(0.%)	(*)	(*)	(0.%)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)	(*)		
		0.7	6.500	0.00	-25.00	0.00	0.0	0.0	0.0	0.00	0.562	0.000	0.000	0.0003	2.106
		(*)	(*)	(35.%)	(*)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)	(*)		
DA95030613	1.254	2.3	0.760	18.81	0.00	-52.604	-386.0	0.0	0.0	0.00	-23.564	0.000	0.000	0.0008	0.088
		(0.%)	(5.%)	(*)	(0.%)	(14.%)	(*)	(*)	(*)	(*)	(0.%)	(*)	(*)		
		2.2	6.500	0.00	-307.56	0.00	0.0	0.0	0.0	0.00	0.340	0.000	0.000	0.0004	1.881
		(*)	(*)	(5.%)	(*)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)	(*)		
DA95022009	1.332	0.8	0.701	16.29	0.00	-49.917	-505.5	0.0	0.0	0.00	-24.000	0.000	0.003	0.0007	0.082
		(0.%)	(7.%)	(*)	(0.%)	(6.%)	(*)	(*)	(*)	(*)	(*)	(*)	(15.%)		
		2.0	6.500	0.00	-320.00	0.00	0.0	0.0	0.0	0.00	-0.011	0.000	-0.023	0.0003	1.005
		(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)	(4.%)		
DA95030622	1.377	15.8	0.708	16.37	0.00	-45.883	-500.0	0.0	0.0	0.00	-28.986	0.000	0.000	0.0013	0.087
		(0.%)	(3.%)	(*)	(0.%)	(*)	(*)	(*)	(*)	(*)	(1.%)	(*)	(*)		
		8.9	6.500	0.00	-223.25	0.00	0.0	0.0	0.0	0.00	0.925	0.000	0.000	0.0004	3.541
		(*)	(*)	(0.%)	(*)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)	(*)		
DA95021318	1.799	0.6	0.594	11.29	0.00	-28.977	-385.8	0.0	0.0	0.00	-22.935	0.000	0.000	0.0008	0.056
		(0.%)	(7.%)	(*)	(0.%)	(6.%)	(*)	(*)	(*)	(*)	(0.%)	(*)	(*)		
		1.6	4.300	0.00	-41.14	0.00	0.0	0.0	0.0	0.00	0.401	0.000	0.000	0.0003	0.827
		(*)	(*)	(11.%)	(*)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)	(*)		

UNCLASSIFIED

Shot Number	Mach Number														Probable Error		
		DBSQ	CX	CNa	CYpa	Cma	Cmq	CZga3	CYga3	Clga2	Clp	CNda	Cmda		X(m)	Angle(deg)	
		ABARM	CX2	CNa3	Cnpa	Cma3	Cmq2	Cmga3	Cnga3	Cnsm	Clid	CNdb	CmdB		Y-Z(m)	Roll(deg)	
DA95021529	1.846	0.6	0.598	11.80	0.00	-27.450	-370.0	0.0	0.0	0.00	-22.188	0.000	0.000		0.0011	0.105	
		(0.%)	(*)	(*)	(0.%)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)	(*)				
		1.5	4.300	0.00	-34.53	0.00	0.0	0.0	0.0	0.00	0.760	0.000	0.000		0.0003	0.912	
		(*)	(*)	(10.%)	(*)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)	(*)				
DA95021308	1.850	1.0	0.567	11.80	0.00	-27.511	-416.3	0.0	0.0	0.00	-22.400	0.000	0.004		0.0007	0.072	
		(0.%)	(*)	(*)	(0.%)	(5.%)	(*)	(*)	(*)	(*)	(*)	(*)	(4.%)				
		2.0	4.300	0.00	-36.00	0.00	0.0	0.0	0.0	0.00	-0.001	0.000	-0.012		0.0004	1.468	
		(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*)	(8.%)	(*)	(1.%)				
DA95021328	2.348	0.4	0.500	10.37	0.00	-19.738	-294.8	0.0	0.0	0.00	-18.315	0.000	0.000		0.0010	0.072	
		(0.%)	(10.%)	(*)	(0.%)	(11.%)	(*)	(*)	(*)	(0.%)	(*)	(*)	(*)				
		1.1	3.300	0.00	-21.90	0.00	0.0	0.0	0.0	0.00	0.622	0.000	0.000		0.0004	2.667	
		(*)	(*)	(13.%)	(*)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)	(*)				
DA95020907	2.364	0.5	0.478	10.17	0.00	-19.021	-330.0	0.0	0.0	0.00	-18.300	0.000	-0.007		0.0007	0.067	
		(0.%)	(6.%)	(*)	(0.%)	(*)	(*)	(*)	(*)	(*)	(*)	(*)	(3.%)				
		1.4	3.300	0.00	-24.00	0.00	0.0	0.0	0.0	0.00	0.000	0.000	0.018		0.0002	0.301	
		(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*)	(2.%)	(*)	(2.%)				
DA95021317	2.414	2.1	0.473	9.92	0.00	-18.120	-298.6	0.0	0.0	0.00	-18.273	0.000	0.000		0.0007	0.071	
		(0.%)	(3.%)	(*)	(0.%)	(5.%)	(*)	(*)	(*)	(1.%)	(*)	(*)	(*)				
		2.6	3.300	0.00	-23.94	0.00	0.0	0.0	0.0	0.00	0.311	0.000	0.000		0.0003	5.420	
		(*)	(*)	(10.%)	(*)	(*)	(*)	(*)	(*)	(*)	(1.%)	(*)	(*)				
DA95020927	2.663	3.7	0.446	8.95	0.00	-15.964	-397.9	0.0	0.0	0.00	-16.736	0.000	0.000		0.0012	0.070	
		(0.%)	(4.%)	(*)	(0.%)	(3.%)	(*)	(*)	(*)	(0.%)	(*)	(*)	(*)				
		3.4	2.900	0.00	-25.84	0.00	0.0	0.0	0.0	0.00	0.566	0.000	0.000		0.0006	1.691	
		(*)	(*)	(4.%)	(*)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)	(*)				
DA95020906	2.741	2.1	0.400	8.92	0.00	-14.877	-254.3	0.0	0.0	0.00	-16.700	0.000	0.016		0.0008	0.073	
		(0.%)	(3.%)	(*)	(0.%)	(6.%)	(*)	(*)	(*)	(*)	(*)	(*)	(2.%)				
		2.5	2.900	0.00	-23.00	0.00	0.0	0.0	0.0	0.00	-0.001	0.000	-0.007		0.0003	0.640	
		(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*)	(2.%)	(*)	(3.%)				

UNCLASSIFIED

Shot Number	Mach Number	DBSQ ABARM	CX CX2	CNa CNa3	CYpa Cnpa	Cma Cma3	Cmq Cmq2	CZga3 Cmga3	CYga3 Cnga3	Clga2 Cnsm	Clp Cld	CNda CndB	Cnda CmdB	Probable Error	
														X(m) Y-Z(m)	Angle(deg) Roll(deg)
DA95020916	2.749	0.0	0.452	9.00	0.00	-15.373	-300.0	0.0	0.0	0.00	-15.991	0.000	0.000	0.0009	0.072
			(0.%)	(*)	(*)	(2.%)	(*)	(*)	(*)	(*)	(0.%)	(*)	(*)		
		0.3	2.900	0.00	-23.00	0.00	0.0	0.0	0.0	0.00	0.269	0.000	0.000	0.0004	1.902
			(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)	(*)		
DA95030603	2.969	0.1	0.385	8.00	0.00	-13.900	-250.0	0.0	0.0	0.00	-13.300	0.000	-0.003	0.0006	0.073
			(0.%)	(*)	(*)	(1.%)	(*)	(*)	(*)	(*)	(*)	(*)	(4.%)		
		0.6	2.500	0.00	-20.00	0.00	0.0	0.0	0.0	0.00	-0.002	0.000	0.004	0.0004	0.454
			(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*)	(1.%)	(*)	(3.%)		
DA95022205	2.970	1.7	0.376	8.72	0.00	-13.535	-275.4	0.0	0.0	0.00	-13.300	0.000	0.013	0.0007	0.063
			(0.%)	(3.%)	(*)	(0.%)	(5.%)	(*)	(*)	(*)	(*)	(*)	(1.%)		
		2.3	2.500	0.00	-20.00	0.00	0.0	0.0	0.0	0.00	0.002	0.000	-0.016	0.0002	1.522
			(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*)	(2.%)	(*)	(1.%)		
DA95022215	3.312	3.0	0.350	8.41	0.00	-11.485	-231.9	0.0	0.0	0.00	-13.886	0.000	0.000	0.0007	0.056
			(0.%)	(2.%)	(*)	(0.%)	(4.%)	(*)	(*)	(*)	(0.%)	(*)	(*)		
		2.9	2.500	0.00	-16.61	0.00	0.0	0.0	0.0	0.00	0.234	0.000	0.000	0.0003	1.309
			(*)	(*)	(7.%)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)	(*)		
DA95022726	3.338	0.4	0.376	8.19	0.00	-11.233	-250.0	0.0	0.0	0.00	-13.398	0.000	0.000	0.0009	0.057
			(0.%)	(6.%)	(*)	(0.%)	(*)	(*)	(*)	(*)	(0.%)	(*)	(*)		
		1.0	2.500	0.00	-20.00	0.00	0.0	0.0	0.0	0.00	0.462	0.000	0.000	0.0003	1.910
			(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)	(*)		
DA95022702	3.682	8.5	0.310	8.13	0.00	-10.169	-210.7	0.0	0.0	0.00	-13.000	-0.007	0.018	0.0006	0.073
			(0.%)	(1.%)	(*)	(0.%)	(3.%)	(*)	(*)	(*)	(*)	(19.%)	(10.%)		
		4.9	2.000	0.00	-14.00	0.00	0.0	0.0	0.0	0.00	-0.001	0.002	0.003	0.0004	1.895
			(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*)	(6.%)	(83.%)	(61.%)		
DA95030121	3.745	17.6	0.309	8.45	0.00	-9.457	-277.1	0.0	0.0	0.00	-13.415	0.000	0.000	0.0007	0.079
			(0.%)	(1.%)	(*)	(0.%)	(2.%)	(*)	(*)	(*)	(0.%)	(*)	(*)		
		7.3	2.000	0.00	-14.31	-95.15	0.0	0.0	0.0	0.00	0.449	0.000	0.000	0.0003	2.543
			(*)	(*)	(2.%)	(4.%)	(*)	(*)	(*)	(*)	(0.%)	(*)	(*)		

UNCLASSIFIED

Shot Number	Mach Number	DBSQ ABARM	CX CX2	CNa CNa3	CYpa Cnpa	Cma Cma3	Cmq Cmq2	CZga3 Cmga3	CYga3 Cnga3	Clga2 Cnsm	Clp Cld	CNda CNdB	Cmda CmdB	Probable Error	
														X(m) Y-Z(m)	Angle(deg) Roll(deg)
DA95022712	3.775	5.0	0.308	7.92	0.00	-9.275	-204.7	0.0	0.0	0.00	-12.546	0.000	0.000	0.0007	0.056
			(0.%)	(1.%)	(*)	(0.%)	(3.%)	(*)	(*)	(*)	(1.%)	(*)	(*)		
		3.7	2.000	0.00	-18.70	-90.00	0.0	0.0	0.0	0.00	0.214	0.000	0.000	0.0003	2.652
			(*)	(*)	(4.%)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)	(*)		
DA95031523	4.127	2.7	0.285	7.65	0.00	-8.432	-152.4	0.0	0.0	0.00	-12.000	0.000	0.000	0.0009	0.073
			(0.%)	(2.%)	(*)	(0.%)	(7.%)	(*)	(*)	(*)	(*)	(*)	(*)		
		2.5	2.000	0.00	-16.27	0.00	0.0	0.0	0.0	0.00	0.399	0.000	0.000	0.0003	0.000
			(*)	(*)	(4.%)	(*)	(*)	(*)	(*)	(*)	(1.%)	(*)	(*)		
DA95030101	4.425	46.6	0.268	8.97	0.00	-7.950	-155.4	0.0	0.0	0.00	-12.000	0.000	-0.038	0.0006	0.148
			(4.%)	(1.%)	(*)	(0.%)	(6.%)	(*)	(*)	(*)	(*)	(*)	(7.%)		
		11.2	1.766	0.00	-13.00	-50.00	0.0	0.0	0.0	0.00	0.029	0.000	0.012	0.0006	0.000
			(50.%)	(*)	(*)	(*)	(*)	(*)	(*)	(*)	(4.%)	(*)	(65.%)		
DA95030111	4.473	17.7	0.257	7.76	0.00	-7.342	-247.2	0.0	0.0	0.00	-11.718	0.000	0.000	0.0007	0.083
			(0.%)	(1.%)	(*)	(0.%)	(2.%)	(*)	(*)	(*)	(1.%)	(*)	(*)		
		7.0	2.000	0.00	-9.66	-93.13	0.0	0.0	0.0	0.00	0.205	0.000	0.000	0.0004	5.225
			(*)	(*)	(5.%)	(4.%)	(*)	(*)	(*)	(*)	(1.%)	(*)	(*)		

UNCLASSIFIED

TABLE IX
Six-degree-of freedom aerodynamic coefficients - Multiple fits

Shot Numbers	Mach Number	DBSQ ABARM											Probable Error	
			CX	CNa	CYpa	Cma	Cmq	CZga3	CYga3	Clga2	CXM		X(m)	Angle (deg)
			CX2	CNa3	Cnpa	Cma3	Cmq2	Cmga3	Cnga3	CXga2	CmaM		Y-Z(m)	Roll (deg)
			CX4	CNa5	Cnpa3	Cma5	Cmq4	Cmga	Cnga5	Clp	CnsM			
DA95022230	DA95022010	1.077	0.9	0.863	18.47	0.00	-52.648	-322.4	0.0	0.0	0.00	-0.24	0.0006	0.072
			(0.%)	(2.%)	(*)	(0.%)	(5.%)	(*)	(*)	(*)	(3.%)			
DA95022219			2.7	6.500	0.00	0.00	0.000	0.0	0.0	0.0	0.00	-65.20	0.0003	1.307
			(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*)	(6.%)			
				0.000	0.00	0.00	0.000	0.0	0.0	0.0	-18.16	0.00		
				(*)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)			
DA95022009	DA95030613	1.293	1.5	0.731	18.27	0.00	-50.968	-487.4	0.0	0.0	0.00	-0.75	0.0009	0.090
			(0.%)	(3.%)	(*)	(0.%)	(6.%)	(*)	(*)	(*)	(1.%)			
			2.1	6.500	0.00	-321.97	0.000	0.0	0.0	0.0	0.00	40.85	0.0004	1.506
			(*)	(*)	(3.%)	(*)	(*)	(*)	(*)	(*)	(4.%)			
				0.000	0.00	0.00	0.000	0.0	0.0	0.0	-23.57	0.00		
				(*)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)			
DA95021318	DA95021529	1.832	0.7	0.585	11.78	0.00	-27.976	-377.7	0.0	0.0	0.00	-0.29	0.0009	0.079
			(*)	(4.%)	(*)	(0.%)	(4.%)	(*)	(*)	(*)	(*)			
DA95021308			2.0	4.300	0.00	-35.61	0.000	0.0	0.0	0.0	0.00	29.48	0.0003	1.484
			(*)	(*)	(7.%)	(*)	(*)	(*)	(*)	(*)	(7.%)			
				0.000	0.00	0.00	0.000	0.0	0.0	0.0	-22.35	0.00		
				(*)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)			
DA95021328	DA95020907	2.375	1.0	0.484	10.52	0.00	-18.904	-306.5	0.0	0.0	0.00	-0.16	0.0008	0.069
			(*)	(2.%)	(*)	(0.%)	(4.%)	(*)	(*)	(*)	(*)			
DA95021317			2.6	3.300	0.00	-24.33	0.000	0.0	0.0	0.0	0.00	19.24	0.0003	3.464
			(*)	(*)	(7.%)	(*)	(*)	(*)	(*)	(*)	(5.%)			
				0.000	0.00	0.00	0.000	0.0	0.0	0.0	-18.31	0.00		
				(*)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)			
DA95020916	DA95020906	2.718	1.9	0.435	9.01	0.00	-15.199	-335.5	0.0	0.0	0.00	-0.15	0.0010	0.071
			(*)	(2.%)	(*)	(0.%)	(3.%)	(*)	(*)	(*)	(*)			
DA95020927			3.3	2.900	0.00	-22.68	0.000	0.0	0.0	0.0	0.00	13.77	0.0004	1.798
			(*)	(*)	(4.%)	(*)	(*)	(*)	(*)	(*)	(3.%)			
				0.000	0.00	0.00	0.000	0.0	0.0	0.0	-16.65	0.00		
				(*)	(*)	(*)	(*)	(*)	(*)	(0.%)	(*)			

UNCLASSIFIED

Shot Numbers	Mach Number	DBSQ ABARM											Probable Error	
			CX	CNa	CYpa	Cma	Cmq	CZga3	CYga3	Clga2	CXM		X(m)	Angle(deg)
			CX2	CNa3	Cnpa	Cma3	Cmq2	Cmga3	Cnga3	CXga2	CmaM		Y-Z(m)	Roll(deg)
			CX4	CNa5	Cnpa3	Cma5	Cmq4	Cmga	Cnga5	Clp	CnsM			
DA95030603	DA95022726	3.147	1.3	0.373	8.69	0.00	-12.456	-260.1	0.0	0.0	0.00	-0.04	0.0007	0.063
				(*) (1.%)	(*) (0.%)	(3.%)	(*)	(*)	(*)	(*)	(*)	(*)		
DA95022205	DA95022215	2.9	2.500	0.00	-19.58	0.000	0.0	0.0	0.0	0.0	0.00	5.92	0.0003	1.582
			(*)	(*) (5.%)	(*)	(*)	(*)	(*)	(*)	(*)	(*) (1.%)			
			0.000	0.00	0.00	0.000	0.0	0.0	0.0	-13.50	0.00			
			(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*) (0.%)	(*)			
DA95022702	DA95022712	3.734	10.1	0.309	8.32	0.00	-9.533	-239.8	0.0	0.0	0.00	-0.02	0.0007	0.072
				(0.%) (1.%)	(*) (0.%)	(1.%)	(*)	(*)	(*)	(*) (33.%)				
DA95030121		7.2	2.129	0.00	-13.92	-90.425	0.0	0.0	0.0	0.00	5.48		0.0004	2.841
			(9.%)	(*) (2.%)	(2.%)	(*)	(*)	(*)	(*)	(*) (2.%)				
			0.000	0.00	0.00	0.000	0.0	0.0	0.0	-13.18	0.00			
			(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*) (0.%)	(*)			
DA95031523	DA95030111	4.300	10.2	0.271	7.74	0.00	-7.853	-247.0	0.0	0.0	0.00	-0.08	0.0008	0.088
				(0.%) (1.%)	(*) (0.%)	(2.%)	(*)	(*)	(*)	(*) (3.%)				
		7.0	2.000	0.00	-13.72	-93.319	0.0	0.0	0.0	0.00	2.94		0.0004	3.658
			(*)	(*) (3.%)	(4.%)	(*)	(*)	(*)	(*)	(*) (3.%)				
			0.000	0.00	0.00	0.000	0.0	0.0	0.0	-11.71	0.00			
			(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*) (1.%)	(*)			

UNCLASSIFIED

UNCLASSIFIED

TABLE XRoll moment coefficient due to fin cant

Model Number	Fin cant (δ) (rad)	$C_{l\delta}\delta$	$C_{l\delta}$ (/rad)
DA11	0.03492	0.20480	5.87
DA12	0.03491	0.21440	6.14
DA13	0.03492	0.34032	9.75
DA15	0.03491	0.23350	6.70
DA16	0.03491	0.26900	7.71
DA17	0.03492	0.31094	8.91
DA18	0.03491	0.40053	11.47
DA19	0.03491	0.28781	8.24
DA21	0.06982	0.44952	6.44
DA22	0.06982	0.92464	13.24
DA23	0.06982	0.39934	5.72
DA26	0.06981	0.46234	6.62
DA27	0.06982	0.56609	8.11
DA28	0.06982	0.62231	8.91
DA29	0.06981	0.75968	10.88
DA30	0.06982	0.56184	8.05

UNCLASSIFIED

DREV aeroballistic range

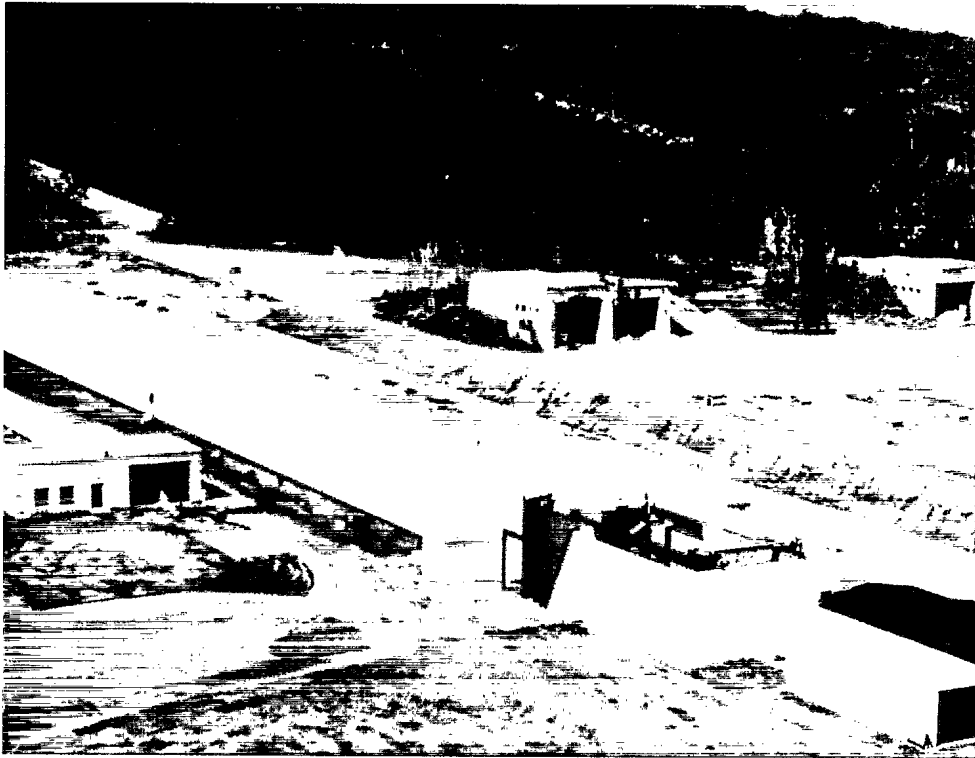


Fig. 1a) Photograph of aeroballistic range complex

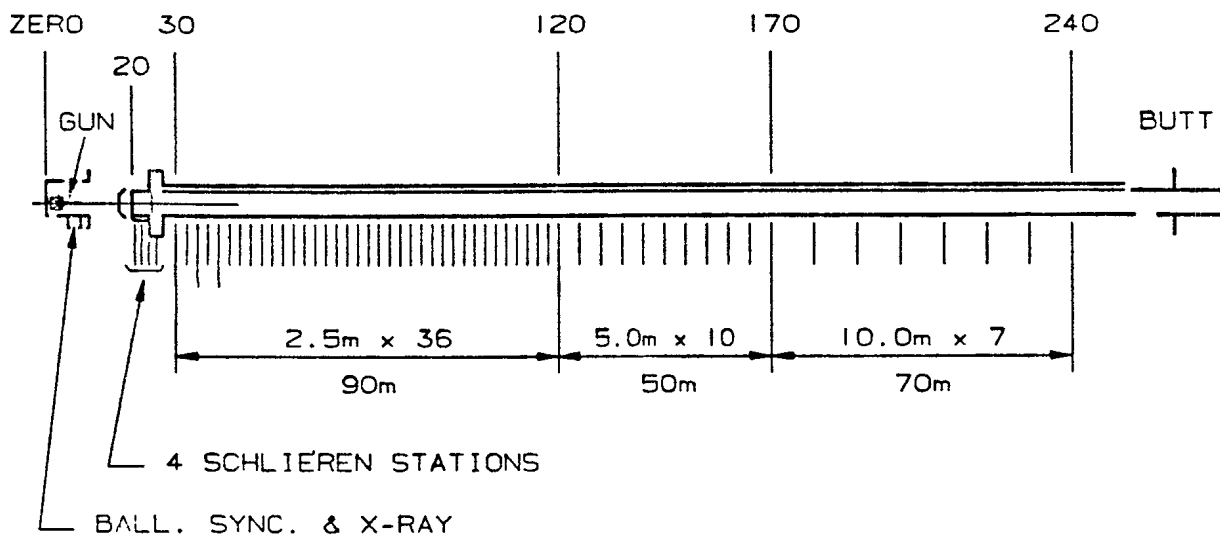


Fig. 1b) Photographic station spacing

UNCLASSIFIED

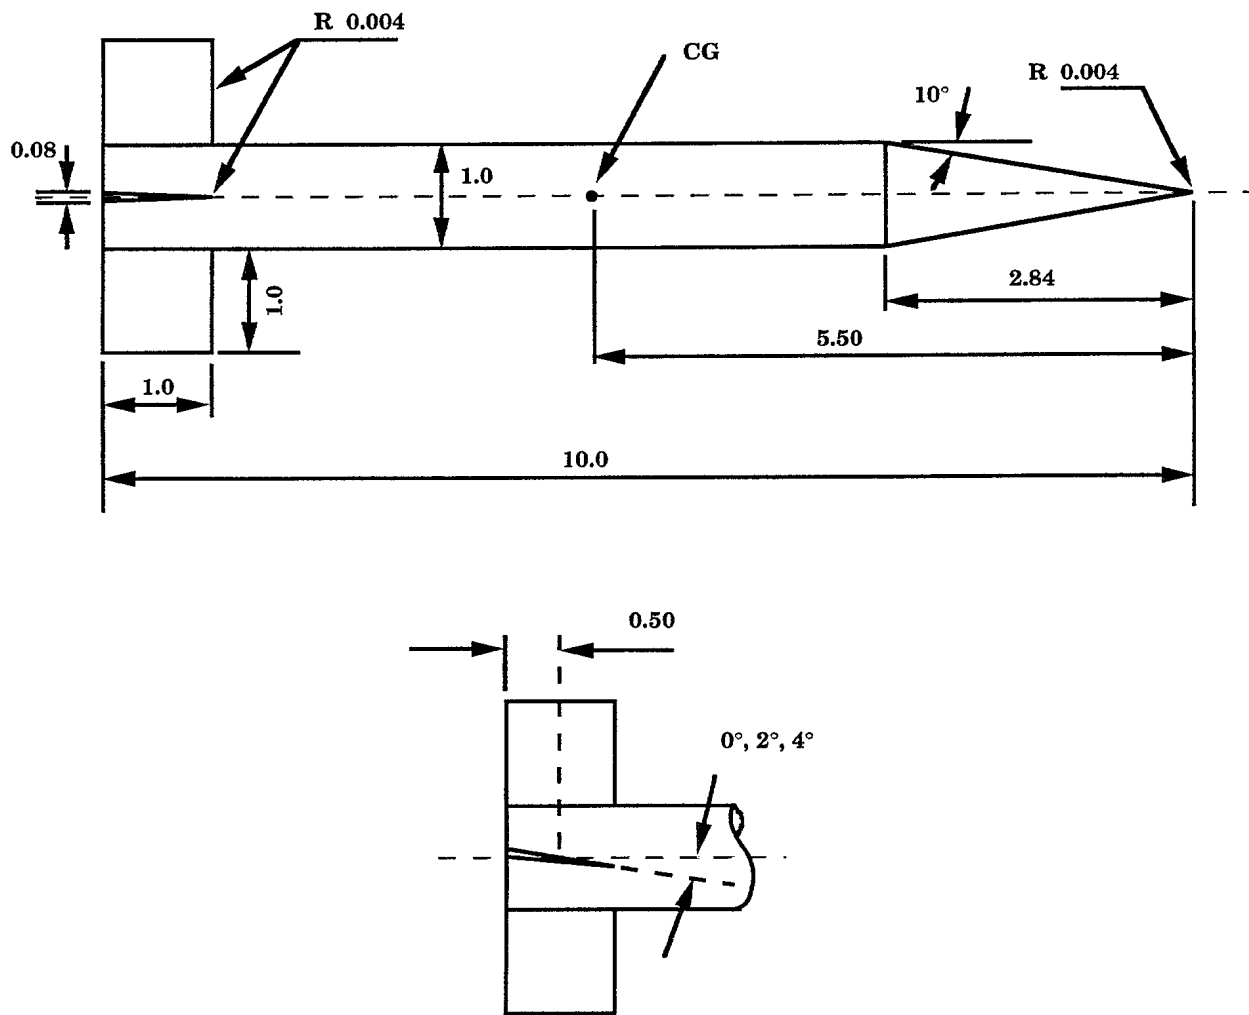


FIGURE 2 - MODEL configuration (Dimensions in calibres 1 cal = 30.0 mm)

Photographs of model and sabot package


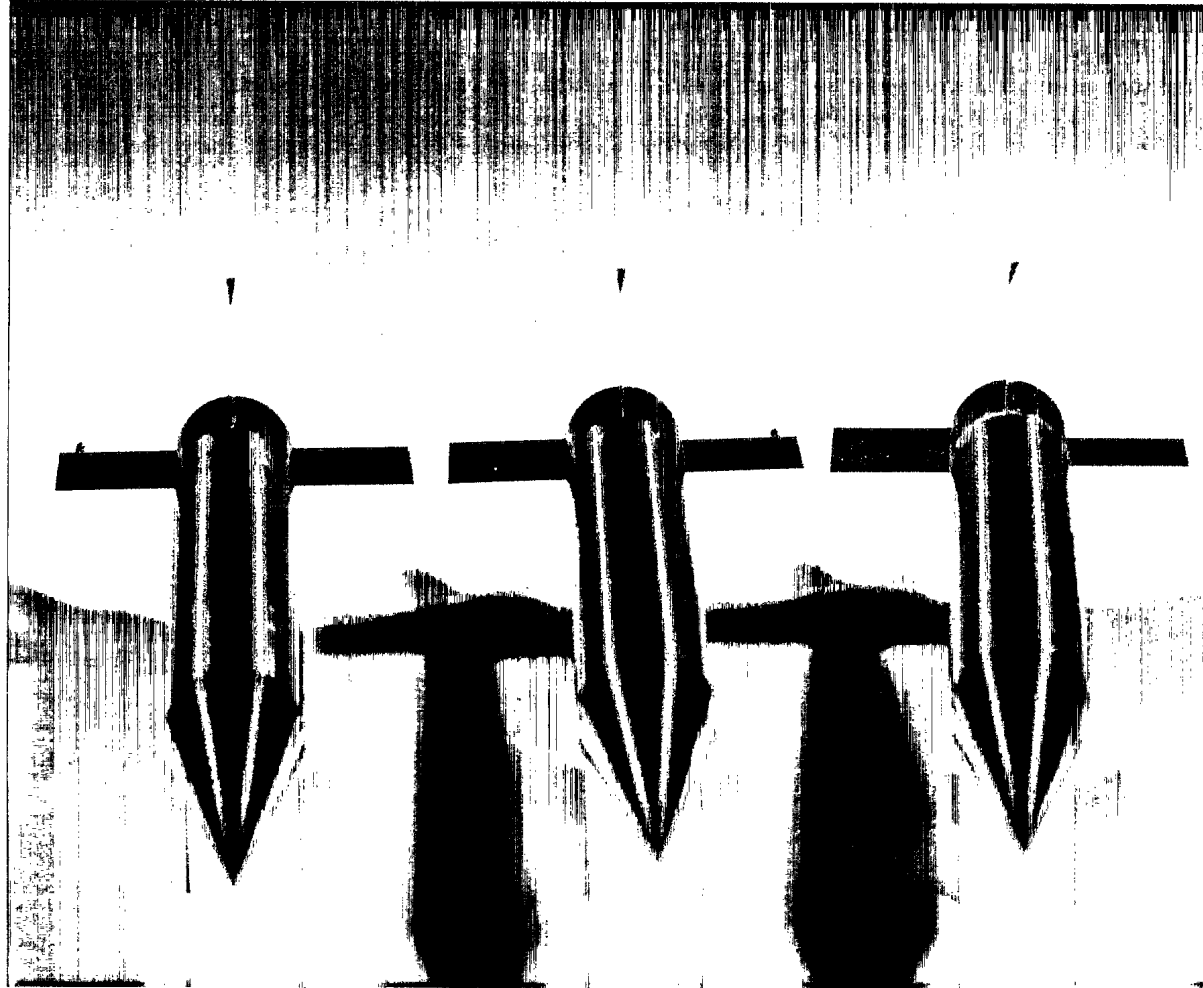


FIGURE 3 - a) Tested projectiles showing fin cants

UNCLASSIFIED

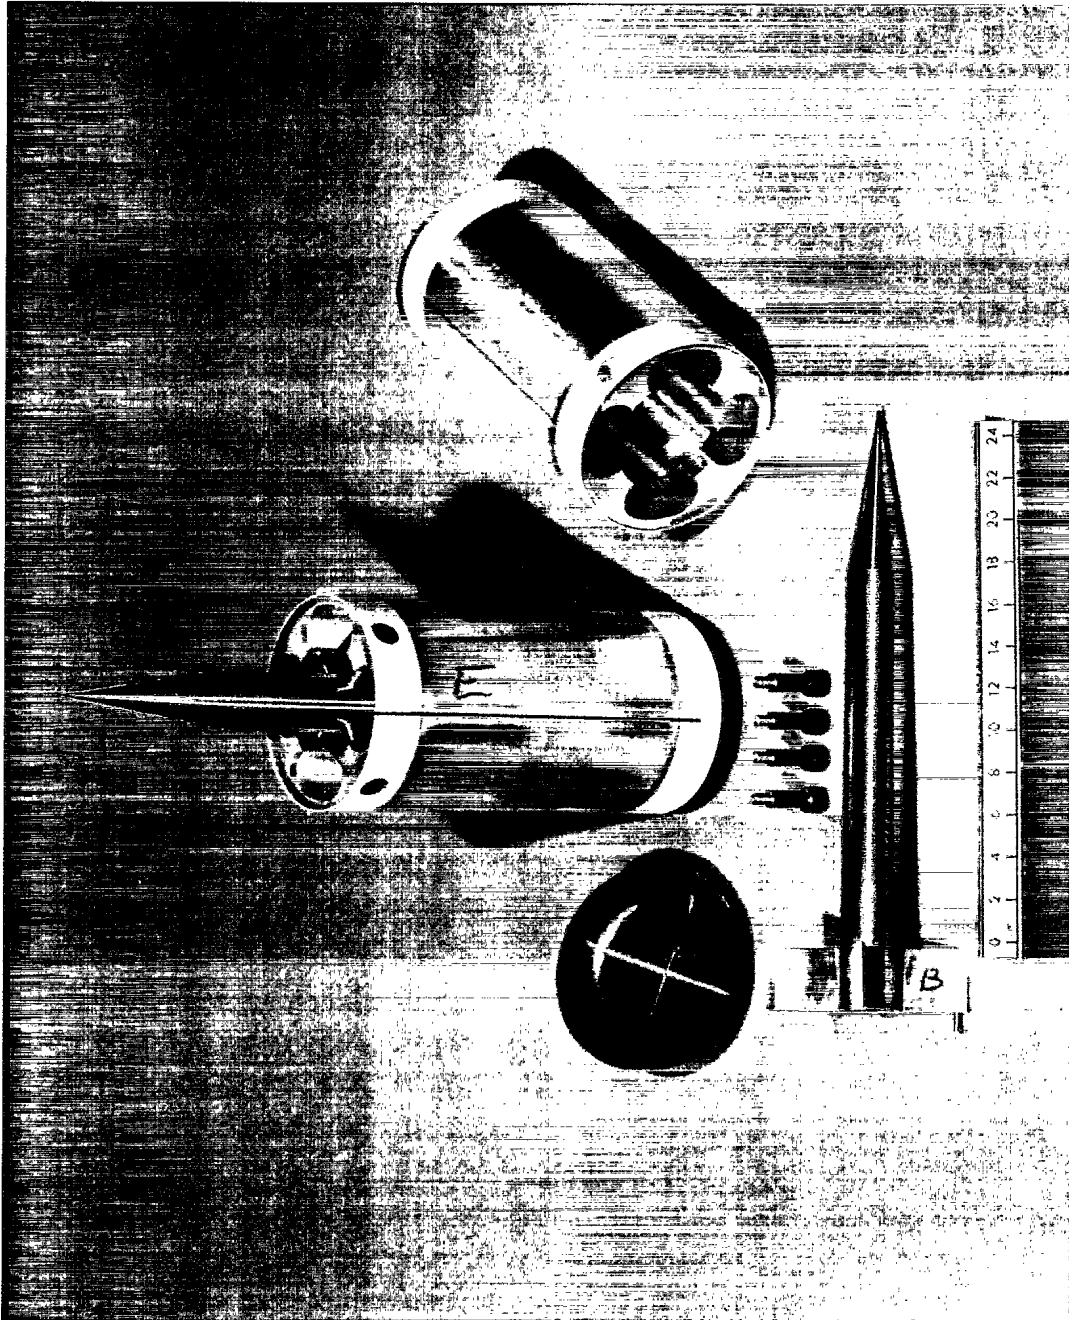


b) Model - sabot package

Typical model - sabot separation



FIGURE 4 - a) Model A30, $V_{muz} = 380$ m/s

UNCLASSIFIED

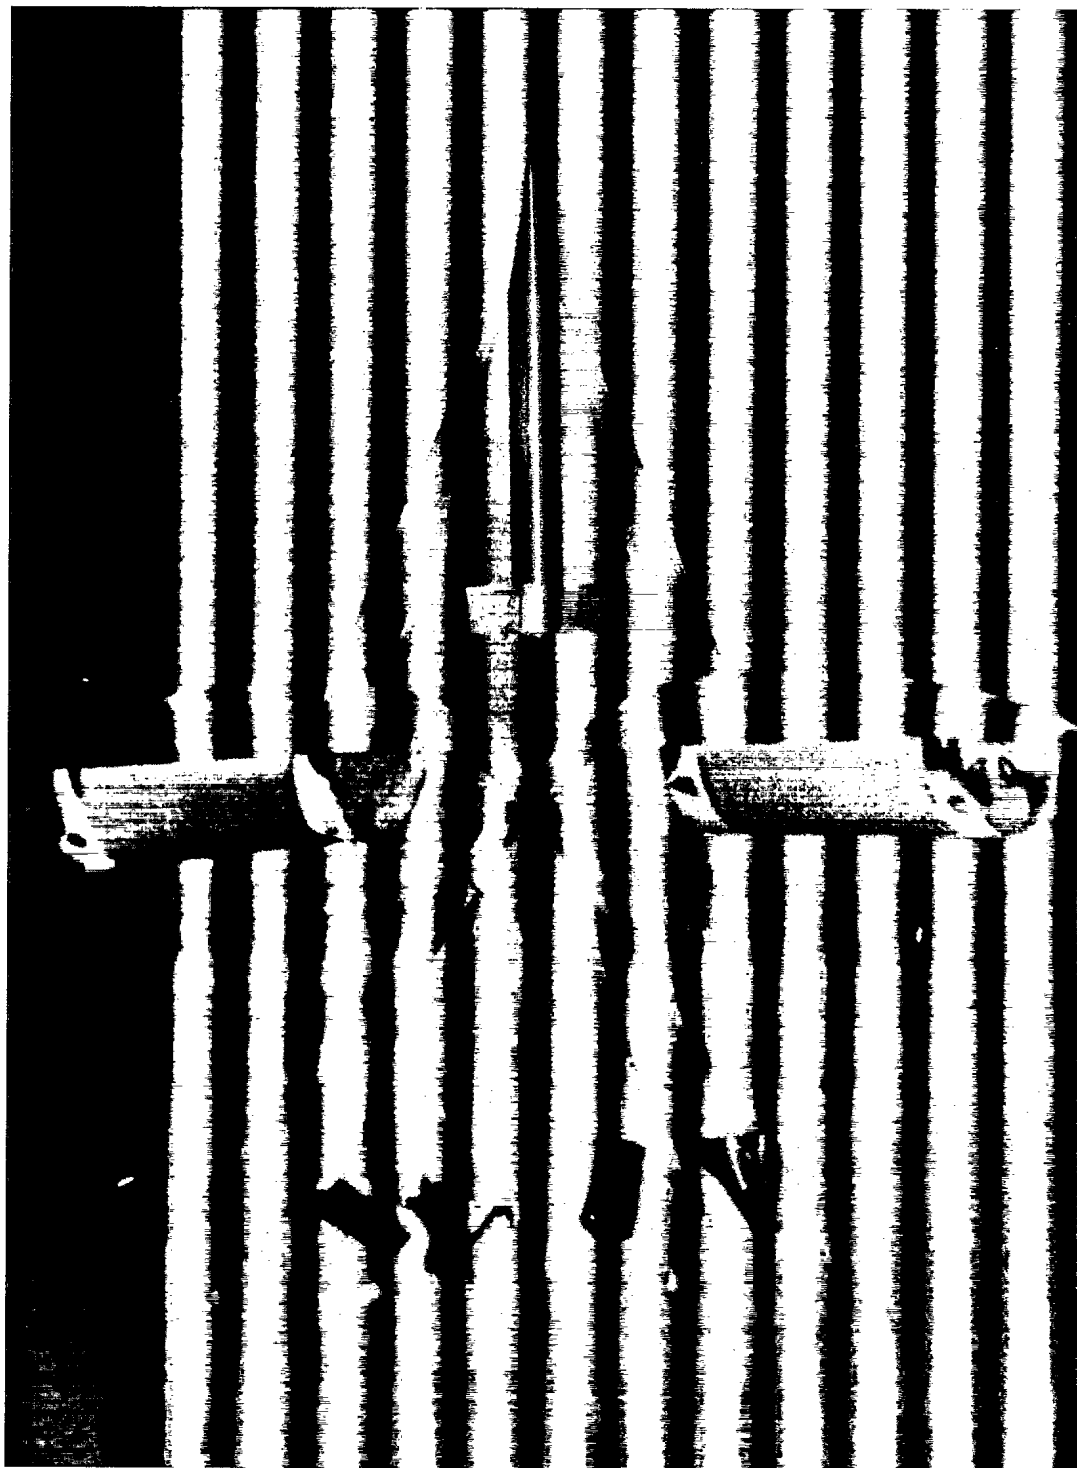

b) Model A23, $V_{\text{muz}} = 1159 \text{ m/s}$

UNCLASSIFIED

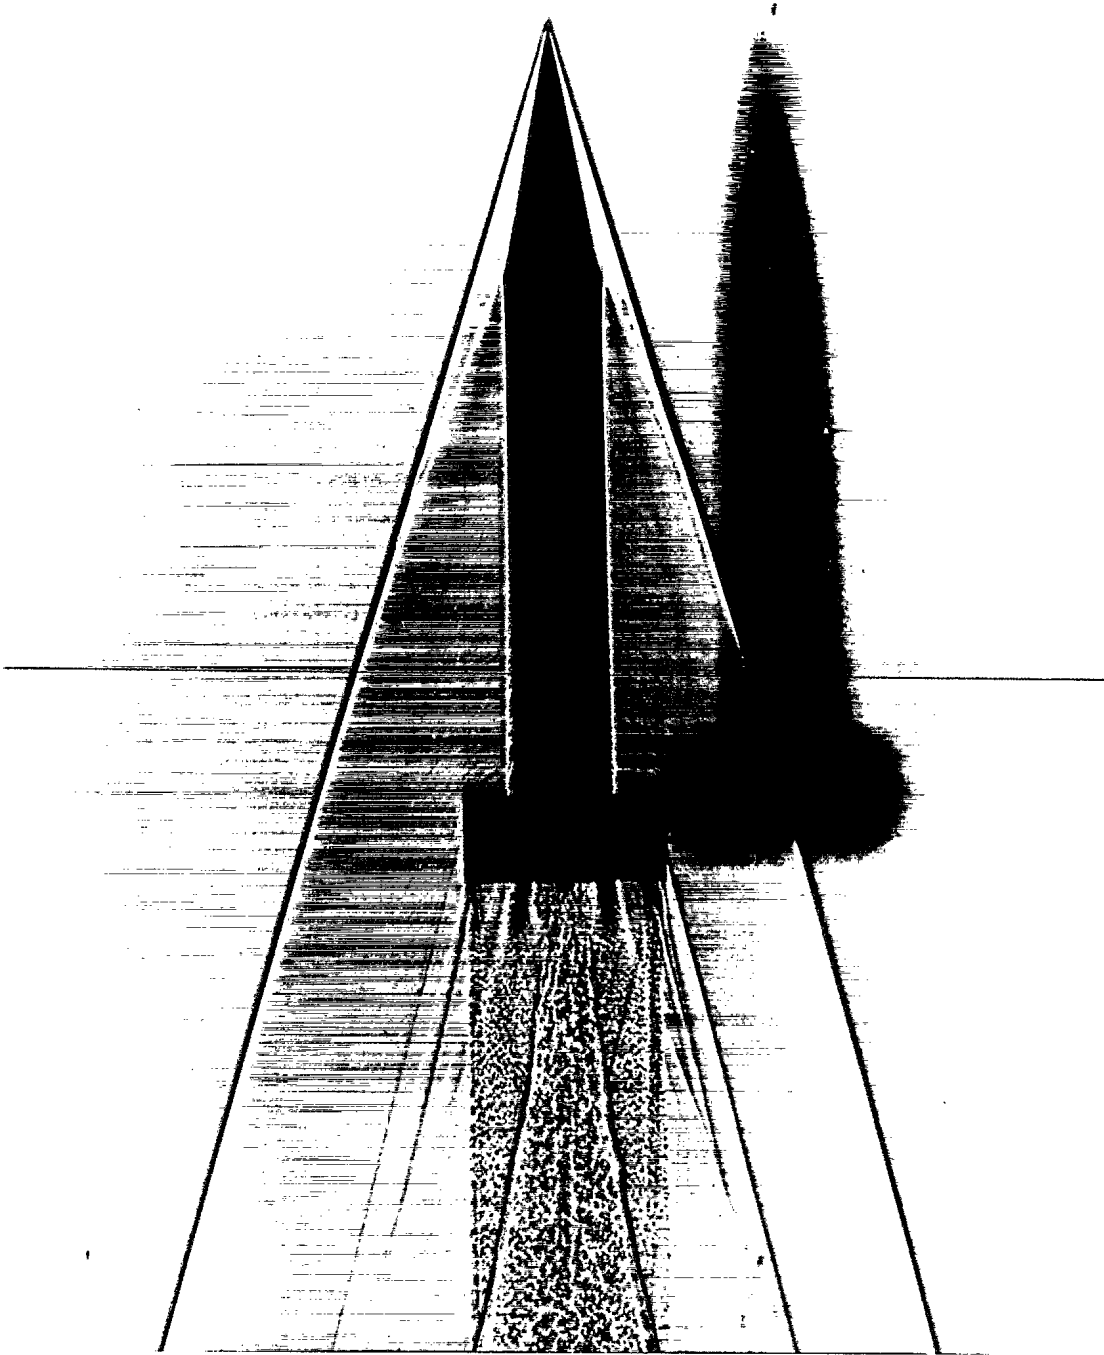


FIGURE 5 - Shadowgraph photograph of Shot A11, Mach = 4.5

UNCLASSIFIED

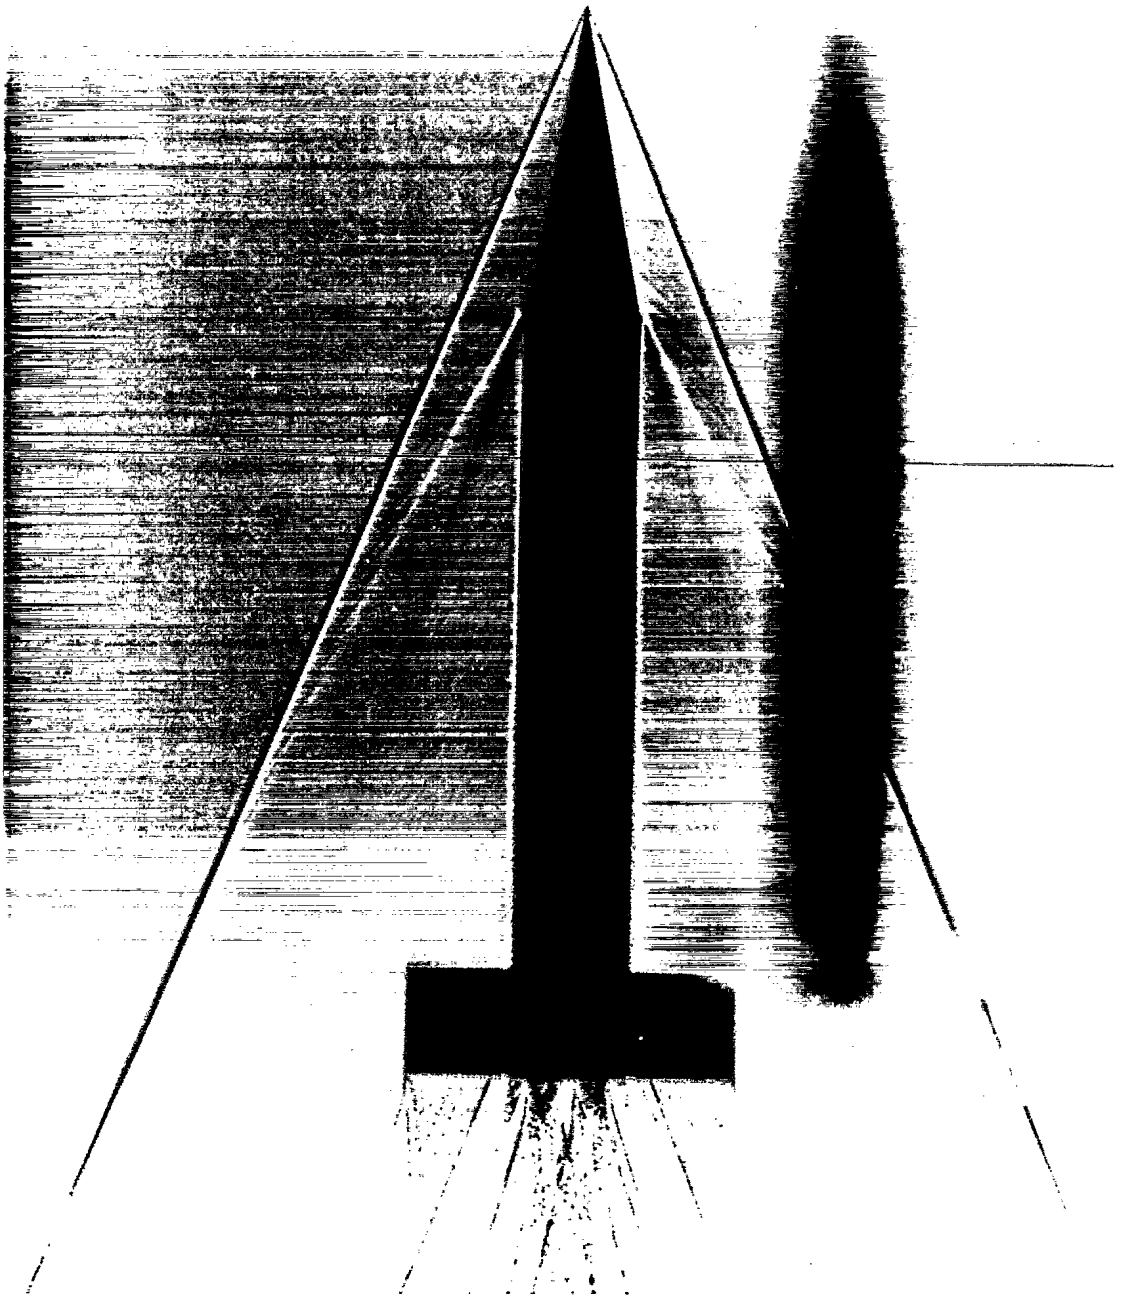


FIGURE 6 - Shadowgraph photograph of Shot A05, Mach = 3.0

UNCLASSIFIED

Shadowgraph photographs of Shot A10

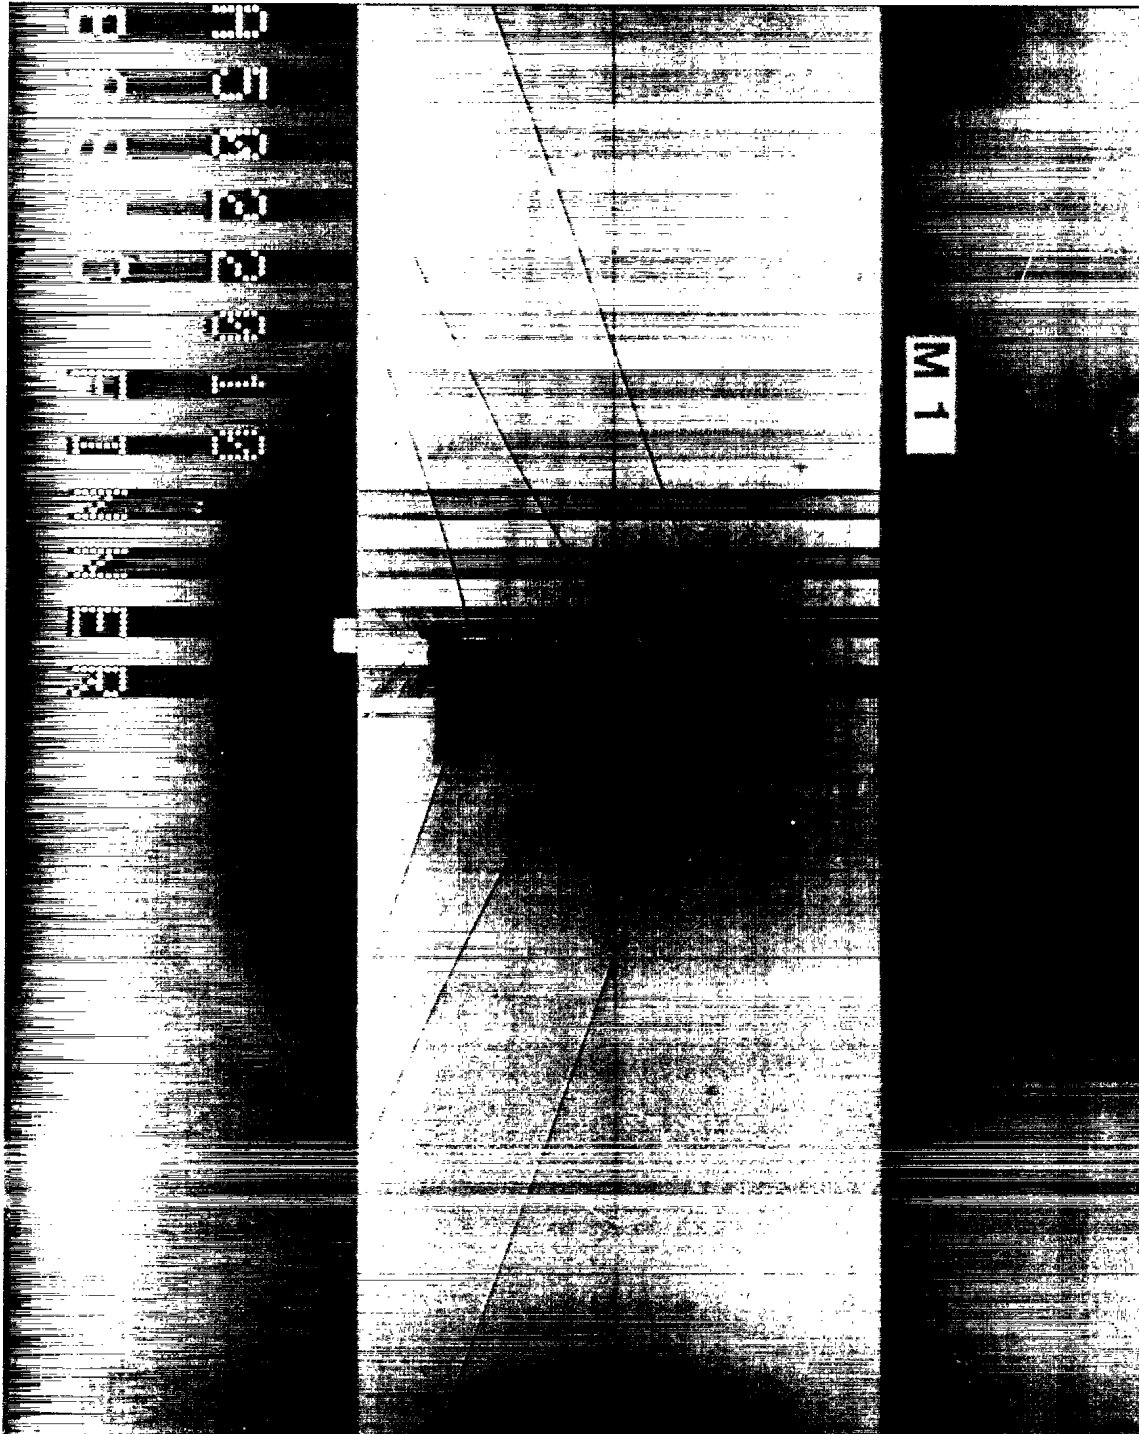


FIGURE 7 - a) $V = 370.7 \text{ m/s}$, $\text{Mach} = 1.078$

UNCLASSIFIED

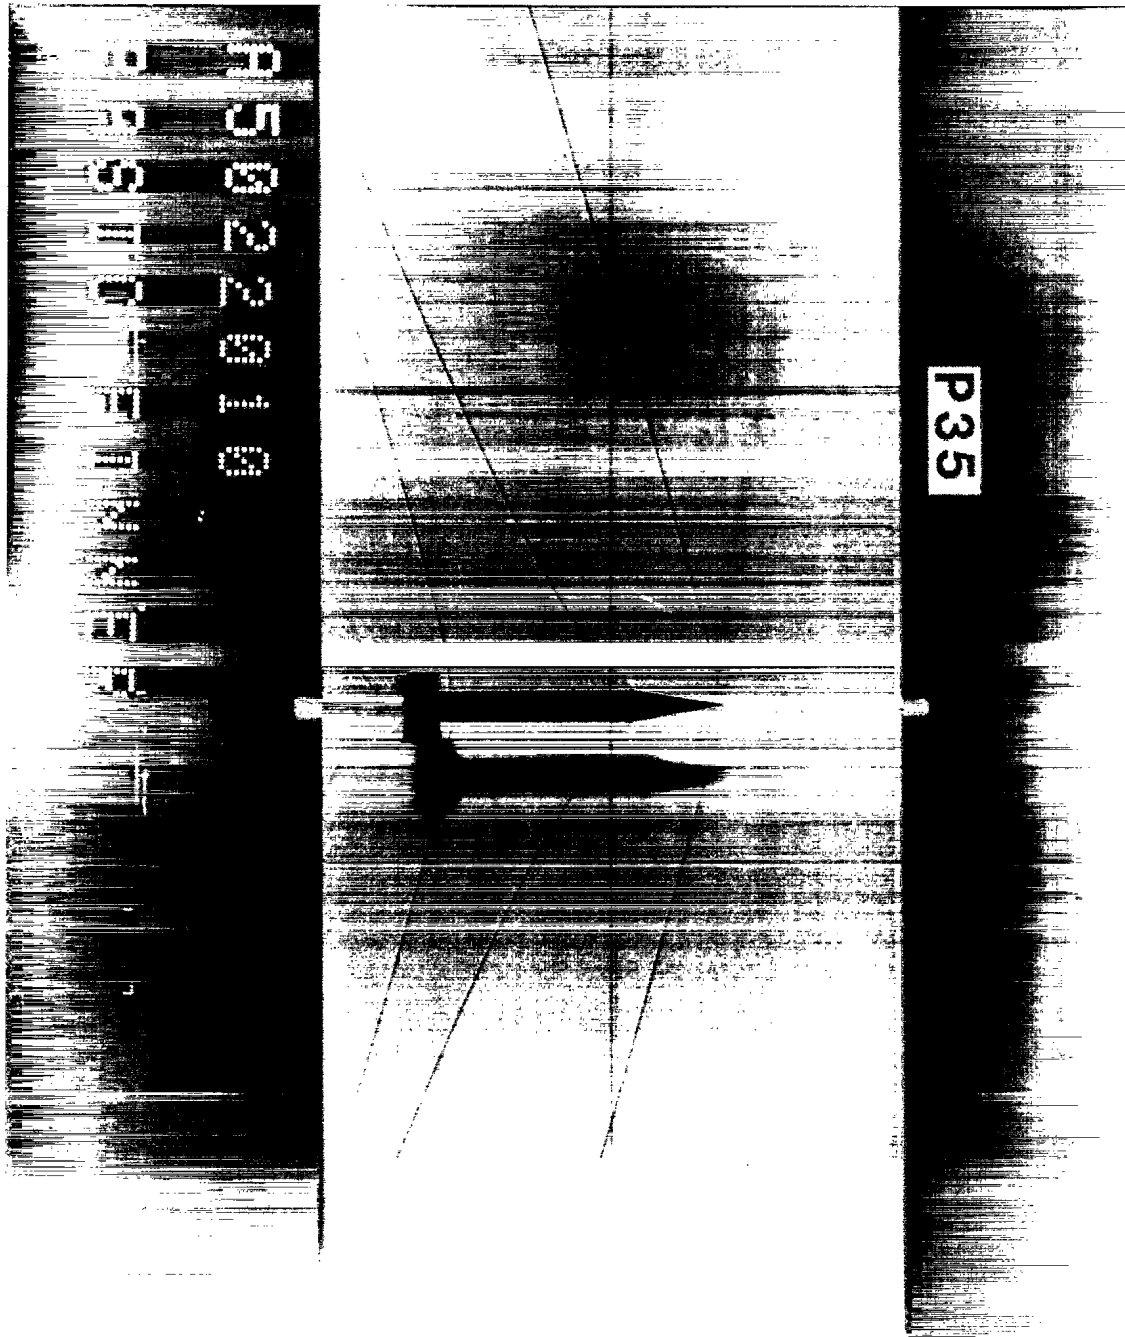


FIGURE 7 - b) $V = 363.7$ m/s, Mach = 1.057

UNCLASSIFIED

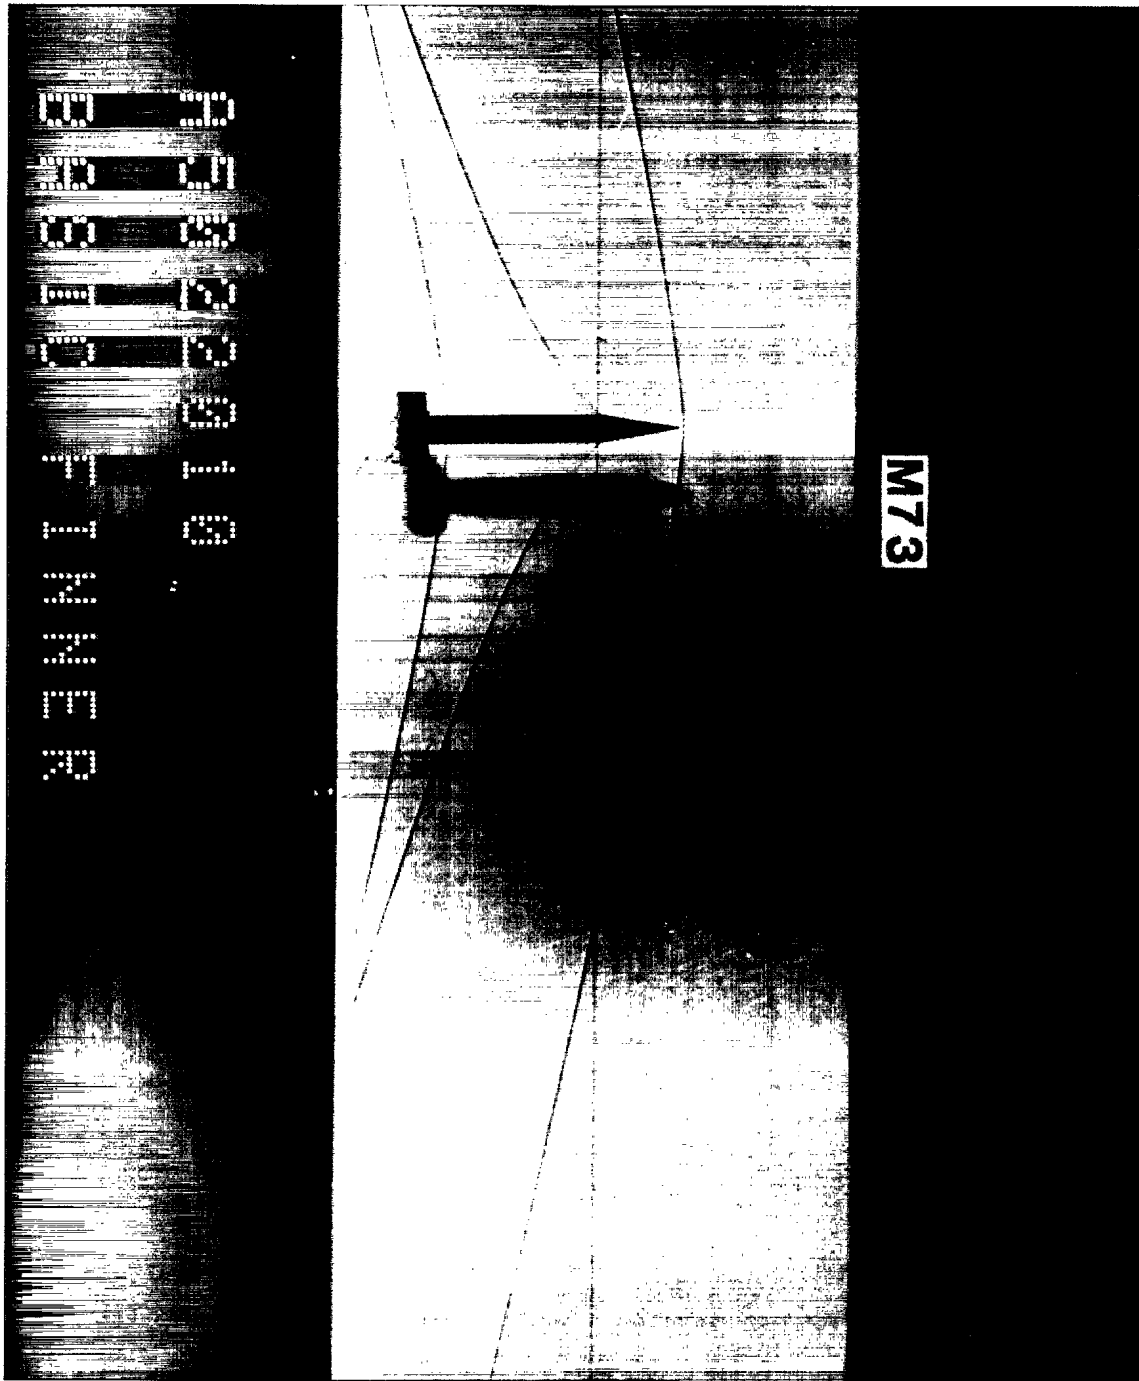


FIGURE 7 - c) $V = 355.9 \text{ m/s}$, $\text{Mach} = 1.035$

UNCLASSIFIED

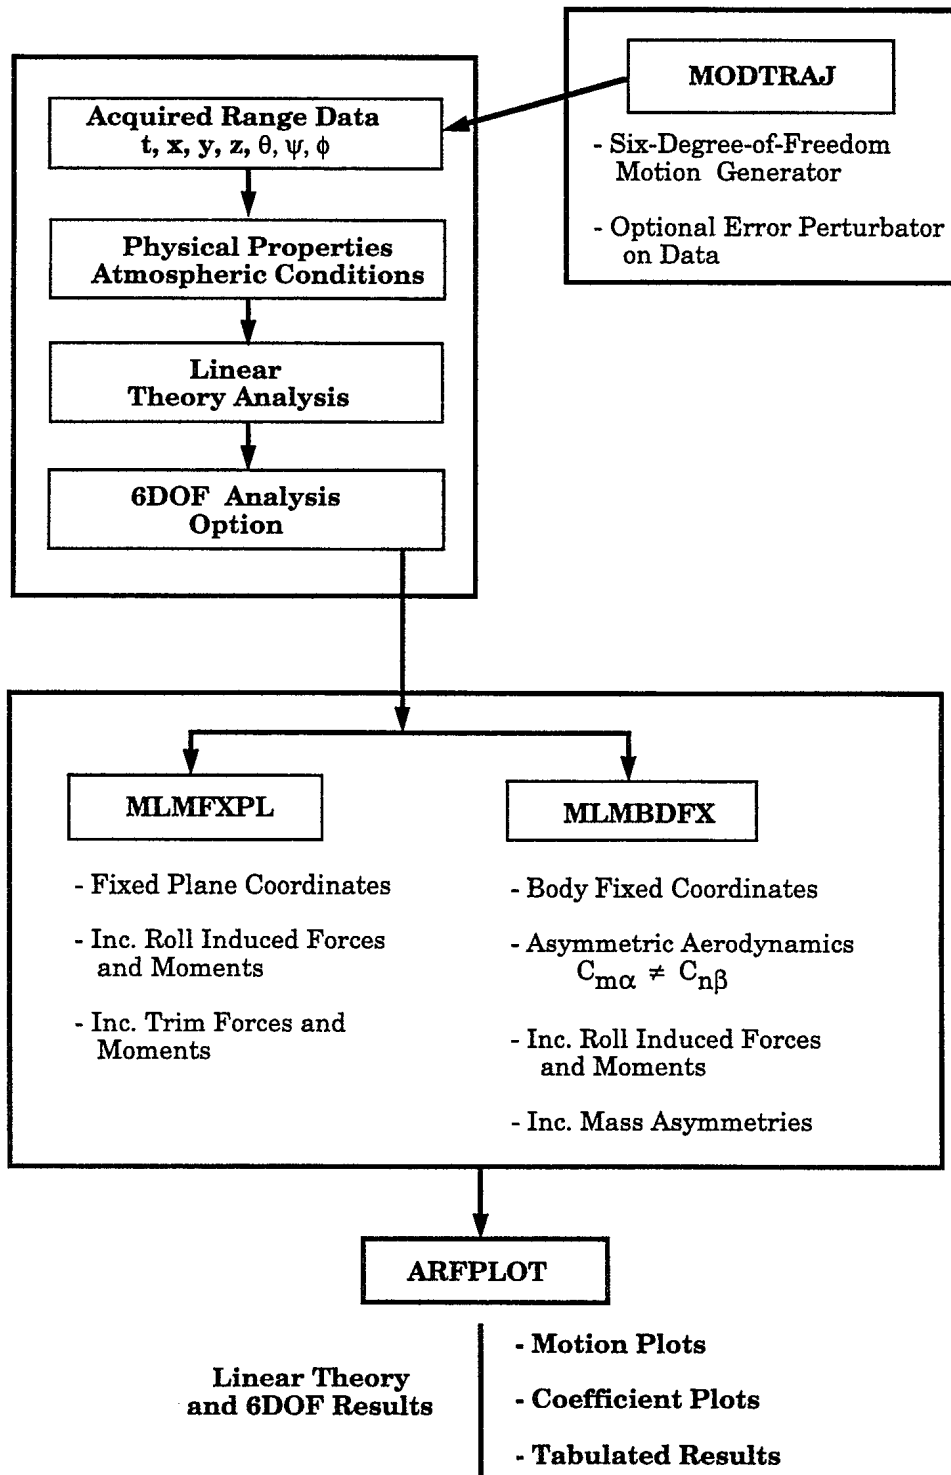


FIGURE 8 - DREV Aeroballistic Range Data Analysis System (BARDAS)

UNCLASSIFIED

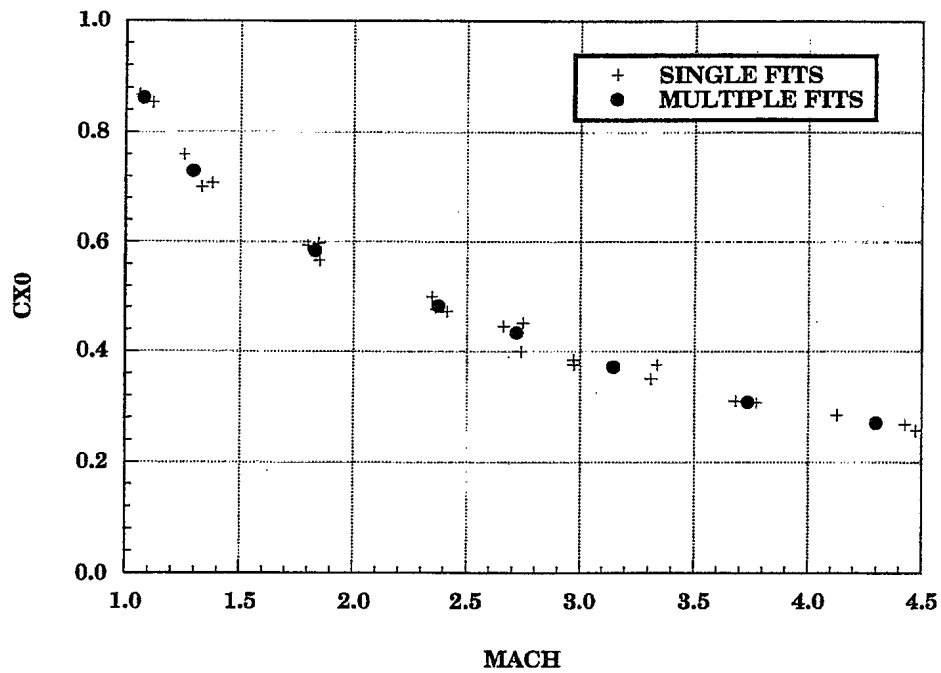


FIGURE 9 - Axial force coefficient versus Mach Number

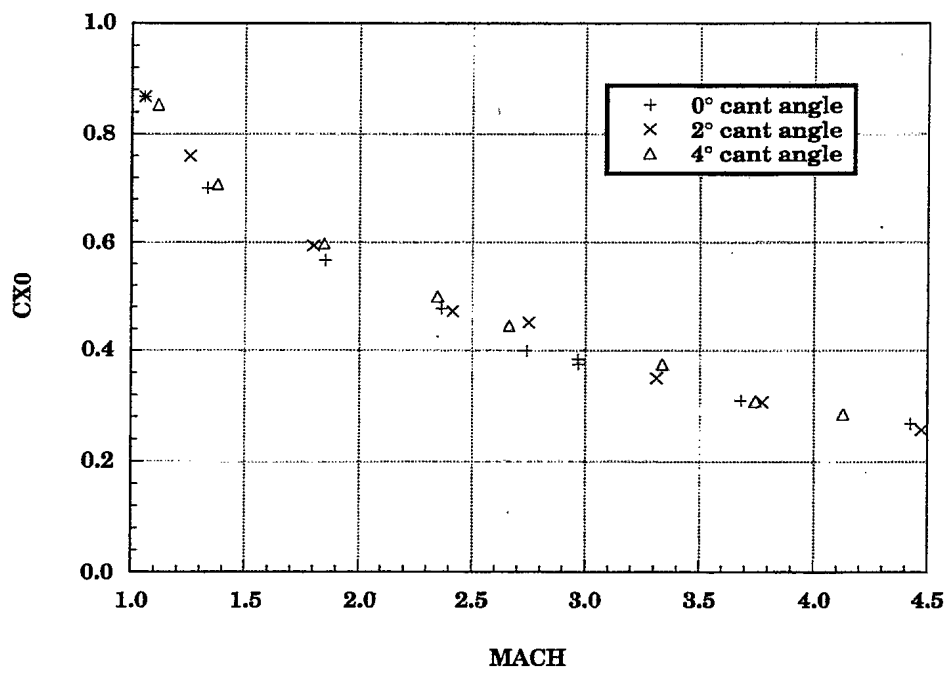


FIGURE 10 - Effect of spin rate on axial force coefficient

UNCLASSIFIED

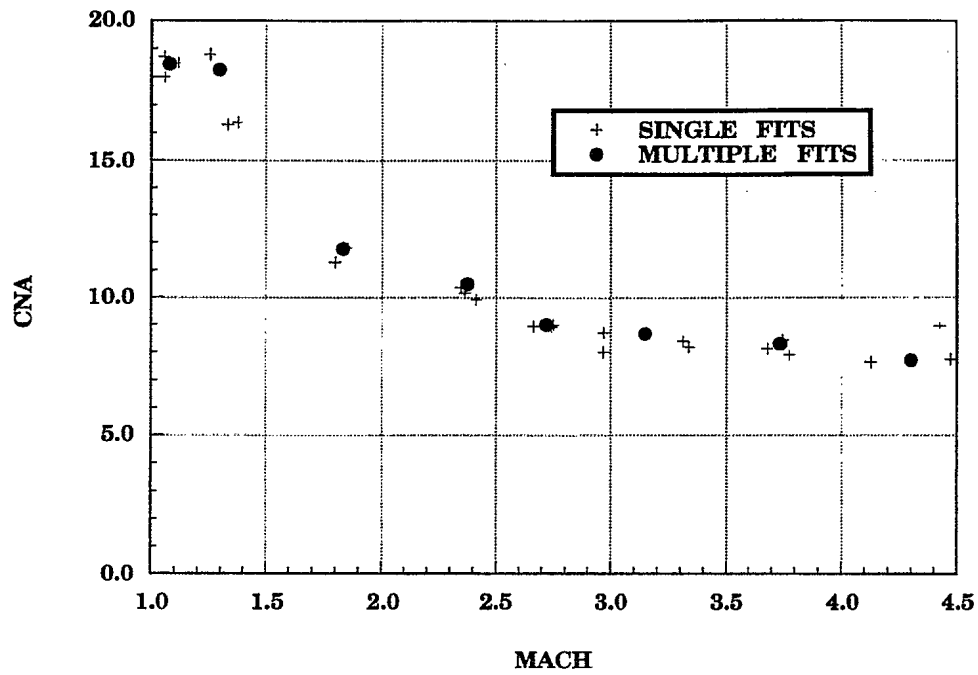


FIGURE 11 - Normal force coefficient slope versus Mach number

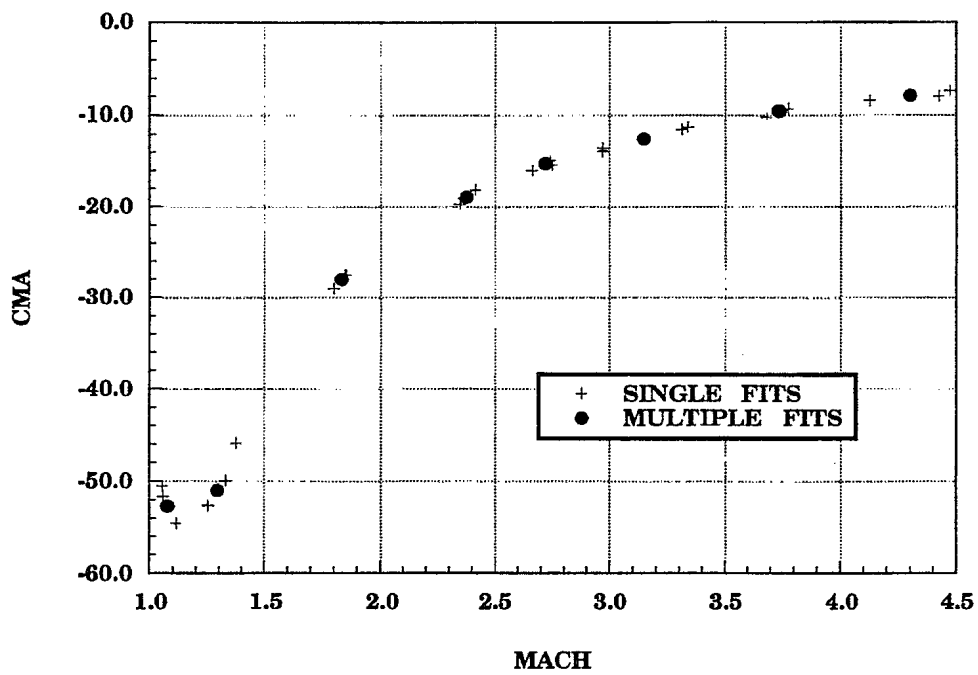


FIGURE 12 - Pitch moment coefficient slope versus Mach number

UNCLASSIFIED

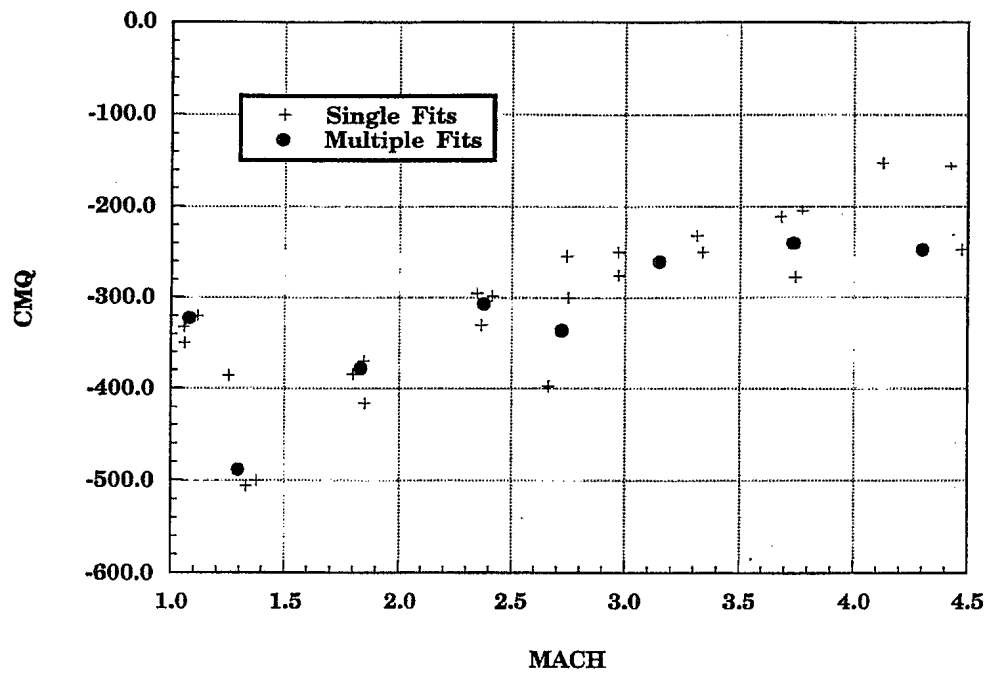


FIGURE 13 - Pitch damping coefficient versus Mach number

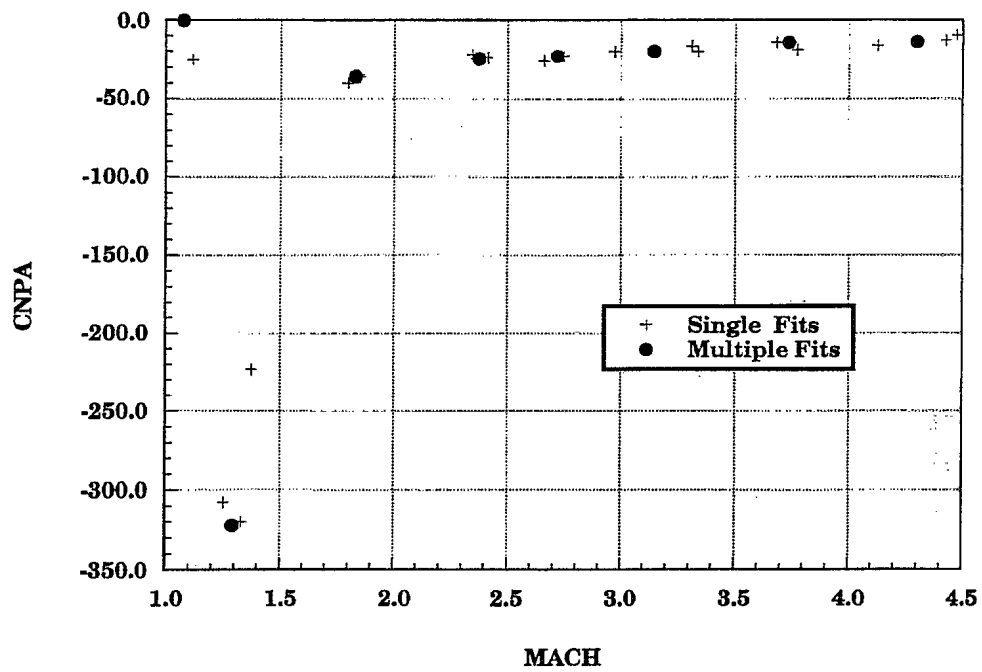


FIGURE 14 - Magnus moment coefficient slope versus Mach number

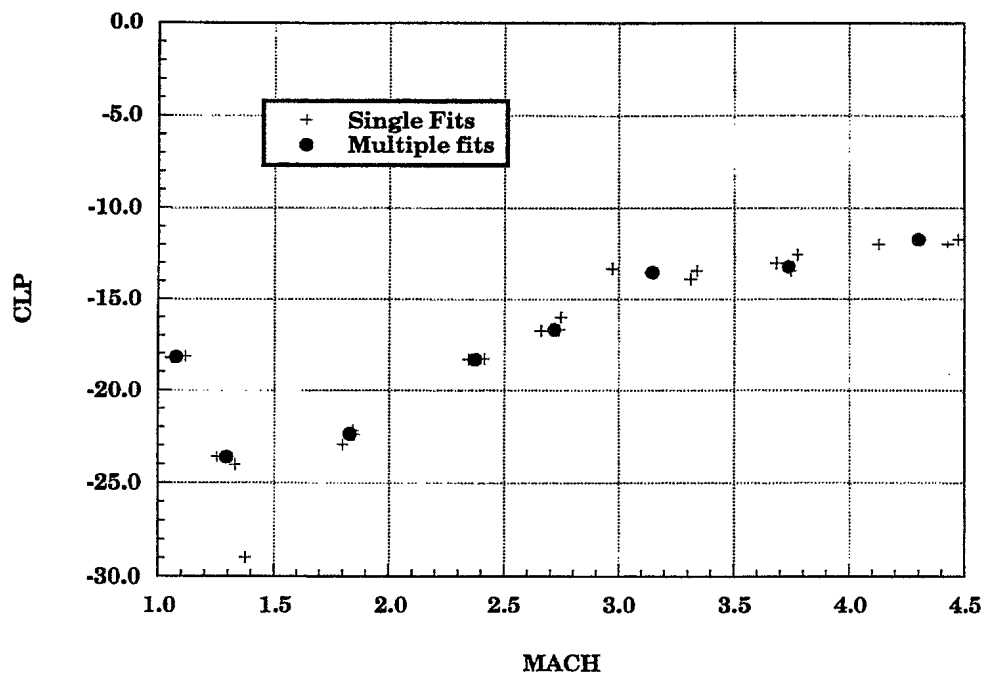


FIGURE 15 - Roll damping coefficient versus Mach number

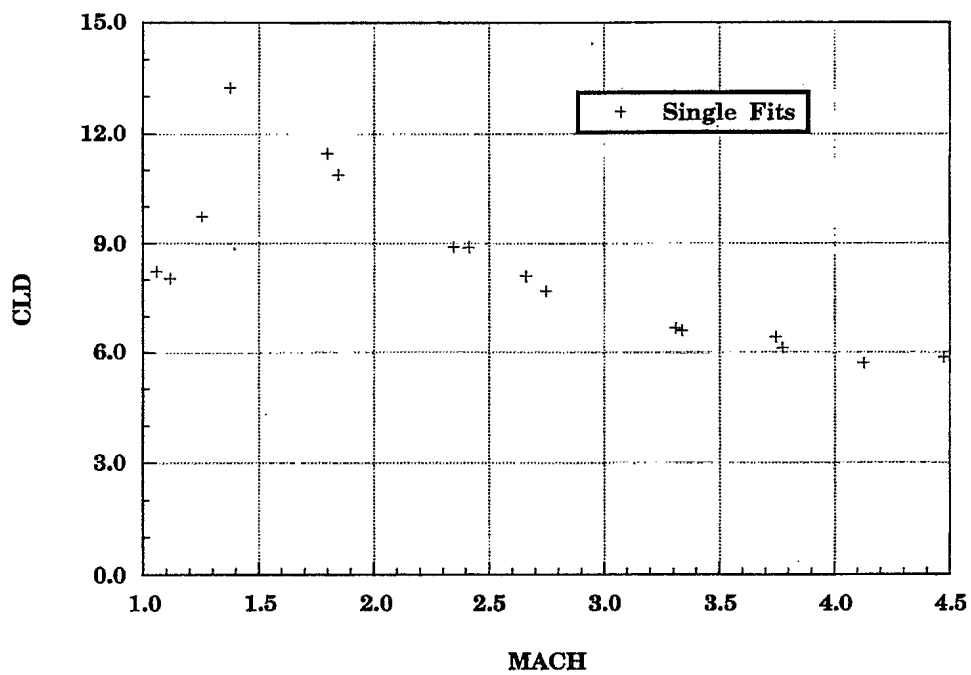


FIGURE 16 - Roll moment due to fin cant versus Mach number

Comparison of DREV results and published data

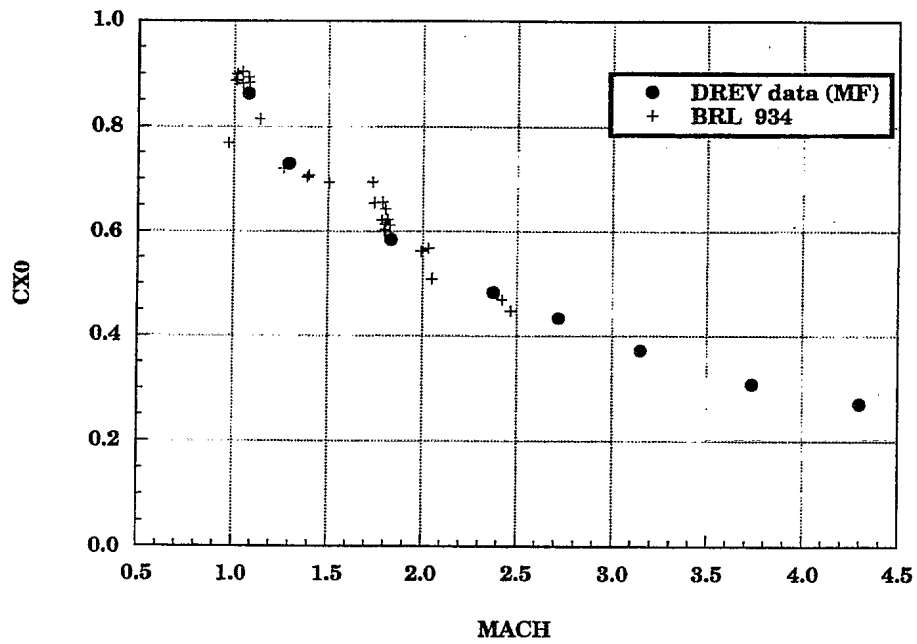


FIGURE 17- a) Axial force

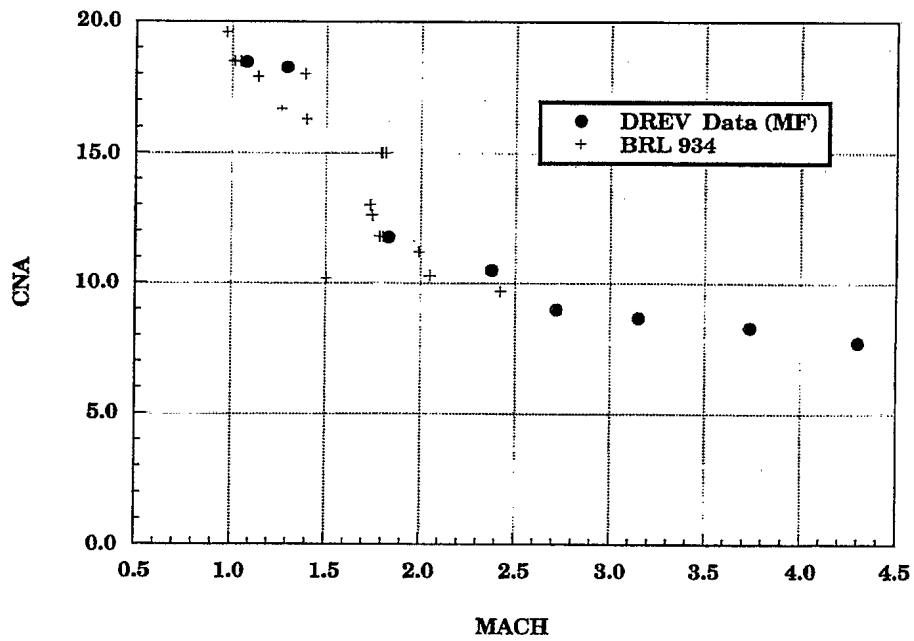


FIGURE 17- b) Normal force coefficient slope

UNCLASSIFIED

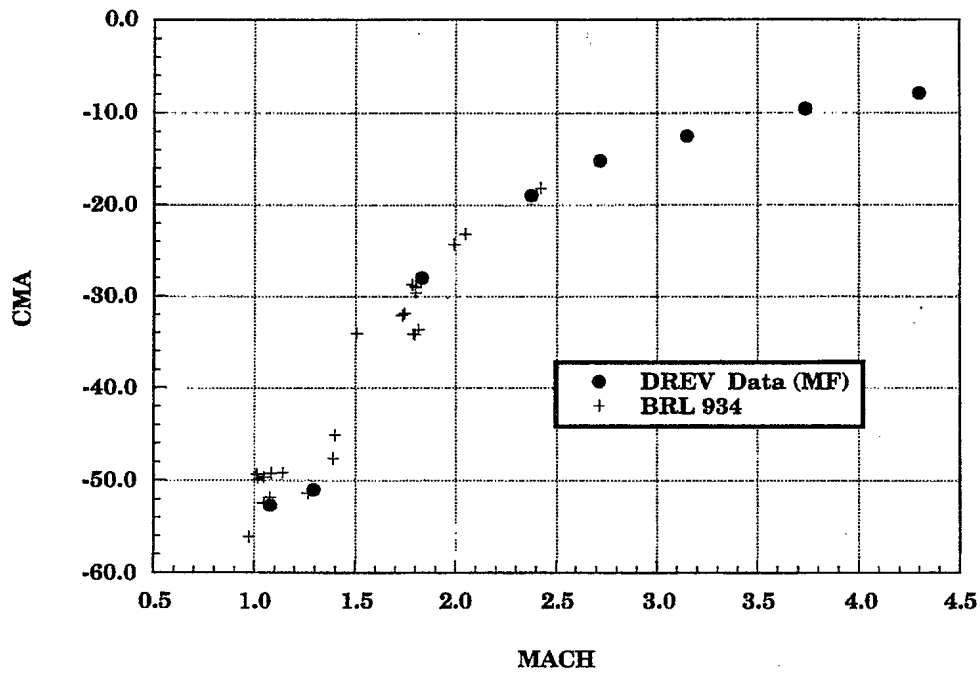


FIGURE 17- c) Pitch moment coefficient slope

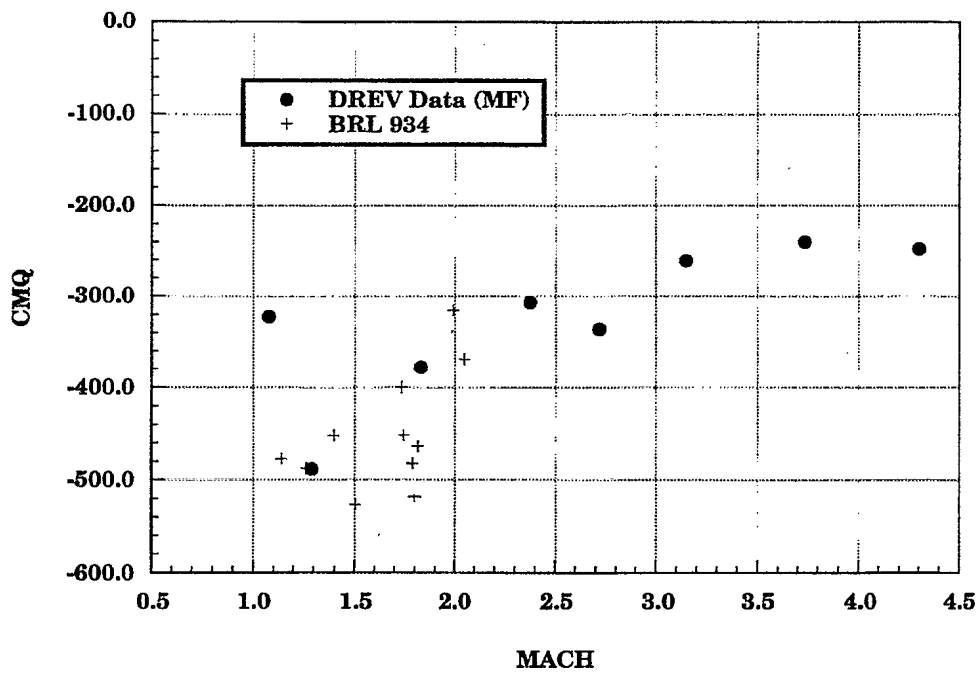


FIGURE 17- d) Pitch damping coefficient

UNCLASSIFIED

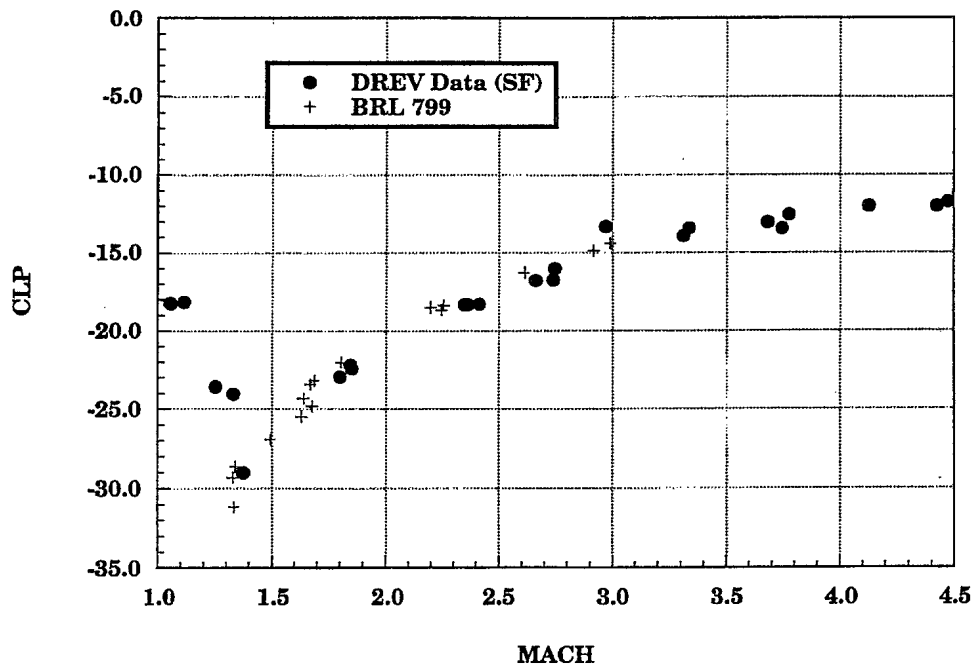


FIGURE 17- e) Roll damping coefficient

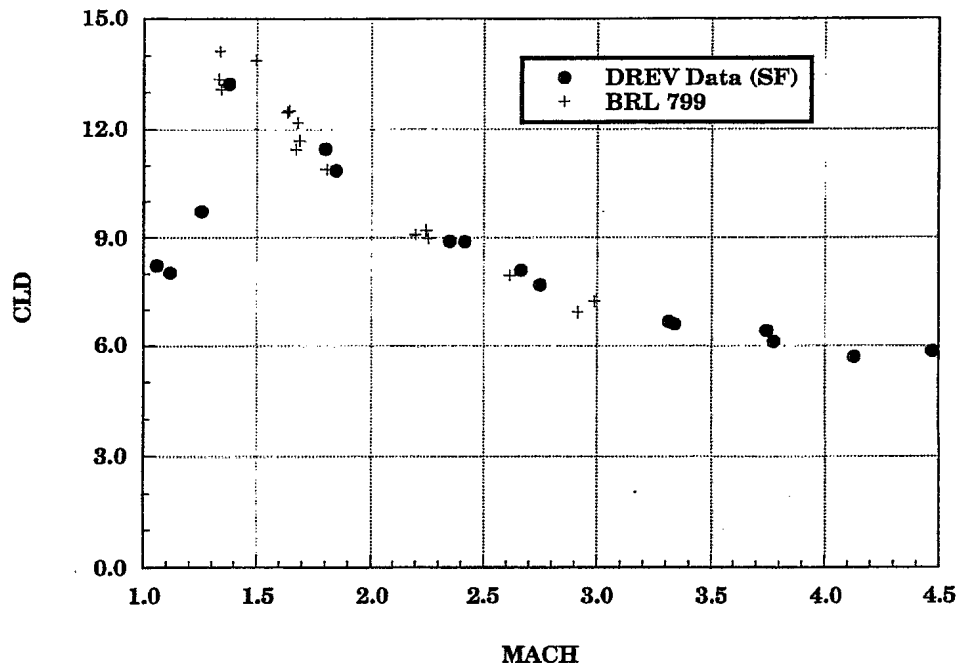


FIGURE 17- f) Roll moment due to fin cant

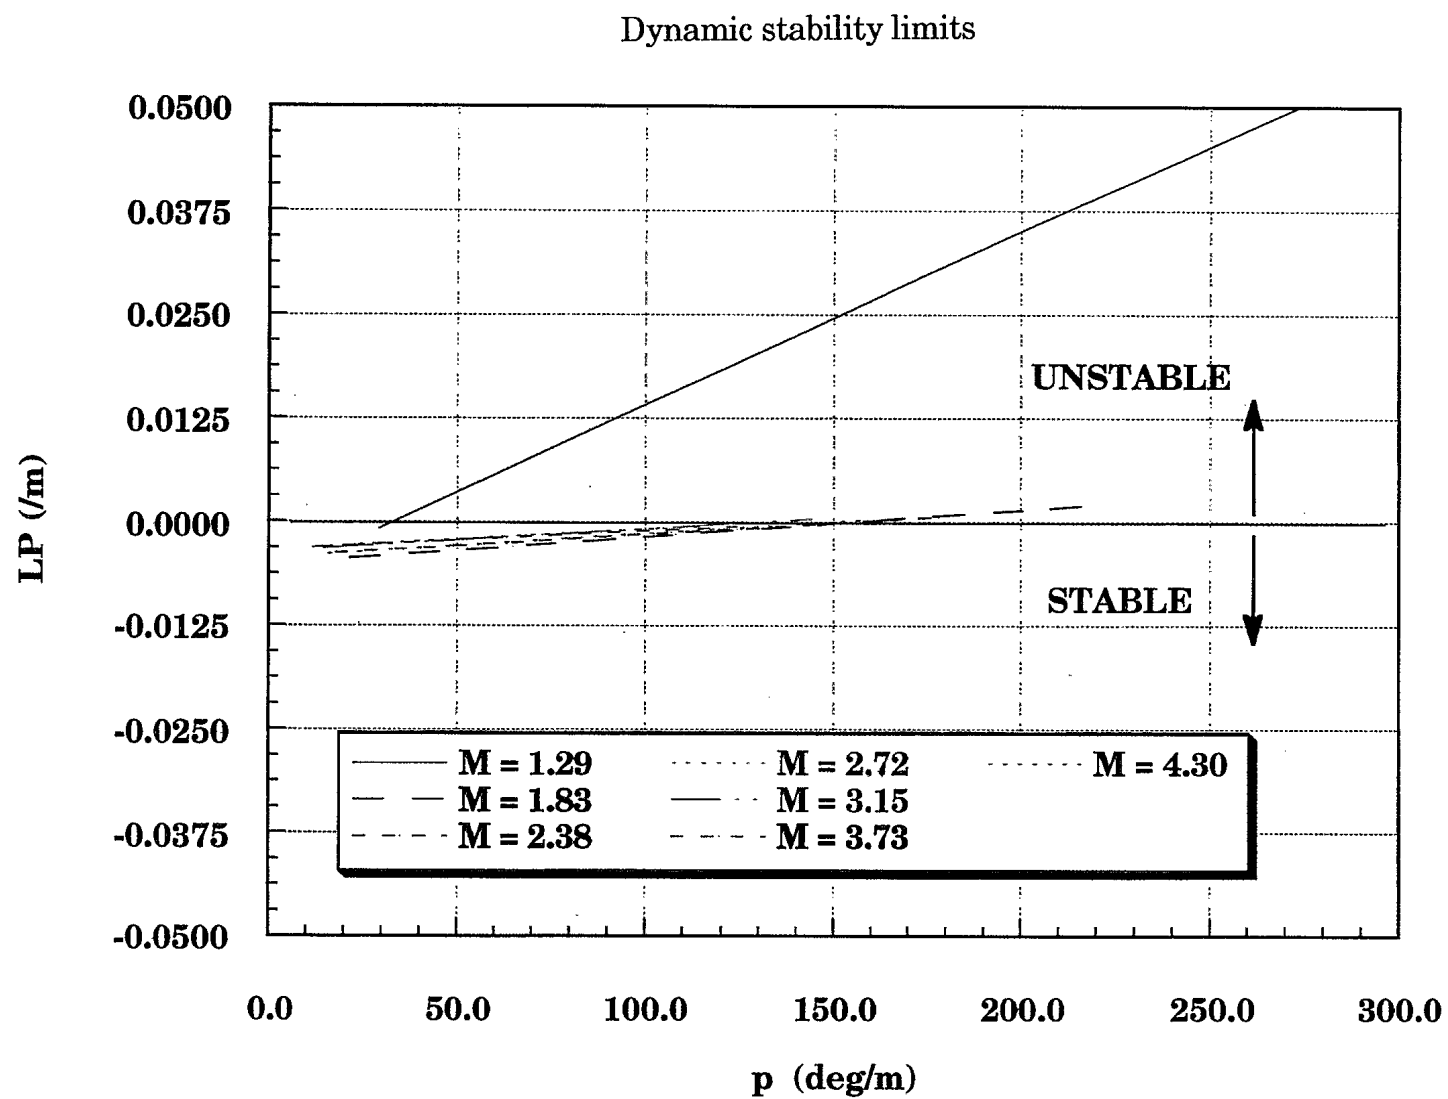


FIGURE 18 - a) View 1

UNCLASSIFIED

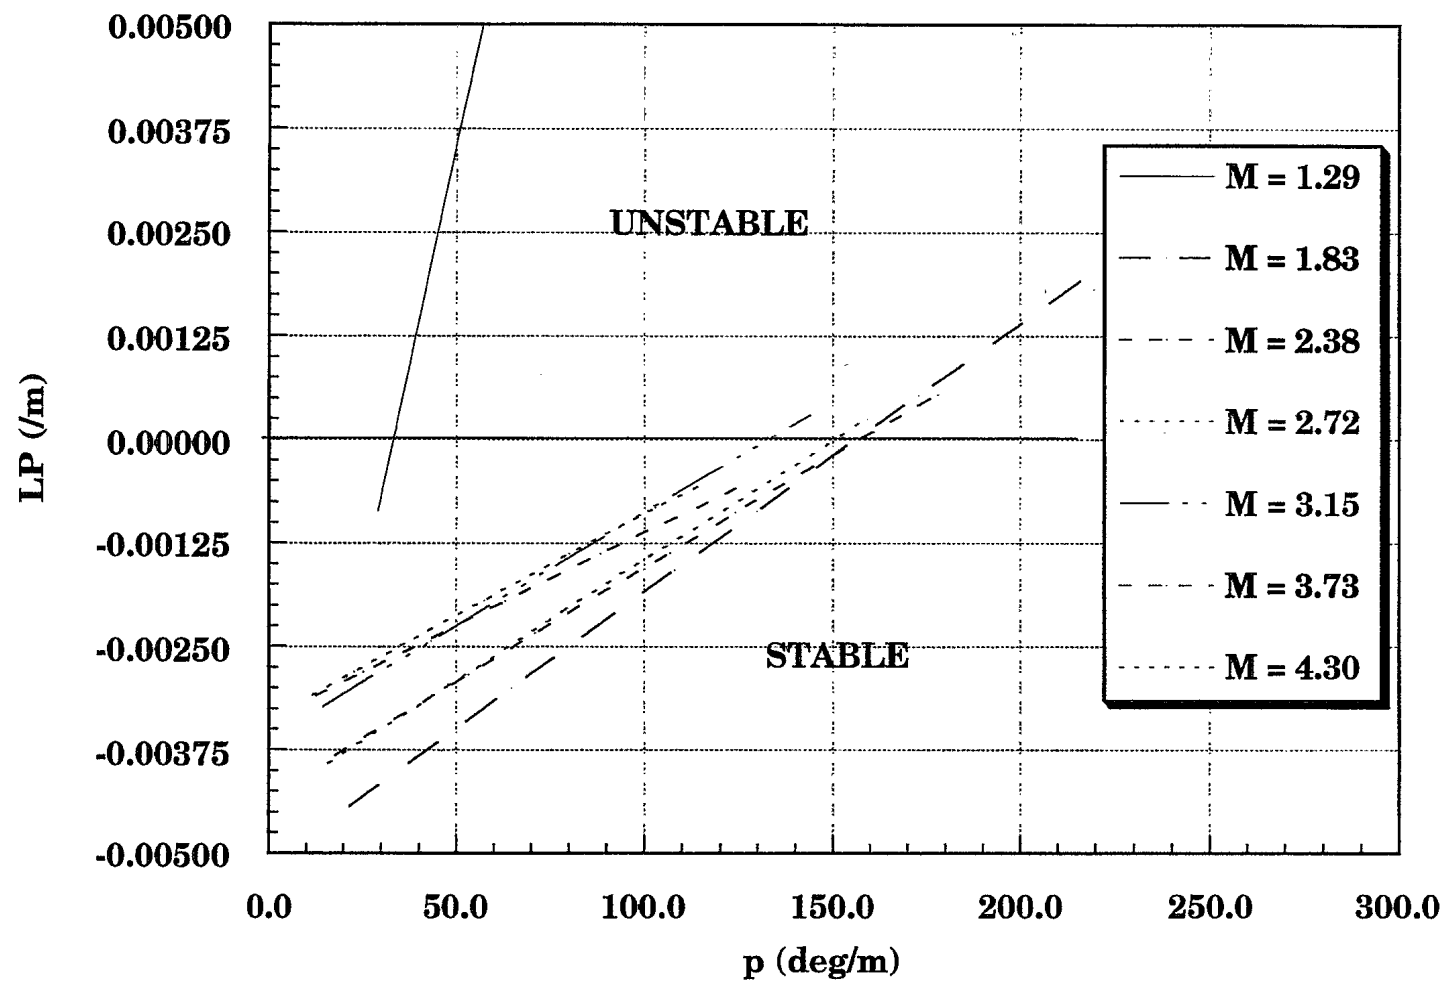


FIGURE 18 - b) View 2 (expanded scale)


UNCLASSIFIED

APPENDIX A

Drawings for Sabot Design of Basic Finner Model

(All dimension in inches)


Ce dessin est la propriété de C.R.D.V. Il ne doit pas être utilisé ni reproduit au même ou en partie sans autorisation. This drawing is the property of DREV. It shall not be used or reproduced either wholly, or in part, without authorization.			
Ce dessin est conforme aux A.C.N. N° 7010 0702 This drawing conforms with C.S.A. N° 7010 0702			
Item	Numéro du dessin Drawing number	Description	Qty. Qty.
1	110 SB - 300	SEAL	1
2	110 SB - 305	SABOT	1
3	110 SB - 306	SOC. HD. CAP SCREW #4-24NF (REWORKED)	4
4	110 SB - 304	RIDER (BONDABLE TEFLON 1/4" x 1" x LENGTH TO SUIT)	2
5	110 SB - 306	PIN	1
6	110 SB - 306	PAD	1
7	N.D.	#8-36 x 1 1/2" SOC. HD. CAP SCR.	4
8	110 SB - 305	SABOT	1

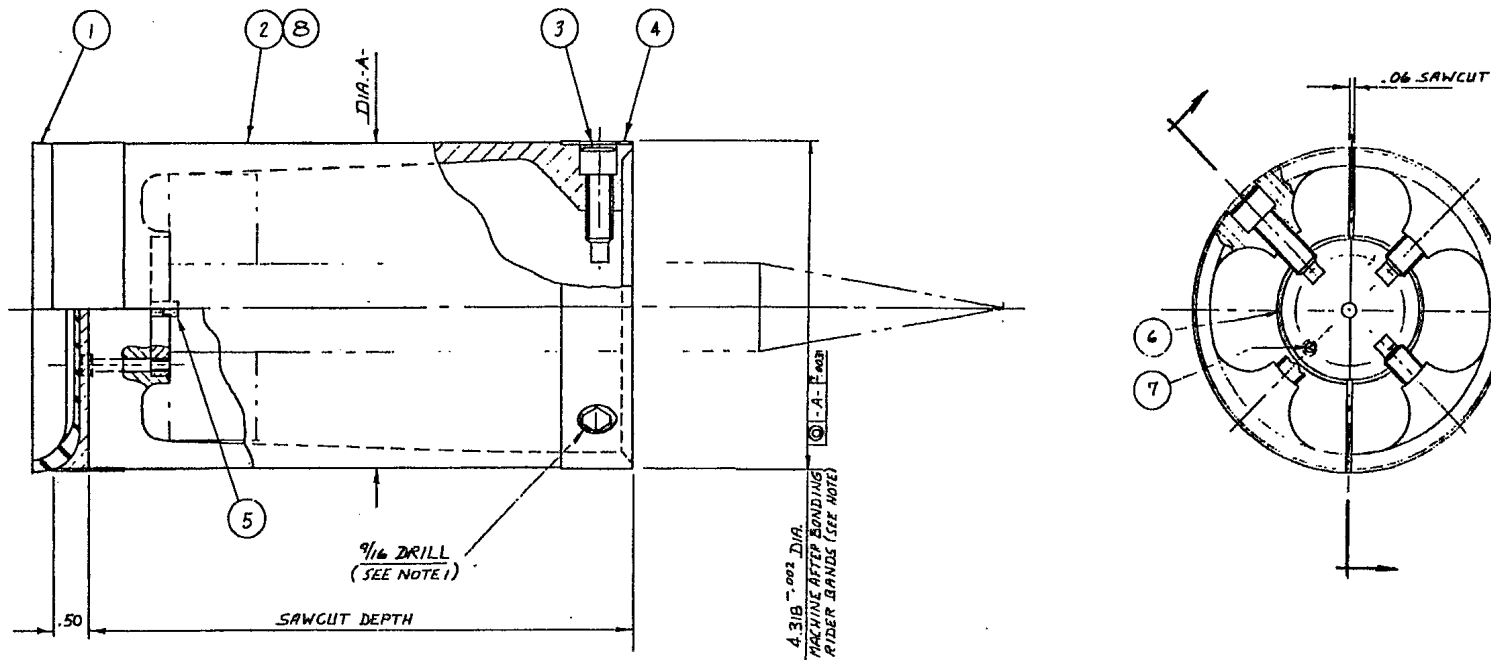

NOTE: 1. BOND ITEM (4) TO ITEM (2) WITH CONTACT CEMENT.
MACHINE RIDER BANDS (EACH END) AS SHOWN.
DRILL 4 HOLES 1/16 DIA. IN CONJUNCTION WITH DWG 110SB-304
2. BOND ITEM (1) TO ITEM (2) WITH CONTACT CEMENT.
LINING UP MOULDED GROOVE IN RUBBER SEAL WITH SAWCUT

Seul réimpression autorisée Toute réimpression sans autorisation est interdite.		Symbole 110 SB - 304		Modifications 110 SB - 304		Par 110 SB - 304	Date 110 SB - 304	Approuvé 110 SB - 304
Dimensions sont en mm Dimensions are in mm		Centre de Recherches pour la Défense, Valcartier. DEFENCE RESEARCH ESTABLISHMENT VALCARTIER. Case postale 880 P.O. Box. Cote de la Rivière, P.Q. Canada, G0A 1R0		Titre 110 SB - 304		Titre 110 SB - 304		Titre 110 SB - 304
Tolérances Dimensions, finesses 1. 110 SB - 304 2. 110 SB - 304 3. 110 SB - 304		Date 110 SB - 304		Date 110 SB - 304		Date 110 SB - 304		Date 110 SB - 304
Entrez votre nom et votre numéro Enter your name and number		Entrez votre nom et votre numéro Enter your name and number		Entrez votre nom et votre numéro Enter your name and number		Entrez votre nom et votre numéro Enter your name and number		Entrez votre nom et votre numéro Enter your name and number

UNCLASSIFIED

[illegible]


UNCLASSIFIED

A technical drawing showing a cross-section of a metal plate with a 1/4 inch deep hole. The hole is labeled with the text "1/4\" DRILL" and "1/4\" DEEP".

SABOT (ITEM ②)
SAME AS ITEM ②
EXCEPT AS SHOWN

COARSE
SAND BLAST

4 HOLES,
DRILL 1/2" BORE
FOR #5-40 SOC. HD.
CAP SCR. IN CONJUNCTION
WITH PAD. ITEM (6)

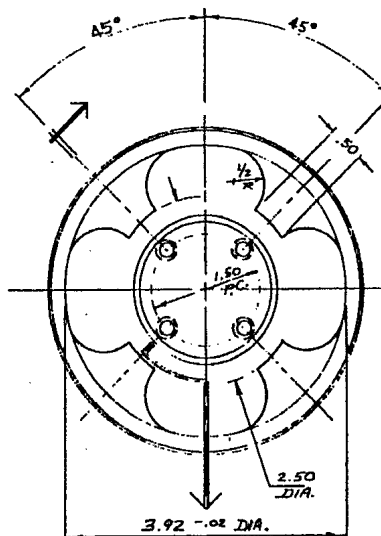

Ce document est la propriété de CIBV. Il ne doit pas être utilisé ou reproduit ou cédé ou être sous autorisation. This drawing is the property of CIBV. It shall not be used or reproduced either wholly, or in part without authorized.		
Ce dessin est conforme aux CEN 5 791 8 792 The drawing complies with CEN 5 791 8 792		
Item	Numéro de dessin	Description

Brief description of material Matériels généralement approuvés	Symbol Symbole	Modifications Aménagements	Ex No	Date	Author Auteur
CENTRE DE RECHERCHES POUR LA DEFENSE, VALCARTEIR. DEFENCE RESEARCH ESTABLISHMENT VALCARTEIR Case postale 550 01, 3011 Carleton Place, P.Q. Canada, G0A 1T0					
Description of use or use Description de l'usage Usage Etat de conservation Surface exposée	Ground found Terrain trouvé	Ignored/Approved Ignoré/approuvé	TITRE TITLE		
REMARKS: Remarques: 1. (2) 1 000 2. 1 100 000 3. 1 100 000 4. 1 100 000 5. 1 100 000 6. 1 100 000 7. 1 100 000 8. 1 100 000 9. 1 100 000 10. 1 100 000 11. 1 100 000 12. 1 100 000 13. 1 100 000 14. 1 100 000 15. 1 100 000 16. 1 100 000 17. 1 100 000 18. 1 100 000 19. 1 100 000 20. 1 100 000 21. 1 100 000 22. 1 100 000 23. 1 100 000 24. 1 100 000 25. 1 100 000 26. 1 100 000 27. 1 100 000 28. 1 100 000 29. 1 100 000 30. 1 100 000 31. 1 100 000 32. 1 100 000 33. 1 100 000 34. 1 100 000 35. 1 100 000 36. 1 100 000 37. 1 100 000 38. 1 100 000 39. 1 100 000 40. 1 100 000 41. 1 100 000 42. 1 100 000 43. 1 100 000 44. 1 100 000 45. 1 100 000 46. 1 100 000 47. 1 100 000 48. 1 100 000 49. 1 100 000 50. 1 100 000 51. 1 100 000 52. 1 100 000 53. 1 100 000 54. 1 100 000 55. 1 100 000 56. 1 100 000 57. 1 100 000 58. 1 100 000 59. 1 100 000 60. 1 100 000 61. 1 100 000 62. 1 100 000 63. 1 100 000 64. 1 100 000 65. 1 100 000 66. 1 100 000 67. 1 100 000 68. 1 100 000 69. 1 100 000 70. 1 100 000 71. 1 100 000 72. 1 100 000 73. 1 100 000 74. 1 100 000 75. 1 100 000 76. 1 100 000 77. 1 100 000 78. 1 100 000 79. 1 100 000 80. 1 100 000 81. 1 100 000 82. 1 100 000 83. 1 100 000 84. 1 100 000 85. 1 100 000 86. 1 100 000 87. 1 100 000 88. 1 100 000 89. 1 100 000 90. 1 100 000 91. 1 100 000 92. 1 100 000 93. 1 100 000 94. 1 100 000 95. 1 100 000 96. 1 100 000 97. 1 100 000 98. 1 100 000 99. 1 100 000 100. 1 100 000 101. 1 100 000 102. 1 100 000 103. 1 100 000 104. 1 100 000 105. 1 100 000 106. 1 100 000 107. 1 100 000 108. 1 100 000 109. 1 100 000 110. 1 100 000 111. 1 100 000 112. 1 100 000 113. 1 100 000 114. 1 100 000 115. 1 100 000 116. 1 100 000 117. 1 100 000 118. 1 100 000 119. 1 100 000 120. 1 100 000 121. 1 100 000 122. 1 100 000 123. 1 100 000 124. 1 100 000 125. 1 100 000 126. 1 100 000 127. 1 100 000 128. 1 100 000 129. 1 100 000 130. 1 100 000 131. 1 100 000 132. 1 100 000 133. 1 100 000 134. 1 100 000 135. 1 100 000 136. 1 100 000 137. 1 100 000 138. 1 100 000 139. 1 100 000 140. 1 100 000 141. 1 100 000 142. 1 100 000 143. 1 100 000 144. 1 100 000 145. 1 100 000 146. 1 100 000 147. 1 100 000 148. 1 100 000 149. 1 100 000 150. 1 100 000 151. 1 100 000 152. 1 100 000 153. 1 100 000 154. 1 100 000 155. 1 100 000 156. 1 100 000 157. 1 100 000 158. 1 100 000 159. 1 100 000 160. 1 100 000 161. 1 100 000 162. 1 100 000 163. 1 100 000 164. 1 100 000 165. 1 100 000 166. 1 100 000 167. 1 100 000 168. 1 100 000 169. 1 100 000 170. 1 100 000 171. 1 100 000 172. 1 100 000 173. 1 100 000 174. 1 100 000 175. 1 100 000 176. 1 100 000 177. 1 100 000 178. 1 100 000 179. 1 100 000 180. 1 100 000 181. 1 100 000 182. 1 100 000 183. 1 100 000 184. 1 100 000 185. 1 100 000 186. 1 100 000 187. 1 100 000 188. 1 100 000 189. 1 100 000 190. 1 100 000 191. 1 100 000 192. 1 100 000 193. 1 100 000 194. 1 100 000 195. 1 100 000 196. 1 100 000 197. 1 100 000 198. 1 100 000 199. 1 100 000 200. 1 100 000 201. 1 100 000 202. 1 100 000 203. 1 100 000 204. 1 100 000 205. 1 100 000 206. 1 100 000 207. 1 100 000 208. 1 100 000 209. 1 100 000 210. 1 100 000 211. 1 100 000 212. 1 100 000 213. 1 100 000 214. 1 100 000 215. 1 100 000 216. 1 100 000 217. 1 100 000 218. 1 100 000 219. 1 100 000 220. 1 100 000 221. 1 100 000 222. 1 100 000 223. 1 100 000 224. 1 100 000 225. 1 100 000 226. 1 100 000 227. 1 100 000 228. 1 100 000 229. 1 100 000 230. 1 100 000 231. 1 100 000 232. 1 100 000 233. 1 100 000 234. 1 100 000 235. 1 100 000 236. 1 100 000 237. 1 100 000 238. 1 100 000 239. 1 100 000 240. 1 100 000 241. 1 100 000 242. 1 100 000 243. 1 100 000 244. 1 100 000 245. 1 100 000 246. 1 100 000 247. 1 100 000 248. 1 100 000 249. 1 100 000 250. 1 100 000 251. 1 100 000 252. 1 100 000 253. 1 100 000 254. 1 100 000 255. 1 100 000 256. 1 100 000 257. 1 100 000 258. 1 100 000 259. 1 100 000 260. 1 100 000 261. 1 100 000 262. 1 100 000 263. 1 100 000 264. 1 100 000 265. 1 100 000 266. 1 100 000 267. 1 100 000 268. 1 100 000 269. 1 100 000 270. 1 100 000 271. 1 100 000 272. 1 100 000 273. 1 100 000 274. 1 100 000 275. 1 100 000 276. 1 100 000 277. 1 100 000 278. 1 100 000 279. 1 100 000 280. 1 100 000 281. 1 100 000 282. 1 100 000 283. 1 100 000 284. 1 100 000 285. 1 100 000 286. 1 100 000 287. 1 100 000 288. 1 100 000 289. 1 100 000 290. 1 100 000 291. 1 100 000 292. 1 100 000 293. 1 100 000 294. 1 100 000 295. 1 100 000 296. 1 100 000 297. 1 100 000 298. 1 100 000 299. 1 100 000 300. 1 100 000 301. 1 100 000 302. 1 100 000 303. 1 100 000 304. 1 100 000 305. 1 100 000 306. 1 100 000 307. 1 100 000 308. 1 100 000 309. 1 100 000 310. 1 100 000 311. 1 100 000 312. 1 100 000 313. 1 100 000 314. 1 100 000 315. 1 100 000 316. 1 100 000 317. 1 100 000 318. 1 100 000 319. 1 100 000 320. 1 100 000 321. 1 100 000 322. 1 100 000 323. 1 100 000 324. 1 100 000 325. 1 100 000 326. 1 100 000 327. 1 100 000 328. 1 100 000 329. 1 100 000 330. 1 100 000 331. 1 100 000 332. 1 100 000 333. 1 100 000 334. 1 100 000 335. 1 100 000 336. 1 100 000 337. 1 100 000 338. 1 100 000 339. 1 100 000 340. 1 100 000 341. 1 100 000 342. 1 100 000 343. 1 100 000 344. 1 100 000 345. 1 100 000 346. 1 100 000 347. 1 100 000 348. 1 100 000 349. 1 100 000 350. 1 100 000 351. 1 100 000 352. 1 100 000 353. 1 100 000 354. 1 100 000 355. 1 100 000 356. 1 100 000 357. 1 100 000 358. 1 100 000 359. 1 100 000 360. 1 100 000 361. 1 100 000 362. 1 100 000 363. 1 100 000 364. 1 100 000 365. 1 100 000 366. 1 100 000 367. 1 100 000 368. 1 100 000 369. 1 100 000 370. 1 100 000 371. 1 100 000 372. 1 100 000 373. 1 100 000 374. 1 100 000 375. 1 100 000 376. 1 100 000 377. 1 100 000 378. 1 100 000 379. 1 100 000 380. 1 100 000 381. 1 100 000 382. 1 100 000 383. 1 100 000 384. 1 100 000 385. 1 100 000 386. 1 100 000 387. 1 100 000 388. 1 100 000 389. 1 100 000 390. 1 100 000 391. 1 100 000 392. 1 100 000 393. 1 100 000 394. 1 100 000 395. 1 100 000 396. 1 100 000 397. 1 100 000 398. 1 100 000 399. 1 100 000 400. 1 100 000 401. 1 100 000 402. 1 100 000 403. 1 100 000 404. 1 100 000 405. 1 100 000 406. 1 100 000 407. 1 100 000 408. 1 100 000 409. 1 100 000 410. 1 100 000 411. 1 100 000 412. 1 100 000 413. 1 100 000 414. 1 100 000 415. 1 100 000 416. 1 100 000 417. 1 100 000 418. 1 100 000 419. 1 100 000 420. 1 100 000 421. 1 100 000 422. 1 100 000 423. 1 100 000 424. 1 100 000 425. 1 100 000 426. 1 100 000 427. 1 100 000 428. 1 100 000 429. 1 100 000 430. 1 100 000 431. 1 100 000 432. 1 100 000 433. 1 100 000 434. 1 100 000 435. 1 100 000 436. 1 100 000 437. 1 100 000 438. 1 100 000 439. 1 100 000 440. 1 100 000 441. 1 100 000 442. 1 100 000 443. 1 100 000 444. 1 100 000 445. 1 100 000 446. 1 100 000 447. 1 100 000 448. 1 100 000 449. 1 100 000 450. 1 100 000 451. 1 100 000 452. 1 100 000 453. 1 100 000 454. 1 100 000 455. 1 100 000 456. 1 100 000 457. 1 100 000 458. 1 100 000 459. 1 100 000 460. 1 100 000 461. 1 100 000 462. 1 100 000 463. 1 100 000 464. 1 100 000 465. 1 100 000 466. 1 100 000 467. 1 100 000 468. 1 100 000 469. 1 100 000 470. 1 100 000 471. 1 100 000 472. 1 100 000 473. 1 100 000 474. 1 100 000 475. 1 100 000 476. 1 100 000 477. 1 100 000 478. 1 100 000 479. 1 100 000 480. 1 100 000 481. 1 100 000 482. 1 100 000 483. 1 100 000 484. 1 100 000 485. 1 100 000 486. 1 100 000 487. 1 100 000 488. 1 100 000 489. 1 100 000 490. 1 100 000 491. 1 100 000 492. 1 100 000 493. 1 100 000 494. 1 100 000 495. 1 100 000 496. 1 100 000 497. 1 100 000 498. 1 100 000 499. 1 100 000 500. 1 100 000 501. 1 100 000 502. 1 100 000 503. 1 100 000 504. 1 100 000 505. 1 100 000 506. 1 100 000 507. 1 100 000 508. 1 100 000 509. 1 100 000 510. 1 100 000 511. 1 100 000 512. 1 100 000 513. 1 100 000 514. 1 100 000 515. 1 100 000 516. 1 100 000 517. 1 100 000 518. 1 100 000 519. 1 100 000 520. 1 100 000 521. 1 100 000 522. 1 100 000 523. 1 100 000 524. 1 100 000 525. 1 100 000 526. 1 100 000 527. 1 100 000 528. 1 100 000 529. 1 100 000 530. 1 100 000 531. 1 100 000 532. 1 100 000 533. 1 100 000 534. 1 100 000 535. 1 100 000 536. 1 100 000 537. 1 100 000 538. 1 100 000 539. 1 100 000 540. 1 100 000 541. 1 100 000 542. 1 100 000 543. 1 100 000 544. 1 100 000 545. 1 100 000 546. 1 100 000 547. 1 100 000 548. 1 100 000 549. 1 100 000 550. 1 100 000 551. 1 100 000 552. 1 100 000 553. 1 100 000 554. 1 100 000 555. 1 100 000 556. 1 100 000 557. 1 100 000 558. 1 100 000 559. 1 100 000 560. 1 100 000 561. 1 100 000 562. 1 100 000 563. 1 100 000 564. 1 100 000 565. 1 100 000 566. 1 100 000 567. 1 100 000 568. 1 100 000 569. 1 100 000 570. 1 100 000 571. 1 100 000 572. 1 100 000 573. 1 100 000 574. 1 100 000 575. 1 100 000 576. 1 100 000 577. 1 100 000 578. 1 100 000 579. 1 100 000 580. 1 100 000 581. 1 100 000 582. 1 100 000 583. 1 100 000 584. 1 100 000 585. 1 100 000 586. 1 100 000 587. 1 100 000 588. 1 100 000 589. 1 100 000 590. 1 100 000 591. 1 100 000 592. 1 100 000 593. 1 100 000 594. 1 100 000 595. 1 100 000 596. 1 100 000 597. 1 100 000 598. 1 100 000 599. 1 100 000 600. 1 100 000 601. 1 100 000 602. 1 100 000 603. 1 100 000 604. 1 100 000 605. 1 100 000 606. 1 100 000 607. 1 100 000 608. 1 100 000 609. 1 100 000 610. 1 100 000 611. 1 100 000 612. 1 100 000 613. 1 100 000 614. 1 100 000 615. 1 100 000 616. 1 100 000 617. 1 100 000 618. 1 100 000 619. 1 100 000 620. 1 100 000 621. 1 100 000 622. 1 100 000 623. 1 100 000 624. 1 100 000 625. 1 100 000 626. 1 100 000 627. 1 100 000 628. 1 100 000 629. 1 100 000 630. 1 100 000 631. 1 100 000 632. 1 100 000 633. 1 100 000 634. 1 100 000 635. 1 100 000 636. 1 100 000 637. 1 100 000 638. 1 100 000 639. 1 100 000 640. 1 100 000 641. 1 100 000 642. 1 100 000 643. 1 100 000 644. 1 100 000 645. 1 100 000 646. 1 100 000 647. 1 100 000 648. 1 100 000 649. 1 100 000 650. 1 100 000 651. 1 100 000 652. 1 100 000 653. 1 100 000 654. 1 100 000 655. 1 100 000 656. 1 100 000 657. 1 100 000 658. 1 100 000 659. 1 100 000 660. 1 100 000 661. 1 100 000 662. 1 100 000 663. 1 100 000 664. 1 100 000 665. 1 100 000 666. 1 100 000 667. 1 100 000 668. 1 100 000 669. 1 100 000 670. 1 100 000 671. 1 100 000 672. 1 100 000 673. 1 100 000 674. 1 100 000 675. 1 100 000 676. 1 100 000 677. 1 100 000 678. 1 100 000 679. 1 100 000 680. 1 100 000 681. 1 100 000 682. 1 100 000 683. 1 100 000 684. 1 100 000 685. 1 100 000 686. 1 100 000 687. 1 100 000 688. 1 100 000 689. 1 100 000 690. 1 100 000 691. 1 100 000 692. 1 100 000 693. 1 100 000 694. 1 100 000 695. 1 100 000 696. 1 100 000 697. 1 100 000 698. 1 100 000 699. 1 100 000 700. 1 100 000 701. 1 100 000 702. 1 100 000 703. 1 100 000 704. 1 100 000 705. 1 100 000 706. 1 100 000 707. 1 100 000 708. 1 100 000 709. 1 100 000 710. 1 100 000 711. 1 100 000 712. 1 100 000 713. 1 100 000 714. 1 100 000 715. 1 100 000 716. 1 100 000 717. 1 100 000 718. 1 100 000 719. 1 100 000 720. 1 100 000 721. 1 100 000 722. 1 100 000 723. 1 100 000 724. 1 100 000 725. 1 100 000 726. 1 100 000 727. 1 100 000 728. 1 100 000 729. 1 100 000 730. 1 100 000 731. 1 100 000 732. 1 100 000 733. 1 100 000 734. 1 100 000 735. 1 100 000 736. 1 100 000 737. 1 100 000 738. 1 100 000 739. 1 100 000 740. 1 100 000 741. 1 100 000 742. 1 100 000 743. 1 100 000 744. 1 100 000 745. 1 100 000 746. 1 100 000 747. 1 100 000 748. 1 100 000 749. 1 100 000 750. 1 100 000 751. 1 100 000 752. 1 100 000 753. 1 100 000 754. 1 100 000 755. 1 100 000 756. 1 100 000 757. 1 100 000 758. 1 100 000 759. 1 100 000 760. 1 100 000 761. 1 100 000 762. 1 100 000 763. 1 100 000 764. 1 100 000 765. 1 100 000 766. 1 100 00					

UNCLASSIFIED

UNCLASSIFIED

A3 Form Size		Ce dessin est la propriété du C.R.D.V. Il ne doit pas être utilisé ou reproduit en entier ou en partie sans autorisation. This drawing is the property of D.R.E.V. It shall not be used or reproduced either wholly or in part unless authorized.	
		Ce dessin est conforme aux A.C.N. S 78.1 & S 78.2. This drawing complies with C.S.A. S 78.1 & S 78.2.	
Item	Numéro du dessin Drawing number	Description	Qtd Qty

PIN
(MAT: NYLON)
(OR EQUIV.)

SCREW
(MAT: 3/8-24 SOC. HD.
CAP SCR. REWORKED)

PAD
(MAT: AISI 4340
HEAT TREAT & HARDEN
TO ROC."C" 42-45)

Sauf indications contraires. Unless otherwise specified.		Symbole Symbol	Modification Amendment	Per By	Date	Autorisé Authority
Dimensions sont en mm. Dimensions are in mm. Etat de surface Surface roughness ✓						
TOLERANCES: Décimales, Decimals 1, 1 (X) ± 0.5 2, 2 (XX) ± 0.20 3, 3 (XXX) ± 0.100 Angles ± 0°-30° Enlever arêtes et coins vifs. Remove sharp edges & corners. Biseaux, Chamfere 45°						
CENTRE DE RECHERCHES POUR LA DEFENSE, VALCARTIER. DEFENCE RESEARCH ESTABLISHMENT VALCARTIER. Case postale 880 P.O. Box. Courcellette, P.Q. Canada. G0A 1R0						
Trace Traced		Approuvé Approved		TITRE TITLE		
Dessiné Drawn A. J. 2/10/84		Approuvé Approved		PIN, SCREW, PAD,		
Vérifié Verified		Projet Project		Echelle Scale		
Accepté Accepted		Feuille Sheet de of		Numéro du dessin Drawing number 110 SB - 306		Format Size A3

2
1

10
 0
 1
 2
 3
 4
 5
 6
 7
 8
 9
 10
 2
 1
 0
 1
 2
 3
 4
 5
 6
 7
 8
 9
 10
 11

Echelle métrique 1 Centimètres
 Metric scale 1 Centimeters

MAT: NEOPRENE
RUBBER

Ce dessin est la propriété du C.R.D.V. Il ne doit pas être utilisé ou reproduit en entier ou en partie sans autorisation.
 This drawing is the property of D.R.E.V. It shall not be used or reproduced either wholly or in part unless authorized.

Ce dessin est conforme aux A.C.N. S. 78.1 B. 8.78.2. This drawing complies with C.S.A. S. 78.1 B. 8. 78.2.

Item	Numéro du dessin Drawing number	Description	Qtd Qty
------	------------------------------------	-------------	------------




Surf indications contraires Unless otherwise specified.		Symbole Symbol	Modification Amendment	Par By	Date	Approuvé Authorized
Dimensions sont en mm. Dimensions are in mm. Etat de surface Surface roughness ✓						
TOLERANCES: Décimales, Decimals 1. 1 (X) ± 0.5 2. 2 (XX) ± 0.20 3. 3 (XXX) ± 0.100 Angles ± 0°-30° Enlever arêtes et coins vifs. Remove sharp edges & corners Biseaux, Chamfers 45°						
Demande de travail Work order						
CENTRE DE RECHERCHES POUR LA DEFENSE, VALCARTIER. DEFENCE RESEARCH ESTABLISHMENT VALCARTIER. Case postale 880 P.O. Box. Courcellette, P.Q. Canada. G0A1R0						
Tracé Traced Dessiné Drawn Vérifié Verified		Approuvé Approved Approuvé Approved Projet Project		TITRE TITLE <u>SEAL</u>		
Accepté Accepted		Feuille de Sheet of		Echelle Scale	Numéro du dessin. Drawing number. 110 SB -300	Format Size A3

APPENDIX B



Motion Plots

UNCLASSIFIED

DA95030101

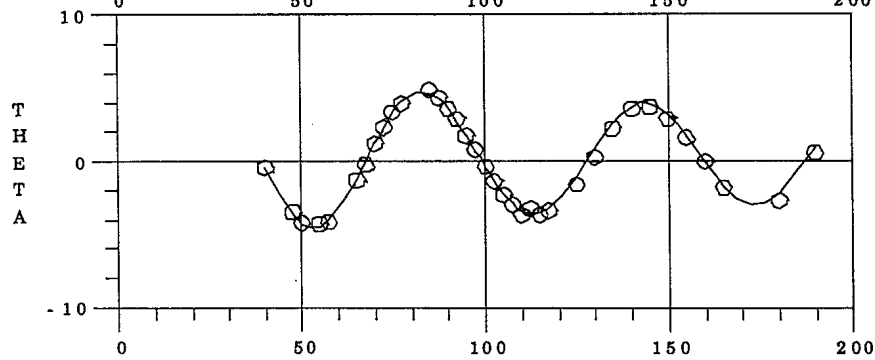
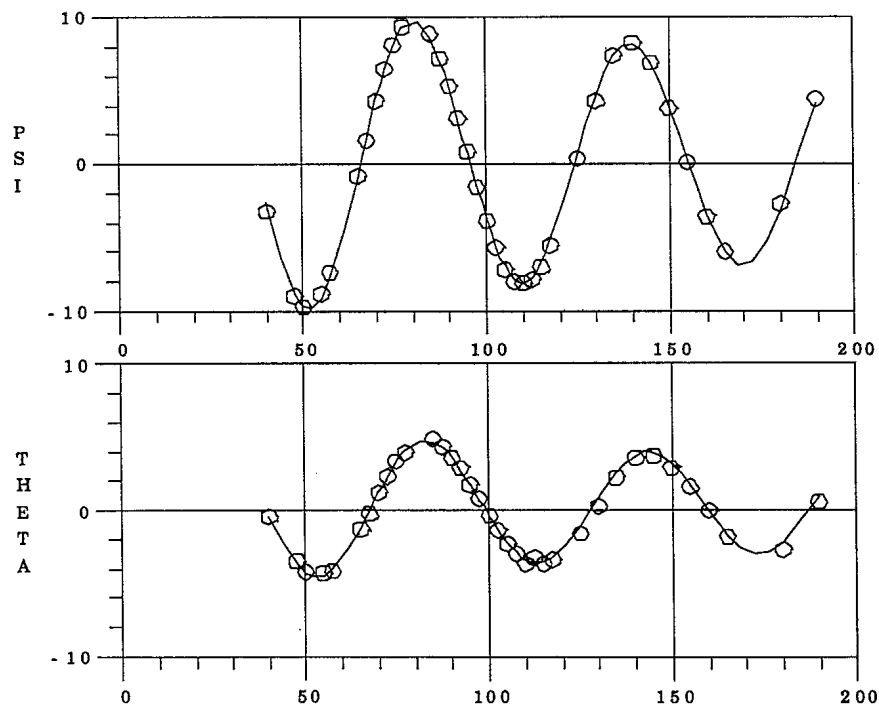
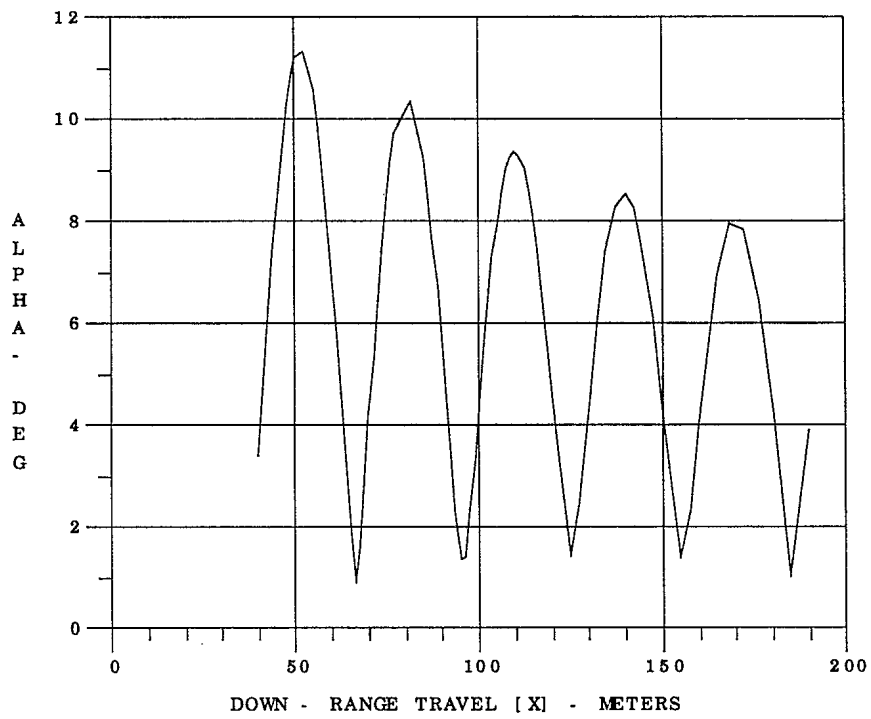


UNCLASSIFIED

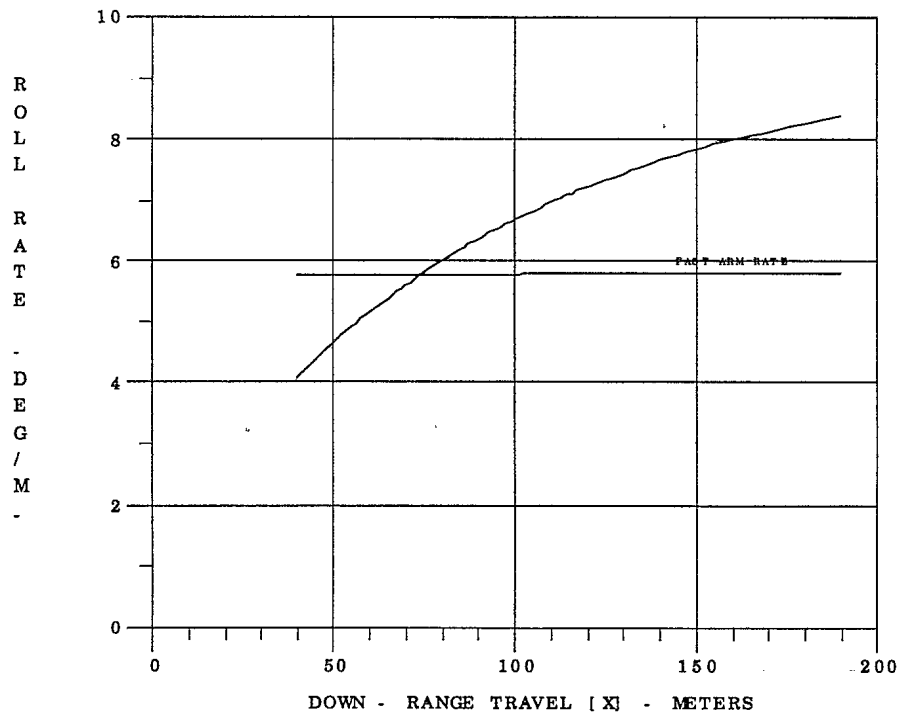
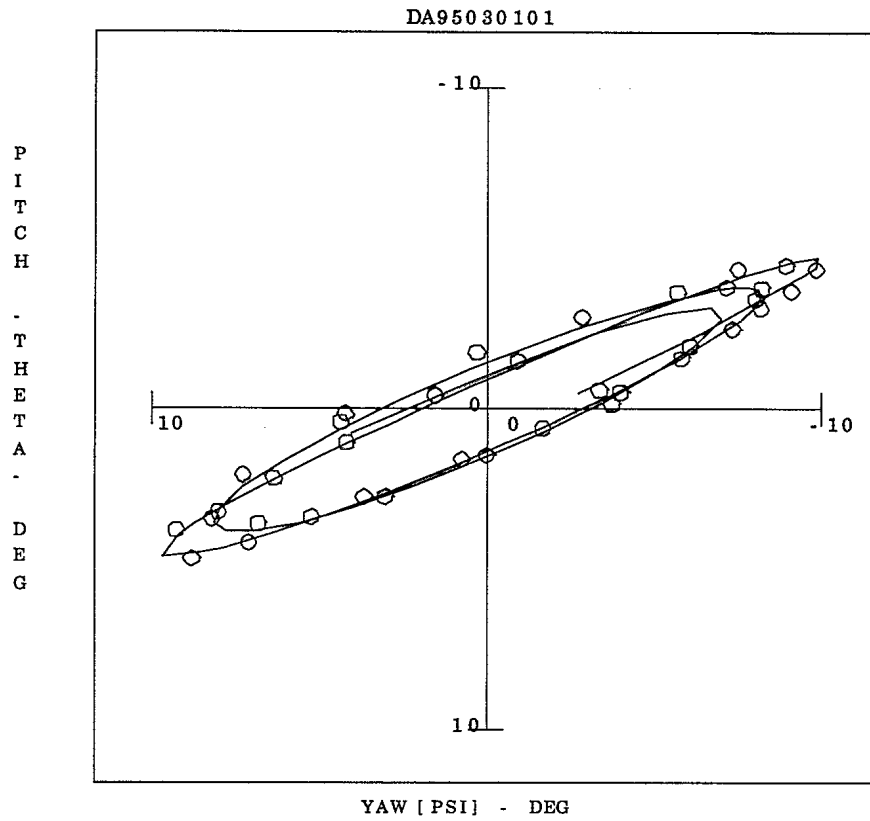


UNCLASSIFIED

DA95022702

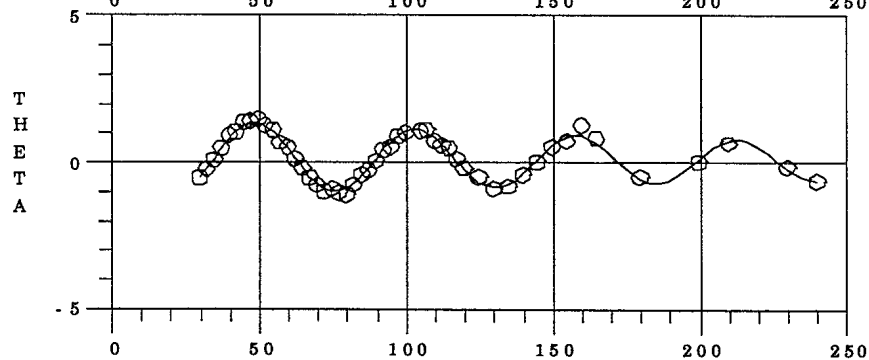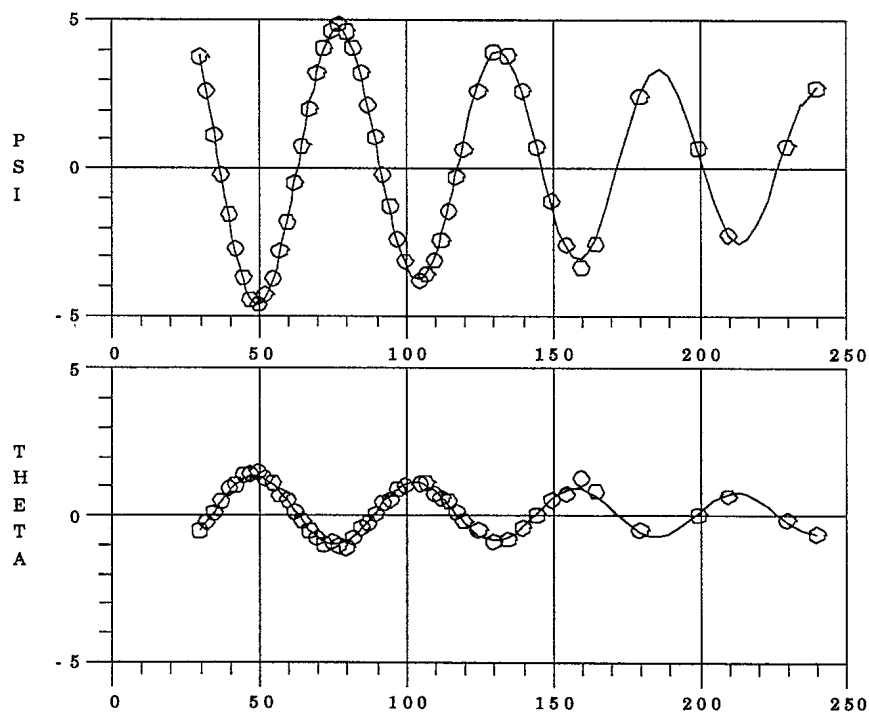
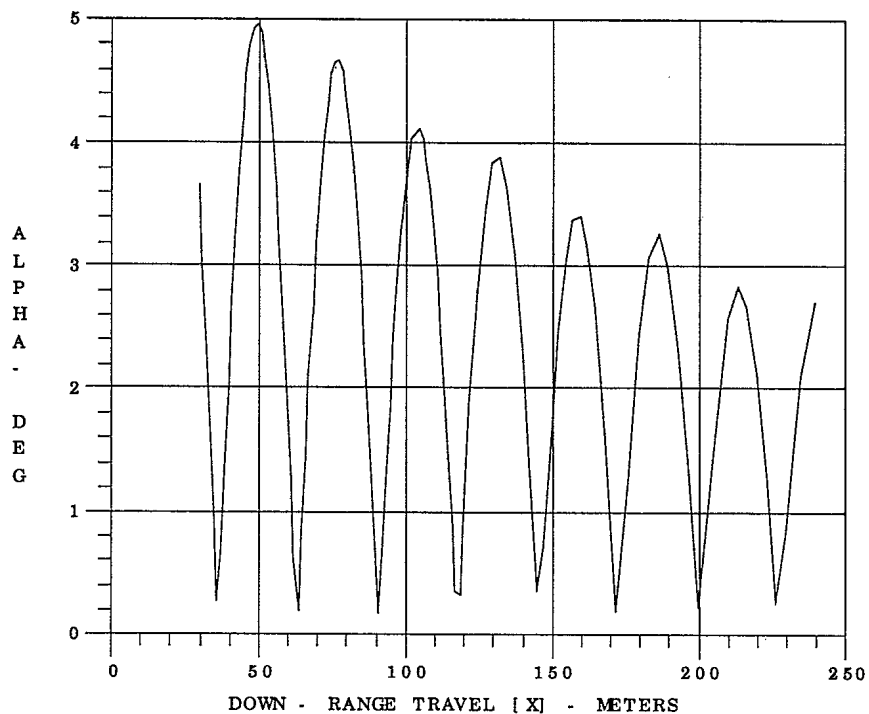


UNCLASSIFIED

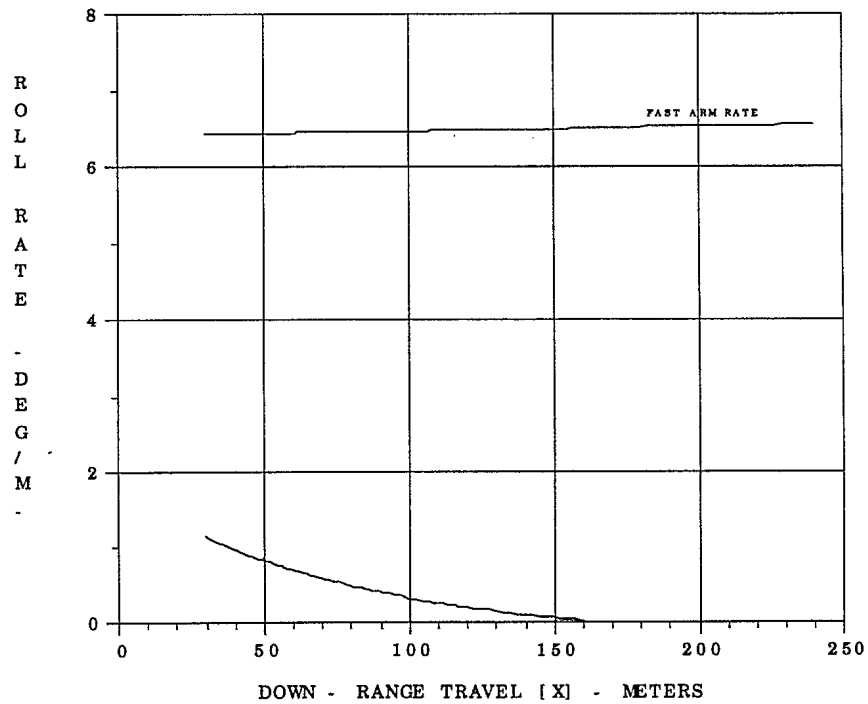
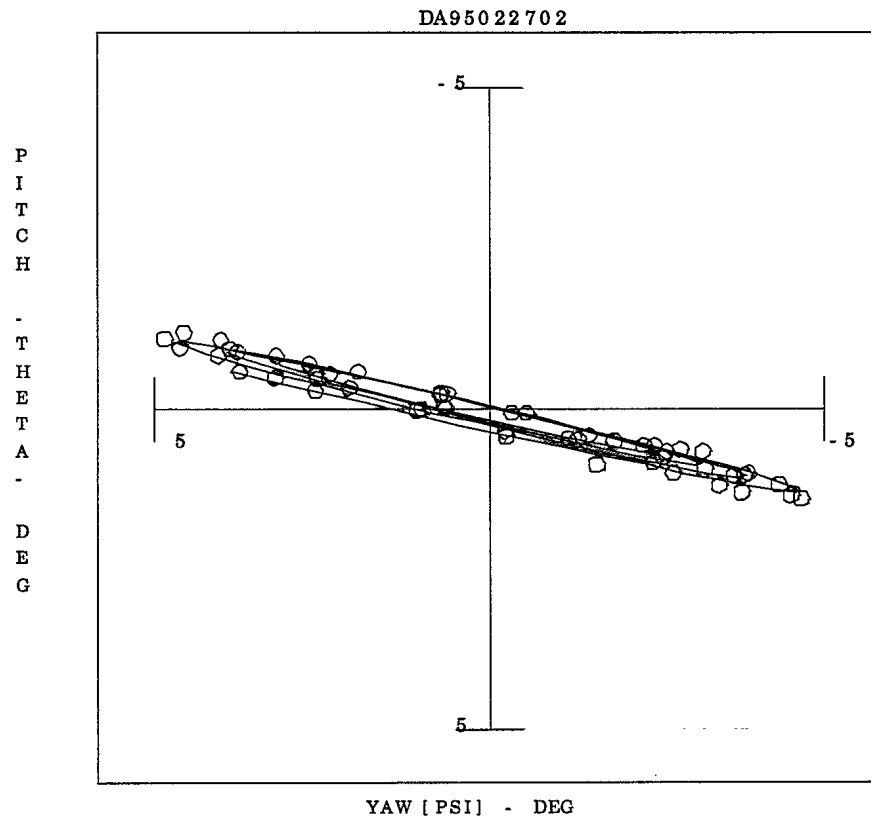


UNCLASSIFIED

DA95030603

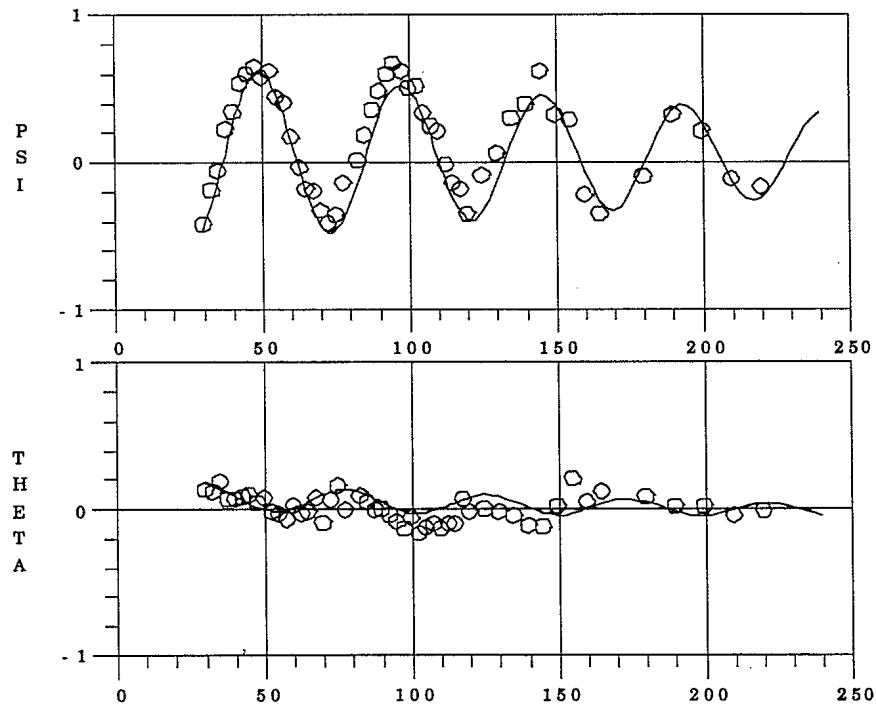
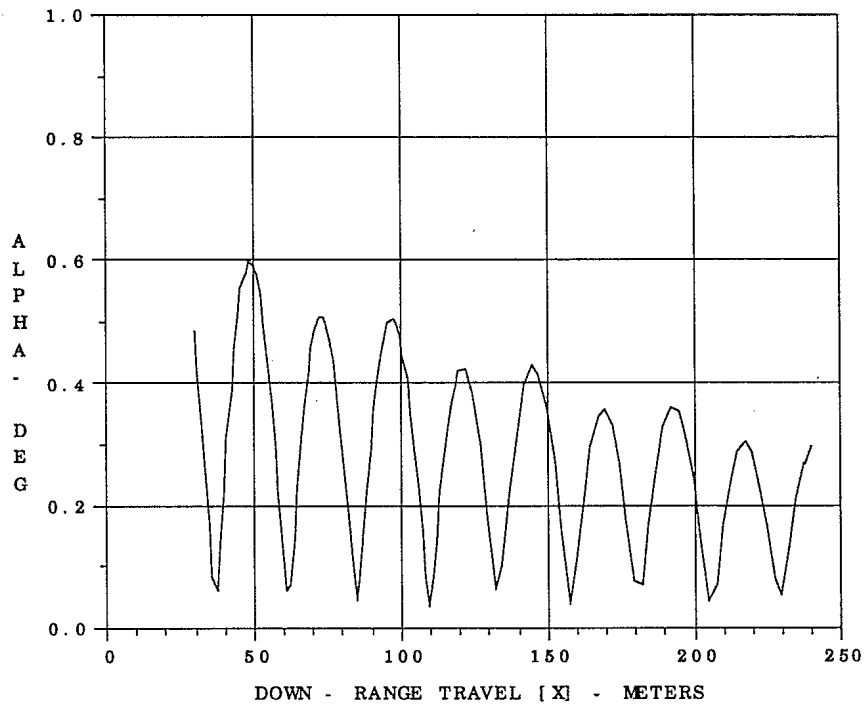


UNCLASSIFIED

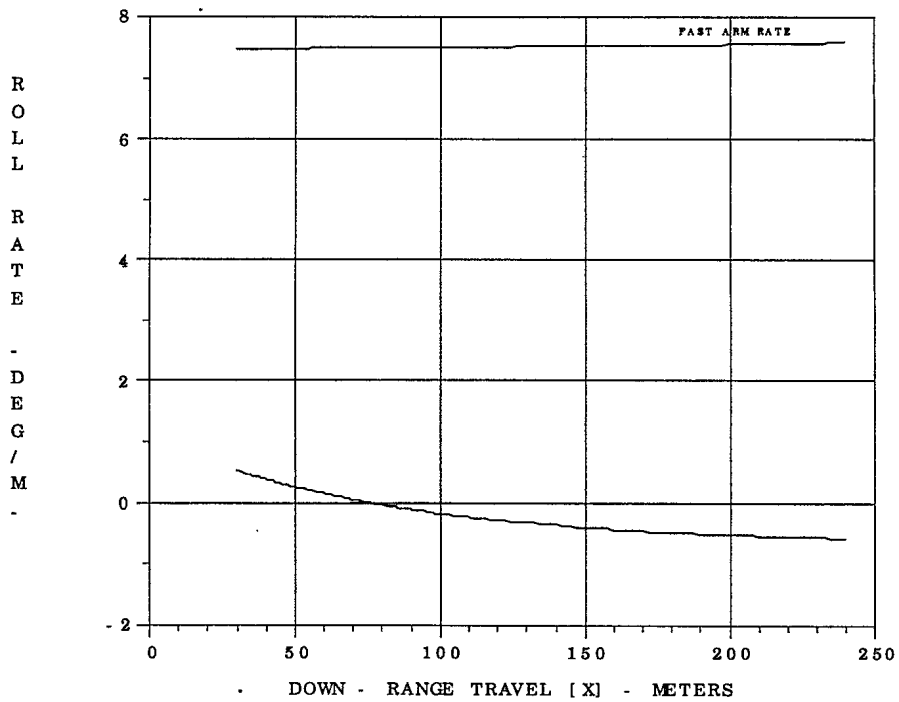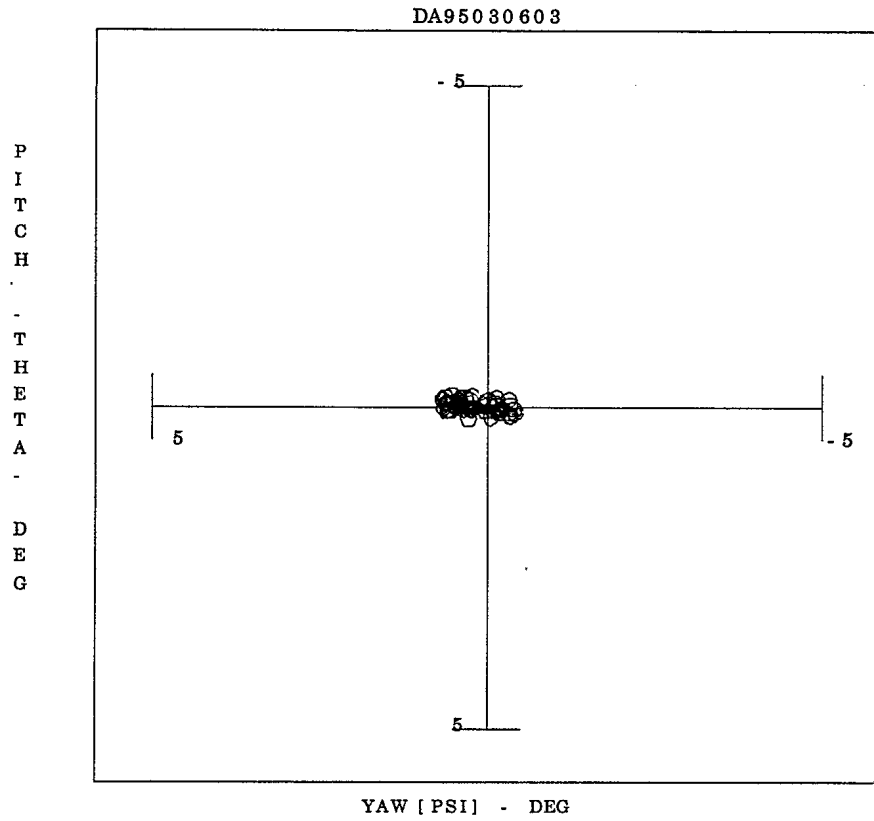

UNCLASSIFIED


DA95022205

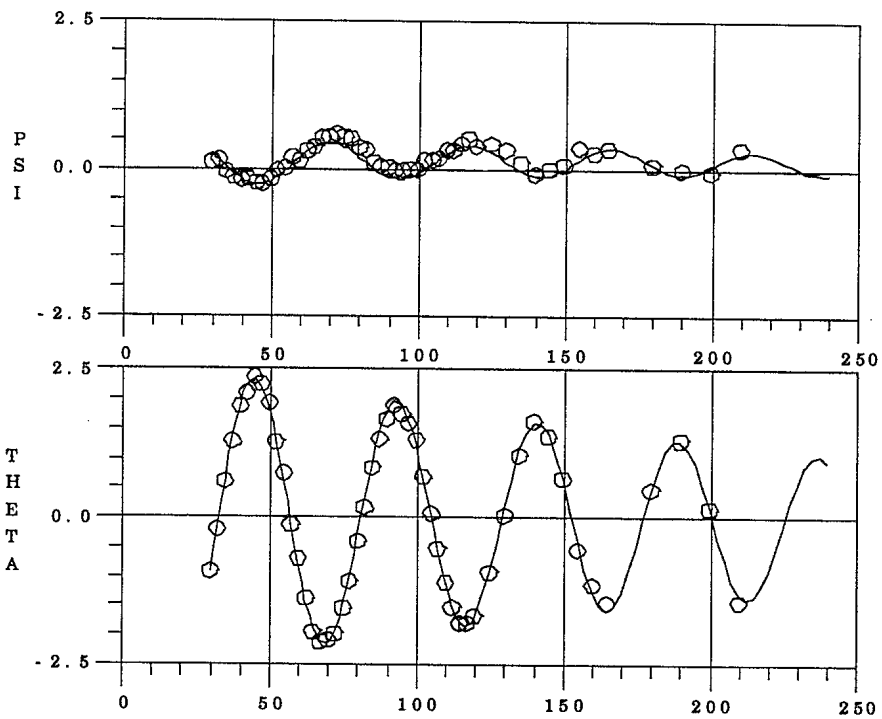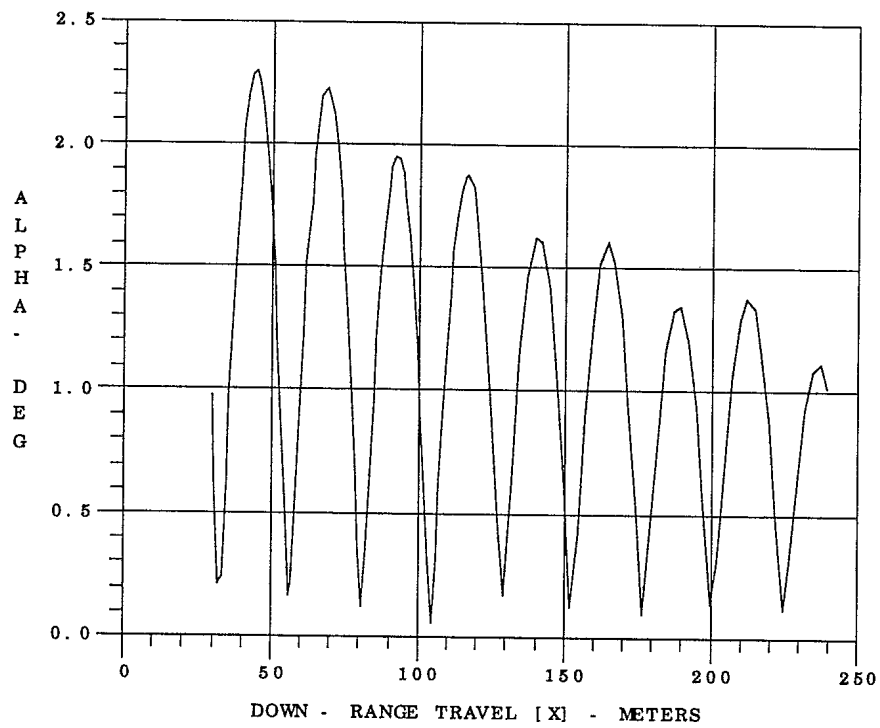

UNCLASSIFIED


DA95022205

P
I
T
C
H
-
T
H
E
T
A
-
D
E
G

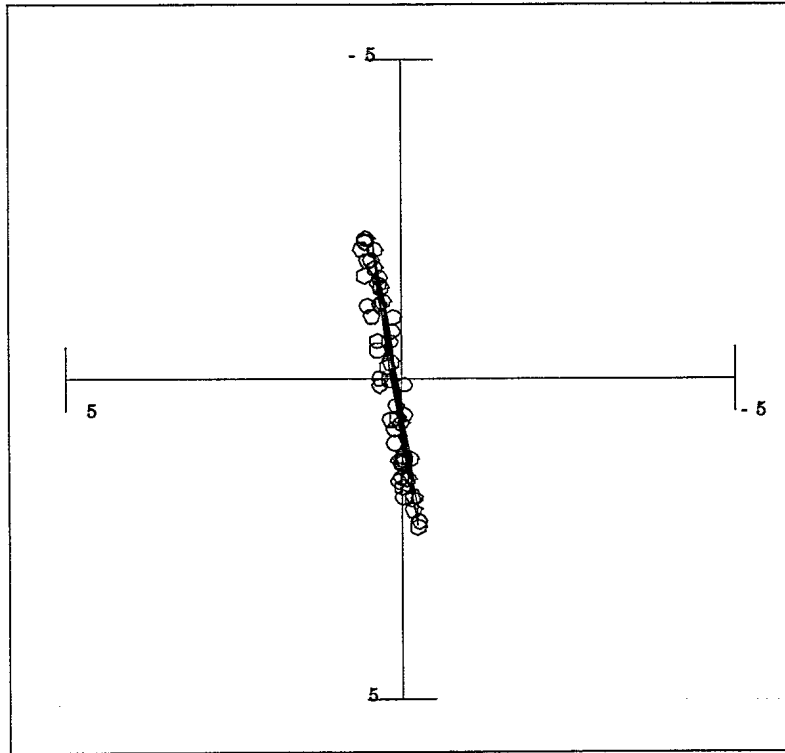




YAW [PSI] - DEG

R
O
L
L
R
A
T
E
-
D
E
G
/
M
-

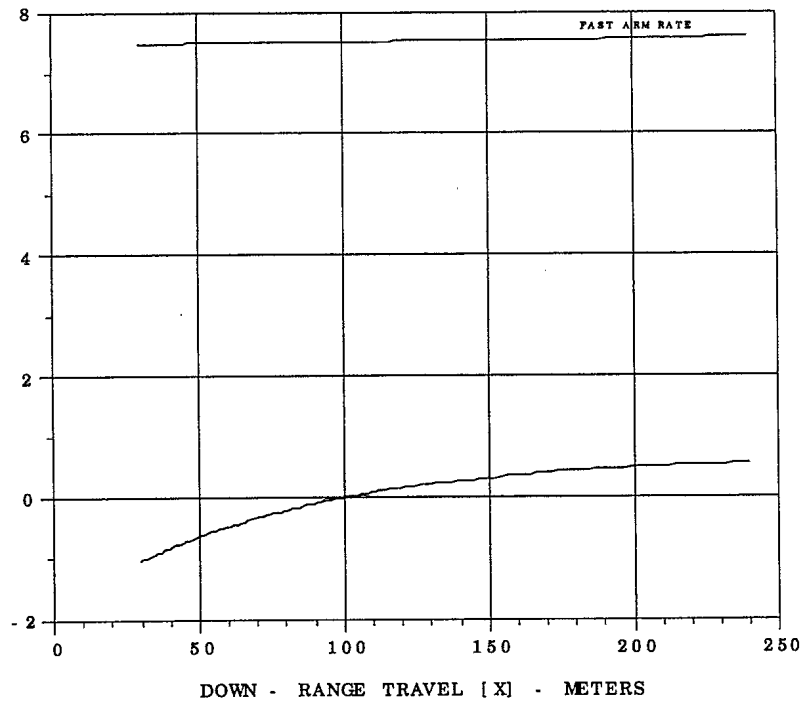

UNCLASSIFIED


DA95020906

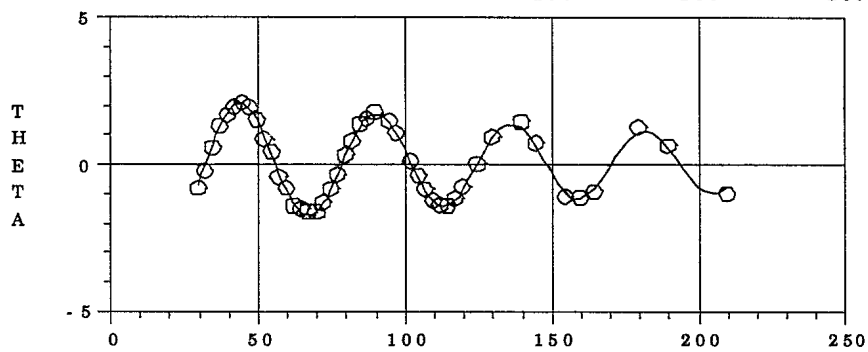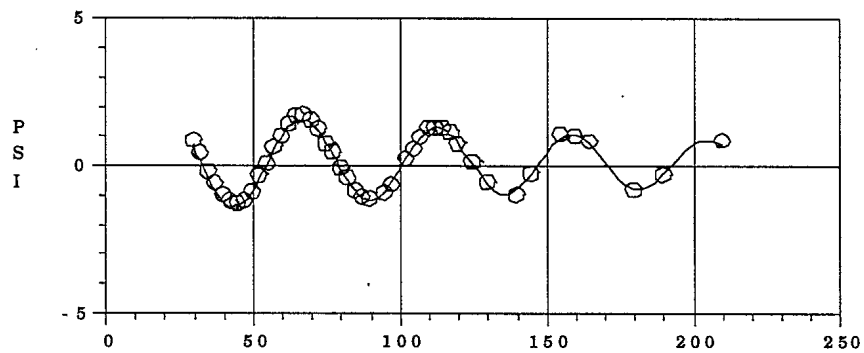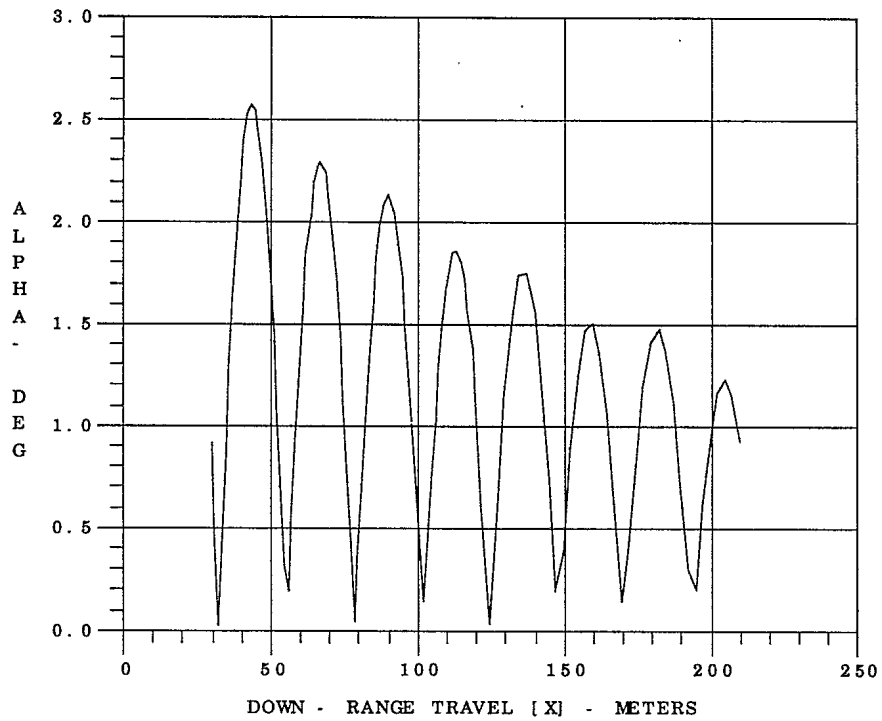

UNCLASSIFIED


DA95020906

P
I
T
C
H
-
T
H
E
T
A
-
D
E
G

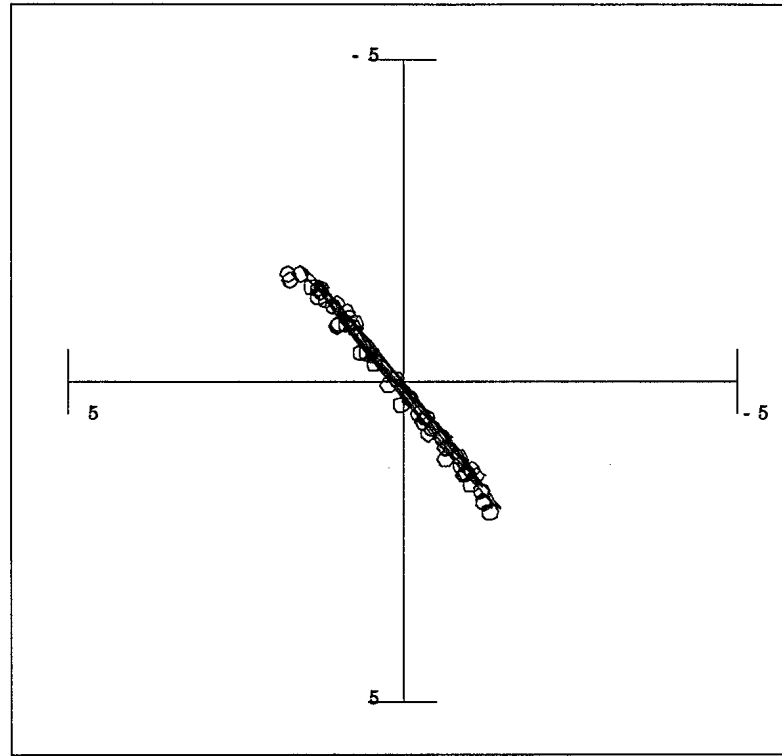



YAW [PSI] - DEG

R
O
L
L
R
A
T
E
-
D
E
G
/
M
-


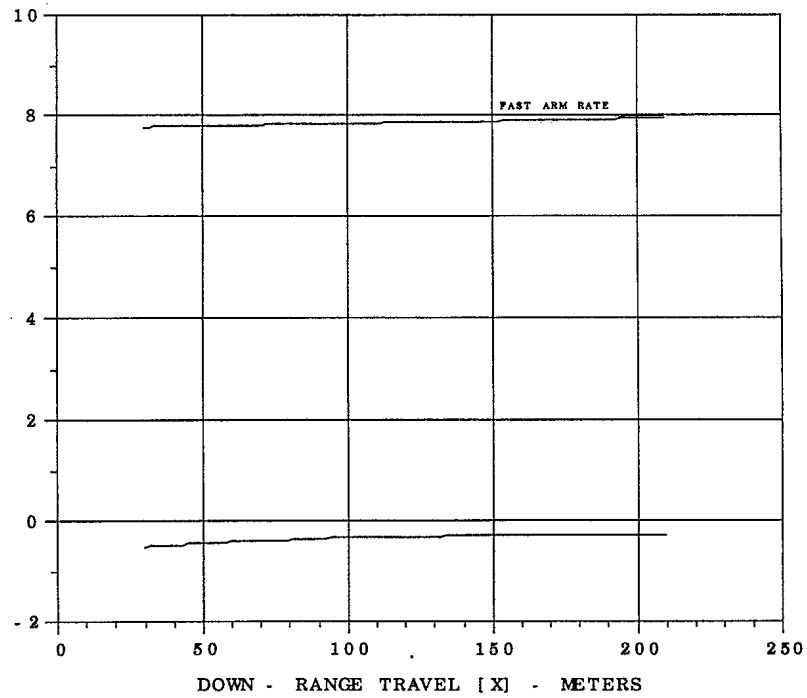


UNCLASSIFIED

DA95020907

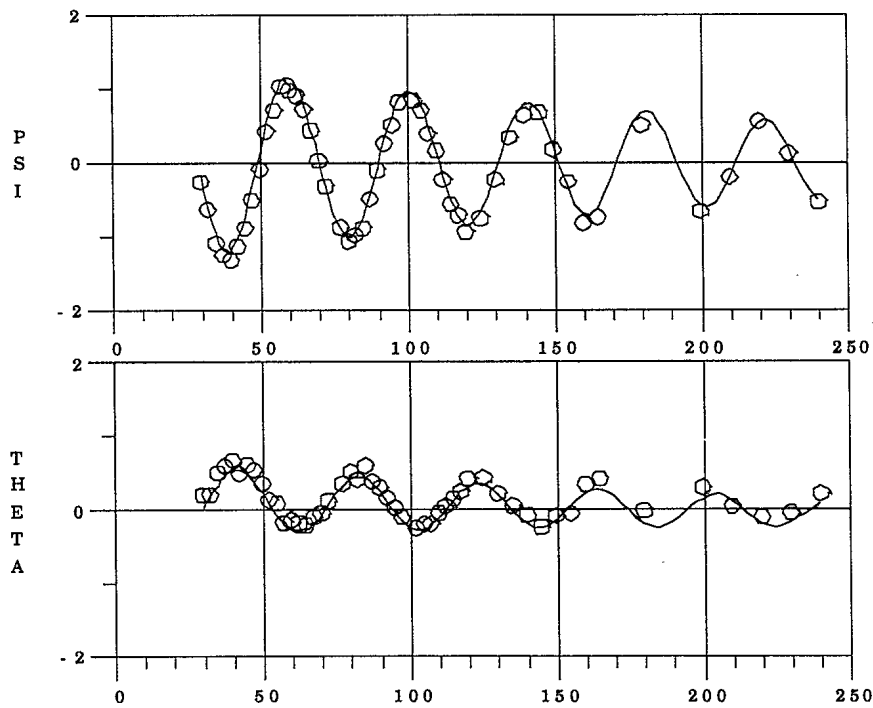
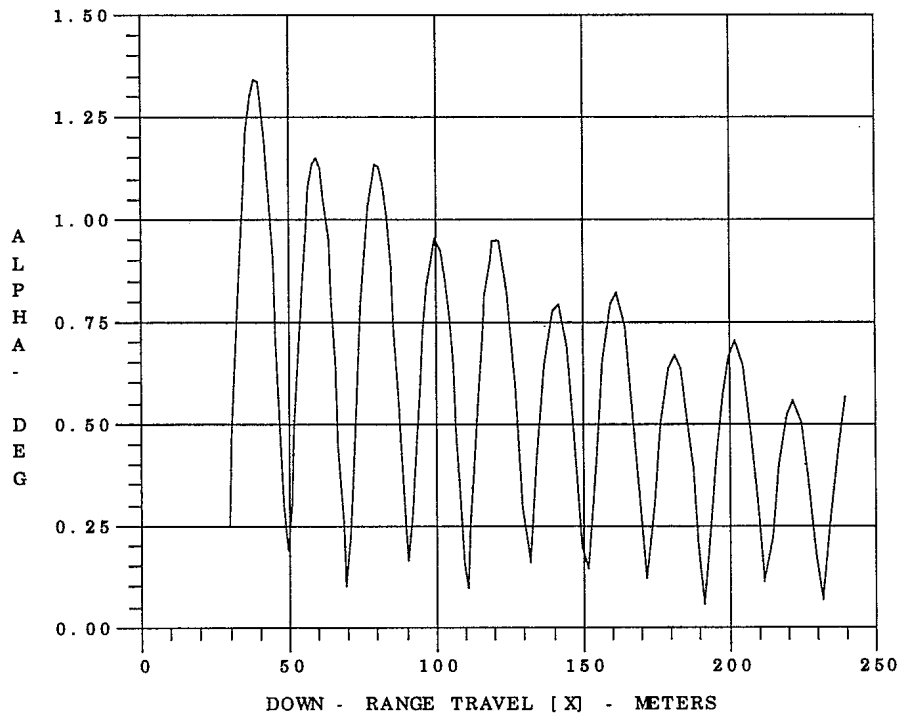


UNCLASSIFIED

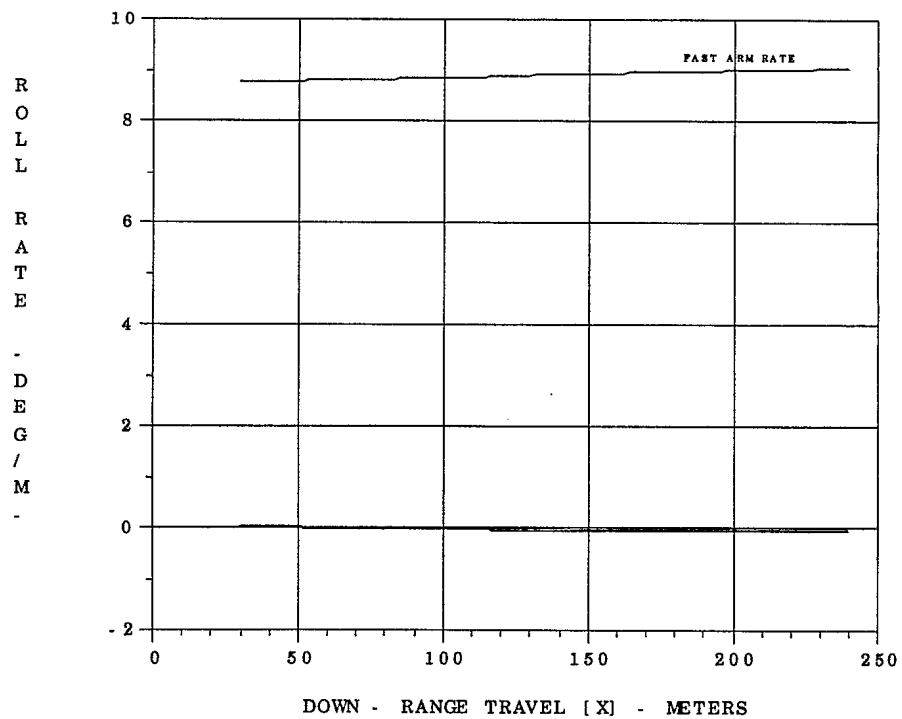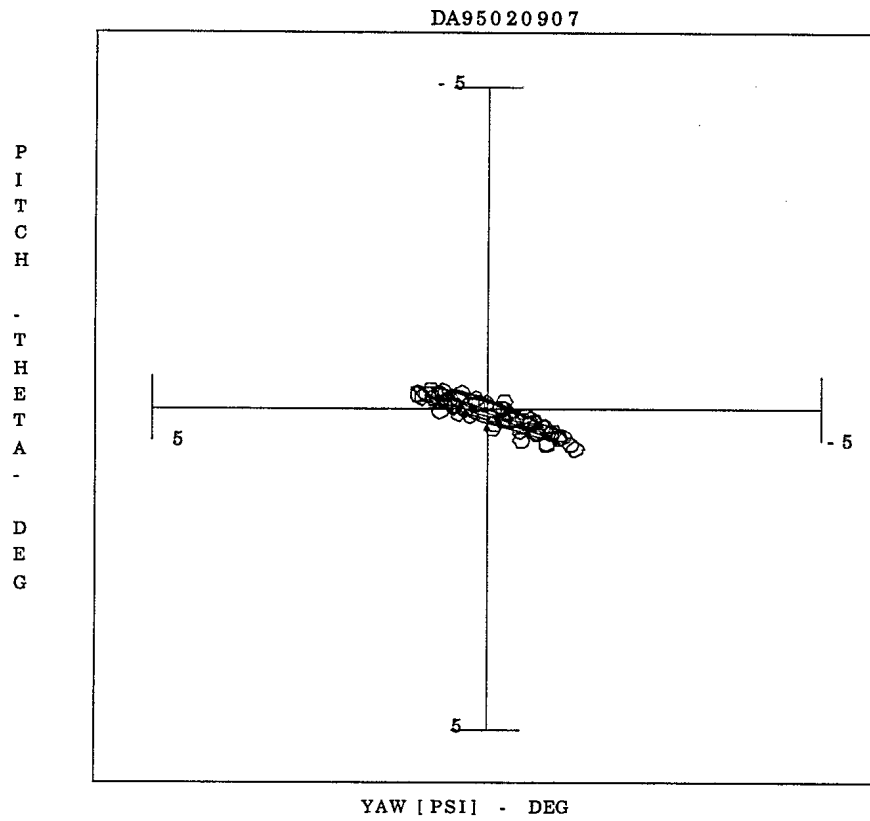

UNCLASSIFIED


DA95021308

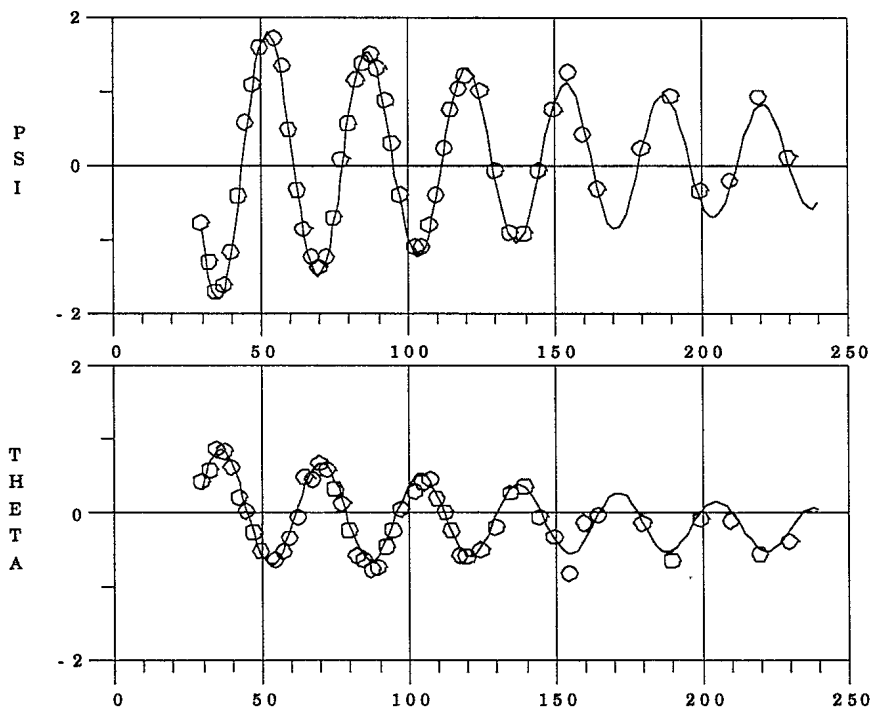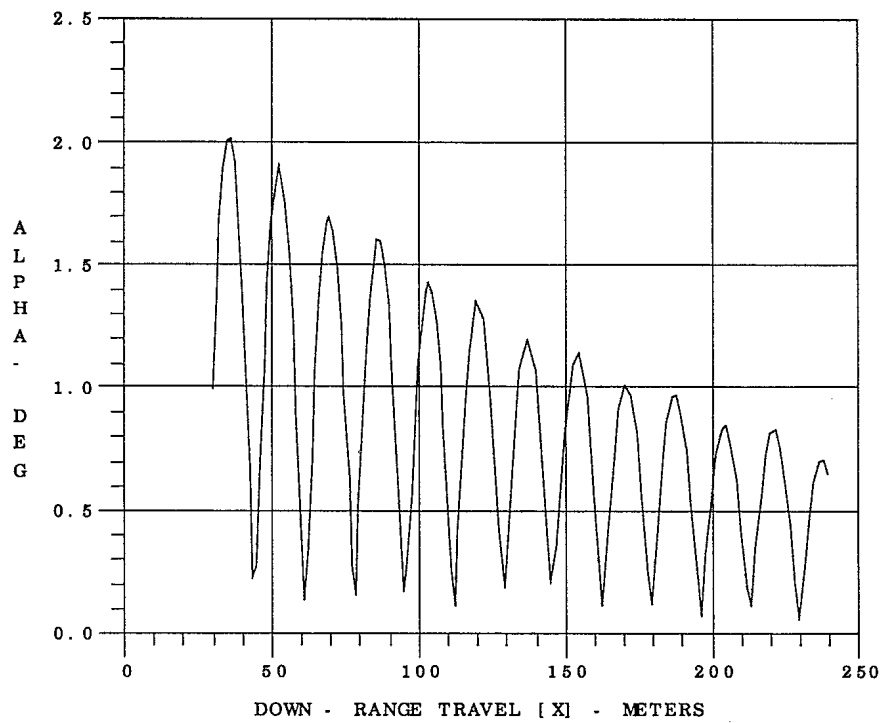

UNCLASSIFIED


DA95021308

P
I
T
C
H
-
T
H
E
T
A
-
D
E
G

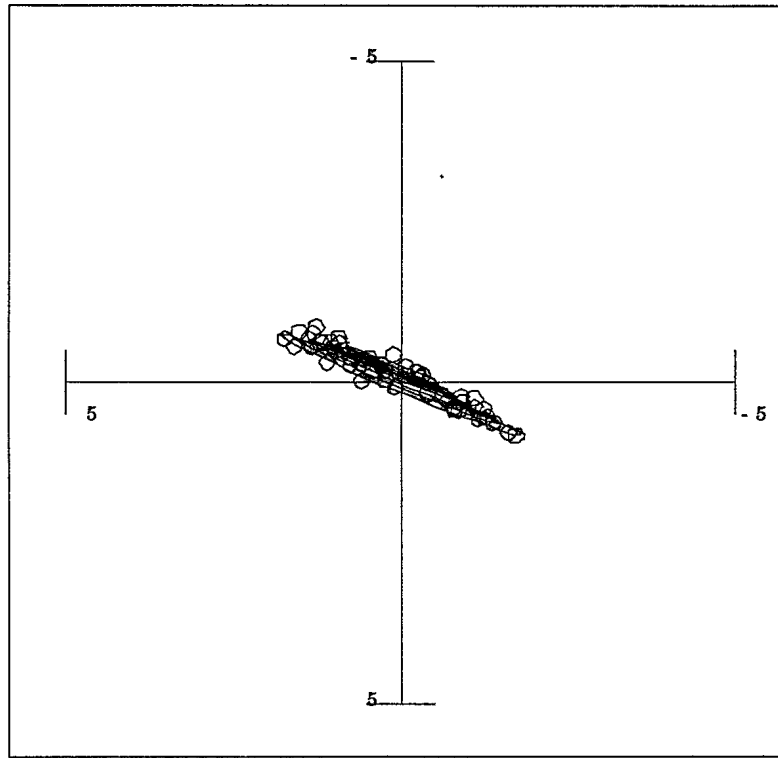

YAW [PSI] - DEG




R
O
L
L
R
A
T
E
-
D
E
G
/
M

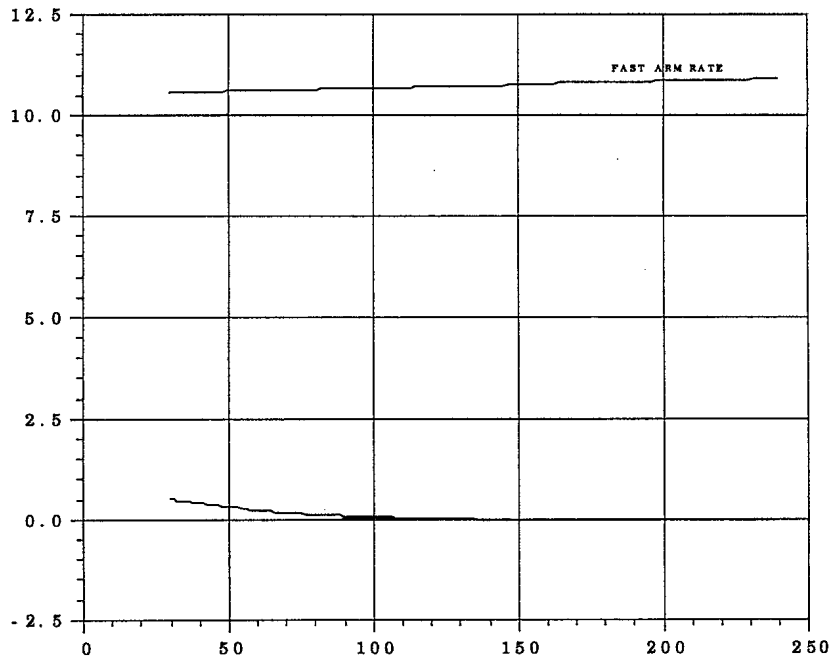



DOWN - RANGE TRAVEL [X] - METERS

UNCLASSIFIED

DA95022009

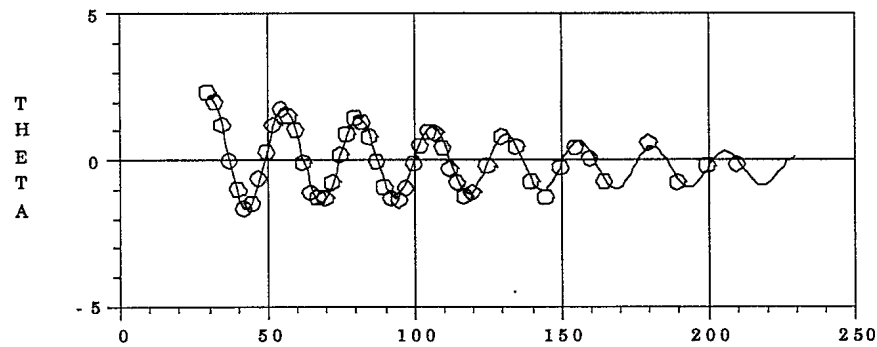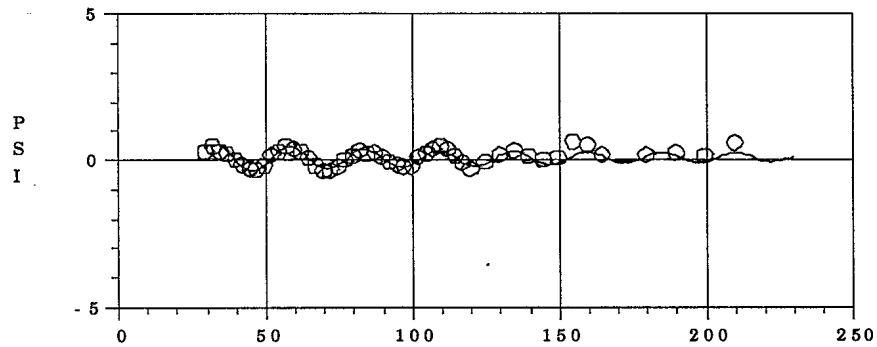
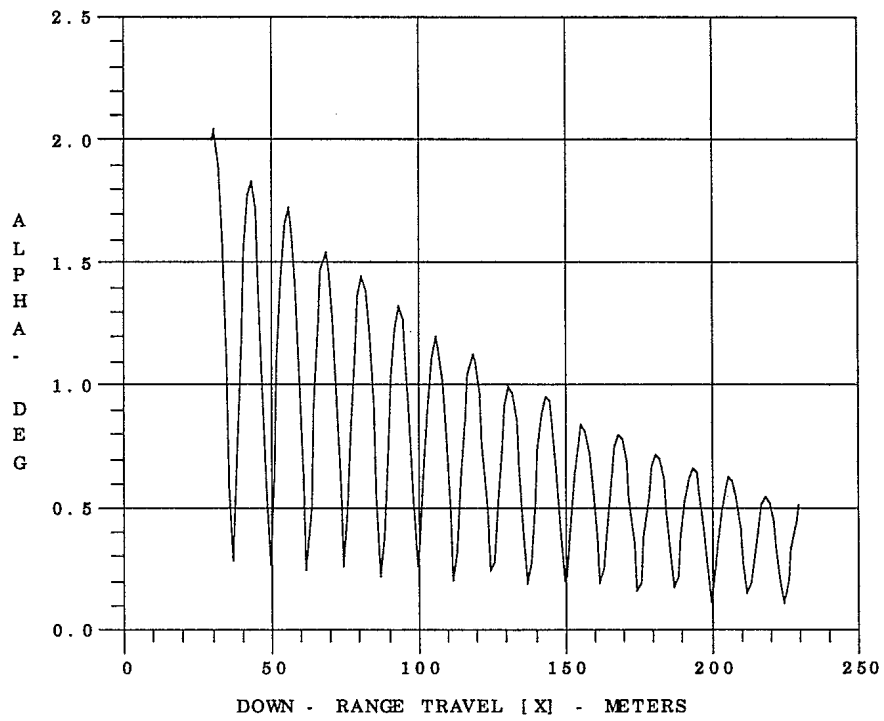


UNCLASSIFIED

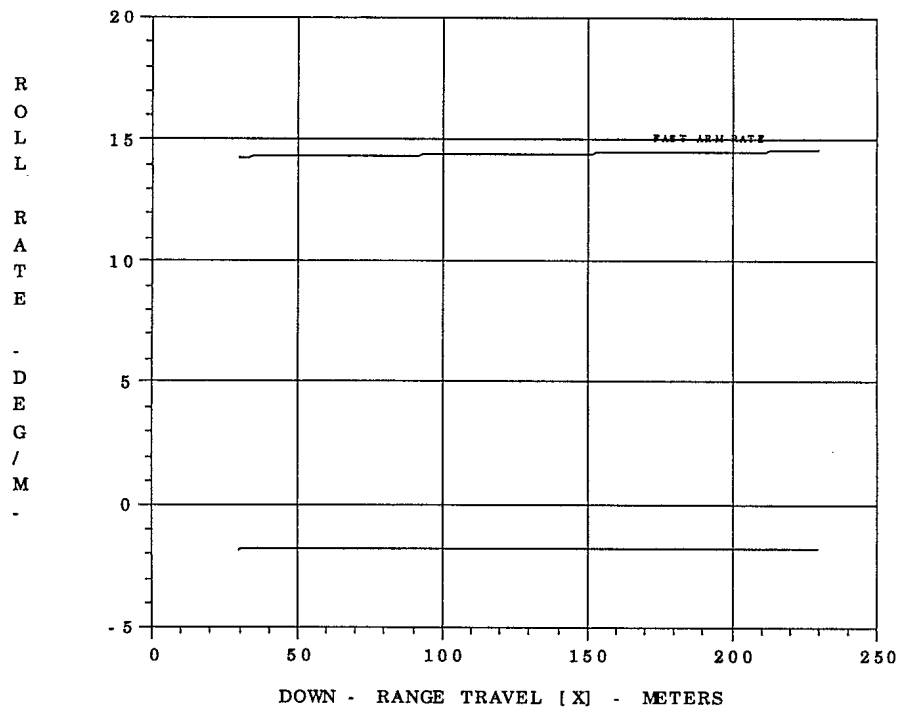
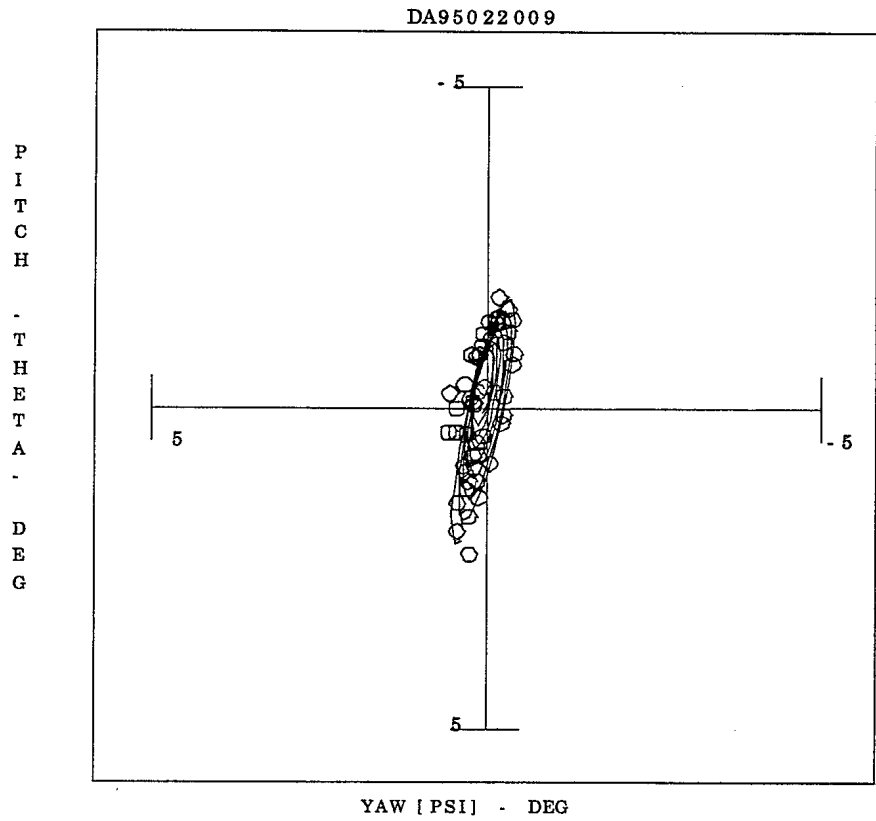


UNCLASSIFIED

DA95022010

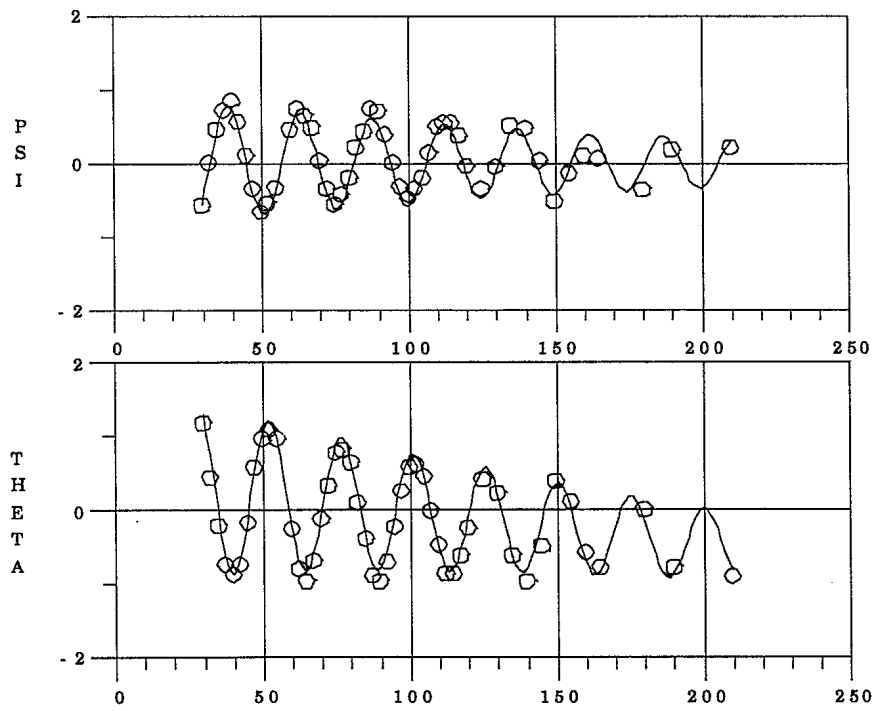
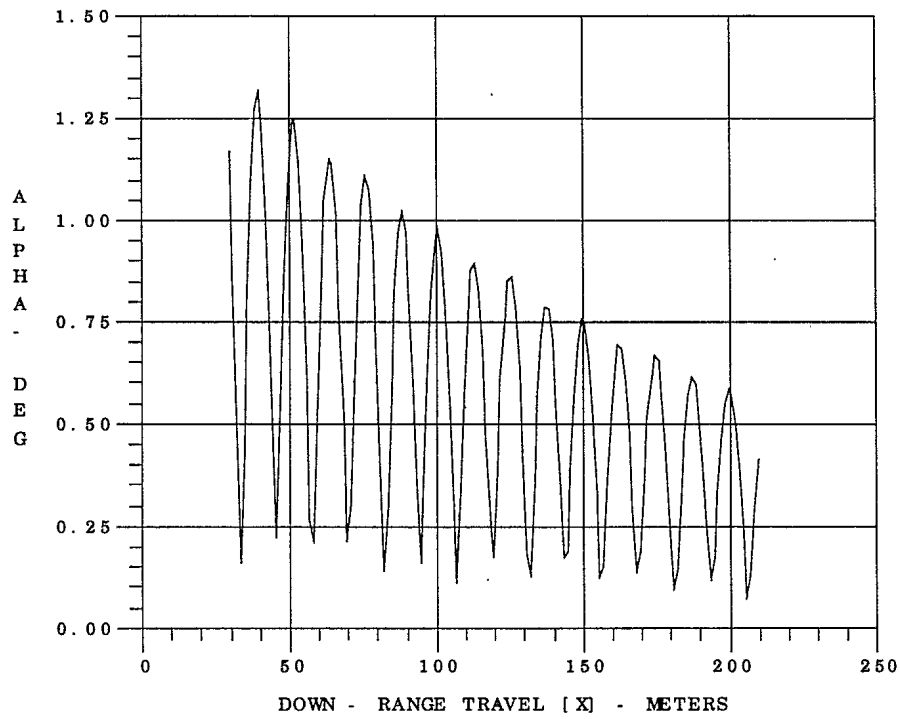


UNCLASSIFIED

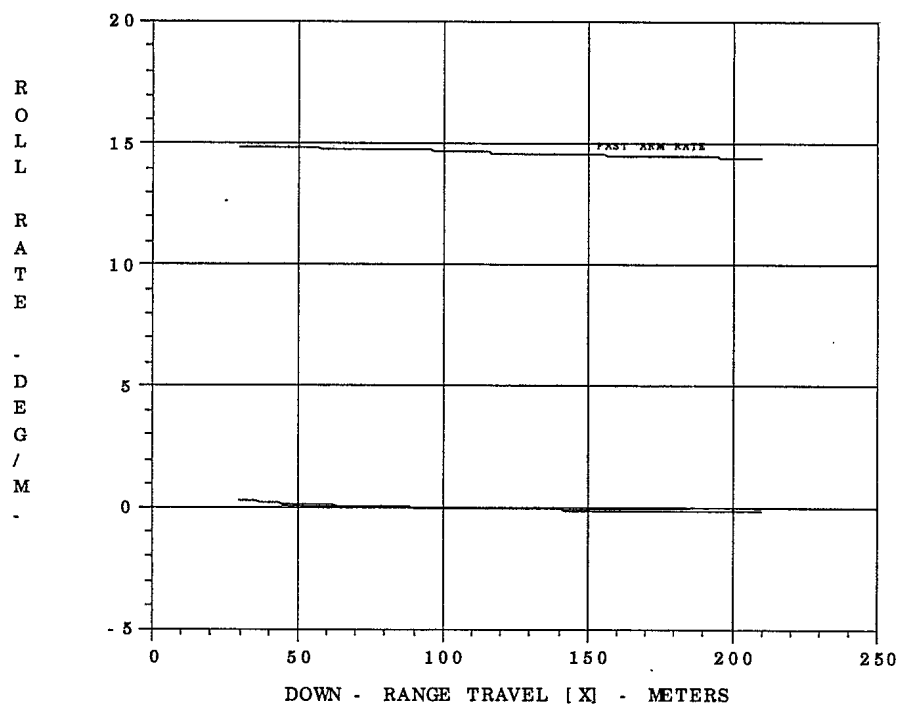
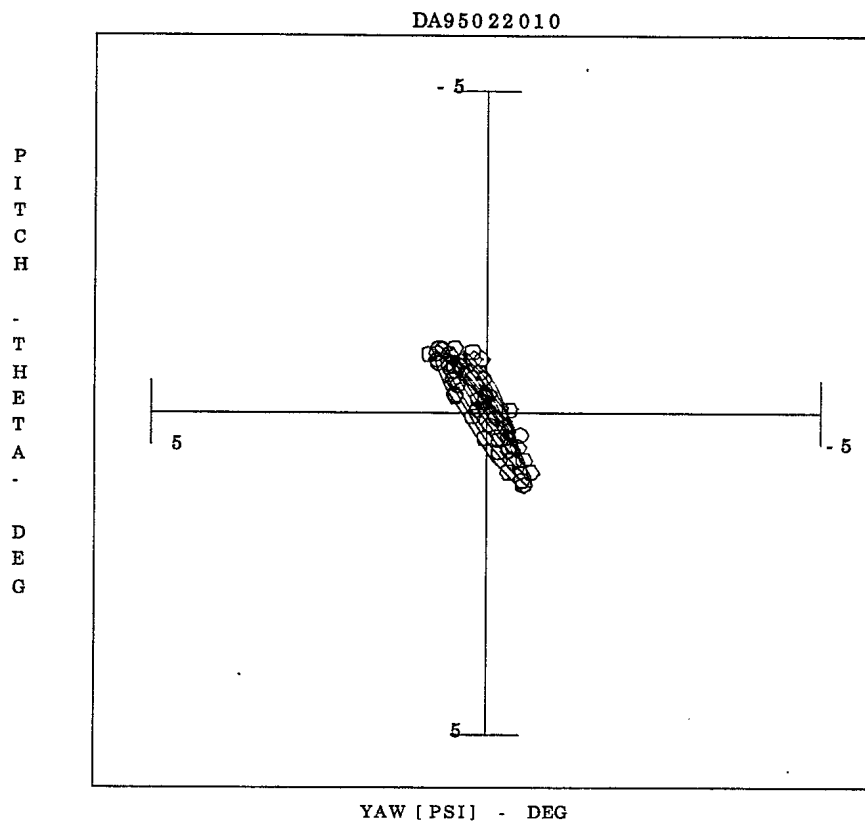


UNCLASSIFIED

DA95030111

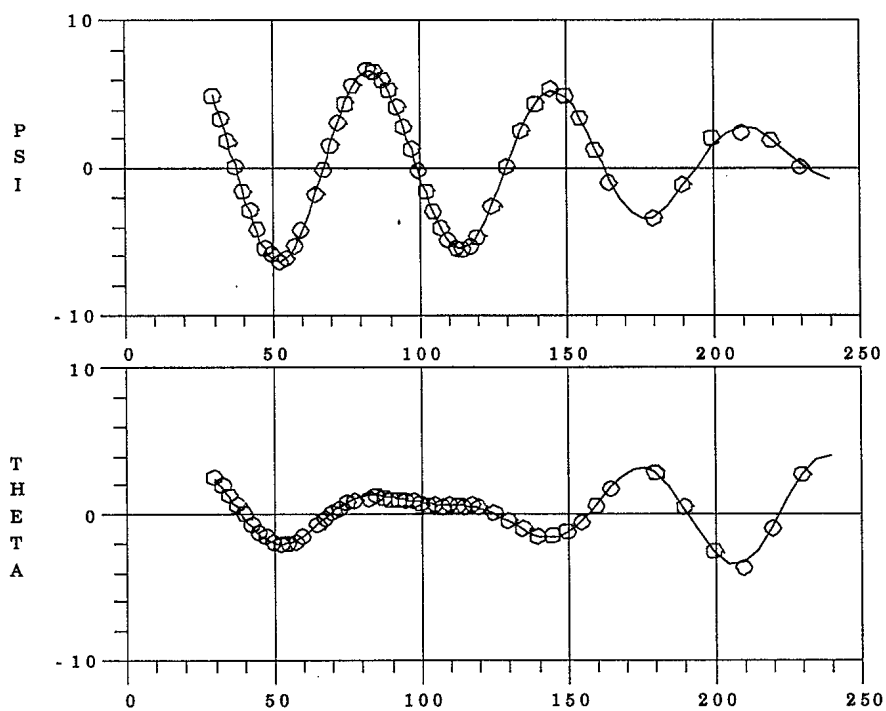
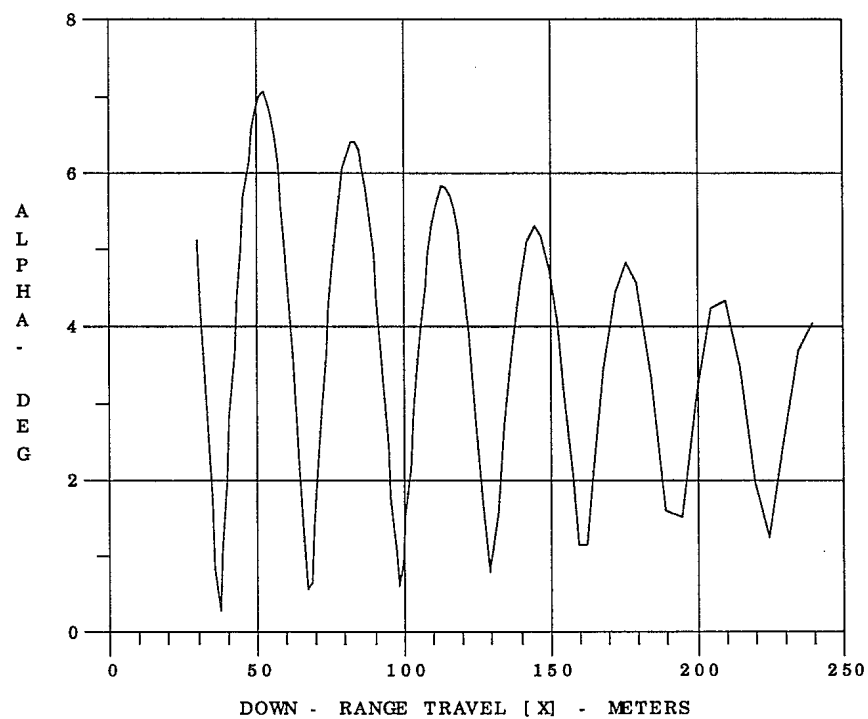


UNCLASSIFIED

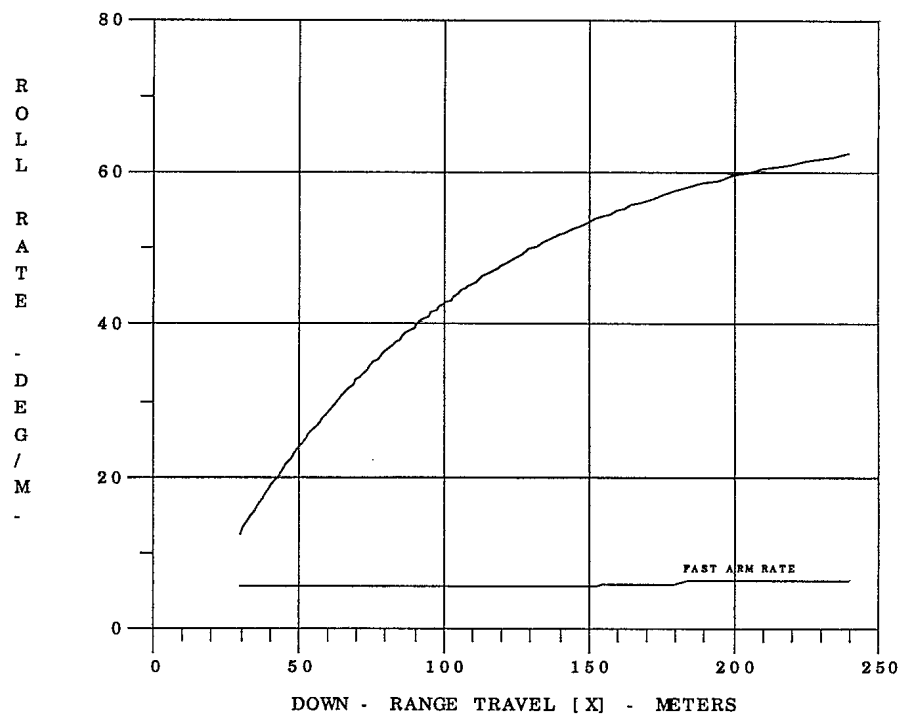
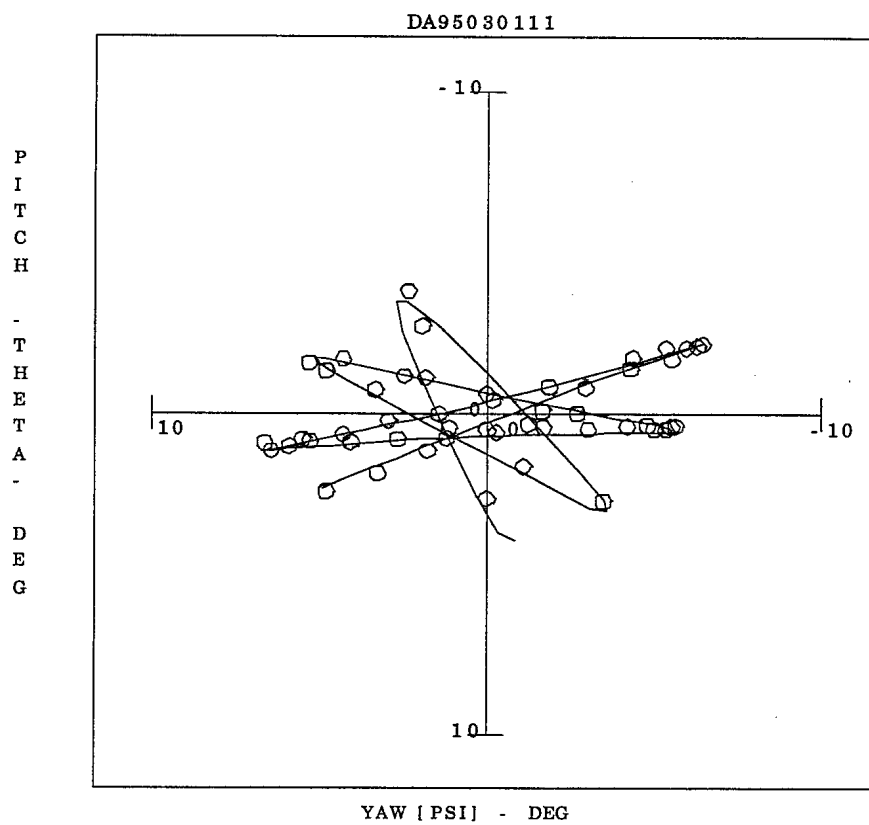


UNCLASSIFIED

DA95022712

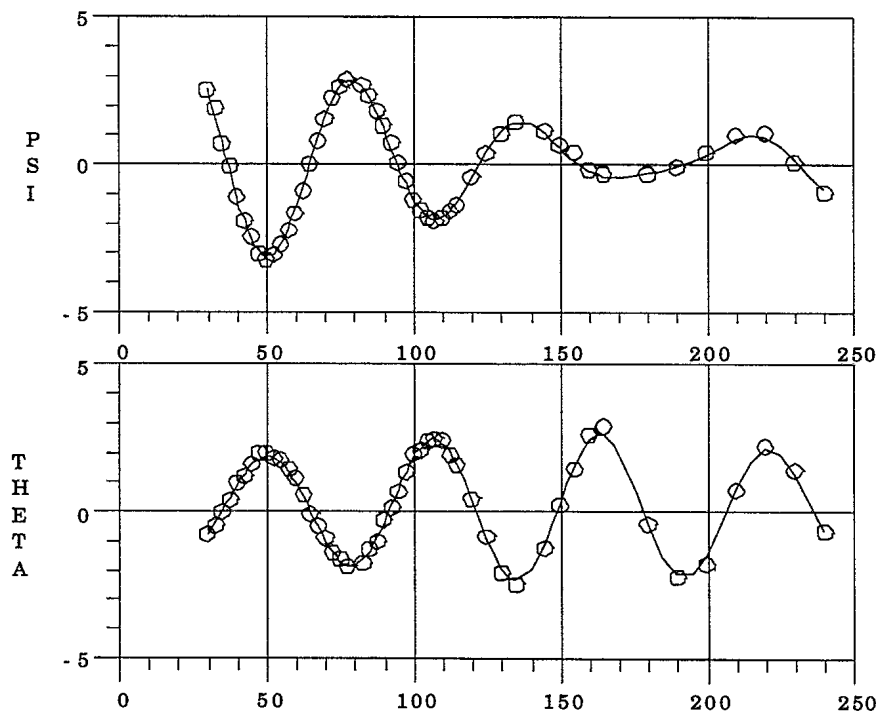
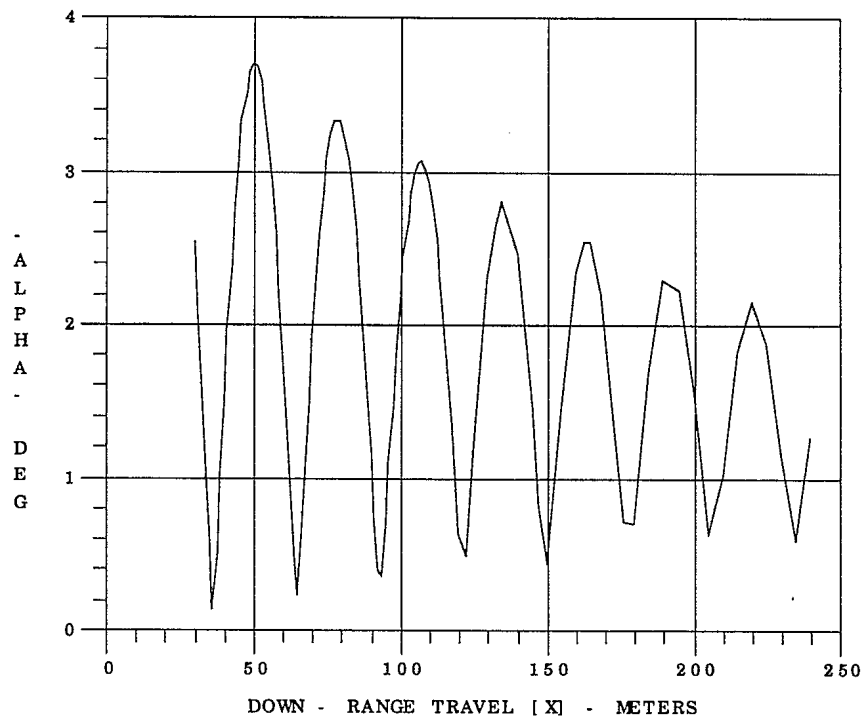


UNCLASSIFIED

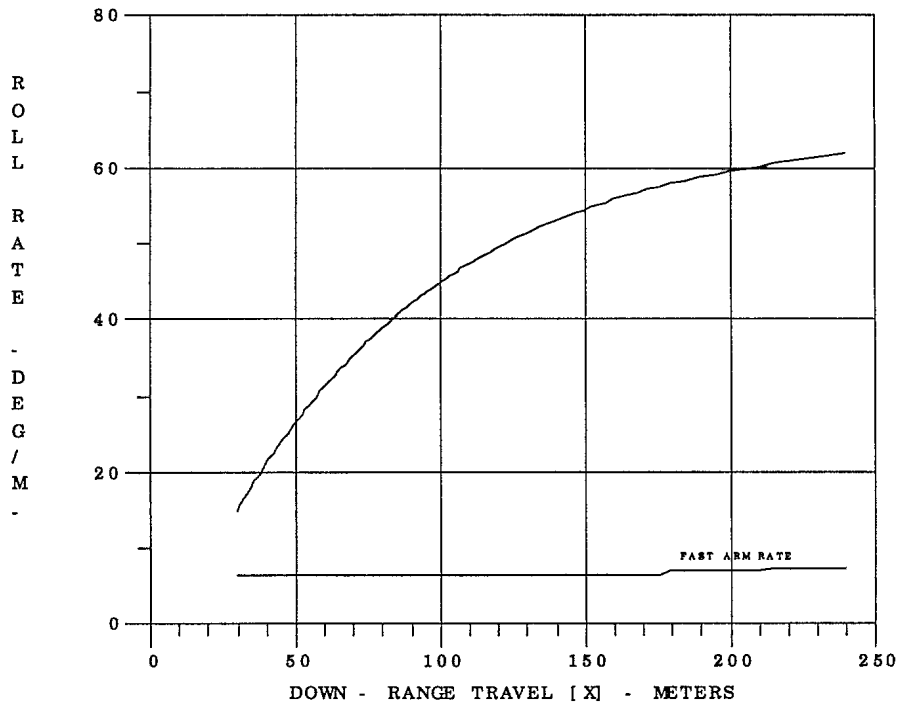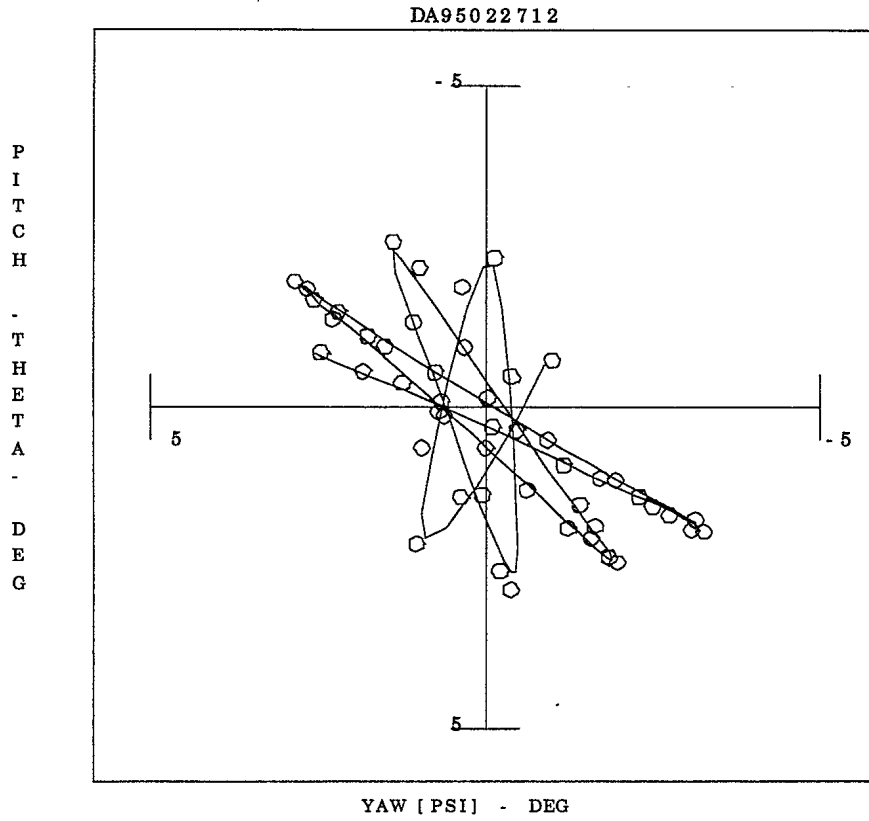

UNCLASSIFIED


DA95030613

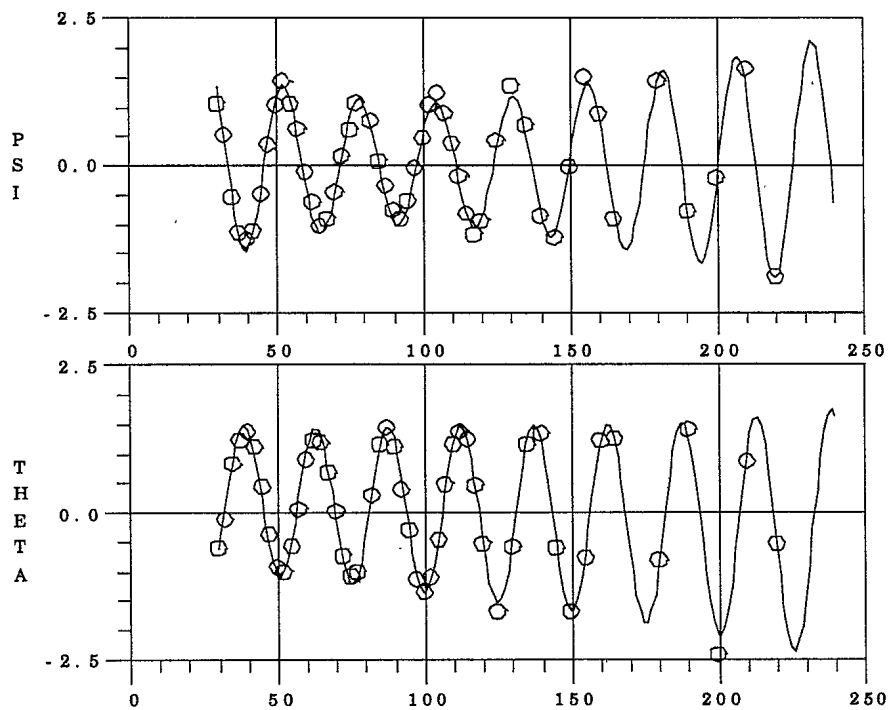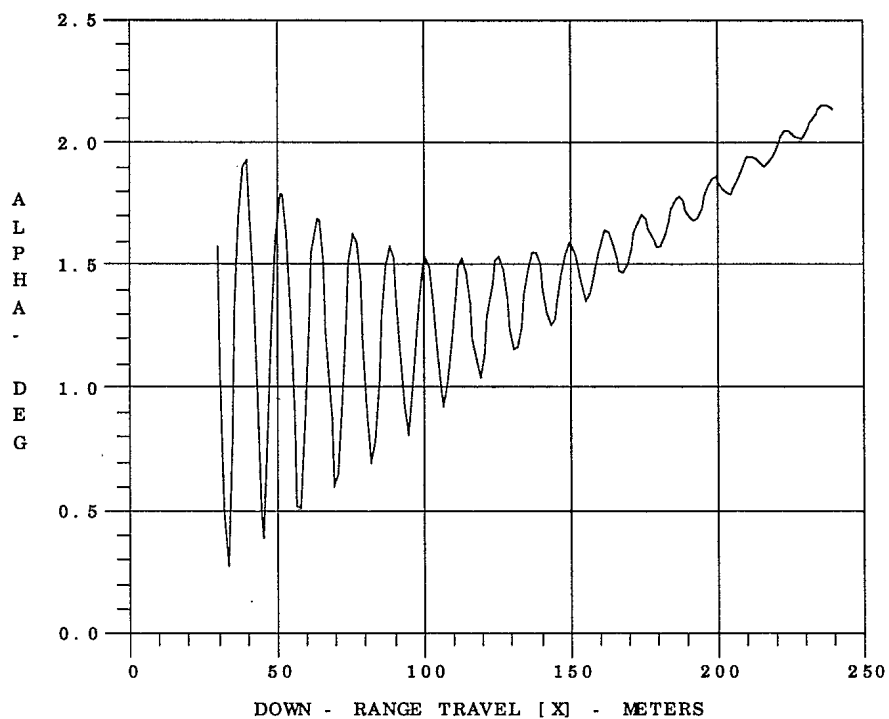

UNCLASSIFIED


DA95030613

P
I
T
C
H
-
T
H
E
T
A
-
D
E
G

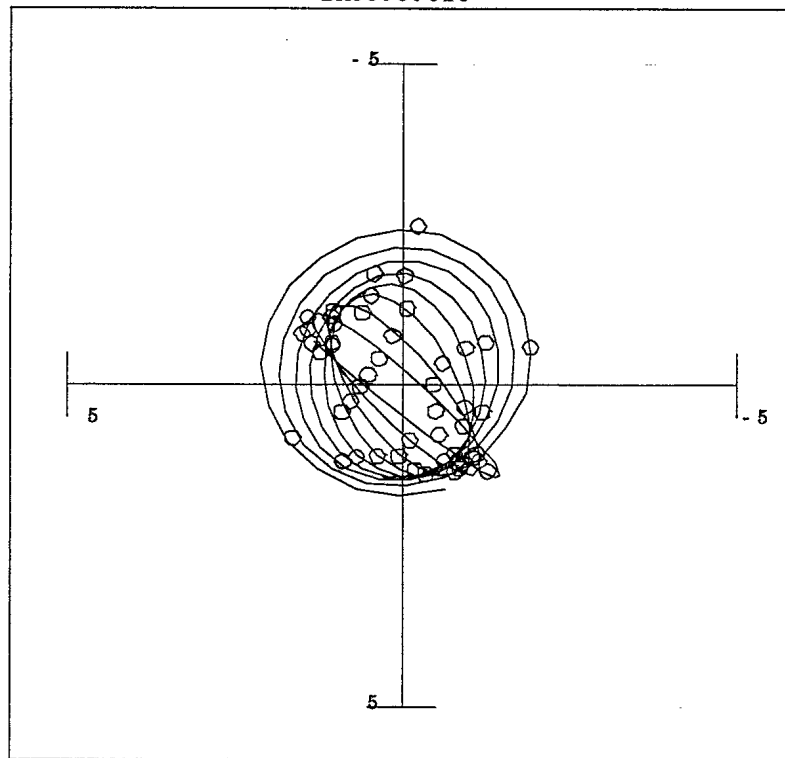



YAW [PSI] - DEG

R
O
L
L
R
A
T
E
-
D
E
G
/
M


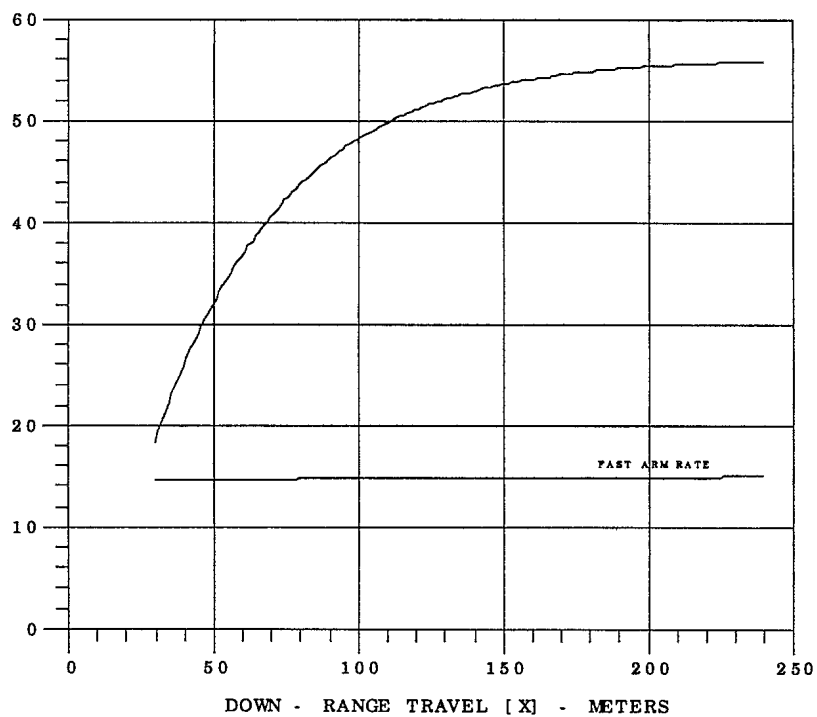


UNCLASSIFIED

DA95022215


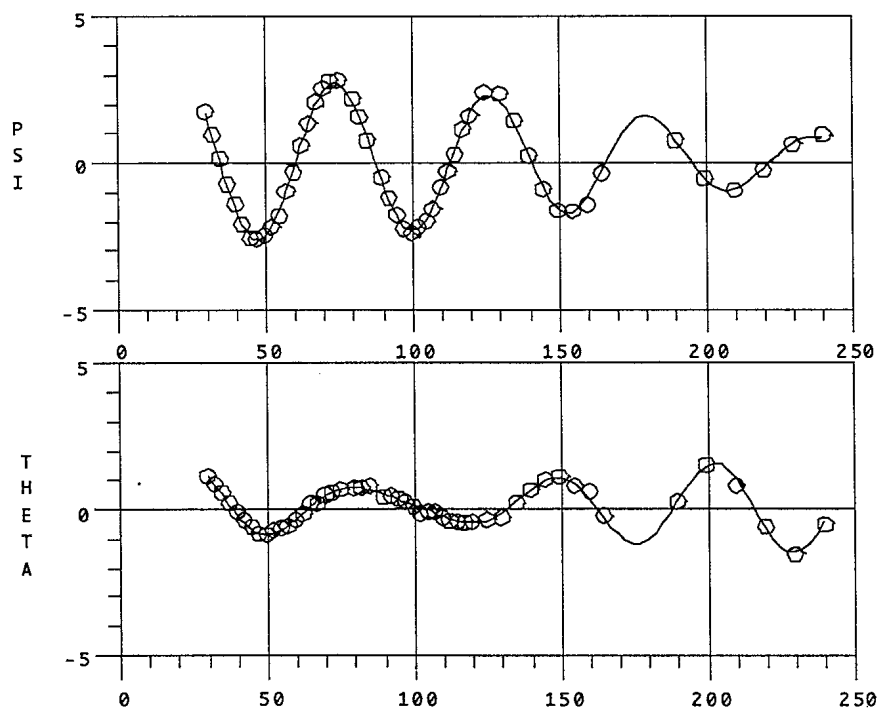
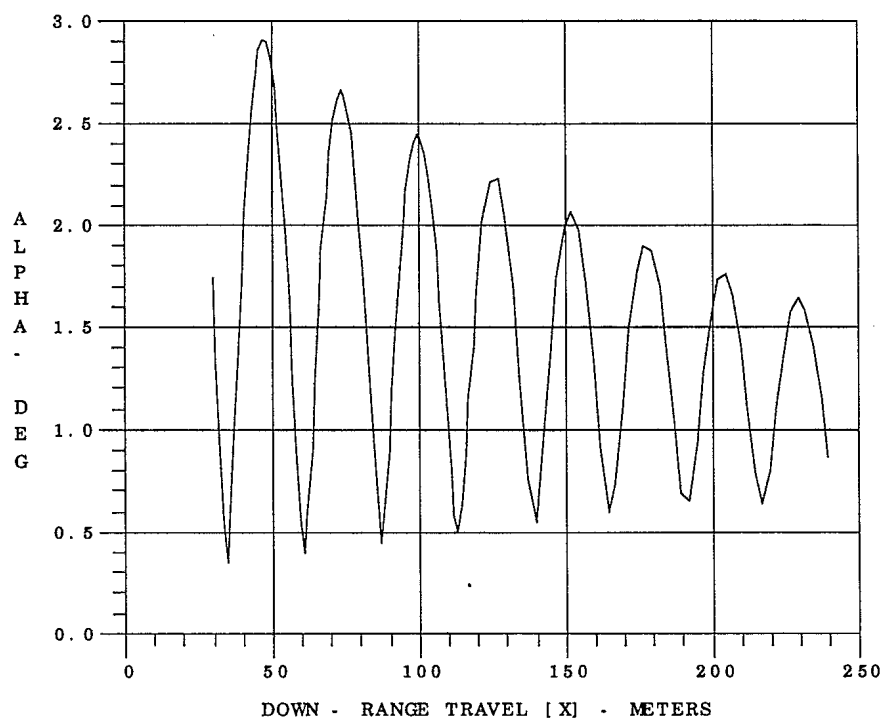


UNCLASSIFIED

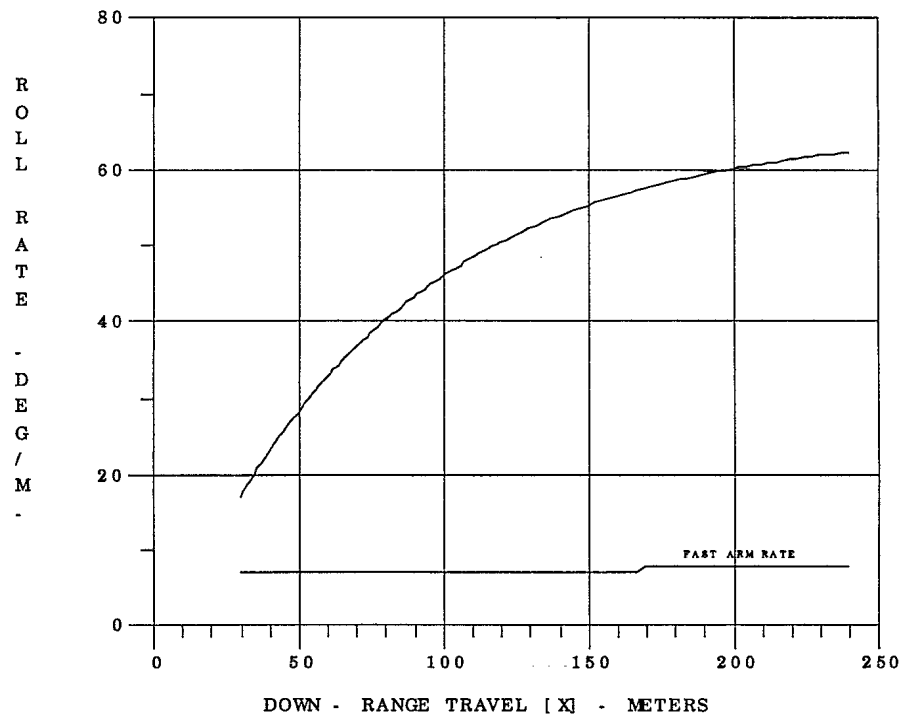
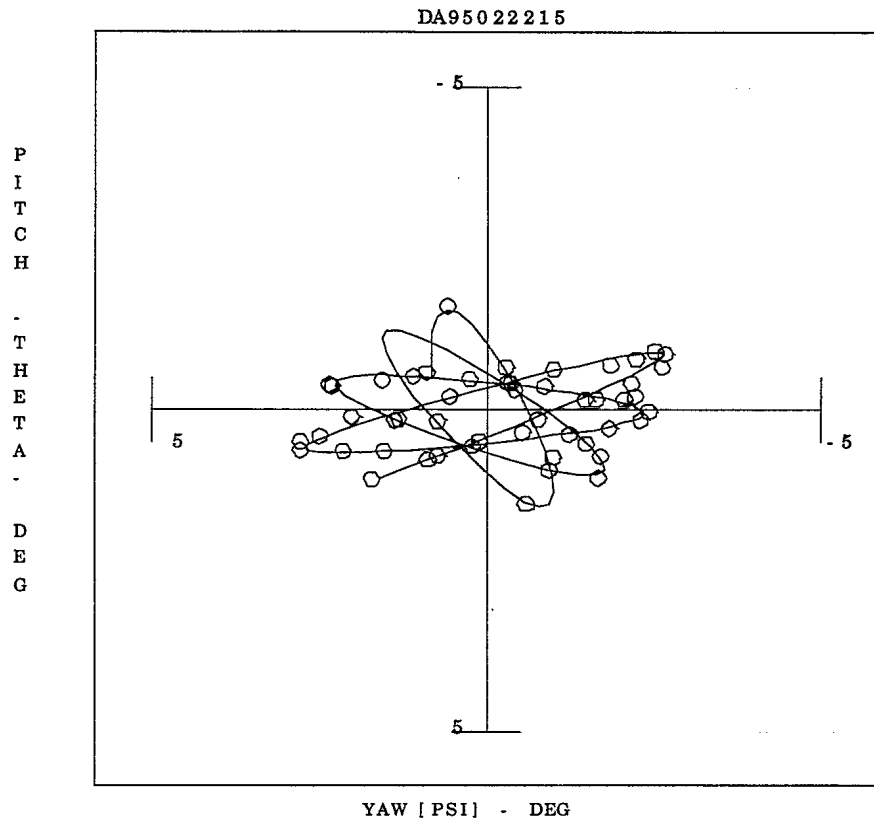


UNCLASSIFIED

DA95020916

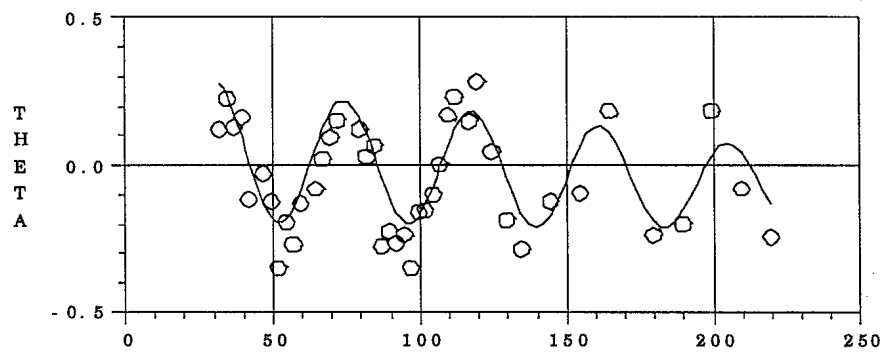
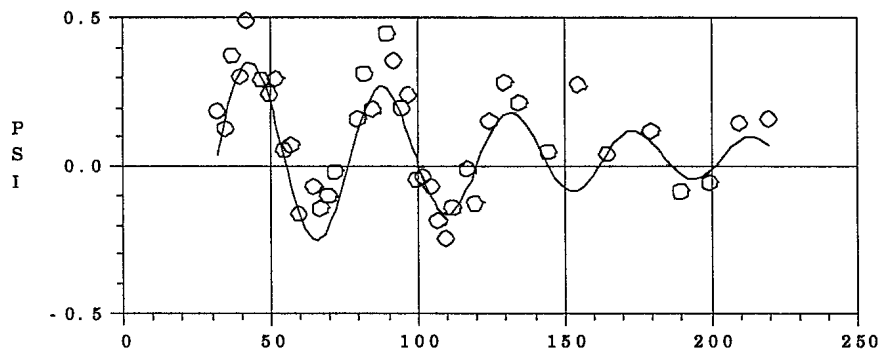
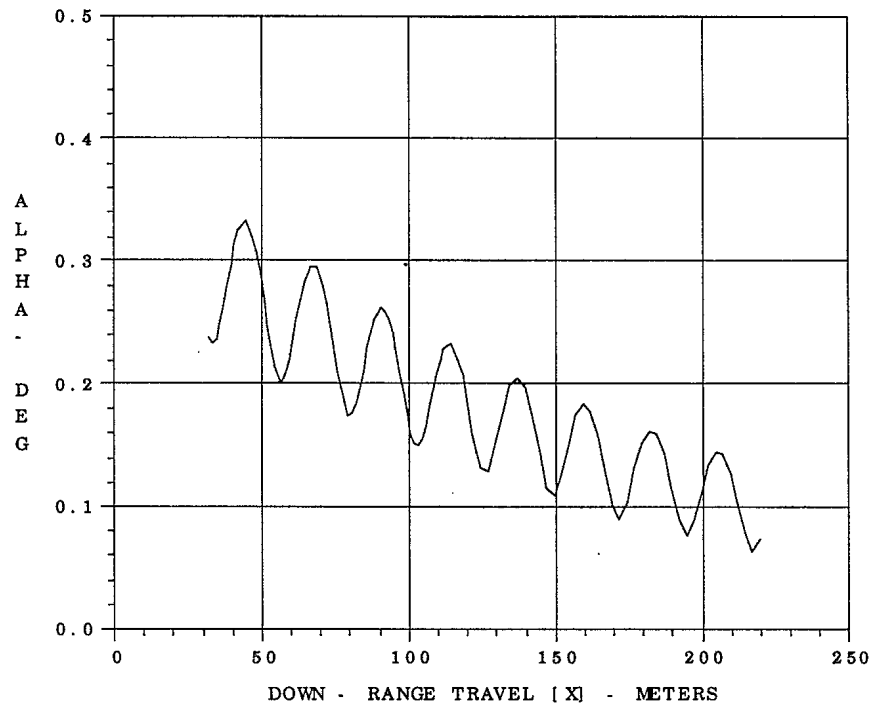


UNCLASSIFIED

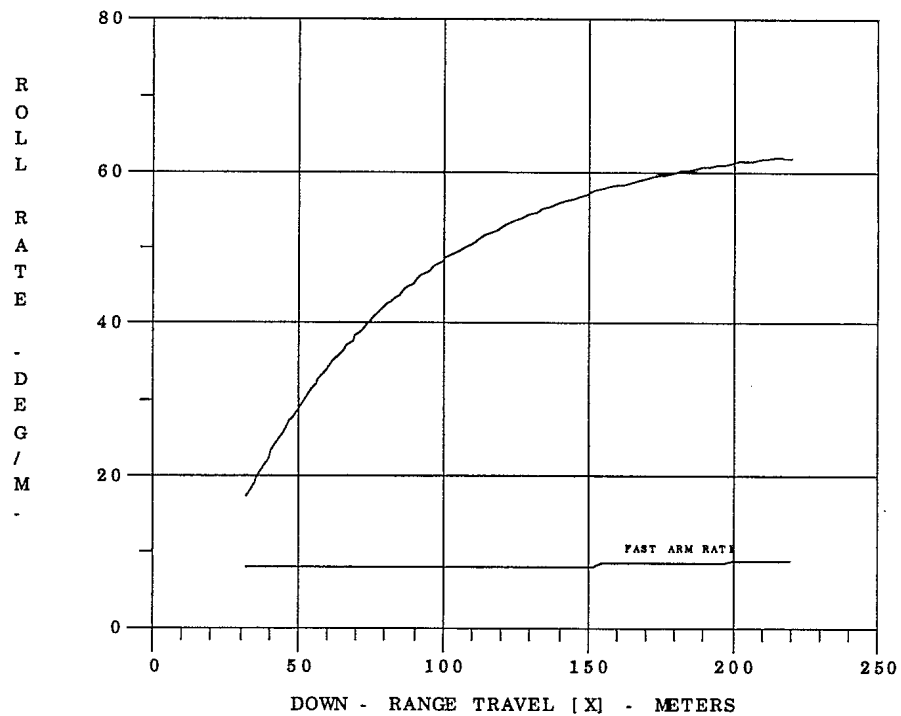
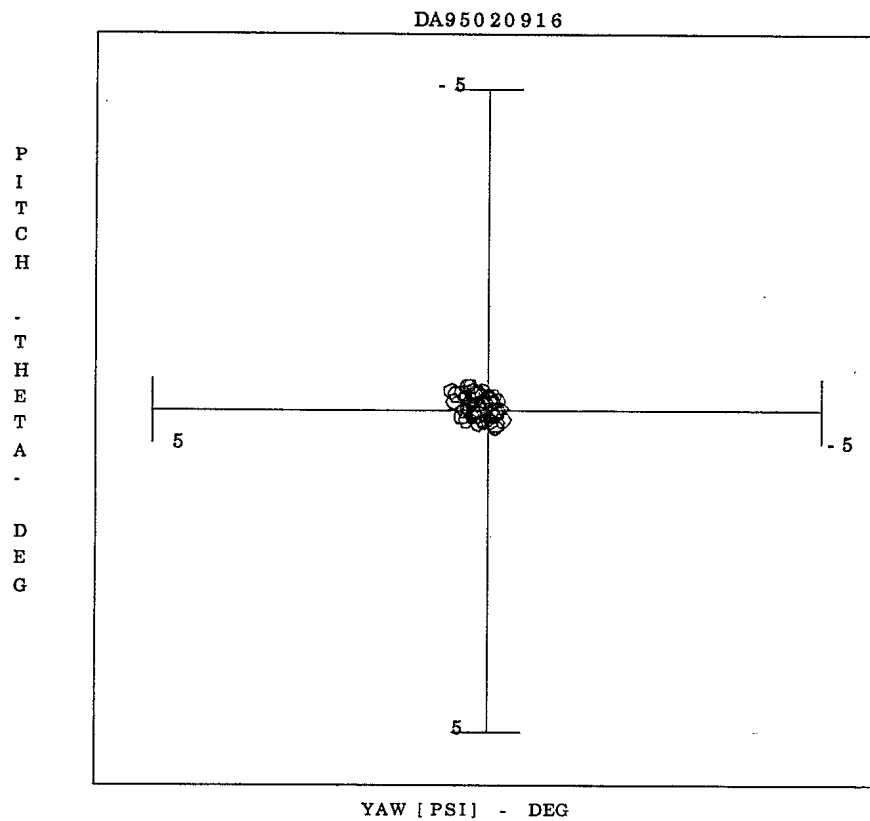


UNCLASSIFIED

DA95021317

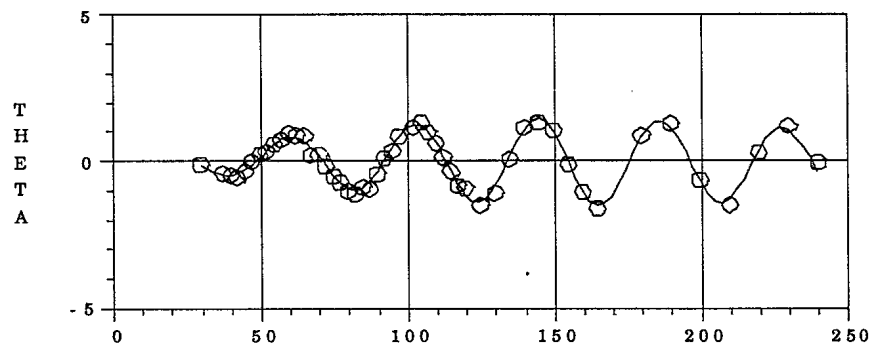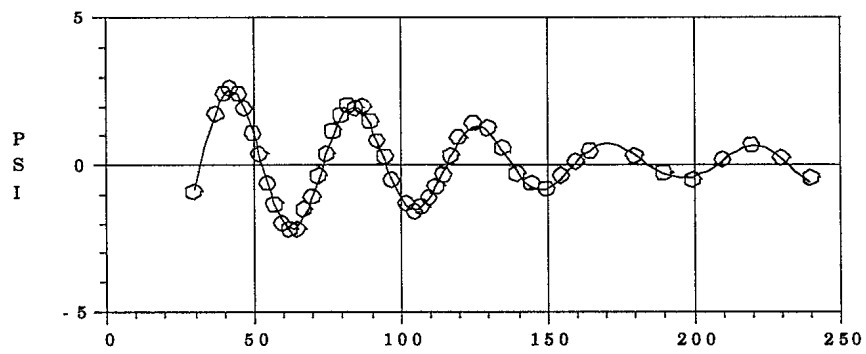
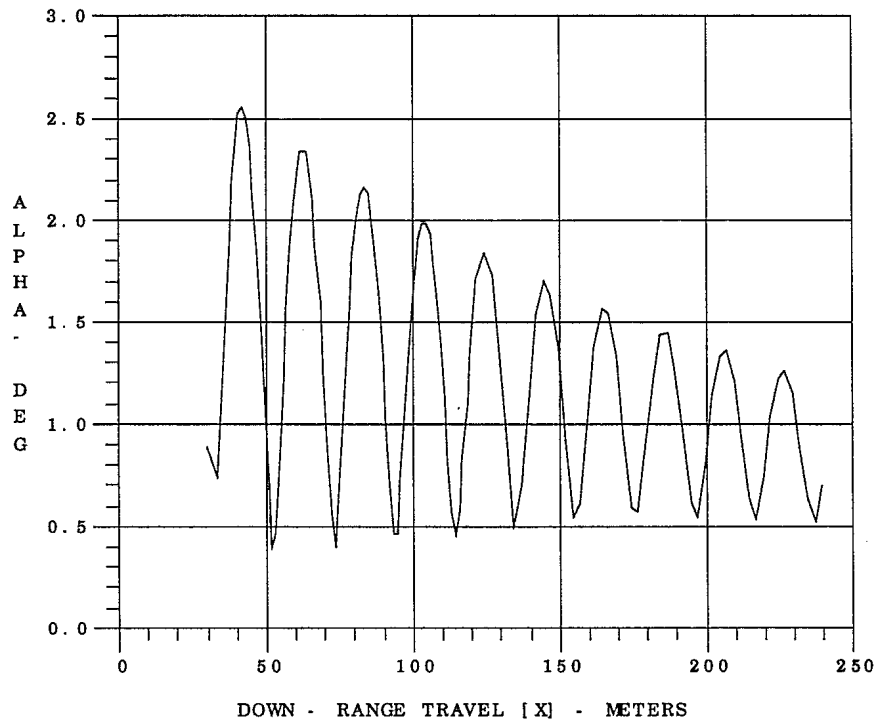


UNCLASSIFIED

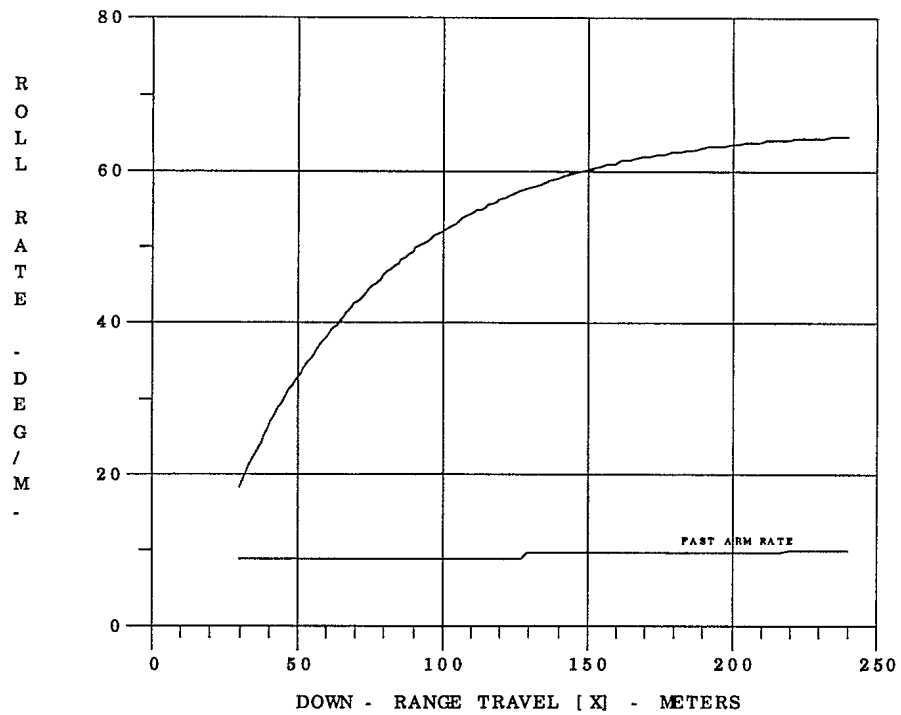
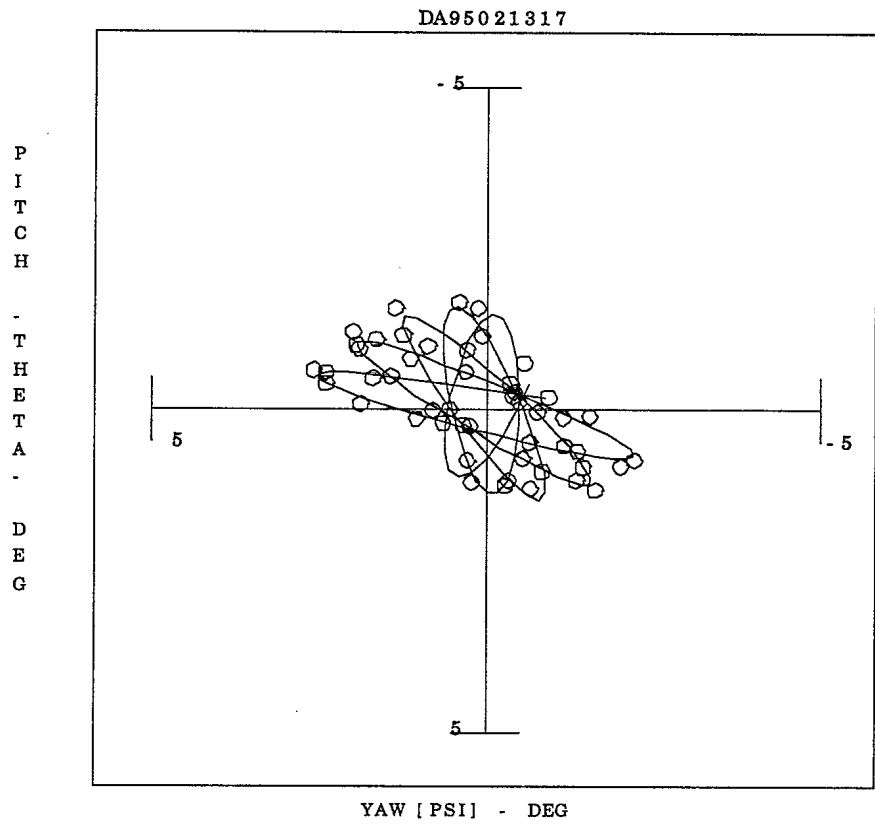


UNCLASSIFIED

DA95021318

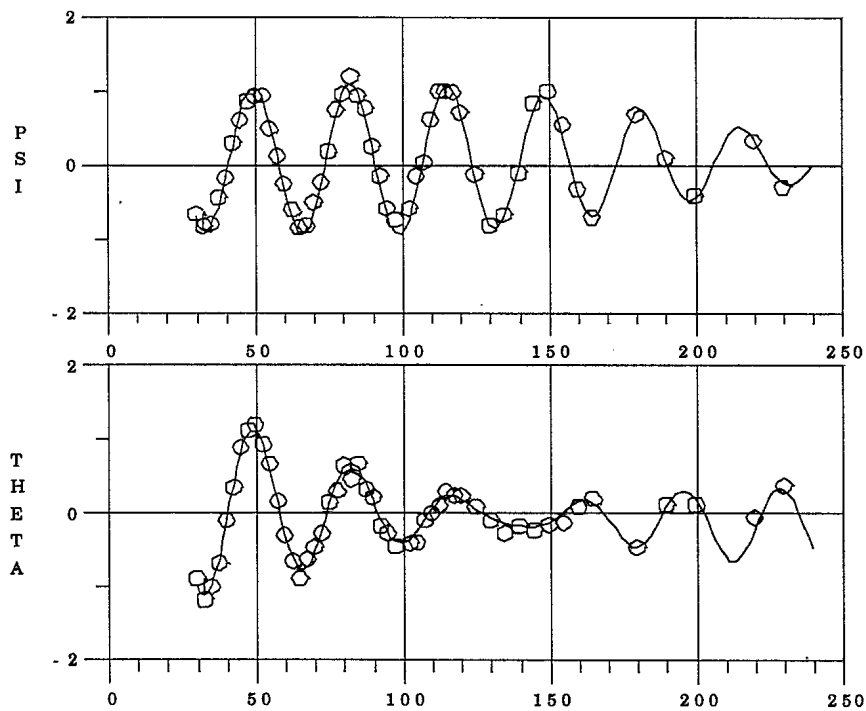
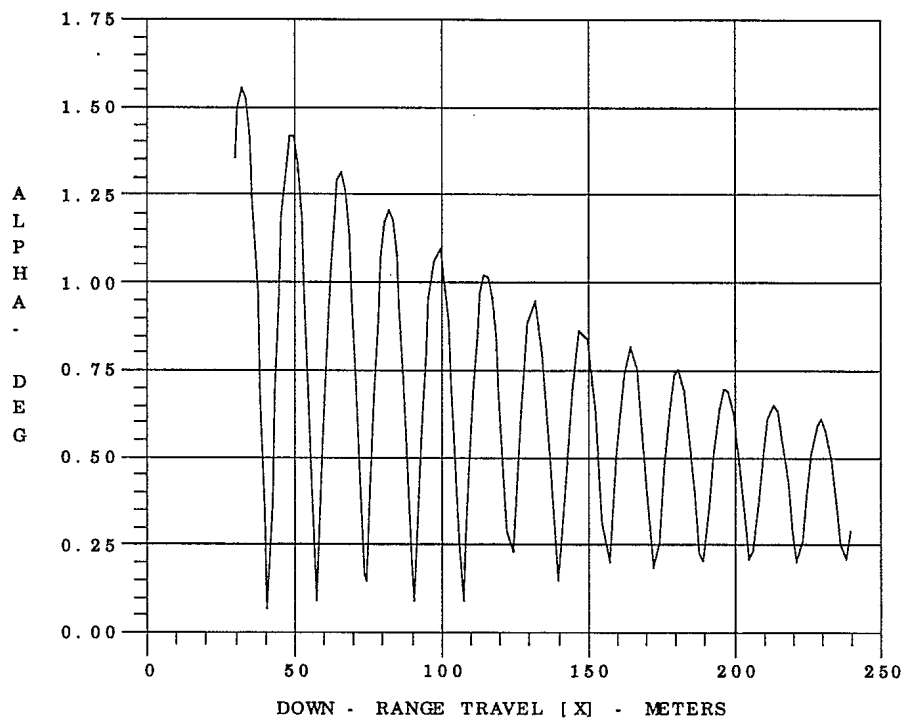


UNCLASSIFIED

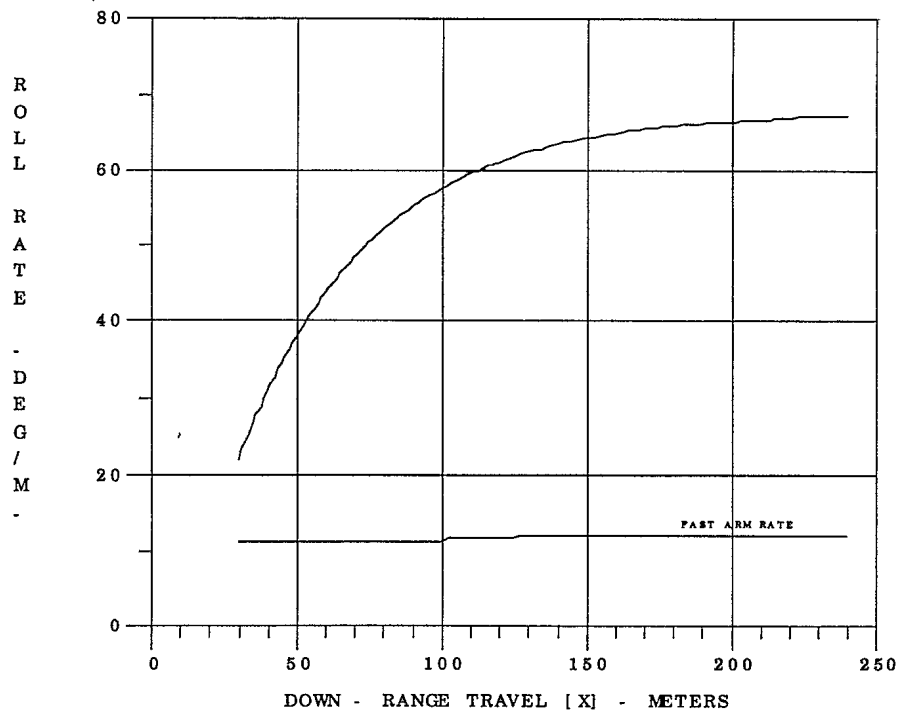
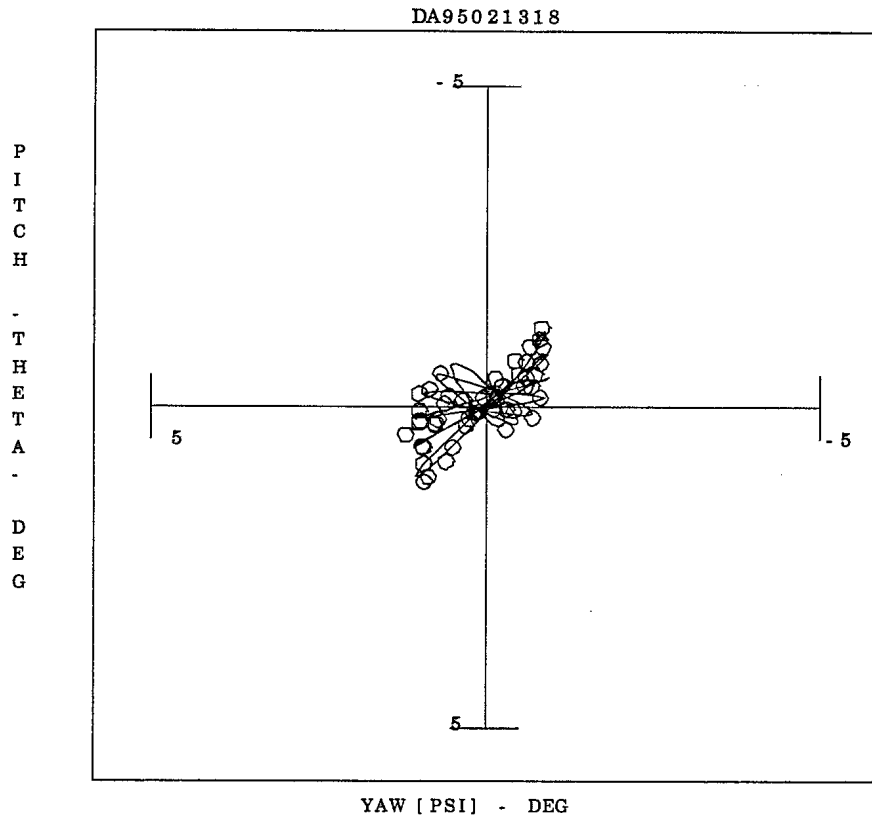


UNCLASSIFIED

DA95022219

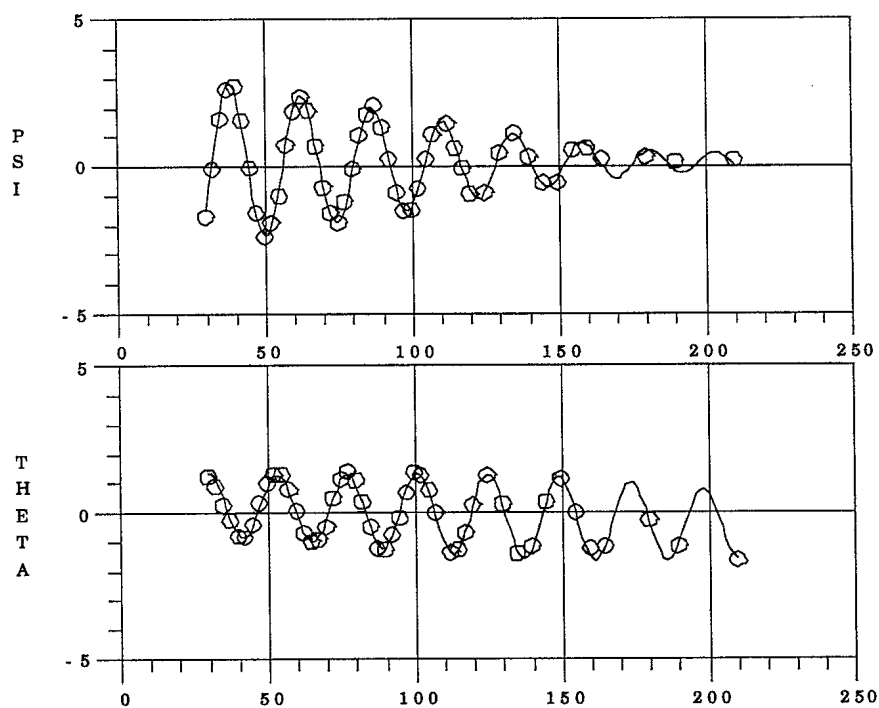
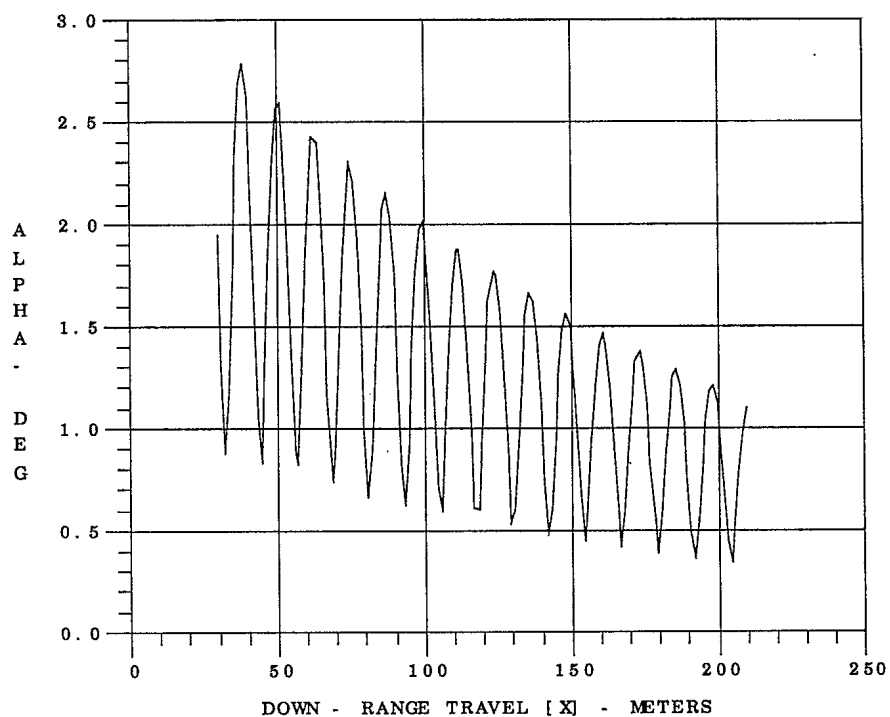


UNCLASSIFIED

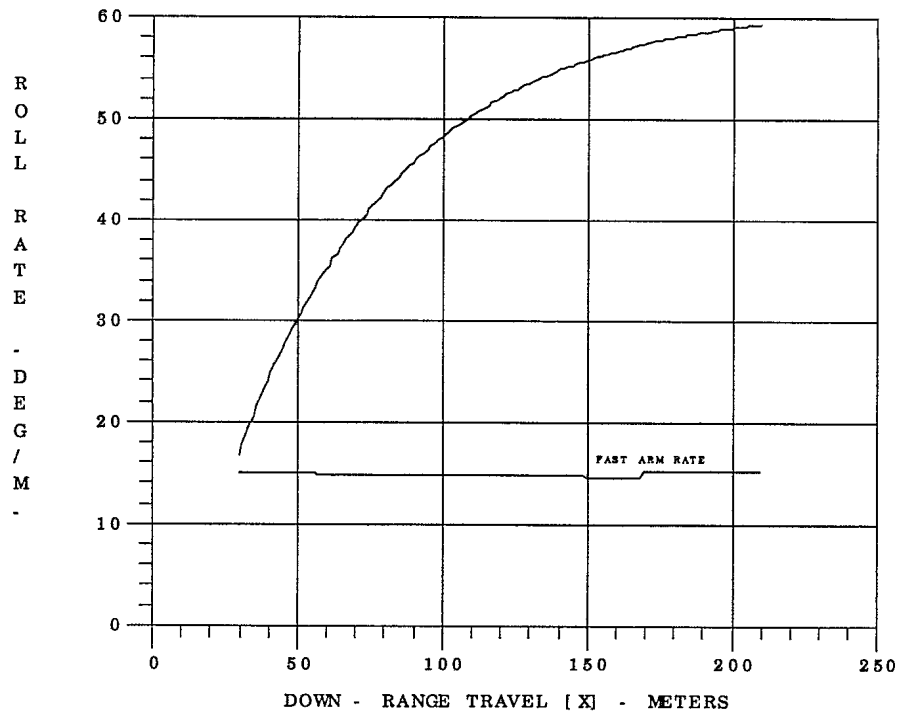
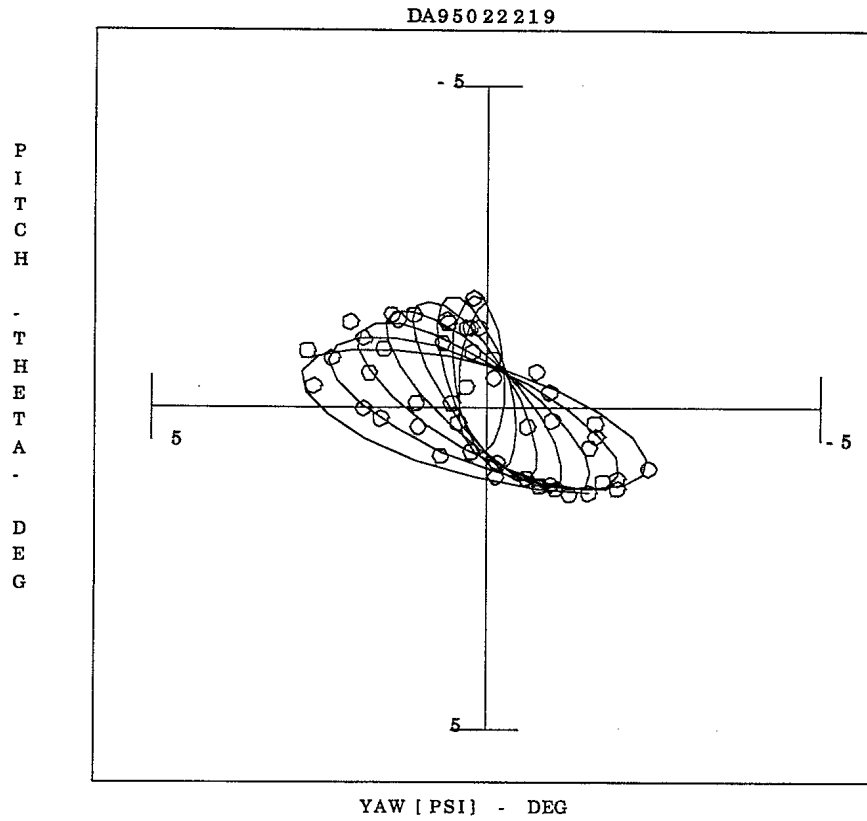


UNCLASSIFIED

DA95030121

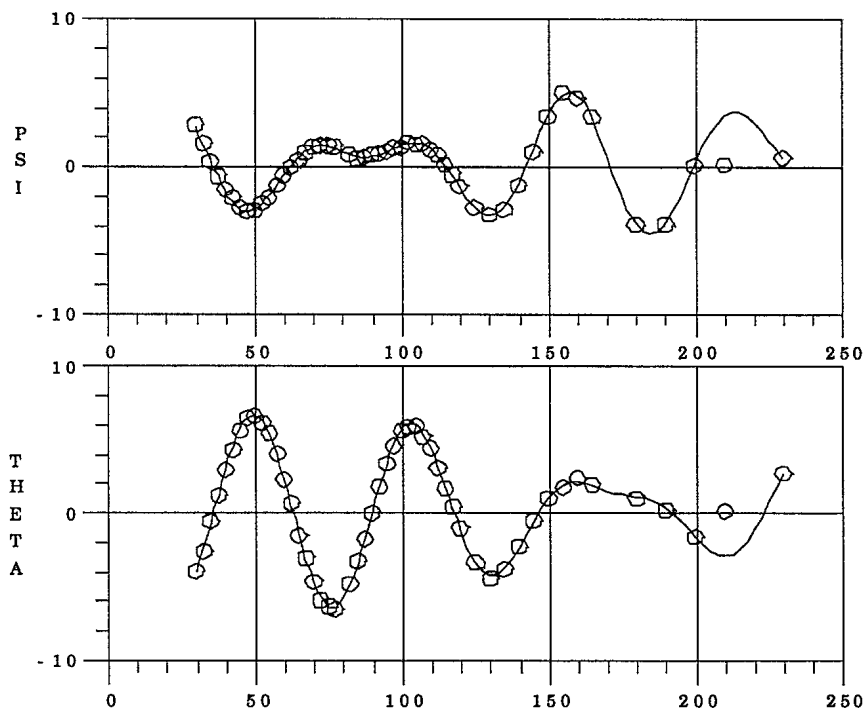
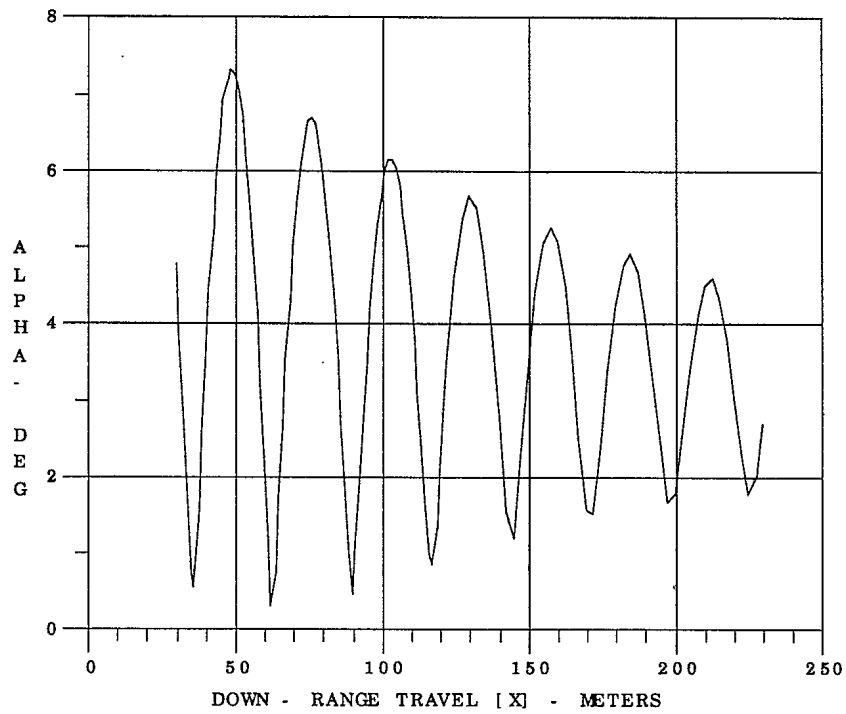


UNCLASSIFIED

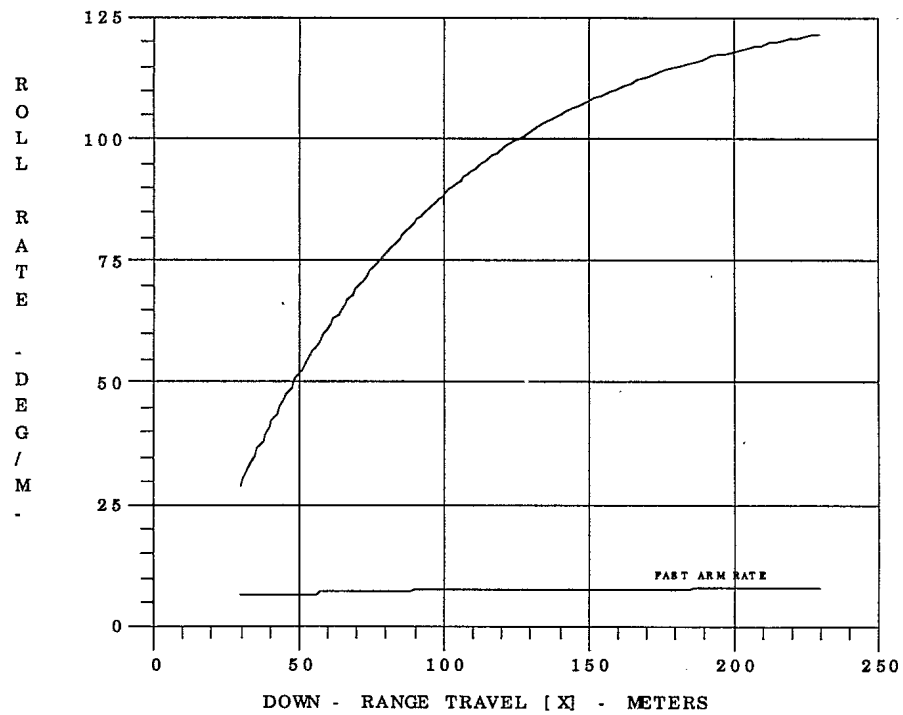
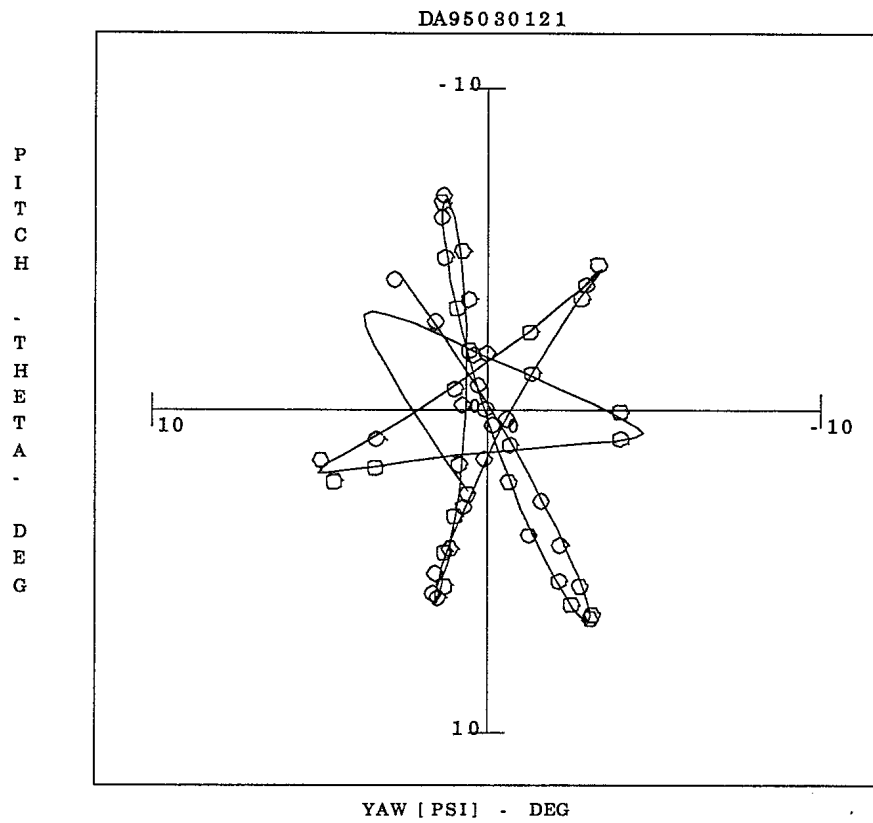


UNCLASSIFIED

DA95030622

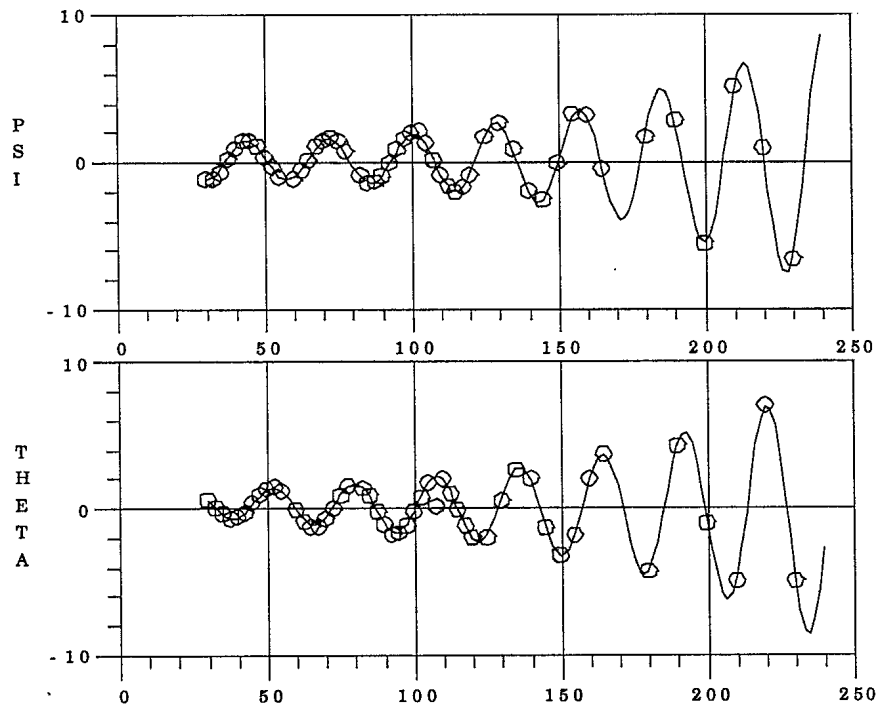
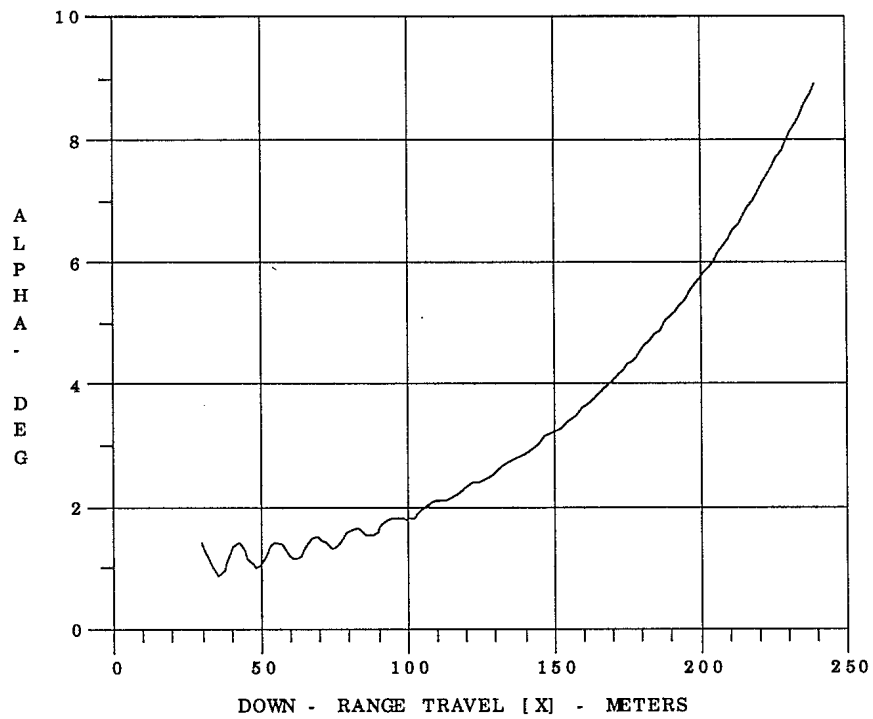


UNCLASSIFIED

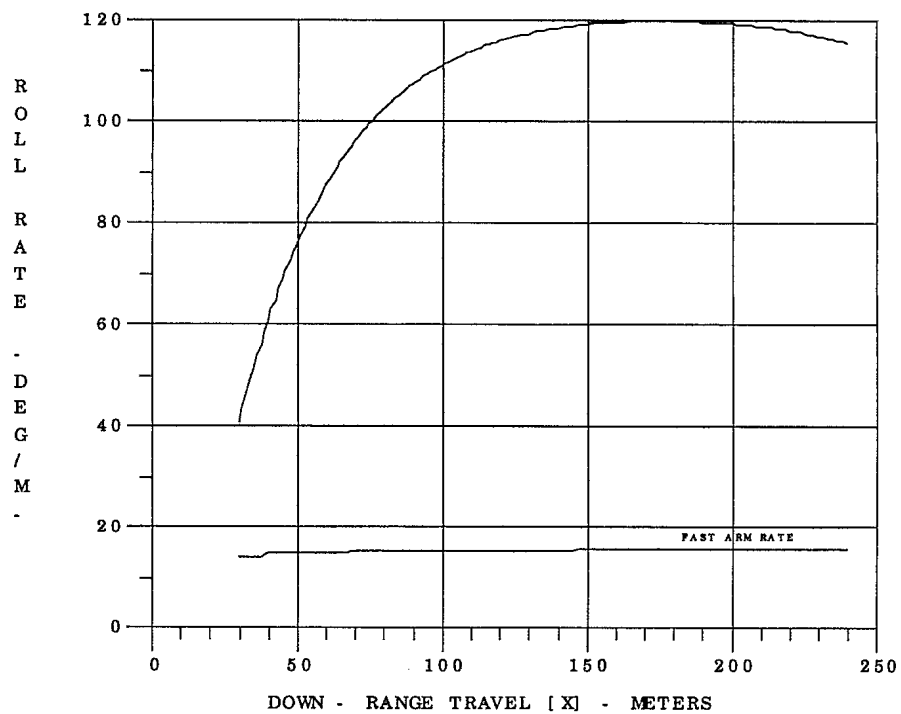
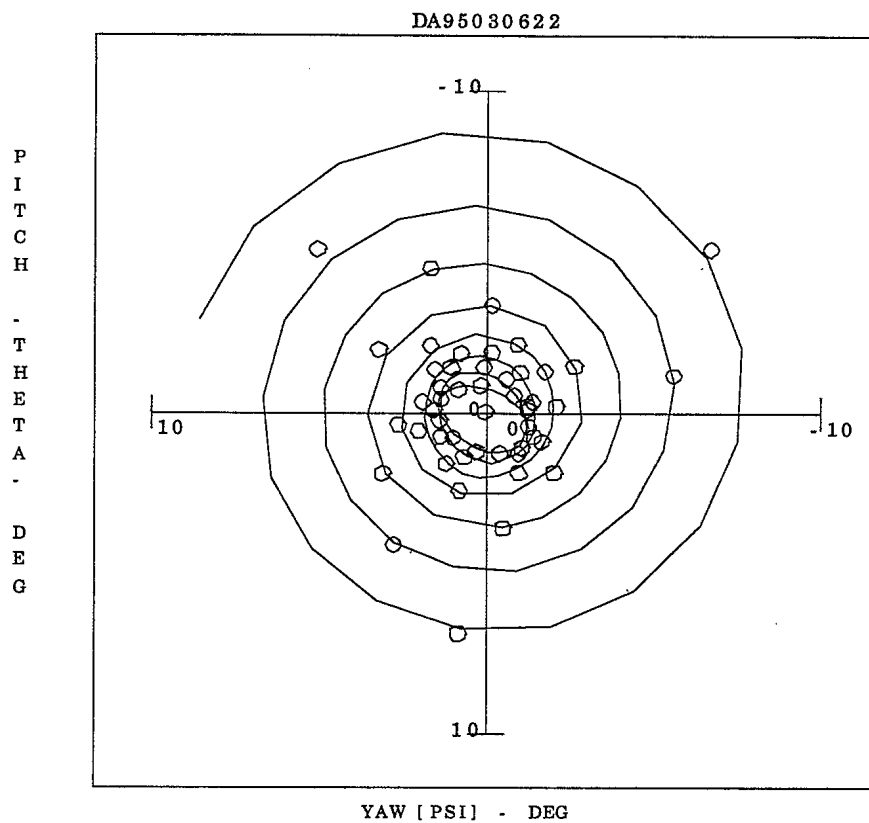


UNCLASSIFIED

DA95031523

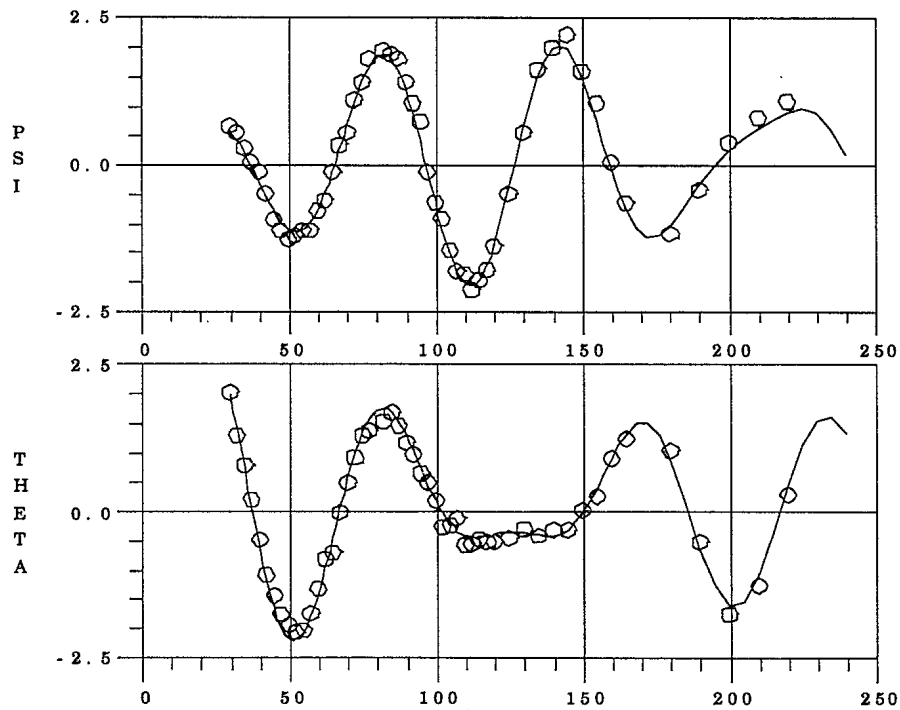
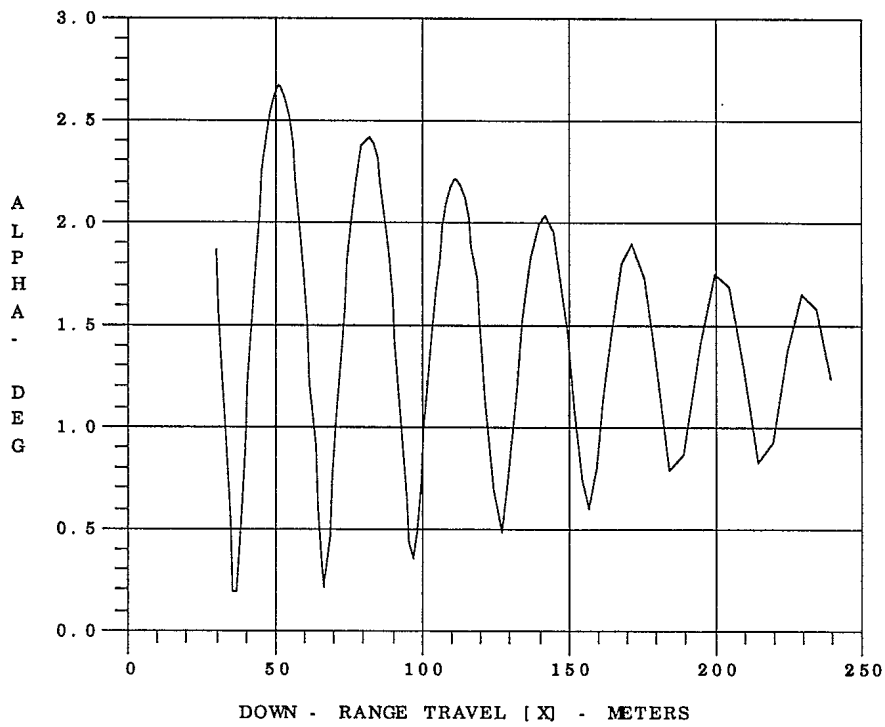


UNCLASSIFIED

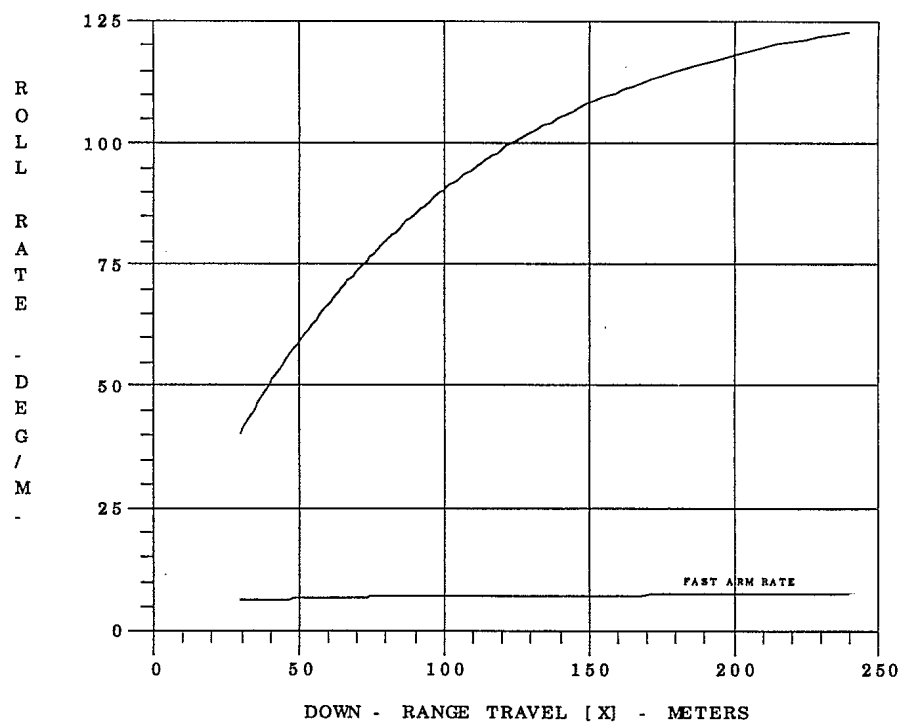
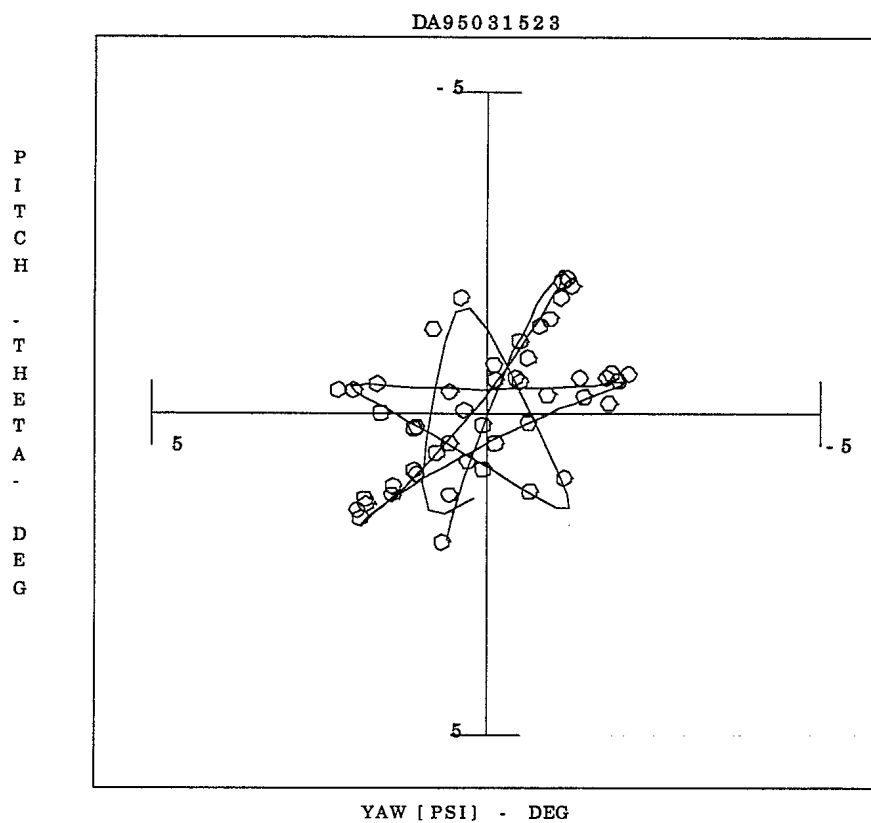


UNCLASSIFIED

DA95022726

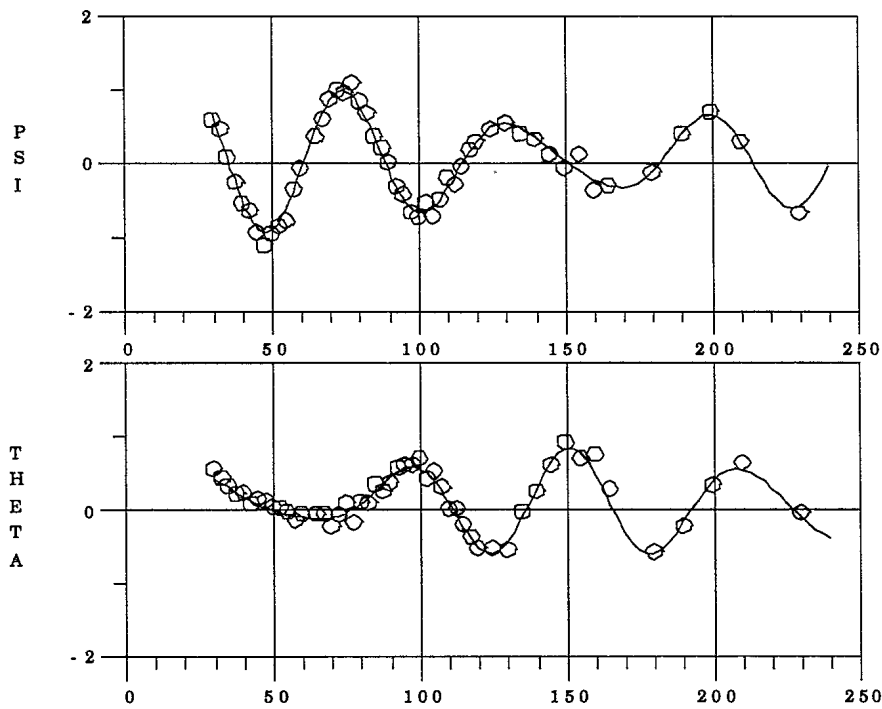
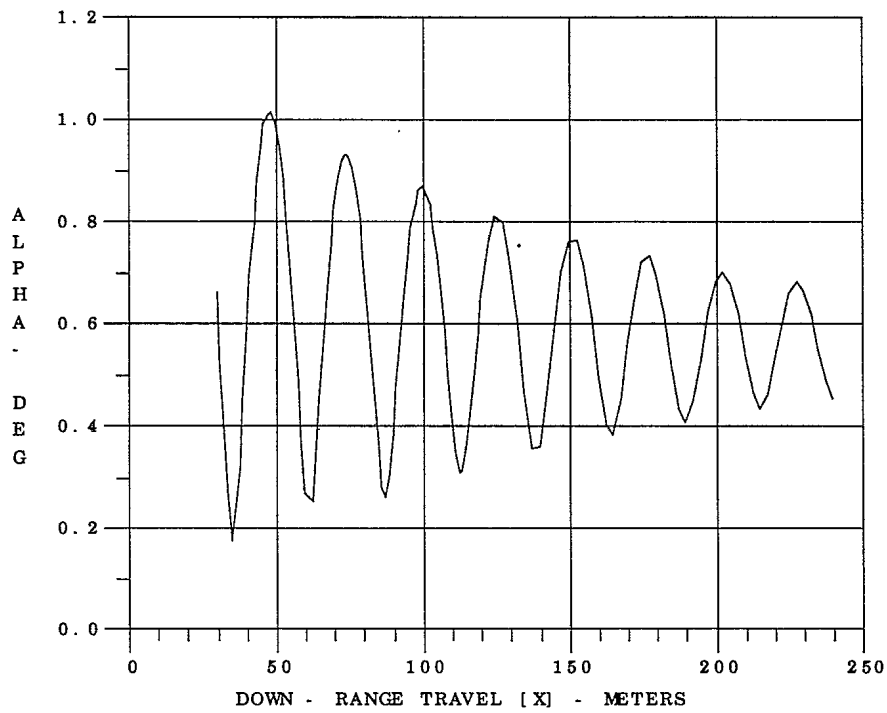


UNCLASSIFIED

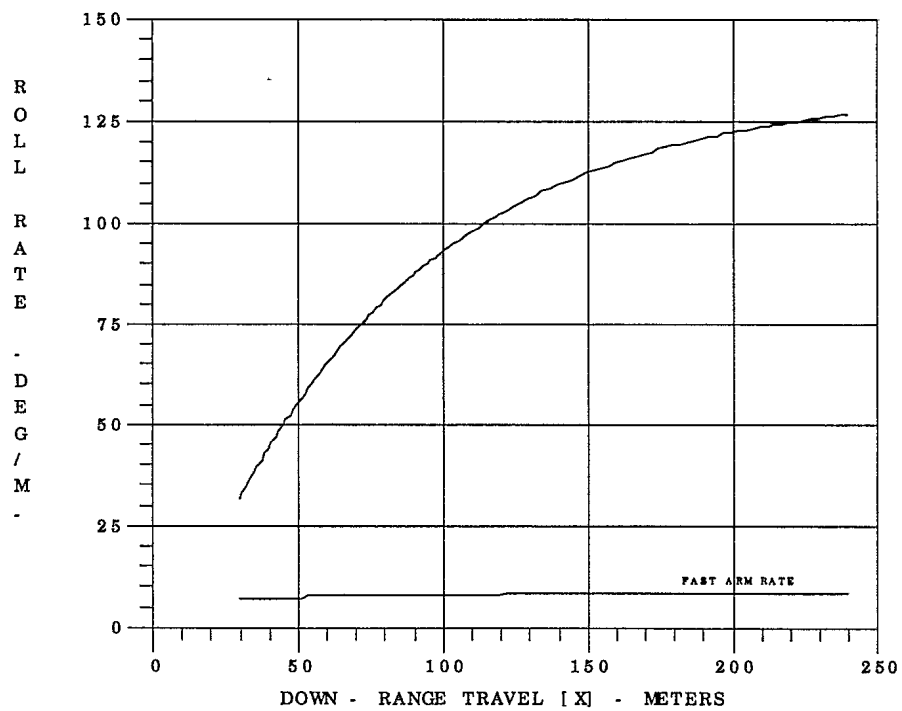
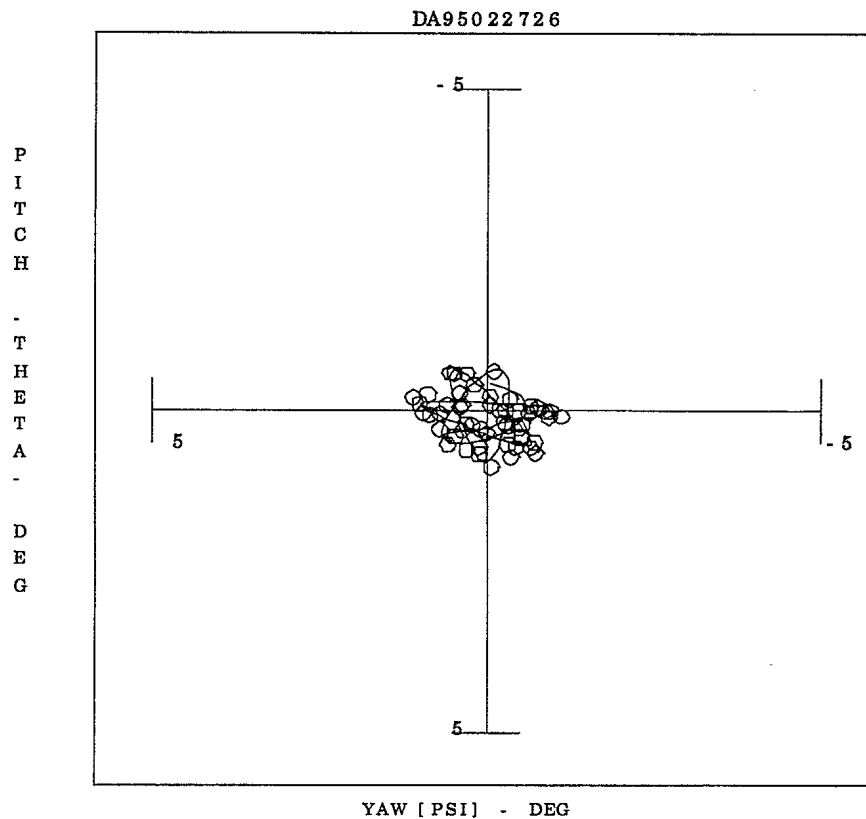


UNCLASSIFIED

DA95020927

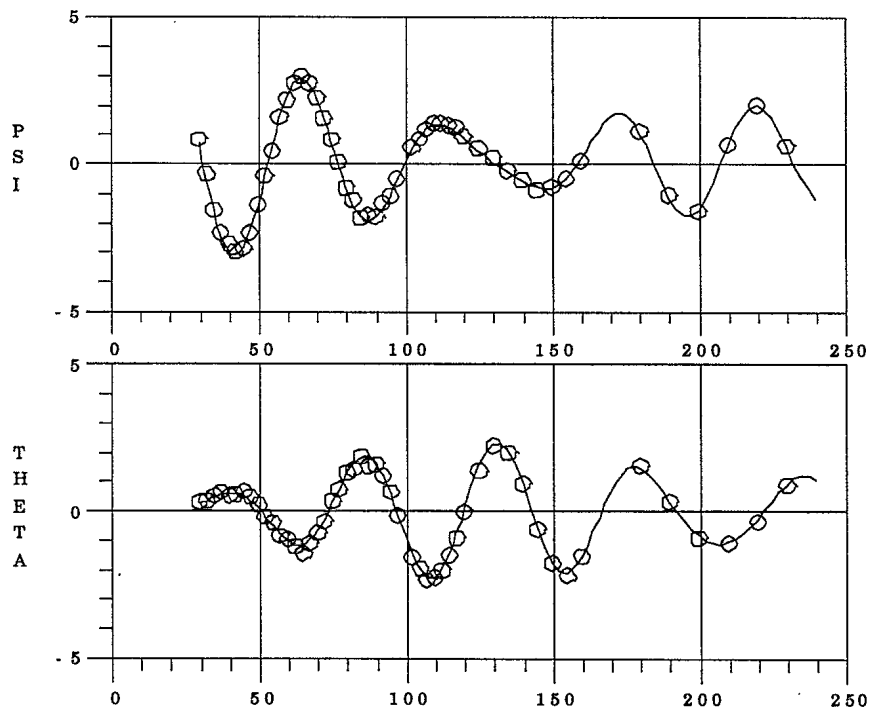
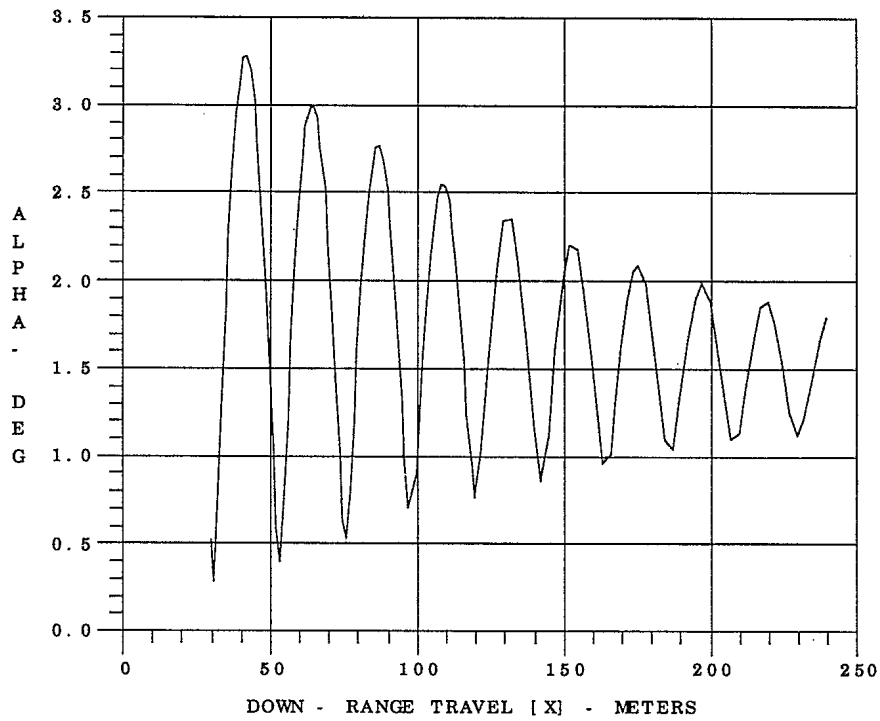


UNCLASSIFIED

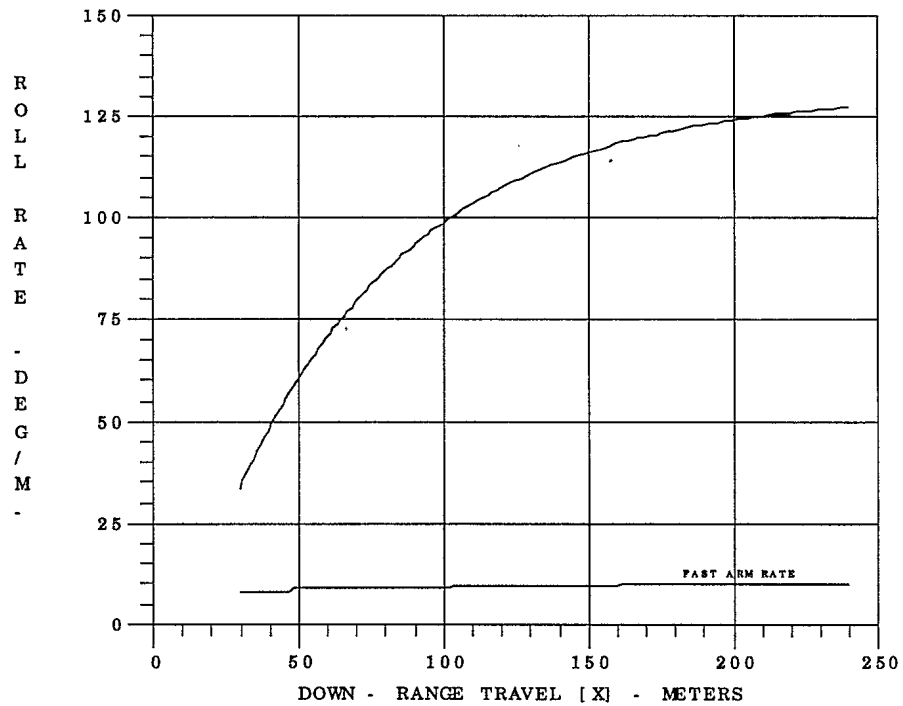
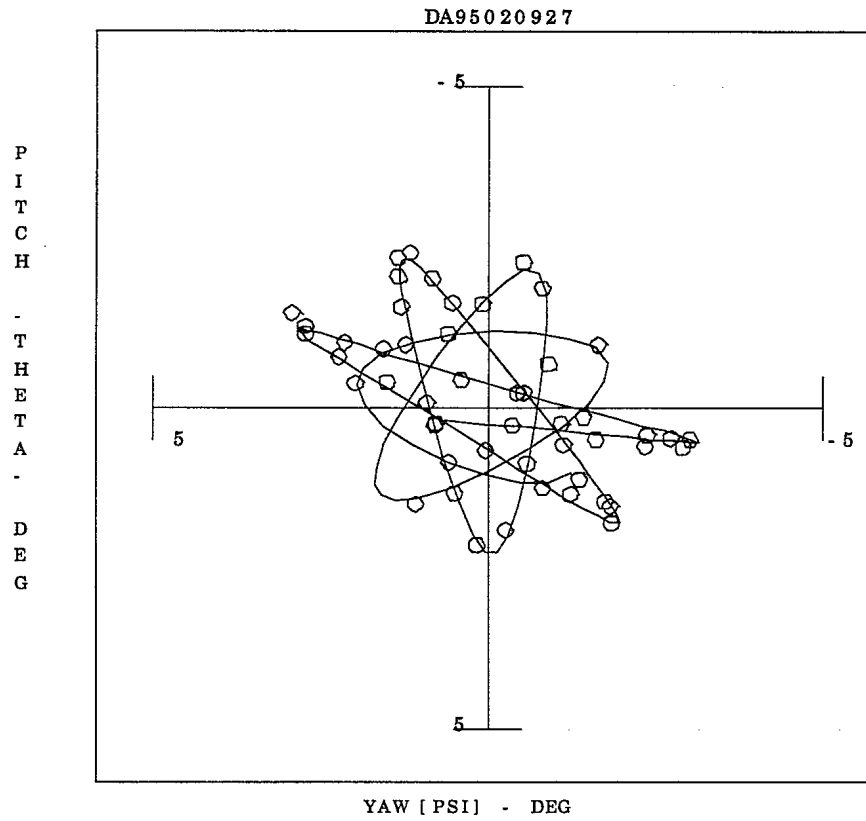


UNCLASSIFIED

DA95021328

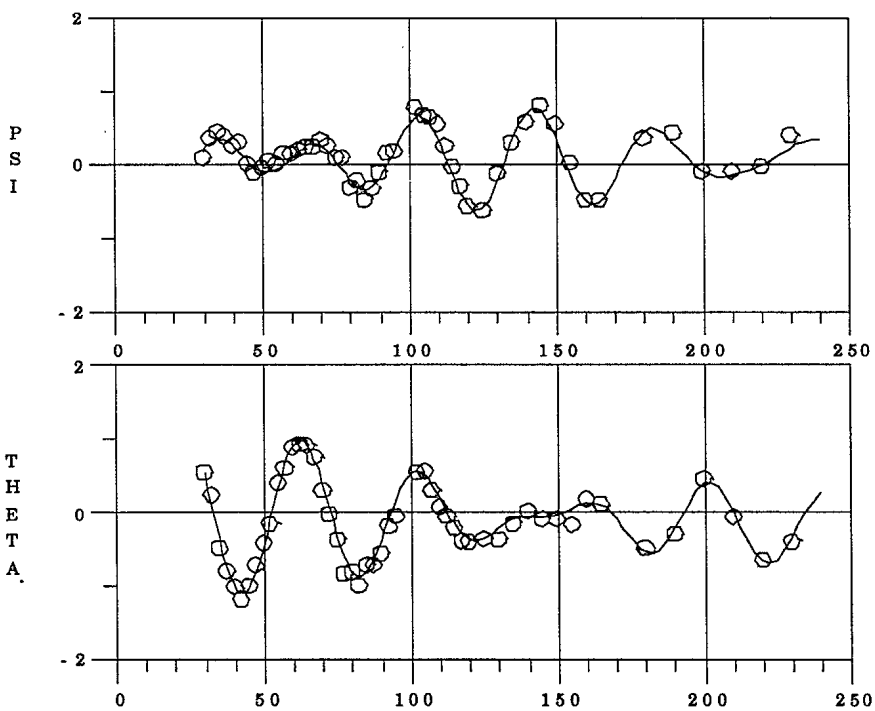
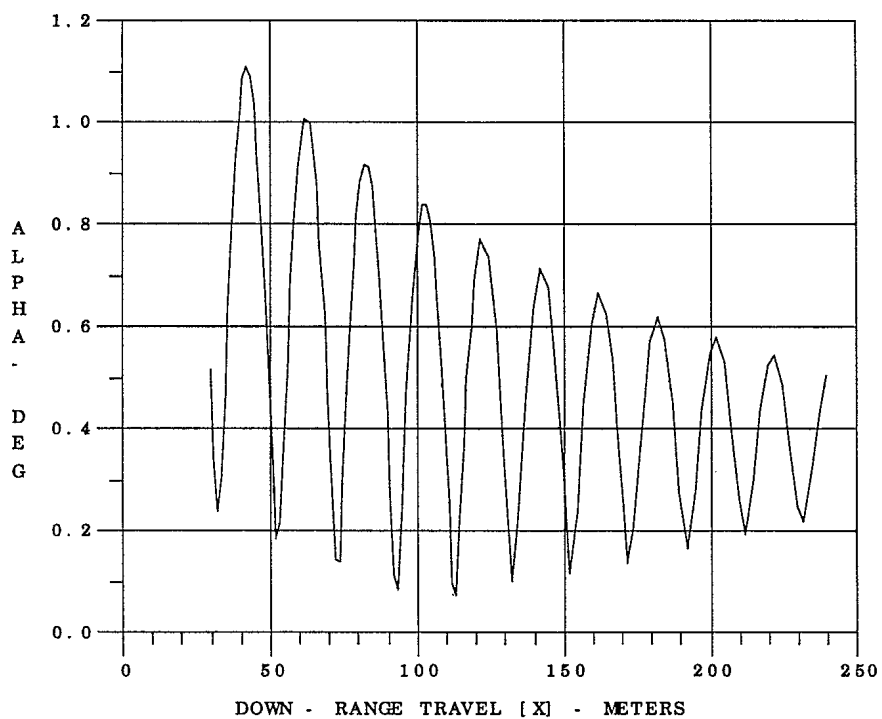


UNCLASSIFIED

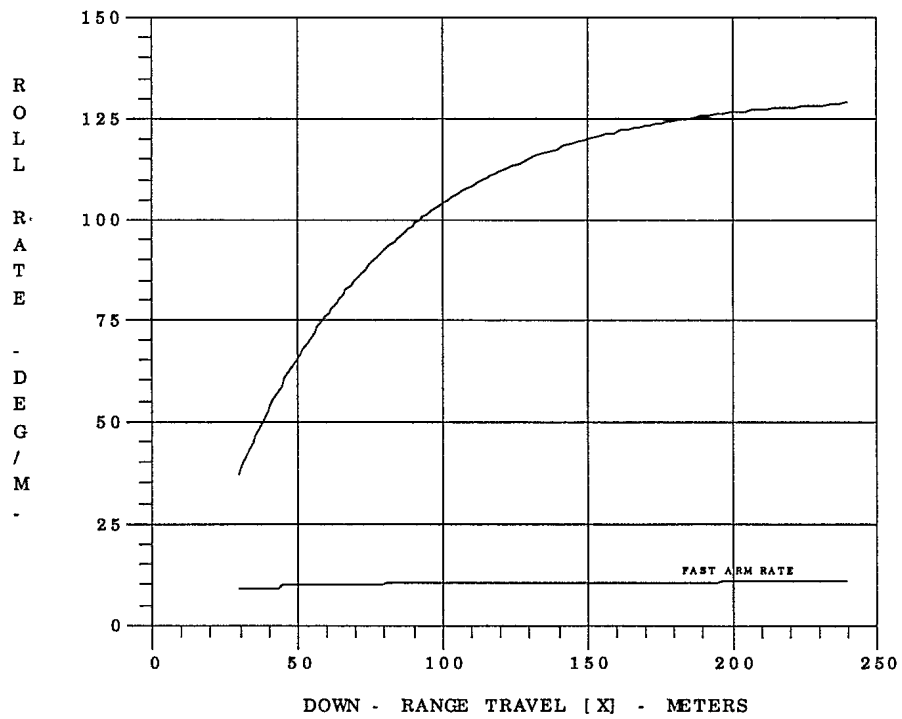
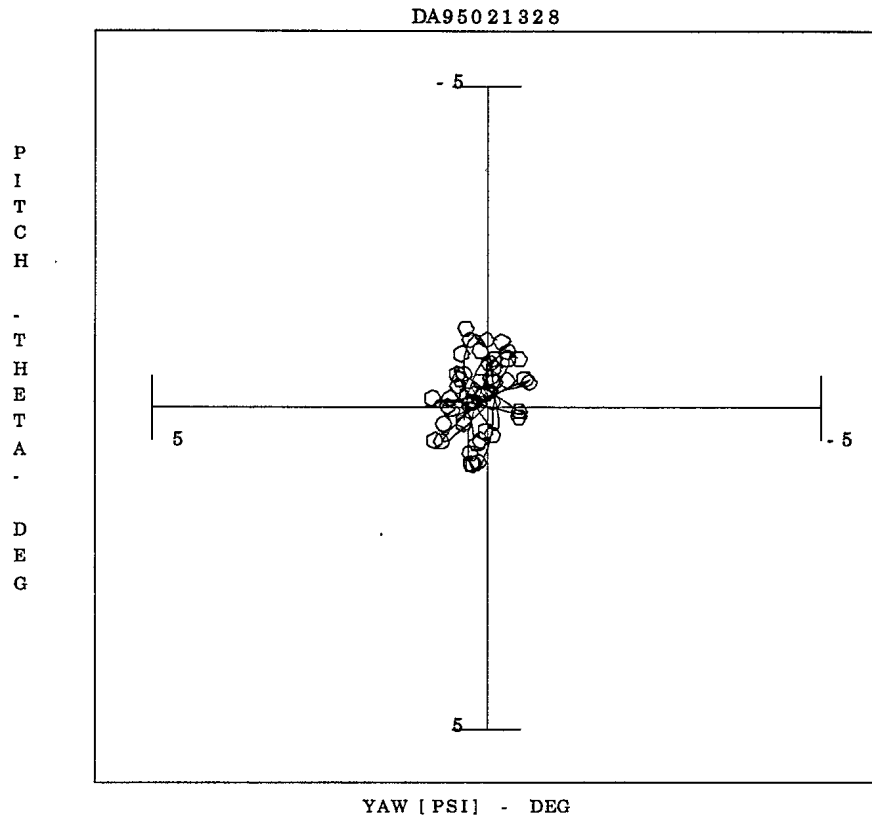


UNCLASSIFIED

DA95021529

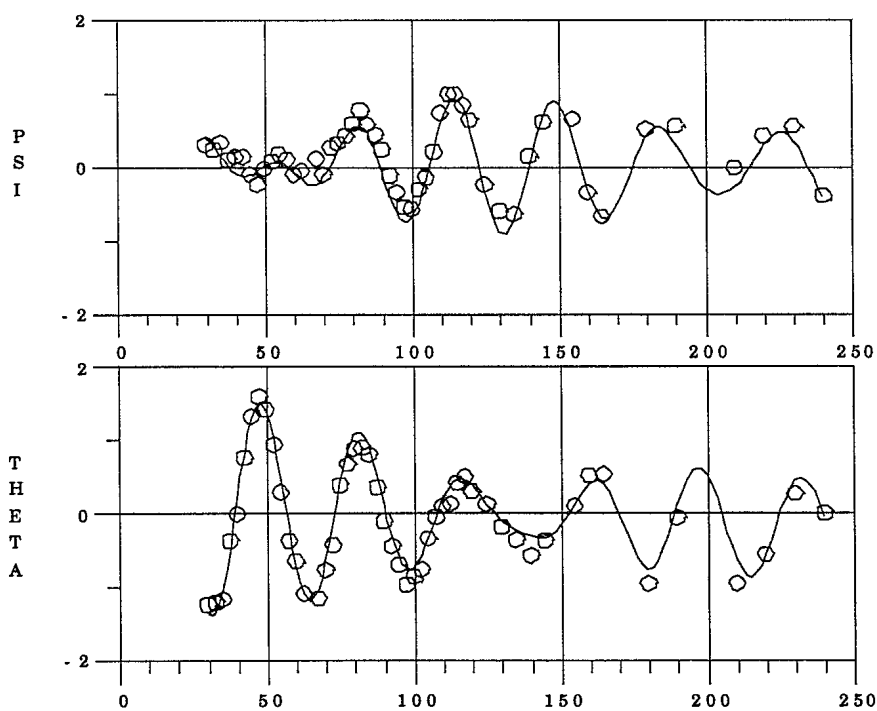
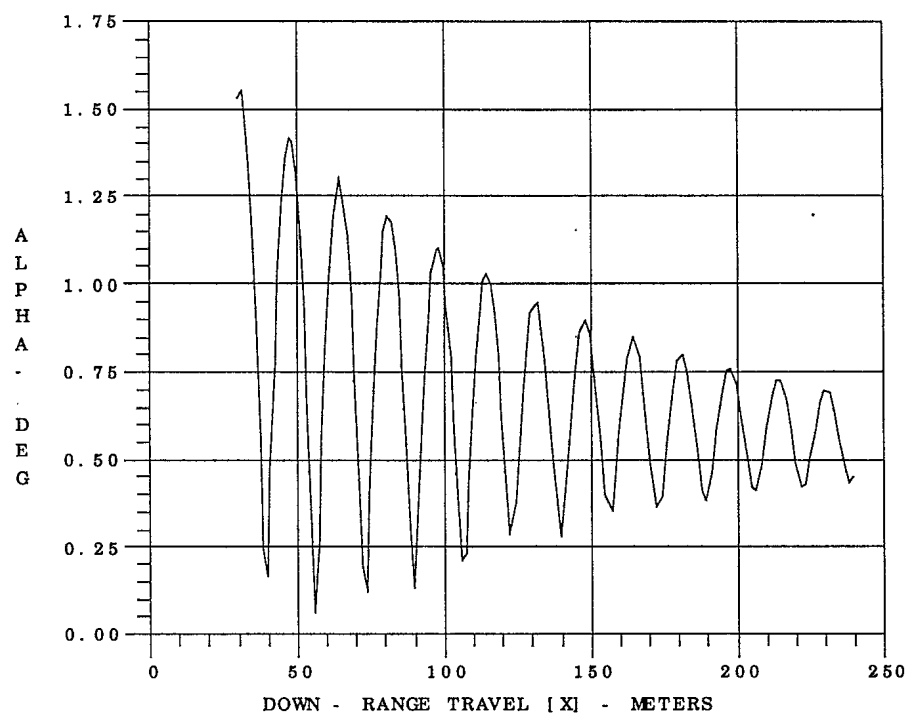


UNCLASSIFIED

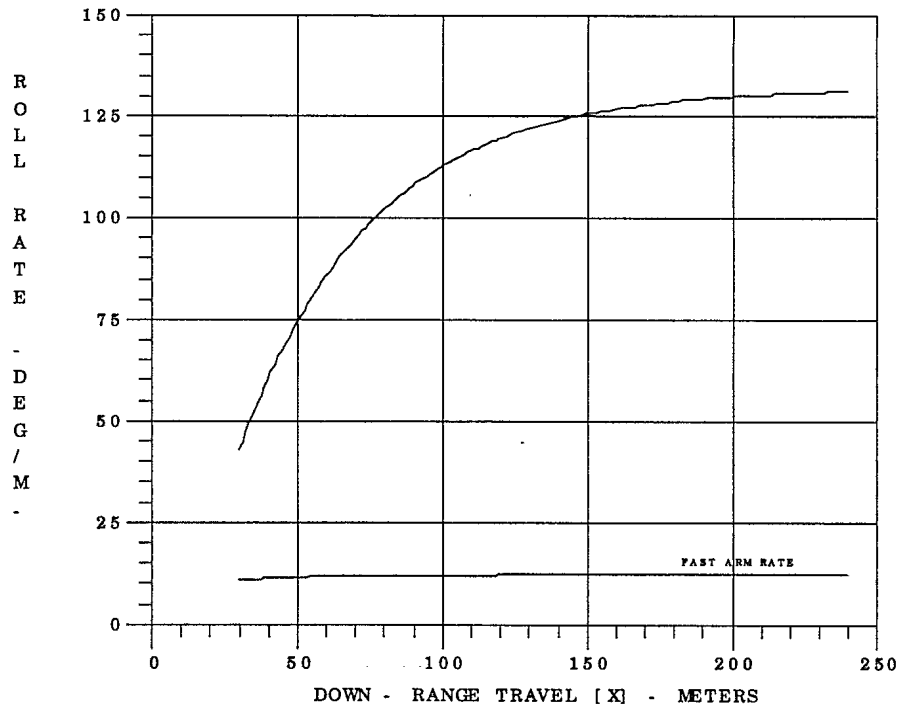
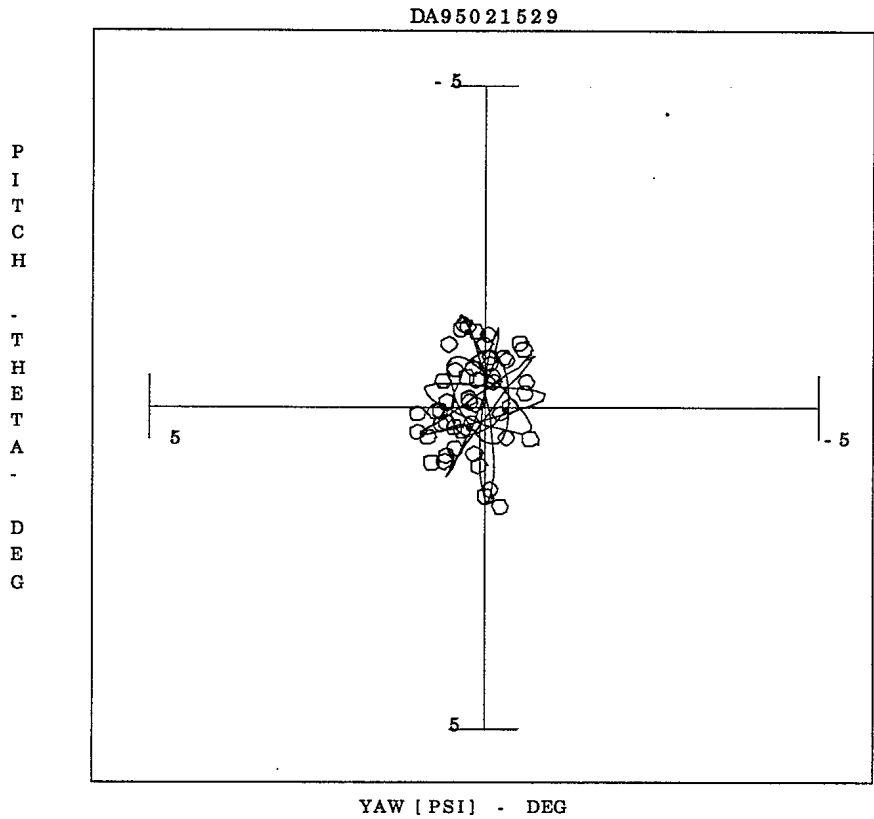


UNCLASSIFIED

DA95022230

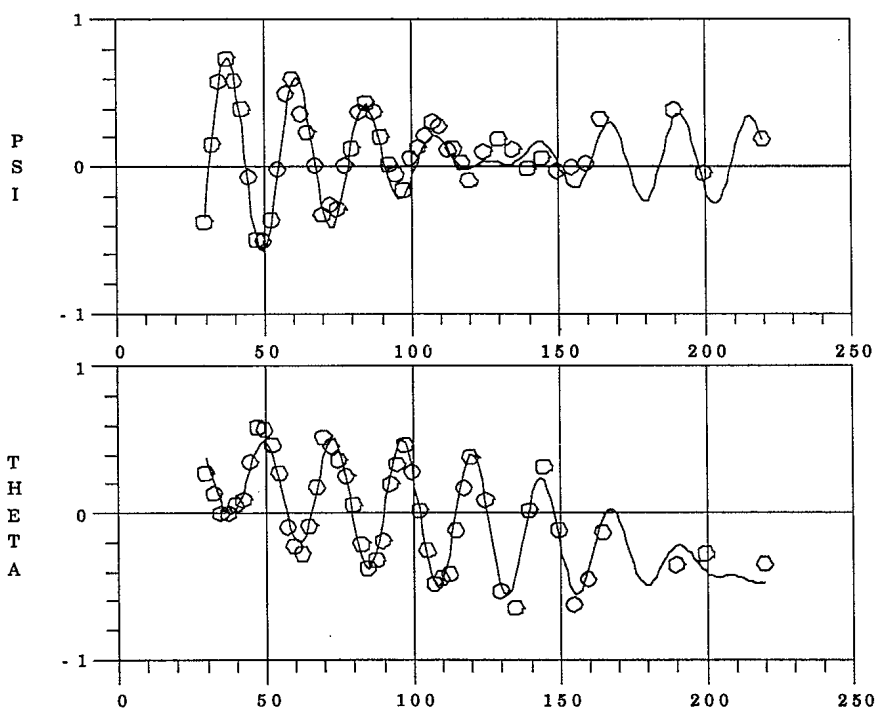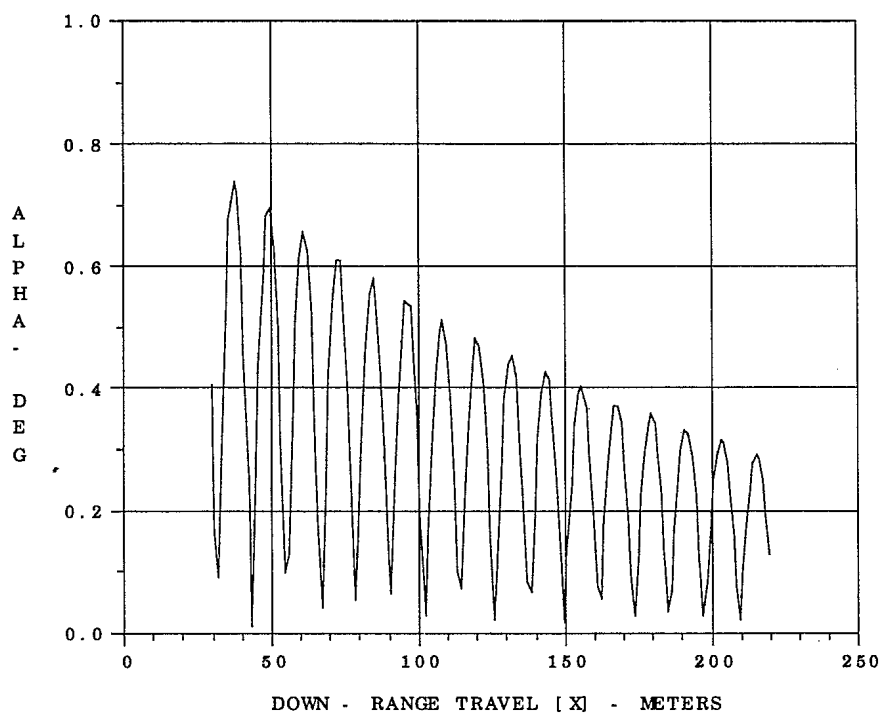

UNCLASSIFIED

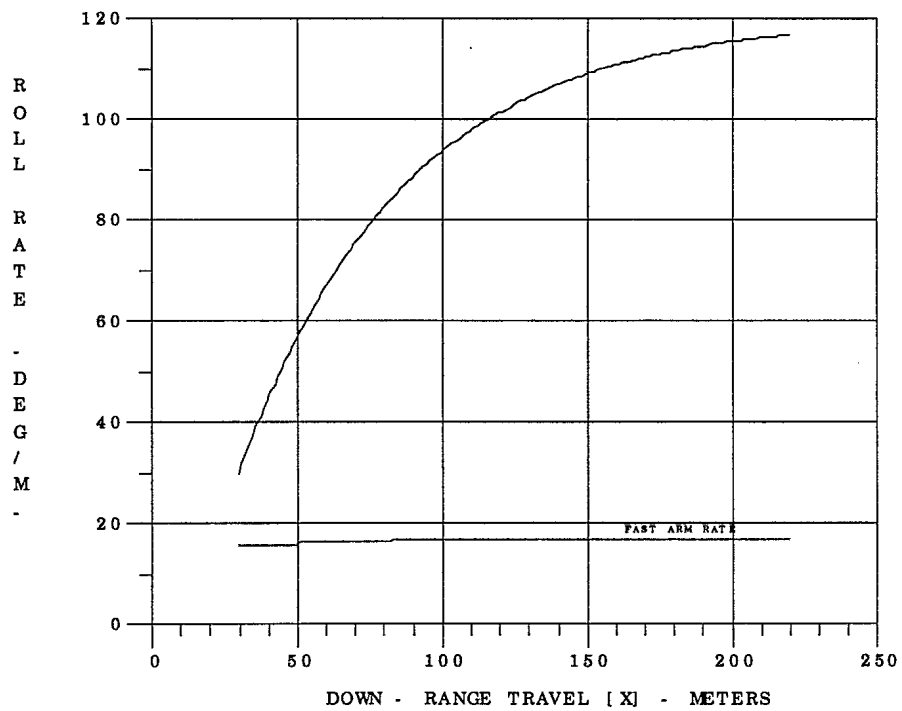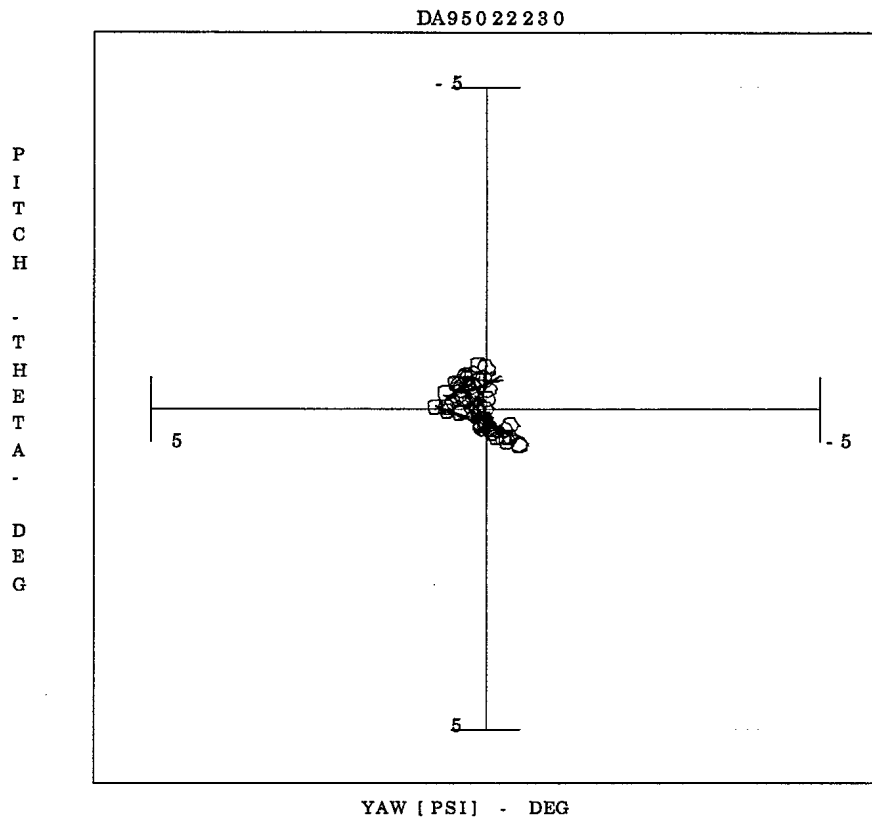

UNCLASSIFIED

INTERNAL DISTRIBUTION

DREV- TM- 9703

1 - Deputy Director General
6 - Document Library
1 - A. Dupuis (author)
1 - F. Lesage
1 - B. Girard
1 - E. Fournier
1 - A. Jeffrey
1 - G. Dumas
1 - P. Twardawa
1 - R. Delagrave
1 - G. Bérubé
1 - M. Lauzon
1 - C. Bradette
1 - L. Audet
1 - C. Julien
1 - Maj. Côté

UNCLASSIFIED

EXTERNAL DISTRIBUTION

DREV- TM - 9703

- 2 - DRDIM
- 1 - DRDB
- 1 - DSAL
- 1 - DLR
- 1 - DAR
- 1 - DARFT
- 1 - DNR
- 1 - DSAA
- 1 - DSAM
- 1 - DAEPM (FT)
- 1 - DTA
- 1 - DAMM
- 1 - DAES
- 1 - DRES
- 1 - PETE
- 1 - PMO LAV

- 1 - Mr. W. Hathaway (author)
Arrow Tech Associates, Inc.
1233 Shelbourne Road
S. Burlington, VT 050403
USA

- 1 - Dr. B. J. Walker
AMSMI-RD-SS-AT
Commander
U. S. Army Missile Command
Redstone Arsenal, AL
35898-5252
USA

UNCLASSIFIED

- 1 - Mr. G. L. Winchenbach
Weapon Flight Mechanics Division
Wright Laboratory Armament Directorate
Eglin AFB, FLA 32542-5434 (USA)

- 1 - Dr. P. Plostins
SLCBR-LF-F
Army Research Laboratory
Aberdeen Proving Ground
Maryland 21005-5066
USA

- 3 - Dr. C. Berner
Dr. M. Giraud
Dr. V. Fleck
Institut Franco-Allemand de Recherches
5, rue du Général Cassagnou
B.P. 34
68301 - Saint-Louis (France)

- 1 - Mr. A. Bernier
Les Technologies Industrielles SNC Inc.
Usine Le Gardeur
5, montée des Arsenaux
Le Gardeur, Québec
J5Z 2P4

- 2 - Bristol Aerospace Limited
P. O. Box 874
Winnipeg, Manitoba
R3C 2S4

UNCLASSIFIED

1 - Dr. L. Chan
High Speed Aerodynamic Laboratory
Institute for Aerospace Research
National Research Council Canada
Montreal Road
Ottawa, Ontario
K1A 0R6

1 - Mr. M. Normand
MAETEC
6161 Boulv. Fossambault
Fossambault, QC
G0A 3M0

1 - Dr. J. Edwards
WX7 Division, Weapons Sector
DRA - Fort Halstead
Sevenoaks
Kent TN14 7BP
England

1 - Mr. A. J. Sadler
Weapons Aerodynamics Division
DRA
Bedford MK41 6AE
England

1 - Dr. A. R. Rye
DSTO
Surveillance Research Laboratory
P. O. Box 1500
Salisbury, SA 5108
Australia

DOCUMENT CONTROL DATA

1. ORIGINATOR (name and address) Defence Research Establishment Valcartier 2459 Blvd. Pie XI Nord Val-Bélair QC G3J 1X5		2. SECURITY CLASSIFICATION (Including special warning terms if applicable) UNCLASSIFIED													
3. TITLE (Its classification should be indicated by the appropriate abbreviation (S,C,R or U)) AEROBALLISTIC RANGE TESTS OF THE BASIC FINNER REFERENCE PROJECTILE AT SUPERSONIC VELOCITIES															
4. AUTHORS (Last name, first name, middle initial. If military, show rank, e.g. Doe, Maj. John E.) DUPUIS, A.D., HATHAWAY, W.															
5. DATE OF PUBLICATION (month and year)		6a. NO. OF PAGES	6b. NO. OF REFERENCES 11												
7. DESCRIPTIVE NOTES (the category of the document, e.g. technical report, technical note or memorandum. Give the inclusive dates when a specific reporting period is covered.) TM															
8. SPONSORING ACTIVITY (name and address) DREV															
9a. PROJECT OR GRANT NO. (Please specify whether project or grant) 2EA14		9b. CONTRACT NO.													
10a. ORIGINATOR'S DOCUMENT NUMBER		10b. OTHER DOCUMENT NOS. N/A													
11. DOCUMENT AVAILABILITY (any limitations on further dissemination of the document, other than those imposed by security classification) <table style="width: 100%; border: none;"><tr><td style="width: 20px;">☒</td><td>Unlimited distribution</td></tr><tr><td>☐</td><td>Contractors in approved countries (specify)</td></tr><tr><td>☐</td><td>Canadian contractors (with need-to-know)</td></tr><tr><td>☐</td><td>Government (with need-to-know)</td></tr><tr><td>☐</td><td>Defence departments</td></tr><tr><td>☐</td><td>Other (please specify) :</td></tr></table>				☒	Unlimited distribution	☐	Contractors in approved countries (specify)	☐	Canadian contractors (with need-to-know)	☐	Government (with need-to-know)	☐	Defence departments	☐	Other (please specify) :
☒	Unlimited distribution														
☐	Contractors in approved countries (specify)														
☐	Canadian contractors (with need-to-know)														
☐	Government (with need-to-know)														
☐	Defence departments														
☐	Other (please specify) :														
12. DOCUMENT ANNOUNCEMENT (any limitation to the bibliographic announcement of this document. This will normally correspond to the Document Availability (11). However, where further distribution (beyond the audience specified in 11) is possible, a wider announcement audience may be selected.) UNLIMITED ANNOUNCEMENT															

13. ABSTRACT (a brief and factual summary of the document. It may also appear elsewhere in the body of the document itself. It is highly desirable that the abstract of classified documents be unclassified. Each paragraph of the abstract shall begin with an indication of the security classification of the information in the paragraph (unless the document itself is unclassified) represented as (S), (C), (R), or (U). It is not necessary to include here abstracts in both official languages unless the text is bilingual).

Free-flight tests were conducted in the Defence Research Establishment Valcartier (DREV) Aeroballistic Range on the Basic Finner reference projectile from transonic to high supersonic velocities. The projectile consisted of four rectangular fins on a cone-cylinder body with a total length-to-diameter ratio of 10.0. Fin cants of 0°, 2° and 4° were imposed. The Mach number range tested was between 1.0 and 4.5. All the main aerodynamic coefficients and stability derivatives were well determined using linear theory, six-degree-of-freedom single- and multiple-fit reductions techniques. The results were also compared with results from other aeroballistic ranges. The fins on the models fired at Mach 4.5 ablated during flight. A dynamic stability analysis showed a Magnus instability at certain Mach numbers and spin rates.

14. KEYWORDS, DESCRIPTORS or IDENTIFIERS (technically meaningful terms or short phrases that characterize a document and could be helpful in cataloguing the document. They should be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location may also be included. If possible keywords should be selected from a published thesaurus. e.g. Thesaurus of Engineering and Scientific Terms (TEST) and that thesaurus-identified. If it is not possible to select indexing terms which are Unclassified, the classification of each could be indicated as with the title.)

FREE-FLIGHT TESTS
FIN STABILIZED PROJECTILES
BASIC FINNER
AERODYNAMIC COEFFICIENTS
SUPERSONIC
TRANSONIC
FLIGHT DYNAMICS
MAGNUS INSTABILITY
AEROBALLISTIC RANGE TESTS
SIX DEGREE OF FREEDOM
MAXIMUM LIKELIHOOD
SCHLIEREN
SHADOWGRAPH
STABILITY ANALYSIS
DYNAMIC INSTABILITY
6 DEGREES OF FREEDOM
LINEAR THEORY
ABLATION

UNCLASSIFIED

Requests for documents
should be sent to:

**DIRECTORATE RESEARCH AND DEVELOPMENT
INFORMATION MANAGEMENT**

Dept. of National Defence
Ottawa, Ontario
K1A 0K2

Tel.: (613) 995-2971
Fax: (613) 996-0392

505377

Toute demande de document
doit être adressée à:

**DIRECTEUR-GESTION DE L'INFORMATION DE RECHERCHE
ET DE DÉVELOPPEMENT**

Ministère de la Défense nationale
Ottawa, Ontario
K1A 0K2

Téléphone: (613) 995-2971
Télécopieur: (613) 996-0392

SANS CLASSIFICATION